

- LEGEND**
- PS1 Pump Station
 - TM Trunk Gravity Main
 - RM Rising Main
 - ③ Catchment Number
 - Freshwater Creek Catchment (Part)
 - Saltwater Creek Catchment (Part)
 - Catchment Boundary
 - DCP Area Boundary
 - Town Centre Frame 'C' Precinct
 - Town Centre Frame 'C' Sector Five

PRINCIPAL DEVELOPER WORKS

| WORKS | DIAMETER (mm) | LENGTH (m) |
|----------------------------|---------------|------------|
| TRUNK MAINS | | |
| TM1 | 450 | 450 |
| | 375 | 650 |
| | 300 | 500 |
| TM4 | 450 | 1500 |
| TM4A | 375 | 1350 |
| TM4B | 375 | 1000 |
| TM5 | 300 | 750 |
| TM6 | 375 | 700 |
| TM6A | 300 | 700 |
| GRAVITY TRUNK SEWER | | |
| GTS4 | 600 | 1950 |
| GTS5 | 450 | 1500 |
| GTS6 | 375 | 800 |
| RISING MAINS | | |
| RM1 | 375 | 5500 |
| RM2 | 525 | 7200 |
| RM115 | 150 | 1050 |
| PUMP STATIONS | | |
| PS1 | | |
| PS2 | | |


EQUIVALENT PERSONS

| Catchment | Within DCP Area | Outside DCP Area | Total |
|------------------------|-----------------|------------------|----------|
| Catchments 1&2 | 8250 EP | 3726 EP | 11976 EP |
| Catchments 3,4,5,6 & 8 | 22395 EP | 6027 EP | 28422 EP |
| Catchment 7 | 1063EP | | |
| TOTAL | 31708 EP | | |



Town Centre Frame 'C' Precinct
Town Centre Frame 'C' Sector Five

SEWERAGE HEADWORKS

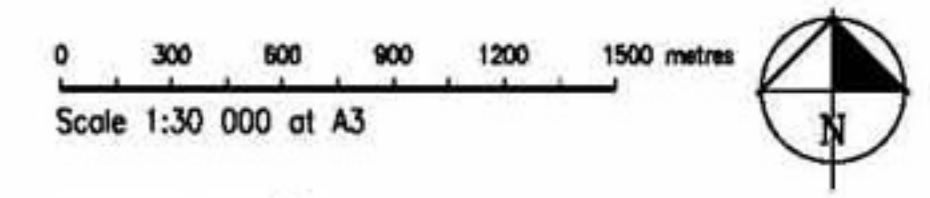

File No 2836-019S5
 Dwg CFC5sectorfig9
 November 2005

FIGURE 9