9.3 Use codes

9.3.1 Dwelling house code

9.3.1.1 Application

- 1. This code applies to undertaking development for dwelling houses⁽²²⁾ on varying lot types located in the General residential zone, the Emerging community zone Transition precinct if on a developed lot, the Redcliffe Kippa-Ring local plan Interim residential precinct, and the Caboolture West local plan Urban living precinct (Next generation neighbourhood sub-precinct) if on a developed lot, if:
 - a. the development has been categorised as either accepted development subject to requirements or assessable development code assessment, and this code is identified as applicable to that development in the assessment benchmarks for assessable development and requirements for accepted development column of a table of assessment (Part 5);
 - b. the development has been categorised as assessable development impact assessment (Part 5).
- 2. For accepted development subject to requirements or assessable development under this Code:
 - a. Part A of the code applies only to accepted development subject to requirements;
 - b. Part B of the code applies only to assessable development.

9.3.1.2 Purpose

1. The purpose of the 9.3.1 'Dwelling house code' is to guide development to ensure residential development creates liveable, safe and attractive living environments that complement the precinct character.

Note - Refer to the overall outcomes for the relevant zone, precinct or sub-precinct to determine the relevant precinct character.

- 2. The purpose of the code will be achieved through the following overall outcomes:
 - a. Dwelling houses⁽²²⁾ support housing diversity that meets the needs of existing and future residents within the region.
 - b. The character and scale of Dwelling houses⁽²²⁾ are compatible with the intended character for the zone and precinct.

Note - Refer to the overall outcomes for the relevant zone, precinct or sub-precinct to determine the relevant precinct character.

- c. Secondary dwellings associate with a principal dwelling, remain subordinate and ancillary to the principal dwelling to retain the low density, low intensity, residential form of a dwelling house⁽²²⁾.
- d. Garages, car ports and domestic outbuildings remain subordinate and ancillary to the principal dwelling and are located and designed to reduce amenity impacts on the streetscape and adjoining properties.
- e. Dwelling houses⁽²²⁾ are designed to add visual interest and contribute to an attractive streetscape and public realm.
- f. Dwelling houses⁽²²⁾ provide a high standard of built form and include landscaping on site to maintain and create attractive streetscapes, active frontages and surveillance.
- g. Dwelling houses⁽²²⁾ are designed to establish a high level of residential amenity, privacy and safety to residents, adjoining neighbours and the wider community.

- h. Dwelling houses⁽²²⁾ are designed to maintain the amenity and safety of pedestrians.
- i. Subtropical design standards are incorporated where possible into the design, siting and orientation of dwellings.
- j. Dwelling houses⁽²²⁾ provide attractive and useable private open space areas that meet the needs of residents.
- k. Dwelling houses⁽²²⁾ are provided with infrastructure and services at a level suitable for the zone or precinct.
- I. Site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- m. Dwelling houses⁽²²⁾ are designed to respond to the lot shape, dimensions and topographic features.
- n. Dwelling houses⁽²²⁾ are designed to respond to sloping topography in the siting, design and form of buildings and structures (e.g. retaining structures) by:
 - i. avoiding where possible cut and fill to create single flat pads and benching;
 - ii. retaining walls are kept to a human scale and not excessive in height and do not extend for lengths inconsistent with the scale of a Dwelling house⁽²²⁾;
 - iii. minimising any impact on the landscape character of the precinct or sub-precinct;

Note - Refer to the overall outcomes for the relevant zone, precinct or sub-precinct to determine the relevant precinct character.

- iv. protecting the amenity of adjoining properties from visual impact of cut and fill;
- v. ensuring slope stability;
- vi. ensuring all necessary maintenance is achievable.
- o. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
 - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
 - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
 - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
 - iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
 - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
 - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
 - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
 - v. protecting native species and protecting and enhancing species habitat;
 - vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
 - vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;

- viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
- ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
- x. ensuring effective and efficient disaster management response and recovery capabilities;
- xi. where located in an overland flow path:
 - A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
 - B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
 - C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
 - D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.

9.3.1.3 Requirements for assessment

If development is to be categorised as accepted development subject to requirements it must comply with the requirements for accepted development set out in Part A, Table 9.3.1.1. Where the development does not meet a requirement for accepted development (RAD) within Part A Table 9.3.1.1, the category of development changes to assessable development under the rules outlined in section 5.3.3. (1), and assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a RAD is not met, and is therefore limited to the subject matter of the RADs that are not complied with. To remove any doubt, for those RADs that are complied with, there is no need for assessment against the corresponding PO.

| Requirements for accepted development (RAD) | Corresponding PO |
|---|------------------|
| RAD1 | PO1 |
| RAD2 | PO2 |
| RAD3 | PO3 |
| RAD4 | PO3 |
| RAD5 | PO4 |
| RAD6 | PO6 |
| RAD7 | P07 |
| RAD8 | PO8 |
| RAD9 | PO8 |
| RAD10 | PO8 |
| RAD11 | PO10 |
| RAD12 | PO12 |
| RAD13 | PO12 |
| RAD14 | PO13-14 |
| RAD15 | PO15 |
| RAD16 | PO17 |
| RAD17 | P017 |

| RAD18 | PO18 |
|---|--|
| RAD19 | PO19 |
| RAD20 | PO21 |
| RAD21 | PO21 |
| RAD22 | PO21 |
| RAD23 | PO21 |
| RAD24 | PO22 |
| RAD25 | PO23 |
| RAD26 | PO24-35 |
| RAD27 | PO24-35 |
| RAD28 | PO36 |
| RAD29 | PO37 |
| RAD30 | PO38 |
| RAD31 | PO39 |
| RAD32 | PO40 |
| RAD33 | PO41 |
| RAD34 | PO41 |
| RAD35 | PO55 |
| RAD36 | PO54-56, 58-60 |
| RAD37 | PO54-56 |
| | |
| RAD38 | PO57 |
| RAD38 RAD39 | PO57 PO61 |
| | |
| RAD39 | PO61 |
| RAD39 RAD40 | PO61 PO42 |
| RAD39 RAD40 RAD41 | PO61 PO42 PO42 |
| RAD39 RAD40 RAD41 RAD42 | PO61 PO42 PO42 PO45 |
| RAD39 RAD40 RAD41 RAD42 RAD43 | PO61 PO42 PO42 PO45 PO45 |
| RAD39 RAD40 RAD41 RAD42 RAD43 RAD44 | PO61 PO42 PO42 PO45 PO45 PO45 |
| RAD39 RAD40 RAD41 RAD42 RAD43 RAD44 RAD45 | PO61 PO42 PO42 PO45 PO45 PO45 PO46 |
| RAD39 RAD40 RAD41 RAD42 RAD43 RAD44 RAD45 RAD46 | PO61 PO42 PO42 PO45 PO45 PO45 PO45 PO46 PO47 |
| RAD39 RAD40 RAD41 RAD42 RAD43 RAD44 RAD45 RAD46 RAD47 | PO61 PO42 PO42 PO45 PO45 PO45 PO45 PO46 PO47 PO47 |
| RAD39 RAD40 RAD41 RAD42 RAD43 RAD43 RAD44 RAD45 RAD46 RAD47 RAD48 | PO61 PO42 PO42 PO45 PO45 PO45 PO45 PO46 PO47 PO47 PO49 |
| RAD39 RAD40 RAD41 RAD42 RAD43 RAD43 RAD44 RAD45 RAD46 RAD47 RAD48 RAD49 | PO61 PO42 PO42 PO45 PO45 PO45 PO45 PO46 PO47 PO47 PO47 PO49 PO50 |
| RAD39 RAD40 RAD41 RAD42 RAD43 RAD43 RAD44 RAD45 RAD46 RAD47 RAD48 RAD49 RAD50 | PO61 PO42 PO42 PO45 PO45 PO45 PO45 PO46 PO47 PO47 PO47 PO49 PO50 PO51 |
| RAD39 RAD40 RAD40 RAD41 RAD41 RAD42 RAD42 RAD43 RAD43 RAD44 RAD45 RAD46 RAD47 RAD48 RAD49 RAD50 RAD51 | PO61 PO42 PO42 PO45 PO45 PO45 PO46 PO47 PO49 PO50 PO53 |

| RAD54 | PO64 |
|-------|------|
| RAD55 | PO65 |
| RAD56 | PO65 |
| RAD57 | PO66 |

Where accepted development subject to requirements cannot comply with one or more of the requirements for accepted development listed as concurrence agency issues, Council will be a Concurrence Agency for assessment of those aspects of a Development Application for Building Works. Noncompliance will be assessed by Council against the corresponding applicable performance outcomes in Part B Requirements for assessable development. Noncompliance with a requirement for a concurrence agency issue does not change the categories of development or categories of assessment. Where the Dwelling house⁽²²⁾ does not comply with one or more of the requirements for accepted development relating to a constraint, the development becomes assessable development - code assessment and an application will be required to be lodged with Council in accordance with the section 5.3.3(1)(a)(ii).

Part A - Requirements for accepted development

Table 9.3.1.1 Requirements for accepted development

| Require | ements for accepted development |
|----------|---|
| | General requirements (All lots - Traditional lot, Narrow lot, Row lot and Laneway lot) |
| Building | g height |
| RAD1 | Building height does not exceed that mapped on Overlay map – Building heights. |
| | Note - Minimum's mapped on Overlay map - Building heights, do not apply to Dwelling houses. |
| | Note - The above does not apply to domestic outbuildings. Refer to requirements for Domestic outbuildings for requirements. |
| | Note - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.1, A4 and part MP1.2, A4. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. |
| RAD2 | The height of tall structures (e.g. antenna, aerial, chimney, flagpole or the like) projects no more than 8.5m above the level of natural ground and transmission and receiving dishes are no larger than 1.2m diameter. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house requires a concurrence agency response from council. |
| Setback | ks |
| RAD3 | Setbacks (excluding built to boundary walls) comply with: |
| | a. Emerging community zone: |
| | i. Transition precinct (developed lot) Morayfield South urban area identified in 'Figure 9.3.1.1 Morayfield South - Urban area ' - Table 9.3.1.6 'Setbacks' |
| | ii. Transition precinct (developed lot) all other areas - Table 9.3.1.5 'Setbacks' |
| | b. General residential zone: |
| | i. Coastal communities precinct - Table 9.3.1.3 'Setbacks' |
| | ii. Suburban neighbourhood precinct - Table 9.3.1.4 'Setbacks' |

| | | iii. Next generation neighbourhood precinct - Table 9.3.1.5 'Setbacks' |
|------|-------------|--|
| | | iv. Urban neighbourhood precinct - Table 9.3.1.6 |
| | | |
| | C. | Caboolture West local plan: |
| | | i. Urban living precinct - Next generation sub-precinct - Table 9.3.1.5 'Setbacks' |
| | . | |
| | d. | Redcliffe Kippa-Ring local plan: |
| | | i. Interim residential precinct - Table 9.3.1.3 'Setbacks' |
| | | |
| | (d) a co | te - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.1, A1 (a), (b) and (c), A2 (a), (b) and part MP1.2, A1 (a), (b) and (c), A2 (a), (b) and (d). Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires concurrence agency response from Council. Note - Greater setbacks may be required if the lot adjoins an environmental corridor area (Refer to values and constraints for details). |
| | Not | e - The above setbacks apply only to Class 1a and Class 10a buildings/structures. |
| | | |
| RAD4 | Buil | t to boundary walls are: |
| | a. | provided on lots with a frontage less than 18m, in accordance with a plan of development approved |
| | a. | by council as part of a previous development approval applying to the land or as subsequently amended by council in writing; |
| | | OR |
| | b. c. | for all other built to boundary walls refer to Table 9.3.1.7 'Built to boundary walls' (mandatory/optional) of a length and height in Table 9.3.1.7 'Built to boundary walls'; |
| | d. | setback from the side boundary: |
| | | i. not more than 20mm; or |
| | | ii. if a plan of development shows only one built to boundary wall on the boundary, not more than 200mm; |
| | e. | on the low side of a sloping lot. |
| | ofa | tor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance iny wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development sement' is recommended; or for all other built to boundary walls a 'easement for maintenance purposes' is recommended. |
| | Not | e - The above setbacks apply only to Class 1a and Class 10a buildings/structures. |
| | | te - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.1, A1 (a), (b) and (c), A2 (a), (b) and and part MP1.2, A1 (a), (b) and (c), A2 (a), (b) and (d). Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires oncurrence agency response from Council. |
| | Edi | tor's note - A wall is not to be built to the boundary if it has a window or if a wall of a building on an adjoining lot: |
| | a. | is within 900mm of that boundary; |

| | | n of that boundary and h ucted from masonry or o | | | | e of Australia. |
|-----------------|---|--|--|--|--|---|
| Site co | ver | | | | | |
| RAD5 | Site cover (exclu not exceed: | ding eaves, sun sha | iding devices, p | atios, balconies | and other unenc | losed structures) doe |
| | a. Emerging o | community zone: | | | | |
| | Trans | Transition precinct (developed lot) - in accordance with the table below | | | | |
| | b. General res | b. General residential zone: | | | | |
| | Coast | Coastal communities precinct – 50% | | | | |
| | • Subu | rban neighbourhood | d precinct – 509 | % | | |
| | • Next | generation neighbor | urhood precinc | t – in accordance | e with the table b | below |
| | Urbar | n neighbourhood pre | ecinct – in acco | ordance with the | table below | |
| | c. Caboolture | c. Caboolture west local plan: | | | | |
| | | | | | | |
| | d. Redcliffe K | n living precinct - Ne ippa-Ring local plan | 1: | sub-precinct - in | accordance with | the table below |
| | d. Redcliffe K • Interir | ippa-Ring local plan | 1: | sub-precinct - in | accordance with | the table below |
| | d. Redcliffe K | ippa-Ring local plan m residential precine Lot Size | n: ct - 50% | | | |
| | d. Redcliffe K • Interin Building height | ippa-Ring local plan m residential precine Lot Size 300m ² or less | 1: ct - 50% 301-400m ² | 401-500m ² | 501-1000m ² | Greater than 1000m ² |
| | d. Redcliffe K • Interir | ippa-Ring local plan m residential precine Lot Size | n: ct - 50% | | | |
| | d. Redcliffe K Interin Building height 8.5m or less | ippa-Ring local plan m residential precine Lot Size 300m ² or less 75% | 1: ct - 50% 301-400m ² 70% | 401-500m ² 60% | 501-1000m ² 60% | Greater than 1000m ² 60% |
| | d. Redcliffe K Interin Building height 8.5m or less >8.5m – 12.0m >12.0m | ippa-Ring local plan m residential precine 300m² or less 75% 50% N/A | n: ct - 50% 301-400m ² 70% 50% N/A | 401-500m ² 60% 60% N/A | 501-1000m ² 60% 50% 50% | Greater than 1000m ² 60% 50% 40% |
| Car par | d. Redcliffe K Interin Building height 8.5m or less >8.5m – 12.0m >12.0m Note - This is a quar with this provision f | ippa-Ring local plan m residential precine 300m² or less 75% 50% N/A | n: ct - 50% 301-400m ² 70% 50% N/A | 401-500m ² 60% 60% N/A | 501-1000m ² 60% 50% 50% | Greater than 1000m² 60% 50% 40% |
| - | d. Redcliffe K Interin Building height 8.5m or less >8.5m – 12.0m >12.0m Note - This is a quar with this provision f | ippa-Ring local plan m residential precine 300m² or less 75% 50% N/A | 1: ct - 50% 301-400m ² 70% 50% N/A n alternative provisi requires a concurrent | 401-500m² 60% 60% N/A ion to the QDC, part Nence agency respon | 501-1000m² 60% 50% 50% MP1.1, A3 and part M se from Council. | Greater than 1000m² 60% 50% 40% |
| Car par RAD6 | d. Redcliffe K Interin Building height 8.5m or less >8.5m – 12.0m >12.0m Note - This is a quar with this provision f | ippa-Ring local plan m residential precine 300m ² or less 75% 50% N/A ntifiable standard that is a or a Dwelling house ⁽²²⁾ | 1: ct - 50% 301-400m ² 70% 50% N/A n alternative provisi requires a concurrent | 401-500m² 60% 60% N/A ion to the QDC, part Nence agency respon | 501-1000m² 60% 50% 50% N. | Greater than 1000m² 60% 50% |

| | Coastal communities precin | ict | |
|------|---|---|--|
| | Suburban neighbourhood p | recinct | |
| | Redcliffe Kippa-Ring local plan: | | |
| | Interim residential precinct | | |
| | | | |
| | Emerging community zone: | | 1 per Dwelling house ⁽²²⁾ |
| | Transition precinct (develop | ed lot) | |
| | General residential zone: | | |
| | Next generation neighbourh | lood precinct | |
| | Urban neighbourhood preci | nct | |
| | Caboolture west local plan code: | | |
| | Urban living precinct - Next | generation sub-precinct | |
| | | | |
| | Note - Does not include the parking of Heavy Vehicles or Heavy Machinery. | | |
| | Note - This is a quantifiable standar | d tha <u>t is</u> an alternative provision to the QDC, part MF | P1.1, A8 and par MP1.2, A8. Non-compliance |
| | with this provision for a Dwelling h | d that is an alternative provision to the QDC, part MF ouse ⁽²²⁾ requires a concurrence agency response | from Council. |
| RAD7 | | | |
| | Garage and carport opening | s are in accordance with the table below | : |
| | | s are in accordance with the table below | |
| | Primary or Secondary frontage | Covered car space opening(s) per street from | |
| | Primary or Secondary frontage Greater than 18m | Covered car space opening(s) per street from | |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m | Covered car space opening(s) per street from Not specified 6m wide maximum | tage |
| | Primary or Secondary frontage Greater than 18m | Covered car space opening(s) per street from | tage |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 4 | tage 6.0m wide maximum and recessed 1.0m |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 1 behind the front wall or balcony of upper level. | tage 6.0m wide maximum and recessed 1.0m |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 4 behind the front wall or balcony of upper level. Editor's note - Front wall is to have a minimum length of 40 | tage 6.0m wide maximum and recessed 1.0m 0% of the adjoining frontage. |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 4 behind the front wall or balcony of upper level. Editor's note - Front wall is to have a minimum length of 40 OR | tage 6.0m wide maximum and recessed 1.0m 0% of the adjoining frontage. |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m 12.5m* or less | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 4 behind the front wall or balcony of upper level. Editor's note - Front wall is to have a minimum length of 40 OR | tage 6.0m wide maximum and recessed 1.0m % of the adjoining frontage. |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m 12.5m* or less Note - *For a laneway lot, vehicle a | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 4 behind the front wall or balcony of upper level. Editor's note - Front wall is to have a minimum length of 40 OR For a laneway lot (Single or two storey): no maximum | tage 6.0m wide maximum and recessed 1.0m % of the adjoining frontage. imum |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m 12.5m* or less Note - *For a laneway lot, vehicle a Note - Refer to Planning scheme p | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 1 behind the front wall or balcony of upper level. Editor's note - Front wall is to have a minimum length of 40 OR For a laneway lot (Single or two storey): no maxi access and parking must be provided via the lanew | tage 6.0m wide maximum and recessed 1.0m % of the adjoining frontage. imum vay. S. |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m 12.5m* or less Note - *For a laneway lot, vehicle a Note - Refer to Planning scheme p | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 1 behind the front wall or balcony of upper level. Editor's note - Front wall is to have a minimum length of 40 OR For a laneway lot (Single or two storey): no maximatic access and parking must be provided via the lanew | tage 6.0m wide maximum and recessed 1.0m % of the adjoining frontage. imum vay. S. |
| | Primary or Secondary frontage Greater than 18m Greater than 12.5m to 18m 12.5m* or less Note - *For a laneway lot, vehicle a Note - Refer to Planning scheme p Note - This is a quantifiable standar provision for a Dwelling house ⁽²²⁾ | Covered car space opening(s) per street from Not specified 6m wide maximum Single storey: 3.0m wide maximum;Two storey: 1 behind the front wall or balcony of upper level. Editor's note - Front wall is to have a minimum length of 40 OR For a laneway lot (Single or two storey): no maxi access and parking must be provided via the lanew | tage 6.0m wide maximum and recessed 1.0m 0% of the adjoining frontage. imum vay. s. : MP1.1, A1 (b). Non-compliance with this new response from Council. |

| Access | and driveways |
|--------|--|
| RAD8 | Crossover widths are a maximum of 40% of the frontage access is being obtained from, or 4.8m whichever is the lesser, or for a laneway lot no maximum. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house requires a concurrence agency response from council. |
| RAD9 | Where there is a plan of development, driveway crossovers are located in accordance with a plan of development approved by Council as part of a development approval or as otherwise amended by Council in writing. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| RAD10 | Driveways do not include a reversing bay, manoeuvring area or visitor parking spaces (other than tandem spaces) in the front setback. |
| | Note -This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. |
| RAD11 | Site access and driveways are designed and located in accordance with: |
| | a. where for a Council-controlled road, AS/NZS2890.1, section 3; b. where for a State-controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act, section 62 approval. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| Casual | surveillance |
| RAD12 | The Dwelling house (or the primary dwelling if including a secondary dwelling) must address primary frontages (excluding motorway and arterial roads) with a minimum of a front door, window(s) and pedestrian entrance. |
| | Note - If an acoustic fence has been conditioned as part of a reconfiguring a lot approval this provision does not apply to that frontage. |
| | Note - Refer to Overlay map - Road hierarchy for road classification. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| RAD13 | A minimum of one habitable room window having an area of at least 1m ² on each level overlooks each adjoining public space (street, public open space or laneway). |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| Waste | |

| RAD14 | Each dwelling (primary and secondary) includes a bin storage area that: | | |
|-----------|---|--|--|
| | a. is not visible from public areas or screened from public areas; | | |
| | b. is not located in the primary frontage setback, unless the dwelling is built to boundary on both sides of the lot with only one frontage; | | |
| | c. is not located in an enclosed garage; | | |
| | d. has a minimum area of 1m x 2m; | | |
| | e. has access to the collection point without going through a dwelling (excluding a garage). | | |
| | Note - Refer to Planning scheme policy - Residential design for details and examples. | | |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. | | |
| Utilities | | | |
| RAD15 | The dwelling is connected to: | | |
| | a. an existing reticulated electricity supply; | | |
| | b. reticulated sewerage where in a reticulated area; | | |
| | c. reticulated water; | | |
| | d. dedicated and constructed road. | | |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. | | |
| Sloping | and | | |
| RAD16 | Building and lot design on slopes between 10% and 15% must: | | |
| | a. use split-level, multiple-slab, pier or pole construction; | | |
| | b. avoid single-plane slabs and benching; | | |
| | c. have built to boundary walls on the low side of the lot to avoid drainage issues; and | | |
| | d. follow the contour and ensure the height of cut and fill, whether retained or not, does not exceed 900mm. | | |

| | Figure - Cut and fill |
|---------|---|
| | Lot Boundaries |
| | Batter Cut Finished surface level 900mm maximum |
| | Note - This is a quantifiable standard that relates to the amenity and aesthetic impacts of the building or structure. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council |
| RAD17 | Building and lot design on slopes greater than 15% do not include slab on ground. |
| | Note - This is a quantifiable standard that relates to the amenity and aesthetic impacts of the building or structure. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| Develop | ment on a laneway |
| RAD18 | The Dwelling house ⁽²²⁾ (or the primary dwelling where including a secondary dwelling) |
| | a. faces the non-laneway frontage; |
| | b. has its main pedestrian entrance (front door) from the non-laneway frontage. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. |
| RAD19 | All vehicle access must be via the laneway. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. |
| Second | ary dwelling |
| RAD20 | The siting and design of dwellings ensures that the secondary dwelling is: |
| | a. not located in front of the primary dwelling; |
| | b. annexed to (adjoining, below or above) or located within 10.0m of the primary dwelling (excluding domestic outbuildings). |
| | Note - Refer to Planning scheme policy - Residential design for details and examples. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |

| RAD21 | No more than 1 secondary dwelling is located on a | an allotment. | | |
|--------|---|---|--|--|
| | Note - This is a quantifiable standard that relates to matters in Non-compliance with this provision for a Dwelling house ⁽²²⁾ r | dentified in Schedule 9, Part 3, Division 2, Table of Regulation. requires a concurrence agency response from Council. | | |
| RAD22 | The GFA of the secondary dwelling does not exce | ed: | | |
| | a. 45m ² GFA for a lot with a primary frontage le | ss than 15m; or | | |
| | b. 55m ² GFA for a lot with a primary frontage of | 15m or more. | | |
| | Note - This is a quantifiable standard that relates to matters in Non-compliance with this provision for a Dwelling house $^{(22)}$ r | dentified in Schedule 9, Part 3, Division 2, Table of Regulation. requires a concurrence agency response from Council. | | |
| RAD23 | Where additional car parking spaces are provided spaces for the primary dwelling to appear as a sin | , car parking spaces are co-located with the parking gle dwelling from the street. | | |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. | | | |
| Domest | ic outbuildings | | | |
| RAD24 | Domestic outbuildings: a. have a total combined maximum roofed area | as outlined in the table below: | | |
| | Size of lot Maximum roofed area | | | |
| | Less than 600m ² | 50m ² | | |
| | 600m ² - 1000m ² | 70m ² | | |
| | >1000m ² - 2000m ² | 80m ² | | |
| | Greater than 2000m ² | 150m ² | | |
| | b. have a maximum building height of 4m and a mean height not exceeding 3.5m; | | | |
| | c. are located behind the main building line and not within primary or secondary frontage setbacks. | | | |
| | Note - These requirements apply to all Class 10a buildings an Note - This is a quantifiable standard that relates to matters in | | | |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. | | | |
| | | | | |
| I | | sion to the QDC, part MP1.1, A4 and part MP1.2, A4. Non-compliance rrence agency response from Council. | | |
| | Note - This is a quantifiable standard that is an alternative provis with this provision for a Dwelling house (22) requires a concu Note - This is a quantifiable standard that is an alternative pro (d) and part MP1.2, A1 (a), (b) and (c), A2 (a), (b) and (d). No | | | |


Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following requirements apply)

Note - Planning scheme policy - Acid sulfate soils provides guidance for requirements for accepted development that has the potential to disturb acid sulfate soils i.e. development involving filling or excavation works below the thresholds of 100m³ and 500m³ respectively.

RAD25 Development does not involve:

- a. excavation or otherwise removing of more than 100m³ of soil or sediment where below 5m Australian Height Datum AHD, or
- b. filling of land of more than 500m³ of material with an average depth of 0.5m or greater where below the 5m AHD.

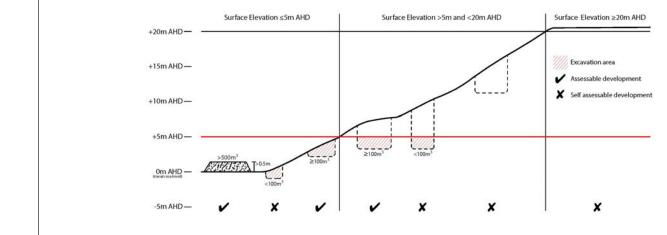

Environmental areas (refer Overlay map - Environmental areas to determine if the following requirements apply)

Note - The following are excluded from the native clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.

| Note - Definition for native vegetation is located in Schedule 1 Definitions. |
|---|
|---|

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.


| RAD26 | Where no suitable land cleared of native vegetation exists, clearing of native vegetation in a High Value Area or Value Area is for the purpose of a new dwelling house ⁽²²⁾ or extension to an existing dwelling house ⁽²²⁾ only on lots less than 750m ² . |
|-------|---|
| | Editor's note - See in heading above for other uses excluded from native vegetation clearing requirements. |
| | Editor's note - Where vegetation clearance is accepted development subject to requirements, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include: |
| | i. co-locating all associated activities, infrastructure and access strips; ii. be the least valued area of koala habitat on the site; iii. minimise the footprint of the development envelope area; |
| | iv. minimise edge effects to areas external to the development envelope; |
| | v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy – Environmental areas; |
| | vi. sufficient area between the development and koala habitat trees to achieve their long-term viability. |
| | Editor's note - Where vegetation clearing is accepted development subject to requirements, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas. |
| RAD27 | No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. |
| | This does not apply to the following: |
| | a. Clearing of native vegetation located within an approved development footprint; |
| | b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; |
| | Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure; |
| | d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence; |
| | e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes; |
| | f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council; |
| | g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens; |
| | h. Grazing of native pasture by stock; |
| | i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development. |

| RAD28 | Development does not result in more than one dwelling house ⁽²²⁾ per lot within separation areas. |
|----------|---|
| RAD29 | Development within the separation area does not include the following uses: |
| | a. caretaker's accommodation ⁽¹⁰⁾ ; |
| | b. community residence ⁽¹⁶⁾ ; |
| | c. dual occupancy ⁽²¹⁾ ; |
| | d. dwelling unit ⁽²³⁾ ; e. hospital ⁽³⁶⁾ ; |
| | e. hospital ⁽³⁶⁾ ; |
| | f. rooming accommodation ⁽⁶⁹⁾ ; |
| | g. multiple dwelling ⁽⁴⁹⁾ ; |
| | h. non-resident workforce accommodation ⁽⁵²⁾ ; |
| | i. relocatable home park ⁽⁶²⁾ ; |
| | j. residential care facility ⁽⁶⁵⁾ ; |
| | k. resort complex ⁽⁶⁶⁾ ; |
| | I. retirement facility ⁽⁶⁷⁾ ; |
| | m. rural workers' accommodation ⁽⁷¹⁾ ; |
| | n. short-term accommodation ⁽⁷⁷⁾ ; |
| | o. tourist park ⁽⁸⁴⁾ . |
| RAD30 | All habitable rooms within the separation area are: |
| | |
| | a. acoustically insulated to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives |
| | Environmental Protection (Noise) Policy 2008; |
| | b. provided with mechanical ventilation. |
| | |
| RAD31 | Private open space areas are separated from the resource processing area by buildings or a 1.8m high |
| | solid structure. |
| | |
| | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffe mine if the following requirements apply) |
| | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffe |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; Community residence⁽¹⁶⁾; Dual occupancy⁽²¹⁾; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; Community residence⁽¹⁶⁾; Dual occupancy⁽²¹⁾; Dwelling house;⁽²²⁾ |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾; e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house; ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house; ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house; ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house; ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; n. Rural workers' accommodation ⁽⁷¹⁾ ; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house; ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; |
| to deter | ve resources transport routes (refer Overlay map - Extractive resources (transport route and buffer mine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house; ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; n. Rural workers' accommodation ⁽⁷¹⁾ ; o. Short-term accommodation ⁽⁷⁷⁾ ; |


| | A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design. |
|----------------|---|
| Overlan | d flow path (refer Overlay map - Overland flow path to determine if the following requirements apply) |
| RAD35 | Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area. |
| RAD36 | Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises. |
| | Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. |
| | Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow |
| RAD37 | Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable. |
| RAD38 | Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area. |
| RAD39 | Development for a material change of use or building work for a Park ⁽⁵⁷⁾ ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design. |
| oonenne p | |
| | olicy - Heritage and landscape character. |
| RAD40 | Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant |
| RAD40 | Development is for the preservation, maintenance, repair and restoration of the site, object or building. |
| RAD40 RAD41 | Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character. |
| | Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character. Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management |
| | Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character. Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan. This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant |

| | a. construction of any building; b. laying of overhead or underground services; c. any sealing, paving, soil compaction; |
|---------------------|---|
| | d. any alteration of more than 75mm to the ground level prior to work commencing. |
| RAD44 | Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees. |
| Infrastru apply) | cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements |
| RAD45 | Development does not include the following uses within a Wastewater treatment site buffer: |
| | a. Caretaker's accommodation⁽¹⁰⁾; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; n. Rural workers' accommodation⁽⁷⁷⁾; p. Tourist park⁽⁸⁴⁾. |
| RAD46 | Development does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer. |
| RAD47 | Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer. |
| RAD48 | Development does not involve the construction of any buildings or structures within the Gas pipeline buffer. |
| RAD49 | Development does not include the following uses located within a landfill site buffer: a. caretaker's accommodation ⁽¹⁰⁾ ; b. community residence ⁽¹⁶⁾ ; c. dual occupancy ⁽²¹⁾ ; d. dwelling house; ⁽²²⁾ e. dwelling unit ⁽²³⁾ ; f. hospital ⁽³⁶⁾ ; g. rooming accommodation ⁽⁶⁹⁾ ; h. multiple dwelling ⁽⁴⁹⁾ ; i. non-resident workforce accommodation ⁽⁵²⁾ ; j. relocatable home park ⁽⁶²⁾ ; k. residential care facility ⁽⁶⁵⁾ ; l. resort complex ⁽⁶⁶⁾ ; m. retirement facility ⁽⁶⁷⁾ ; n. rural workers' accommodation ⁽⁷¹⁾ ; o. short term accommodation ⁽⁷⁷⁾ ; p. tourist park ⁽⁸⁴⁾ . |
| | |
| RAD50 | All habitable rooms located within an Electricity supply substation buffer are: |

| | a. located a minimum of 10m from an electricity supply substation⁽⁸⁰⁾; and b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008. | | | | |
|-----------------------|---|--|--|--|--|
| RAD51 | Development does not involve the construction of any buildings or structures containing habitable rooms or sensitive land uses within a High voltage electricity line buffer. | | | | |
| | Riparian and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the followin requirements apply) | | | | |
| Note - W wetland s | 1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and etbacks. | | | | |
| RAD52 | No development is to occur within: | | | | |
| | a. 50m from top of bank for W1 waterway and drainage line | | | | |
| | b. 30m from top of bank for W2 waterway and drainage line | | | | |
| | c. 20m from top of bank for W3 waterway and drainage line | | | | |
| | d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands. | | | | |
| | Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks. | | | | |
| | Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations. | | | | |
| | Note - The minimum setback distance applies to the each side of waterway. | | | | |
| | Scenic amenity - Regionally significant (Hills) and Locally important (Coast) - (refer Overlay map - Scenic amenity to determine if the following requirements apply) | | | | |
| RAD53 | Where located in the Regionally significant (Hills) scenic amenity overlay, buildings and structures are not: | | | | |
| | a. located on a hill top or ridge line; andb. all parts of the building and structure are located below the hill top or ridge line. | | | | |

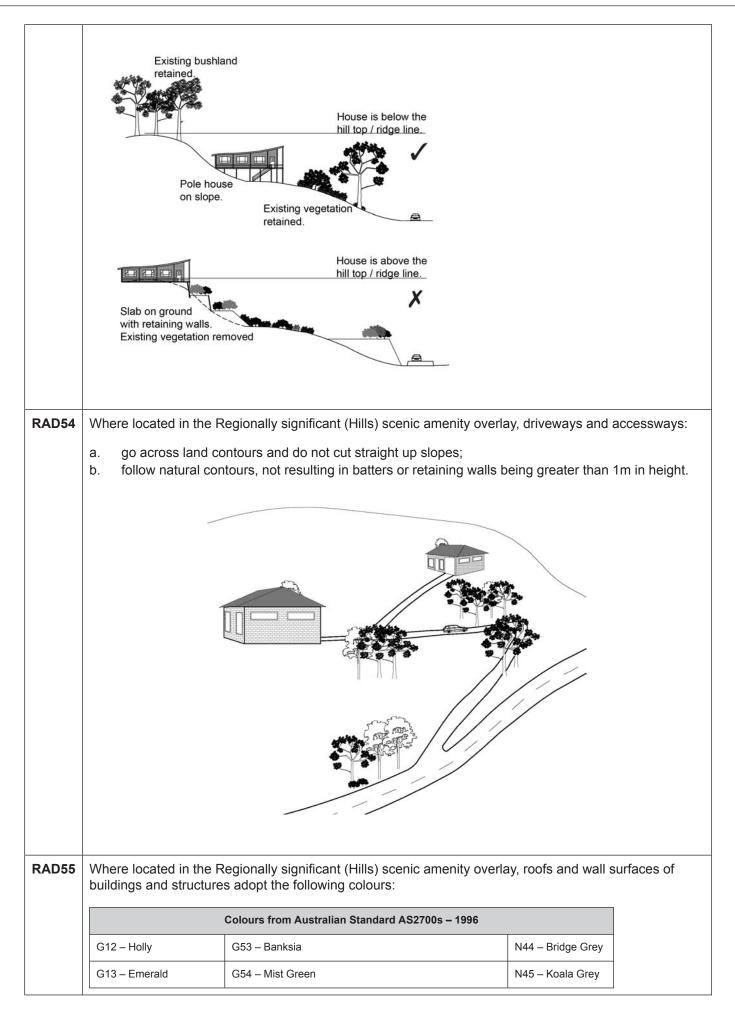

| | Colours from Australian Standard AS2700s – 1996 | | | | | | | |
|-------|---|--|---|---------------------------------|--|--|--|--|
| | G14 – Moss Green | G55 – Lichen | N52 – Mid Grey | | | | | |
| | G15 – Rainforest Green | G56 – Sage Green | N54 – Basalt | | | | | |
| | G16 – Traffic Green | G62 – Rivergum | N55 – Lead Grey | | | | | |
| | G17 – Mint Green | G64 – Slate | X54 – Brown | | | | | |
| | G21 – Jade | G65 – Ti Tree | X61 – Wombat | | | | | |
| | G22 – Serpentine | N25 – Birch Grey | X62 – Dark Earth | | | | | |
| | G23 – Shamrock | N32 – Green Grey | X63 – Iron Bark | | | | | |
| | G24 – Fern Green | N33 – Lightbox Grey | Y51 – Bronze Olive | | | | | |
| | G25 – Olive | N35 – Light Grey | Y61 – Black Olive | | | | | |
| | G34 – Avocado | N41 – Oyster | Y63 – Khaki | | | | | |
| | G52 – Eucalyptus | N42 – Storm Grey | Y66 – Mudstone | | | | | |
| | | N43 – Pipeline Grey | | | | | | |
| | | | | | | | | |
| RAD57 | | Locally important (Coast) scenic amenity overlay | | | | | | |
| | a. landscaping com b. fences and walls 1m, they have 50 coast; c. where over 12m in | nprises indigenous coastal species; a facing the coast are no higher than 1m. Where 0% transparency. This does not apply to a fence in height, the building design includes the followin edges and walls, strong vertical blades and wall | fences and walls ar or wall at an angle g architectural char | e of 90o to the | | | | |
| | a. landscaping com b. fences and walls 1m, they have 50 coast; c. where over 12m in | nprises indigenous coastal species; a facing the coast are no higher than 1m. Where 0% transparency. This does not apply to a fence in height, the building design includes the followin edges and walls, strong vertical blades and wall | fences and walls ar or wall at an angle g architectural char | e of 90o to the | | | | |
| | a. landscaping com b. fences and walls 1m, they have 50 coast; c. where over 12m i i. curving balcony of | Apprises indigenous coastal species; a facing the coast are no higher than 1m. Where the following design includes the following edges and walls, strong vertical blades and wall all articulation expressed with different colours, or the following edges and walls are no higher than 1m. Where the following edges and walls are no higher than 1m. Where the following edges and walls, strong vertical blades and wall blades and wall articulation expressed with different colours, or the following edges are the following edges are the following edges and walls are no higher than 1m. Where the following edges are no higher than 1m. Where the following edges and walls, strong vertical blades and wall blades and wall are the following edges and walls, strong vertical blades and wall blades are the following edges are the following edges edges edges are the following edge | fences and walls ar or wall at an angle g architectural char planes; | e of 90o to the acter elemen | | | | |
| | a. landscaping com b. fences and walls 1m, they have 50 coast; c. where over 12m i i. curving balcony of | Apprises indigenous coastal species; a facing the coast are no higher than 1m. Where the following design includes the following edges and walls, strong vertical blades and wall all articulation expressed with different colours, or the following edges and walls are no higher than 1m. Where the following edges and walls are no higher than 1m. Where the following edges and walls, strong vertical blades and wall blades and wall articulation expressed with different colours, or the following edges are the following edges are the following edges and walls are no higher than 1m. Where the following edges are no higher than 1m. Where the following edges and walls, strong vertical blades and wall blades and wall are the following edges and walls, strong vertical blades and wall blades are the following edges are the following edges edges edges are the following edge | fences and walls ar or wall at an angle g architectural char planes; | e of 90o to the acter elemen | | | | |

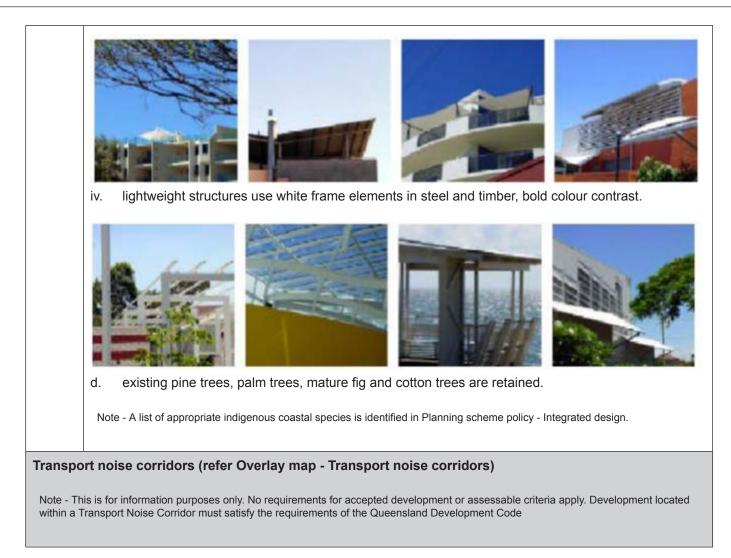

Part B - Criteria for assessable development

Where development is categorised as assessable development - code assessment in the Table of Assessment, the assessment benchmarks are the criteria set out in Part B, Table 9.3.1.2 as well as the purpose statement and overall outcomes of this code.

Where development is categorised as assessable development - impact assessable, the assessment benchmarks become the whole of the planning scheme.

| Table 9.3.1.2 | Criteria for | assessable | development |
|---------------|--------------|------------|-------------|
|---------------|--------------|------------|-------------|

| Performance Outcomes | Examples that achieve aspects of the Performance Outcomes | | | |
|---|---|--|--|--|
| General criteria | | | | |
| Building height | | | | |
| P01 | E1 | | | |
| Buildings have a height that:a. is consistent with the intended character of the streetscape, precinct and zone; | Building height does not exceed that mapped on Overlay map – Building heights. Note - Minimum's mapped on Overlay map - Building heights, do not apply to Dwelling houses. | | | |

| b. | responds to the topographical features of the lot, including slope and orientation; | | | above does not apply to domestic outbuildings. Refer to nt criteria for Domestic outbuildings for requirements. | | |
|----------------|---|---|---|--|--|--|
| C. | is not visually dominant or overbearing with respect to the streetscape. | Note - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.1, A4 and part MP1.2, A4. Non-compliance with this provision for a Dwelling house requires a concurrence agency response from Council. | | | | |
| | e - This is a qualitative statement that is an alternative provision ne QDC, part MP1.1, P4 and MP1.2, P4. | | | | | |
| | e - Refer to Planning scheme policy - Residential design for ils and examples. | | | | | |
| PO2 | 2 | E2 | | | | |
| | structures (e.g. antenna, aerial, chimney, flagpole, iving dishes or the like) have a height and diameter is not visually dominant or overbearing with respect to the streetscape and the wider receiving environment; does not adversely affect amenity of the area or of adjoining properties. | chin abo rece Not in S Nor | nney, f ve the eiving e - This chedul n-comp | nt of tall structures (e.g. antenna, aerial, flagpole or the like) projects no more than 8.5m e level of natural ground and transmission and dishes are no larger than 1.2m diameter. is a quantifiable standard that relates to matters identified e 9, Part 3, Division 2, Table of Regulation. liance with this provision for a Dwelling house requires a ce agency response from council. | | |
| Set | oacks | | | | | |
| PO3 | 3 | E3.′ | I | | | |
| Dwe | lling houses ⁽²²⁾ and structures are setback to: | Sett | backs | comply with: | | |
| a. | be consistent with the intended character of the streetscape, precinct and zone; Note - Refer to the overall outcomes for the relevant zone, precinct or sub-precinct to determine the relevant precinct character. | a. | Eme | erging community zone: Transition precinct (developed lot) Morayfield South urban area identified in 'Figure 9.3.1.1 Morayfield South - Urban area ' - Table 9.3.1.6 'Setbacks' | | |
| b. | ensure parked vehicles do not restrict pedestrian and traffic movement and safety; | | ii. | Transition precinct (developed lot) all other areas - Table 9.3.1.5 'Setbacks' | | |
| c. d. e. | provide adequate separation to particular infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure; maintain the privacy of adjoining properties; limit the length, height and openings of boundary walls to maximise privacy and amenity on adjoining properties; | b. | Gen i. ii. iii. | eral residential zone: Coastal communities precinct - Table 9.3.1.3 'Setbacks' Suburban neighbourhood precinct - Table 9.3.1.4 'Setbacks' Next generation neighbourhood precinct - Table 9.3.1.5 'Setbacks' | | |
| f. | ensure built to boundary walls do not create unusable or inaccessible spaces and do not negatively impact the streetscape character or the expected amenity of adjoining properties; | | iv. | Urban neighbourhood precinct - Table 9.3.1.6 'Setbacks' | | |
| g. | maintain private open space areas that are of a size and dimension to be useable and functional spaces. | C. | Cab | oolture West local plan: | | |

| Note - This is a qualitative statement that is an alternative provision to the QDC, part MP1.1, P1 and P2 and MP1.2, P1 and P2. | i. Urban living precinct - Next generation sub-precinct - Table 9.3.1.5 'Setbacks' |
|---|---|
| Note - Refer to Planning scheme policy - Residential design for details and examples. | d. Redcliffe Kippa-Ring local plan: i. Interim residential precinct - Table 9.3.1.3 'Setbacks' |
| | Note - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.1, A1 (a), (b) and (c), A2 (a), (b) and (d) and part MP1.2, A1 (a), (b) and (c), A2 (a), (b) and (d). Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council.Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details). Note - The above setbacks apply only to Class 1a and Class 10a buildings/structures. |
| | E3.2 |
| | Built to boundary walls are: |
| | a. provided on lots with a frontage less than 18m, in accordance with aplan of development approved by council as part of a previous development approval applying to the land or as subsequently amended by council in writing; |
| | OR |
| | b. for all other built to boundary walls refer to Table 9.3.1.7 'Built to boundary walls' (mandatory/optional); |
| | c. of a length and height in Table 9.3.1.7 'Built to boundary walls'; |
| | d. setback from the side boundary: |
| | i. not more than 20mm; or |
| | if a plan of development shows only one built to boundary wall on the boundary, not more than 200mm; |
| | e. on the low side of a sloping lot. |
| | Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls a 'easement for maintenance purposes' is recommended. |
| | Note - The above setbacks apply only to Class 1a and Class 10a buildings/structures. |

| Site cover PO4 Dwelling houses⁽²²⁾ and structures will ensure that site cover: a. provides open areas around buildings for useable and functional private open space; b. ensures that buildings and structures are consistent with the intended character of the area; c. does not result in other elements of the site being compromised (e.g. setbacks, open space etc). Note - This is a qualitative statement that is an alternative provision to the QDC, part MP1.1, P3 and MP1.2, P3. Note - Refer to Planning scheme policy - Residential design for details and examples. | E4 Site cover (excluding eaves, sun shading devices, patios, balconies and other unenclosed structures) does not exceed: a. Emerging community zone: Transition precinct (developed lot) - in accordance with the table below b. General residential zone: Coastal communities precinct – 50% Suburban neighbourhood precinct – 50% Next generation neighbourhood precinct – in accordance with the table below |
|--|--|
| | Urban neighbourhood precinct – in accordance with the table below c. Caboolture west local plan: Urban living precinct - Next generation sub-precinct - in accordance with the table below d. Redcliffe Kippa-Ring local plan: Interim residential precinct - 50% |

| | | | 300m ² or less | 301-400m ² | 401-500m ² | 501-1000m ² | Greater than 1000m ² |
|---|-------|--------------------------|------------------------------|-----------------------|---|---|---------------------------------------|
| | | 8.5m or less | 75% | 70% | 60% | 60% | 60% |
| | | >8.5m – 12.0m | 50% | 50% | 60% | 50% | 50% |
| | | >12.0m | N/A | N/A | N/A | 50% | 40% |
| | | to the QD with this p | C, part N provision | | d part MP1,2 g house ⁽²²⁾ i | an alternative , A3. Non-con requires a con | |
| Private open space | | | | | | | |
| PO5 | | No exam | ple pro | vided. | | | |
| Dwellings are provided with private open space that | t is: | | | | | | |
| a. of a size and dimension to be useable and functional; | | | | | | | |
| b. directly accessible from the dwelling; | | | | | | | |
| c. located so that residents and neighbouring properties experience a suitable level of reside amenity; | ntial | | | | | | |
| d. free of objects or structures that reduce or limit functionality. | it | | | | | | |
| Note - Dwelling houses ⁽²²⁾ adjoining an arterial or sub-arterial road must not locate private open space areas adjoining or within the setback to that road. Refer to Overlay map - Road hierarchy for road classifications. | | | | | | | |
| Note - Utility areas (e.g. driveways, air-conditioning units, water tanks, clothes drying facility, storage structures, refuse storage areas and retaining structures) are to be shown on a site plan. | | | | | | | |
| Note - Private open space areas may be included within an unenclosed living structure (e.g. patio). | | | | | | | |
| Note - This is a qualitative standard that relates to the amenity aesthetic impacts of the building or structure. | and | | | | | | |
| Car parking | I | | | | | | |
| PO6 | | E6 | | | | | |
| Car parking is provided on-site that provides for the number and type of vehicles anticipated to access to lot and ensures a surplus of car parking is avoided. | he | Car park table bel | - · | ces are pr | ovided in a | accordance | with the |
| Note - This is a qualitative statement that is an alternative provis to the QDC, part MP1.1, P8 and MP1.2, P8. | | Location | | | - | n number of d o be provide | |
| | I | | | | | | |

| | | Ge | neral residential zor | ne: | 3 per Dwelling house ⁽²²⁾ |
|--|--|-------------|---|---------------------------|---|
| | | • | Coastal commu precinct | nities | |
| | | • | Suburban neigh precinct | bourhood | |
| | | Re | dcliffe Kippa-Ring lo | ocal plan: | |
| | | • | Interim resident precinct | ial | |
| | | Err | nerging community z | zone: | 1 per Dwelling house ⁽²²⁾ |
| | | • | Transition precin (developed lot) | nct | |
| | | Ge | neral residential zor | ne: | |
| | | • | Next generation neighbourhood | | |
| | | • | Urban neighbou precinct | ırhood | |
| | | Са | boolture west local p | lan code: | |
| | | • | Urban living pre Next generation sub-precinct | | |
| | | | ote - Does not incluc ichinery. | le the park | ing of Heavy Vehicles or Heavy |
| | | to t wit | ote - This is a quantif the QDC, part MP1. h this provision for a ency response from | 1, A8 and p Dwelling I | ard that is an alternative provision oar MP1,2, A8. Non-compliance house ⁽²²⁾ requires a concurrence |
| PO | , | E7 | | | |
| Garages and carports facing a street are designed to: | | | rage and carport | opening | s are in accordance with the |
| a. | not dominate the street frontage; | | | | |
| b. | maintain active frontages and opportunities for surveillance from within the dwelling; | | mary or condary frontage | Covered frontage | car space opening(s) per street |
| C. | contribute to the intended character of the streetscape; | | eater than 18m | Not speci | |
| | | | eater than 12.5m 18m | OIII WIQE | maximum |
| d. | be separated to facilitate on street parking. | 12. | .5m* or less | Single sto | orey: 3.0m wide maximum; |
| Note - This is a qualitative standard that is an alternative provision to the QDC, part MP1.1, P1. | | | | recessed | ey: 6.0m wide maximum and 1.0m behind the front wall or of upper level. |
| | | | | | ote - Front wall is to have a minimum 40% of the adjoining frontage. |


| Note - This is a qualitative standard that relates aesthetic impacts of the building or structure. Note - Refer to Planning scheme policy - Resid details and examples. | OR For a laneway lot (Single or two storey): no |
|---|---|
| | Note - *For a laneway lot, vehicle access and parking must be provided via the laneway. Note - Refer to Planning scheme policy - Residential design for details and examples. Note - For a Dwelling house on a lot under 450m², this is a quantifiable standard that is an alternative provision to the QDC, part MP1.1, A1 (b). Non-compliance with this provision requires a concurrence agency response from Council. Note - For a Dwelling house on a lot of 450m² or more, this is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision requires a concurrence agency response from Council. |
| Access and driveways | |
| PO8 | E8.1 |
| Driveways, pedestrian entries and interare designed to: a. provide lawful access; b. not detract from the creation of ac frontages and positively contribute streetscape character; | ve streetNote - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. |
| c. provide a safe pedestrian environ d. not result in excessive crossovers areas; e. allows adequate space for on-street f. allows adequate space for street p trees; g. allow adequate space for garbage the location of street infrastructure | E8.2and hardstandet parking;and hardstandwhere there is a plan of development, driveway crossovers are located in accordance with a plan of development approved by Council as part of a development approval or as otherwise amended by Council in writing.collection andNote - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house |
| Note - This is a qualitative standard that relates in Schedule 9, Part 3, Division 2, Table of Regu Note - Refer to Planning scheme policy - Resid details and examples. | a concurrence agency response from council. matters identified tion. E8.3 Driveways do not include a reversing bay, manoeuvring |

| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. | | |
|--|---|--|--|
| PO9 | No example provided. | | |
| The driveway construction across the verge conforms to the relevant standard drawing for the classification of the road in accordance with Planning scheme policy - Integrated design. Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | | | |
| | | | |
| PO10 | No example provided. | | |
| Site access and driveways are designed and located in accordance with: | | | |
| a. where for a Council-controlled road, AS/NZS2890.1, section 3; | | | |
| where for a State-controlled road, the Safe Intersection Sight Distance requirements in AustrRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act, section 62 approval. | | | |
| Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | | | |
| Screening – fences | | | |
| PO11 | No example provided. | | |
| Fencing and screening complements the streetscape character, contributes to privacy while maintaining surveillance between buildings and public spaces. | | | |
| Note - The objective of providing surveillance of the street takes precedence over the provision of physical barriers for noise mitigation purposes. Where a barrier for noise is unavoidable it is to be aesthetically treated in accordance with an option detailed in Planning scheme policy - Residential design. | | | |
| Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | | | |
| Note - Refer to Planning scheme policy - Residential design for details and examples. | | | |
| Casual surveillance | | | |
| PO12 | E12.1 | | |

| Buildings and structures are designed and oriented to have active frontages that provide visual interest, address road frontages and facilitate casual surveillance of all public spaces (streets, laneways, public open space areas, pedestrian paths and car parking areas) through: | The Dwelling house (or the primary dwelling if including a secondary dwelling) must address primary frontages (excluding motorway and arterial roads) with a minimum of a front door, window(s) and pedestrian entrance. |
|--|---|
| a. incorporating habitable room windows and balconies that overlook public spaces including secondary frontages; | Note - If an acoustic fence has been conditioned as part of a reconfiguring a lot approval this provision does not apply to that frontage. |
| b. emphasising the pedestrian entry so that it is easily identifiable and safely accessible from the primary | Note - Refer to Overlay map - Road hierarchy for road classification. |
| frontage. Note - Dwelling houses ⁽²²⁾ adjoining an arterial or sub-arterial road | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| Note - Dwelling houses. ⁴⁴⁷ adjoining an arterial or sub-arterial road must address the arterial or sub-arterial road. Refer to Overlay map - Road hierarchy for road classifications. | Note - Refer to Planning scheme policy - Residential design for details and examples. |
| Note - Refer to State Government standards for CPTED. | |
| Note - Ground level dwellings at the front of the lot have individual access points to the street. | E12.2 A minimum of one habitable room window having an area of at least 1m ² on each level overlooks each adjoining public space (street, public open space or laneway). |
| Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| Waste | |

| Each dwelling (primary and secondary) includes a bin storage area that: a. is not visible from public areas or screened from public areas; |
|---|
| storage area that: a. is not visible from public areas or screened from |
| • |
| |
| is not located in the primary frontage setback, unless the dwelling is built to boundary on both sides of the lot with only one frontage; |
| c. is not located in an enclosed garage; |
| has a minimum area of 1m x 2m; |
| e. has access to the collection point without going through a dwelling (excluding a garage). |
| Note - Refer to Planning scheme policy - Residential design for details and examples. |
| с. d. е. |

| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
|--|---|
| PO14 | No example provided. |
| Waste storage areas are: | |
| a. not located in front of the main building line; or | |
| b. are screened and aesthetically treated (e.g. with landscaping) to not dominate the streetscape. | |
| Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | |
| Note - Refer to Planning scheme policy - Residential design for details and examples. | |
| Utilities | |
| PO15 | E15 |
| The dwelling is connected to: | The dwelling is connected to: |
| a. an existing reticulated electricity supply; | a. an existing reticulated electricity supply; |
| b. reticulated sewerage; | b. reticulated sewerage where in a reticulated area; |
| c. reticulated water; | c. reticulated water; |
| d. dedicated and constructed road. | d. dedicated and constructed road. |
| Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| Sloping land | |
| PO16 | E16 |
| All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents. Note - Note - This is a quantifiable standard that relates to the amenity and aesthetic impacts of the building or structure. | Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary; |

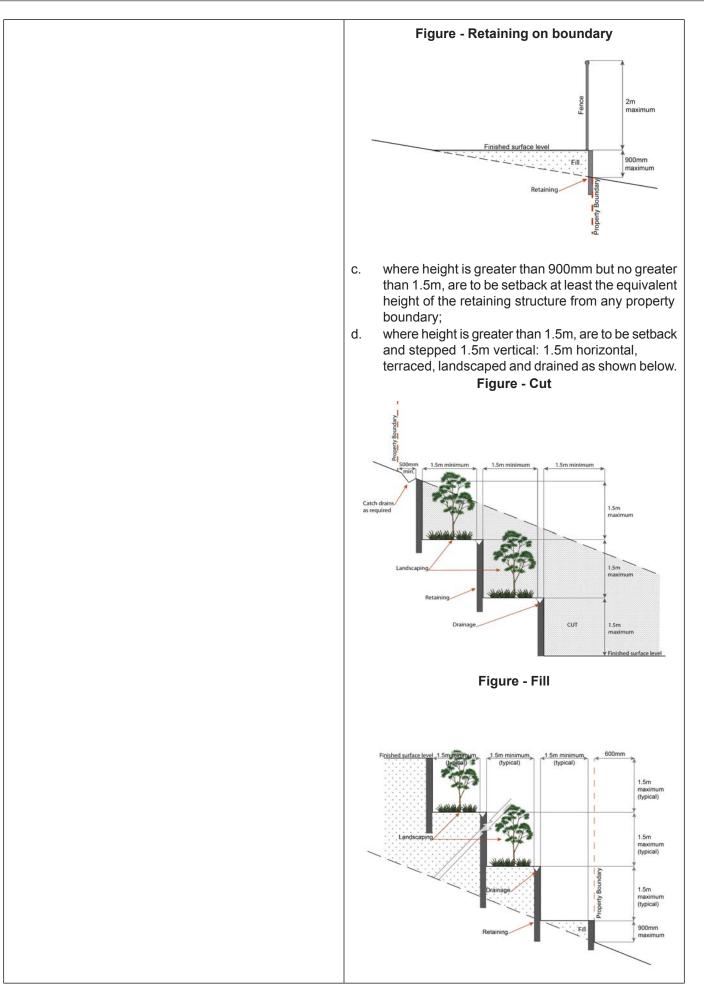

| | Note - This is a quantifiable standard that relates to the amenity and aesthetic impacts of the building or structure. |
|---|---|
| P017 | E17.1 |
| Development is designed to respond to sloping topography in the sitting, design and form of buildings and structures by: a. minimising overuse of cut and fill to create single flat pads and benching; b. avoiding expanses of retaining walls, loss of trees and vegetation and interference with natural drainage systems; c. minimising any impact on the landscape character of the zone; d. protecting the amenity of adjoining properties. Note - This is a quantifiable standard that relates to the amenity and aesthetic impacts of the building or structure. | Building and lot design on slopes between 10% and 15% must: a. avoid single-plane slabs and benching with the use of split-level, multiple-slab, pier or pole construction; b. have built to boundary walls on the low side of the lot to avoid drainage issues. Note - This is a quantifiable standard that relates to the amenity and aesthetic impacts of the building or structure. E17.2 New buildings on land with a slope greater than 15% do not have slab on ground construction. Note - This is a quantifiable standard that relates to the amenity and aesthetic impacts of the building or structure. |
| Development on a laneway | |
| PO18 | E18 |
| Where a lot has a non-laneway frontage, the dwelling is designed and orientated towards the non-laneway frontage e.g. Street or park) and incorporates design elements to address and activate the non-laneway frontage (e.g. front door, windows, low front fencing (if any) with a gate etc). Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | The Dwelling house⁽²²⁾ (or the primary dwelling where including a secondary dwelling) a. faces the non-laneway frontage; b. has its main pedestrian entrance (front door) from the non-laneway frontage. Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house⁽²²⁾ requires a concurrence agency response from Council. |
| PO19 | No example provided. |
| All vehicle access must be via the laneway. | |
| Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | |
| PO20 Dwelling houses ⁽²²⁾ on laneways contribute to the streetscape by: | No example provided. |

| a. | providing concealed garbage bin storage areas to reduce the dominance of bins on the lane; | |
|---|--|--|
| b. | maximising security and amenity; | |
| C. | including landscaping that: | |
| | i. does not provide areas of concealment; | |
| | breaks up the dominance of garages and vehicle parking; | |
| | iii. delineates the boundaries between lots. | |
| | e - This is a qualitative standard that relates to matters identified Schedule 9, Part 3, Division 2, Table of Regulation. | |
| Sec | ondary dwelling | Γ |
| PO2 | 21 | E21.1 |
| Sec | ondary dwellings: | The siting and design of dwellings ensures that the secondary dwelling is: |
| a. | are subordinate and ancillary to the primary dwelling in size and function; | a. not located in front of the primary dwelling; |
| b. | have a GFA that does not exceed: i. 45m² for a lot with a primary frontage less than 15m; or ii. 55m² for a lot with a primary frontage of 15m | b. annexed to (adjoining, below or above) or located within 10.0m of the primary dwelling (excluding domestic outbuildings). Note - Refer to Planning scheme policy - Residential design for |
| c. d. | or more. have the appearance, bulk and scale of a single dwelling from the street; maintain sufficient area for the siting of all buildings, structures landscaping and car parking spaces for | details and examples. Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from council. |
| structures, landscaping and car parking spaces for the Dwelling house ⁽²²⁾ on the lot. Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. | | E21.2 No more than 1 secondary dwelling is located on an allotment. Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. |
| | | E21.3 The GFA of the secondary dwelling does not exceed: |

| | a. 45m² GFA for a lot with a primary frontage less than 15m; or b. 55m² GFA for a lot with a primary frontage of 15m or more. |
|-----------------------|---|
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. |
| | E21.4 |
| | Where additional car parking spaces are provided, car parking spaces are co-located with the parking spaces for the primary dwelling to appear as a single dwelling from the street. |
| | Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house ⁽²²⁾ requires a concurrence agency response from Council. |
| Domestic outbuildings | 1 |

Domestic outbuild

PO22

Domestic outbuildings and car ports are:

- a. of a height that does not negatively impact the visual amenity of adjoining properties;
- b. located on-site to not dominate the streetscape.

Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian.

Note - This is a qualitative standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation.

E22

Domestic outbuildings:

a. have a total combined maximum roofed area as outlined in the table below:

| Size of lot | Maximum roofed area |
|--|---------------------|
| Less than 600m ² | 50m ² |
| 600m ² - 1000m ² | 70m ² |
| >1000m ² - 2000m ² | 80m ² |
| Greater than 2000m ² | 150m ² |

- b. have a maximum building height of 4m and a mean height not exceeding 3.5m;
- c. are located behind the main building line and not within primary or secondary frontage setbacks.

Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian.

Note - This is a quantifiable standard that relates to matters identified in Schedule 9, Part 3, Division 2, Table of Regulation. Non-compliance with this provision for a Dwelling house⁽²²⁾ requires a concurrence agency response from Council. Note - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.1, A4 and part MP1.2, A4. Non-compliance with this provision for a Dwelling house requires a concurrence agency response from Council.

Note - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.1, A1 (a), (b) and (c), A2 (a), (b) and (d) and part MP1.2, A1 (a), (b) and (c), A2 (a), (b) and (d). Non-compliance with this provision for a Dwelling houserequires a concurrence agency response from Council. Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).

Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

| PO23 | E23 | | |
|---|---|--|--|
| Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development: a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment; b. protects the environmental and ecological values and health of receiving waters; c. protects buildings and infrastructure from the effects of acid sulfate soils. | Development does not involve: a. excavation or otherwise removing of more than 100m³ of soil or sediment where below than 5m Australian Height datum AHD; or b. filling of land of more than 500m³ of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD. | | |

Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note – The following are excluded from the native vegetation clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;

h. Grazing of native pasture by stock;

i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

| Vegetation clearing, ecological value and connectivity | | |
|--|----------------------|--|
| PO24 | No example provided. | |
| Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that: | | |
| a. the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded; b. on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*. * Editor's note - This is not a requirement for an environmental offset under the Environmental Offset Act 2014. | | |
| PO25 | No example provided. | |
| Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by: | | |
| a. retaining habitat trees; b. providing contiguous patches of habitat; c. provide replacement and rehabilitation planting to improve connectivity; | | |

| No example provided. |
|----------------------|
| |
| No example provided. |
| |
| |
| No example provided. |
| |
| |
| |
| No example provided. |
| |
| |
| |

| PO30 | No example provided. |
|--|------------------------|
| Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by: | |
| a. ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads; b. avoiding or minimising changes to landforms to maintain hydrological water flows; c. adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry⁽⁴⁾ and animal keeping⁽⁵⁾ activities. | |
| PO31 | No example provided. |
| Development minimises adverse impacts of stormwater run-off on water quality by: | |
| a. minimising flow velocity to reduce erosion; b. minimising hard surface areas; c. maximising the use of permeable surfaces; d. incorporating sediment retention devices; e. minimising channelled flow. | |
| Vegetation clearing and access, edge effects and urb | an heat island effects |
| PO32 | No example provided. |
| Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment. | |
| PO33 | No example provided. |
| Development minimises potential adverse 'edge effects' on ecological values by: | |
| a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; | |
| c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; | |
| d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors; | |
| e. landscaping with native plants of local origin. | |
| Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and | |

| light pollution, increased fire frequency and changes in the groundwater and surface water flow. | |
|--|---|
| PO34 | No example provided. |
| Development avoids adverse microclimate change and does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by: | |
| a. pervious surfaces; b. providing deeply planted vegetation buffers and green linkage opportunities; c. landscaping with local native plant species to achieve well-shaded urban places; d. increasing the service extent of the urban forest canopy. | |
| Vegetation clearing and Matters of Local Environmen | tal Significance (MLES) environmental offsets |
| PO35 | No example provided. |
| Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas. Editor's note - For MSES Koala Offsets, the environmental offset provisions in Schedule 11 of the Regulation, in combination with the requirements of the Environmental Offsets Act 2014, apply. | |
| Extractive resources separation area (refer Overlay mains if the following assessment criteria apply) Note - To demonstrate achievement of the performance outcomes, a person. Guidance to preparing noise impact assessment report is pro- | noise impact assessment report is prepared by a suitably qualified |
| PO36 | E36 |
| Development does not increase the number of people living in the Extractive Resources separation area. | One dwelling house ⁽²²⁾ permitted per lot within separation area. |
| PO37 | E37 |
| Development: a. does not introduce or increase uses that are sensitive to the impacts of an Extractive industry⁽²⁷⁾; b. is compatible with the operation of an Extractive industry⁽²⁷⁾; c. does not comprise or undermine the function and integrity of the separation area in providing a buffer between key extractive and processing activities and sensitive, incompatible uses outside the separation area. | Development within the separation area does not include the following activities: a. Caretaker's accommodation ⁽¹⁰⁾ ; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling unit ⁽²³⁾ ; e. Hospital ⁽³⁶⁾ ; f. Rooming accommodation ⁽⁶⁹⁾ ; g. Multiple dwelling ⁽⁴⁹⁾ ; h. Non-resident workforce accommodation ⁽⁵²⁾ ; |

| PO41 Development: | E41.1 Development does not create a new vehicle access point onto an Extractive resources transport route. |
|--|--|
| PO40 Development: a. does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route; b. does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes; c. adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to: i. locating the furthest distance possible from the transportation route; ii. habitable rooms being located the furthest from the transportation route; iii. shielding and screening private outdoor recreation space from the transportation routes. | E40 The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house⁽²²⁾; e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; n. Rural workers' accommodation⁽⁷⁷¹⁾; o. Short-term accommodation⁽⁷⁷⁷⁾; p. Tourist park⁽⁸⁴⁾. |
| PO39 Development provides open space areas for passive recreation in a manner where impacts from key extractive/processing activities, particularly noise, is minimised. Extractive resources transport route (refer Overlay n to determine if the following assessment criteria app | E39 Private open space areas are separated from the resource processing area by buildings or a 1.8m high solid structure. pap - Extractive resources (transport route and buffer) |
| PO38 Habitable rooms achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment. | i. Relocatable home park⁽⁶²⁾; j. Residential care facility⁽⁶⁵⁾; k. Resort complex⁽⁶⁶⁾; l. Retirement facility⁽⁶⁷⁾; m. Rural workers' accommodation⁽⁷¹⁾; n. Short-term accommodation⁽⁷⁷⁾; o. Tourist park⁽⁸⁴⁾. E38 All habitable rooms within the separation area are: a. acoustically insulated to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008; b. provided with mechanical ventilation. |

| a. | | |
|----------------------------------|---|--|
| b. c. | does not adversely impact upon the efficient and effective transportation of extractive material along a transportation route; ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility; utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard. | E41.2 A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design. |
| the Not by a Not add | following assessment criteria apply) e - To assist in demonstrating achievement of heritage performance a suitably qualified person verifying the proposed development is in e - To assist in demonstrating achievement of this performance out ordance with Planning scheme policy – Heritage and landscape of pted in accordance with AS 4970-2009 Protection of trees on dev e - Places, including sites, objects and buildings having local cultur dscape character and listed in Schedule 1 of Planning scheme policies and the scheme policies of the scheme poli | tcome, a Tree assessment report is prepared by a qualified arborist in haracter. The Tree assessment report will also detail the measures elopment sites. ral heritage significance, are identified on Overlay map - Heritage and |
| | tage significance at a State level and being entered in the Queen eme policy - Heritage and landscape character. | sland Heritage Register, are also identified in Schedule 1 of Planning |
| | eme policy - Heritage and landscape character. | |

 PO43
 No example provided.

 Demolition and removal is only considered where:
 a.

 a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or
 b.

 b. demolition is confined to the removal of
 b.

outbuildings, extensions and alterations that are not part of the original structure; or

| c. limited demolition is performed in the course of repairs, maintenance or restoration; or d. demolition is performed following a catastrophic event which substantially destroys the building or object. | |
|--|---|
| PO44 | No example provided. |
| Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view. | |
| PO45 | E45 |
| Development does not adversely impact upon the health and vitality of significant trees. Where development occurs in proximity to a significant tree, construction measures and techniques as detailed in AS 4970-2009 Protection of trees on development sites are adopted to ensure a significant tree's health, wellbeing and vitality. Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably qualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome. | Development does: a. not result in the removal of a significant tree; b. not occur within 20m of a protected tree; c. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 – Pruning of Amenity Trees. |
| Infrastructure buffers (refer Overlay map - Infrastruct criteria apply) | ture buffers to determine if the following assessment |
| PO46 | E46 |
| Odour sensitive development is separated from Wastewater treatment plants so they are not adversely affected by odour emission or other air pollutant impacts. | The following uses are not located within a wastewater treatment site buffer: a. Caretaker's accommodation ⁽¹⁰⁾ ; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; n. Rural workers' accommodation ⁽⁷¹⁾ ; |

- Short-term accommodation⁽⁷⁷⁾; Tourist park⁽⁸⁴⁾. о.
- p.

PO47

| Development within a Bulk water supply infrastructure buffer is located, designed and constructed to: a. protect the integrity of the water supply pipeline; b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline; PO48 Development is located and designed to maintain required access to Bulk water supply infrastructure. | Development: a. does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer; b. involving a major hazard facility or environmentally relevant activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer. E48 Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things): a. buildings or structures; b. gates and fences; c. storage of equipment or materials; d. landscaping or earthworks or stormwater or other infrastructure. |
|--|---|
| PO49 Development within the Gas pipeline buffer: a. avoids attracting people in large numbers to live, work or congregate; b. avoids the storage of hazardous chemicals; c. maintains adequate access for any required maintenance or upgrading work; d. minimises risk of harm to people and property. Editor's note - The <i>Petroleum and Gas (Production and Safety) Act 2004</i> (sections 807 and 808) requires that building or changes in surface level on pipeline land must not occur unless all the pipeline licence holders consent. | E49 Development does not involve the construction of any buildings or structures within the Gas pipeline buffer. Editor's note - The <i>Petroleum and Gas (Production and Safety) Act</i> 2004 (sections 807 and 808) requires that building or changes in surface level on pipeline land must not occur unless all the pipeline licence holders consent. |
| PO50 Odour sensitive development is separated from landfill sites so they are not adversely affected by odour emission or other air pollutant impacts. | E50 The following uses are not located within a Landfill buffer: a. Caretaker's accommodation ⁽¹⁰⁾ ; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house ⁽²²⁾ ; e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; n. Rural workers' accommodation ⁽⁷¹⁾ ; o. Short-term accommodation ⁽⁷⁷⁾ ; p. Tourist park ⁽⁸⁴⁾ . |

| PO51 | E51 |
|--|---|
| Habitable rooms within an Electricity supply substation buffer are located a sufficient distance from substations ⁽⁸⁰⁾ to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields. Note - Habitable room is defined in the Building Code of Australia (Volume 1) | Habitable rooms: a. are not located within an Electricity supply substation buffer; and b. proposed on a site subject to an Electricity supply supply substation⁽⁸⁰⁾ are acoustically insulted to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008. Note - Habitable room is defined in the Building Code of Australia (Volume 1) |
| PO52 | No example provided. |
| Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation ⁽⁸⁰⁾ to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment. Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy – Noise. Note - Habitable room is defined in the Building Code of Australia (Volume 1) | |
| P053 | E53 |
| Development within a High voltage electricity line buffer provides adequate buffers to high voltage electricity lines to protect amenity and health by ensuring development: a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields in accordance with the principle of prudent avoidance; b. is located and designed in a manner that maintains a high level of security of supply; c. is located and design so not to impede upon the functioning and maintenance of high voltage electrical infrastructure. | Development does not involve the construction of any buildings or structures within a High voltage electricity line buffer. |
| Overland flow path (refer Overlay map - Overland flow apply) | path to determine if the following assessment criteria |
| Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council. | d with defined flood event (DFE) within the inundation area can be |

| PO54 | No example provided. |
|--------------|----------------------|
| Development: | |

| a. b. | minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure. | |
|----------------|---|--|
| PO5 | 5 | E55 |
| Dev | elopment: | No example provided. |
| a. b. | maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment; does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property. | |
| Eng doe | e - A report from a suitably qualified Registered Professional ineer Queensland is required certifying that the development s not increase the potential for significant adverse impacts on upstream, downstream or surrounding premises. | |
| | e - Reporting to be prepared in accordance with Planning scheme cy – Flood hazard, Coastal hazard and Overland flow. | |
| PO5 | 6 | No example provided. |
| Dev | elopment does not: | |
| a. b. | directly, indirectly or cumulatively cause any increase in overland flow velocity or level; increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure. | |
| acce | e - Open concrete drains greater than 1m in width are not an eptable outcome, nor are any other design options that may ease scouring. | |
| PO5 | 7 | E57 |
| the e detri | elopment ensures that public safety and the risk to environment are not adversely affected by a mental impact of overland flow on a hazardous mical located or stored on the premises. | Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances. |
| PO5 | 8 | E58 |
| over | elopment which is not in a Rural zone ensures that land flow is not conveyed from a road or public open ce onto a private lot. | Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot. |

| P059 | E59.1 |
|--|---|
| POS9 Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow PO60 Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over: a. a stormwater pipe if the nominal pipe diameter exceeds 300mm; b. an overland flow path where it crosses more than one premises; c. inter-allotment drainage infrastructure. Note - Refer to Planning scheme policy - Integrated design for details and examples. Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM. | Es9.1 Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM: a. Urban area – Level III; b. Rural area – N/A; c. Industrial area – Level V; d. Commercial area – Level V. E59.2 Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment. No example provided. |
| Additional criteria for development for a Park ⁽⁵⁷⁾ | |
| PO61 | E61 |
| Development for a Park ⁽⁵⁷⁾ ensures that the design and layout responds to the nature of the overland flow affecting the premises such that: | Development for a Park ⁽⁵⁷⁾ ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design. |
| a. public benefit and enjoyment is maximised; | |
| b. impacts on the asset life and integrity of park structures is minimised; | |
| c. maintenance and replacement costs are minimised. | |
| Riparian and wetland setbacks | |
| PO62 | E62 |
| | |

| Development provides and maintains a suitable setback from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following matters: a. impact on fauna habitats; Development does not occur within: a. 50m from top of bank for W1 waterway and drainage line b. 30m from top of bank for W2 waterway and drainage line | nd |
|---|---|
| environmental values. This is achieved by recognising and responding to the following matters: | nd |
| a. impact on fauna habitats: b. 30m from top of bank for W2 waterway and | nd |
| drainage line | |
| b. impact on wildlife corridors and connectivity; c. impact on stream integrity; c. impact on stream integrity; c. and the stream integrity; <l< td=""><td></td></l<> | |
| d.impact of opportunities for revegetation and rehabilitation planting;d.100m from the edge of a Ramsar wetland, from all other wetlands. | I, 50m |
| e. edge effects. Note - W1, W2 and W3 waterway and drainage lines, and w are mapped on Schedule 2, Section 2.5 Overlay Maps – Ri and wetland setbacks. | |
| | Scenic |
| Scenic amenity - Regionally significant (Hills) and Locally important (Coast) (refer Overlay map - So amenity to determine if the following assessment criteria apply) | |
| | |
| amenity to determine if the following assessment criteria apply) PO63 E63 Development: Where located in the Regionally significant (Hills) | |
| amenity to determine if the following assessment criteria apply)PO63E63 | iot: |
| amenity to determine if the following assessment criteria apply) PO63 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings as the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the E63 Where located in the Regionally significant (Hills) amenity overlay, buildings and structures are not a located on a hill top or ridge line; b. all parts of the building and structure are lobelow the hill top or ridge line. | iot: |
| amenity to determine if the following assessment criteria apply) PO63 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings as the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the environment. | ot: located s) scenic traight up atters or |
| amenity to determine if the following assessment criteria apply) PO63 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings as the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the environment. PO64 Development: a. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. | ot: located s) scenic traight up atters or |
| amenity to determine if the following assessment criteria apply) PO63 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings as the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the environment. PO64 Development: a. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. c. go across land contours, and do not cut stratic slopes; b. follow natural contours, not resulting in battic retaining walls being greater than 900mm in that: PO65 Buildings and structures incorporate colours and finishes that: | ot: located s) scenic traight up atters or in height. s) scenic |
| amenity to determine if the following assessment criteria apply) PO63 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings as the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the environment. PO64 Development: a. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic: b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. coludings and structures incorporate colours and finishes that: a. are consistent with a natural, open space character and bushland environment; E65.1 Evelours from Australian Standard AS2700s – 1996 | ot: located s) scenic traight up atters or in height. s) scenic |
| amenity to determine if the following assessment criteria apply) PO63 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings as the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape characteristic; c. is viewed as being visually consistent with the natural landscape characteristic; does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. e. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. e. adoes not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. e. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. e. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. Buildings and structures incorporate colours and finishes that: | s) scenic traight up atters or in height. s) scenic dings and |
| amenity to determine if the following assessment criteria apply) PO63 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings as the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the environment. PO64 Development: a. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. c. follow natural contours, not resulting in batt retaining walls being greater than 900mm in that: a. are consistent with a natural, open space character and bushland environment; b. do not produce glare or appear visual incompatible | s) scenic traight up atters or in height. s) scenic dings and |
| amenity to determine if the following assessment criteria apply) PO63 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings at the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the environment. PO64 Development: a. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. b. retains the natural character or bushland settings as the dominant landscape characteristic. PO65 Buildings and structures incorporate colours and finishes that: a. are consistent with a natural, open space character and bushland environment; b. do not produce glare or appear visual incompatible with the surrounding natural character and bushland environment; E65.1 | s) scenic traight up atters or in height. s) scenic dings and idge Grey ala Grey |

| | G16 – Traffic Green | G64 – Slate | N55 – Lead Grey |
|---|--|---|---|
| | G17 – Mint Green | G65 – Ti Tree | X54 – Brown |
| | G21 – Jade | N25 – Birch Grey | X61 – Wombat |
| | G22 – Serpentine | N32 – Green Grey | X62 – Dark Earth |
| | G23 – Shamrock | N33 – Lightbox Grey | X63 – Iron Bark |
| | G24 – Fern Green | N35 – Light Grey | Y51 – Bronze Olive |
| | G25 – Olive | N41 – Oyster | Y61 – Black Olive |
| | G34 – Avocado | N42 – Storm Grey | Y63 – Khaki |
| | G52 – Eucalyptus | N43 – Pipeline Grey | Y66 – Mudstone |
| | G53 – Banksia | | |
| | | • | |
| | E65.2 | | |
| | Where located in th amenity overlay, ro structures are pain less than 35%. | ofs and wall surfac | es of buildings and |
| PO66 | E66 | | |
| Landscaping a. complements the coastal landscape character and amenity; b. has known resilience and robustness in the coastal environment; Fences and walls: a. do not appear visually dominant or conspicuous within its setting; b. reduce visual appearance through the use of built form articulation, setbacks, and plant screening; c. use materials and colours that are complementary to the coastal environment. Building design responds to the bayside location and complements the particular bayside character and amenity by adopting and incorporating a range of architectural character elements. Vegetation that contributes to bayside character and identity are: a. retained; | b. fences and w c. existing pine cotton trees a d. where over 1 includes the f elements: i. curving vertical ii. balcony different and win iii. roof top devices iv. lightweig | comprises indigeno alls are no higher i trees, palm trees, i are retained. 2m in height, the b following architectu balcony edges and blades and wall pla roofs, wall articulat t colours, curves in dow awnings; outlooks, tensile str ; ght structures use ts in steel and timb | us coastal species than 1m; and mature fig and uilding design iral character d walls, strong anes; ion expressed with plan and section uctures as shading white frame |

Note - This is for information purposes only. No requirements for accepted development or assessable criteria apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code

assessment criteria apply)

Setback Tables

Table 9.3.1.3 Setbacks

| | Coastal communities precinct and Redcliffe Kippa-Ring local plan - Interim residential precinct | | | | | | | | | |
|----------------------|---|---------------------|---|---------|---------------------------------|---|---|----------------------------|----------------------------|-----------------------------|
| Height of wall | | Frontage Primary | | | Frontage Secondary to street | | | Side To OMP and wall | Rear To OMP and wall | Canal To OMP and wall |
| | To wall | То ОМР | To covered car parking space | To wall | То ОМР | To covered car parking space | To OMP, wall and covered car parking space | | | |
| | | | Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian. | | | Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian. | 5 | | | |
| Less than 4.5m | Min 6m | Min 4.5m | Min 5.4 | Min 3m | Min 2m | Min 5.4 | Min 0.5 | As per QDC | As per QDC | Min 4.5m |
| 4.5m to 8.5m | Min 6m | Min 4.5m | N/A | Min 3m | Min 2m | N/A | Min 0.5 | As per QDC | As per QDC | Min 4.5m |
| Greater than 8.5m | Min 6m | Min 4.5m | N/A | Min 3m | Min 2m | N/A | Min 0.5 | As per QDC | As per QDC | Min 4.5m |

Table 9.3.1.4 Setbacks

| | General residential zone - Suburban neighbourhood precinct and Township zone - Residential precinct | | | | | | | | | |
|----------------------|---|--------|---|---------------------------------|--------|---|---|--|----------------------------|-----------------------------|
| Heightof wall | Frontage Primary | | | Frontage Secondary to street | | | Frontage Secondary to lane | Side Non-built to | Rear To OMP and wall | Canal To OMP and wall |
| | To wall | To OMP | To covered car parking space Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian. | | To OMP | To covered car parking space Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian. | To OMP, wall and covered car parking space | boundary wall To OMP and wall | | |
| Less than 4.5m | Min 4.5m | Min 3m | Min 5.4 | Min 3m | Min 2m | Min 5.4 | Min 0.5 | As per QDC | As per QDC | Min 4.5m |
| 4.5m to 8.5m | Min 4.5m | Min 3m | N/A | Min 3m | Min 2m | N/A | Min 0.5 | As per QDC | As per QDC | Min 4.5m |

Table 9.3.1.5 Setbacks

| Emerging | | | | | | Il residential lext generation | | | | od precinct |
|----------------------|-----------------|--------|---|-----------------------------|--------|---|--------------------------------------|--|----------------------------|-----------------------------|
| Heightof wall | FrontagePrimary | | | FrontageSecondary to street | | | Frontage Secondary to lane | SideNon-built to boundary | Rear To OMP and wall | Canal To OMP and wall |
| | To wall | То ОМР | To covered car parking space | To wall | То ОМР | To covered car parking space | red wall and r covered ing car | wall To OMP and wall | | |
| | | | Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian. | ; | | Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian. | ; | | | |
| Less than4.5m | Min 3m | Min 2m | Min 5.4m | Min 2m | Min 1m | Min 5.4m | Min 0.5 | As per QDC | As per QDC | Min 4.5m |
| 4.5m to 8.5m | Min 3m | Min 2m | N/A | Min 2m | Min 1m | N/A | Min 0.5 | As per QDC | As per QDC | Min 4.5m |
| Greater than 8.5m | Min 6m | Min 5m | N/A | Min 3m | Min 2m | N/A | Min 0.5 | As per QDC | As per QDC | Min 4.5m |

Table 9.3.1.6 Setbacks

| Heightof wall | FrontagePrimary | | | FrontageSecondary to street | | | FiortegSecorday to lane | SideNon-built to boundary | Rear To OMP and wall | Canal To OMP and wall |
|------------------|-----------------|--------|---|-----------------------------|--------|---|----------------------------|---------------------------------|----------------------------|-----------------------------|
| | To wall | To OMP | To covered car parking space Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian. | To wall | Το ΟΜΡ | To covered car parking space Note - These requirements apply to all Class 10a buildings and structures as defined by the Building Code of Australian. | | wall To OMP and wall | waii | waii |

9 Development codes

| Less than4.5m | Min 1m | Min 1m | Min 5.4m | Min 1m | Min 1m | Min 5.4m | Min 0.5 | As per QDC | As per QDC | Min 4.5m |
|-------------------------|--------|--------|----------|--------|--------|----------|---------|---------------|---------------|----------|
| 4.5 to 8.5m | Min 1m | Min 1m | N/A | Min 1m | Min 1m | N/A | Min 0.5 | As per QDC | As per QDC | Min 4.5m |
| Greater than 8.5m | Min 5m | Min 3m | N/A | Min 2m | Min 1m | N/A | Min 0.5 | As per QDC | As per QDC | Min 4.5m |

Table 9.3.1.7 Built to boundary walls

| Lot frontage width | Mandatory / Optional | Length and height of built to boundary wall | | | | | | | | |
|----------------------------|---|--|--|--|--|--|--|--|--|--|
| width | Optional | General residential zone: Coastal communities precinct Suburban neighbourhood precinct Redcliffe Kippa-Ring local plan: Interim residential precinct | Emerging community zone: Transition precinct (Developed lot) General residential zone: Next generation neighbourhood precinct Caboolture West local plan: Urban living precinct (Next generation sub-precinct) | Emerging community zone: Transition precinct (Developed lot) if within the Morayfield South urban area on Figure 9.3.1.1 General residential zone: Urban neighbourhood precinct | | | | | | |
| 7.5m or less | Mandatory - both sides unless a corner lot | Not permitted* | Max Length: 80% of the length of the boundary Max Height: 7.5m | Max Length: 80% of the length of the boundary Max Height: 8.5m | | | | | | |
| More than 7.5m to 12.5m | Mandatory - one side | Not permitted* | Max Length: 60% of the length of the boundary Max Height: 7.5m | Max Length: 70% of the length of the boundary Max Height: 10.5m | | | | | | |
| More than 12.5m to 18m | Optional: i. on 1 boundary only; ii. where the built to boundary wall adjoins a lot with a frontage less than 18m. Not permitted - Otherwise | Not permitted* | Max Length: the lesser of 15m or 60% of the length of the boundary Max Height: 7.5m | Max Length: the lesser of 15m or 60% of the length of the boundary Max Height: 10.5m | | | | | | |
| Greater than 18m | Not permitted* | Not permitted* | Not permitted* | Not permitted* | | | | | | |

Note -The above setbacks apply only to Class 1a and Class 10a buildings/structures.

Note - Max Length includes the length of walls of any other buildings on the same boundary. e.g. detached garage, carport or shed.

Note - For the maximum height of domestic outbuildings refer to the examples that achieve aspects of the performance outcomes for building height and domestic outbuildings.

*Note - Built to boundary walls are not permitted, however, reduced side and rear boundary clearances may be permitted as prescribed (e.g. QDC).



