


VISION IMPAIRED PEDESTRIAN CLEARANCE REQUIREMENTS FROM BUILDING SHORELINE

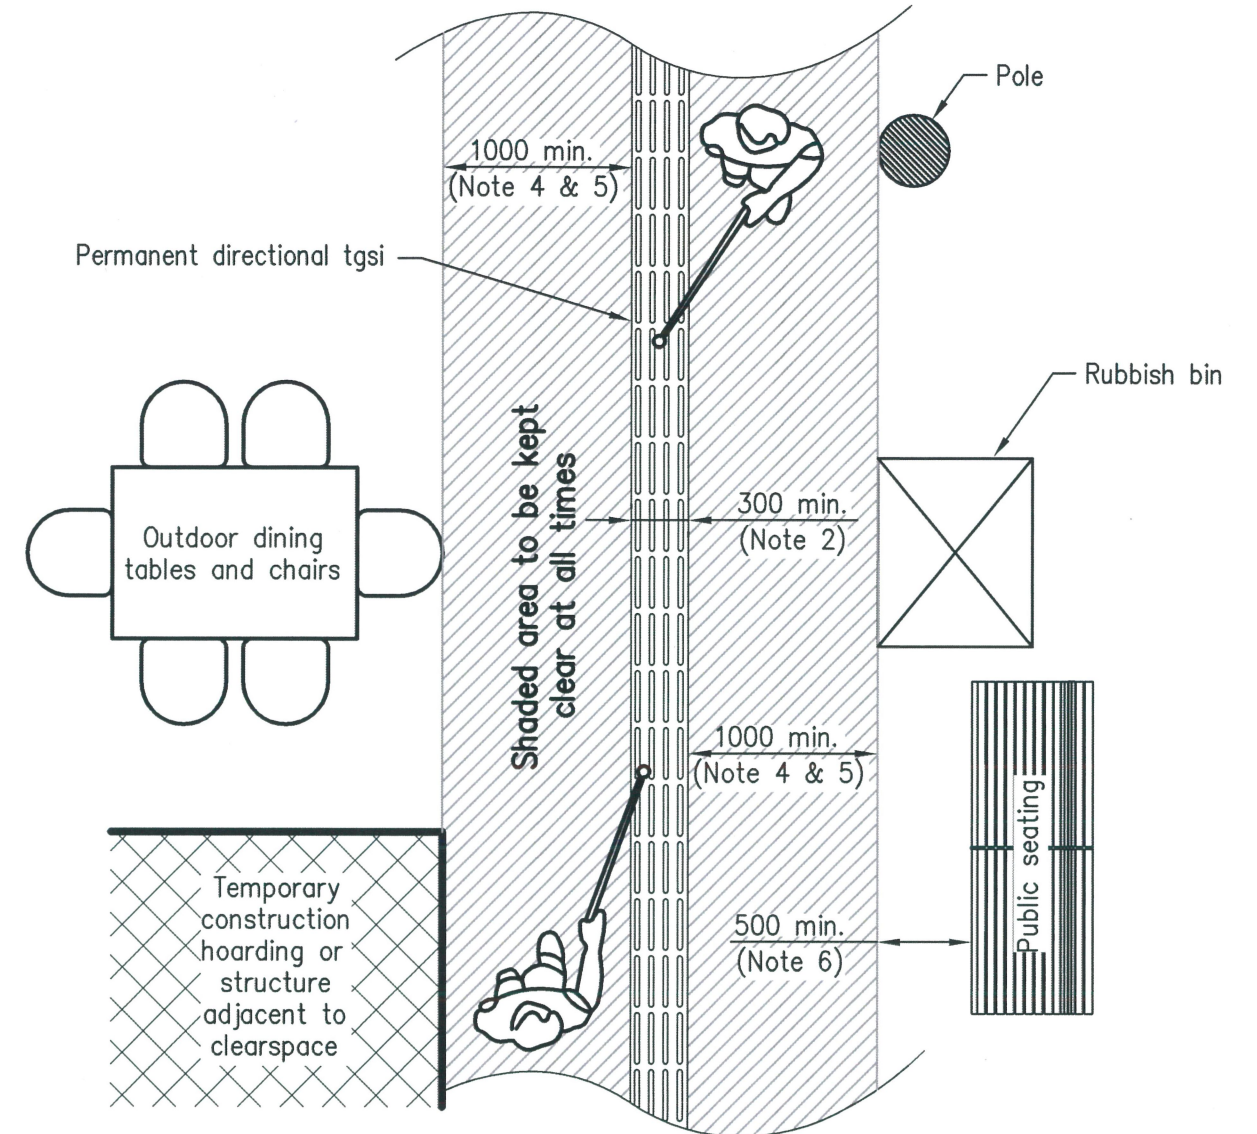

VISION IMPAIRED PEDESTRIAN CLEARANCE REQUIREMENTS ON DIRECTION TSGI ('BRAILLE') TRAIL

NOTES:

1. Refer to AS1428.4.1 for general detail on the selection and placement of TSGI.
2. Width of directional TSGI to be 300 minimum, 600 maximum as per AS1428.4.1.
3. Width of warning TSGI to be 600 as per AS1428.4.1.
4. Obstruction shown (pole, furniture, seating etc.) are examples only.
5. 1000 minimum clearance between any obstruction and directional TSGI as per Clause 6.3 of AS1428.1.
6. 500 minimum clearance between seating and path of travel as per Clause 27.1 of AS1428.2.
7. Refer to Translink standard drawings for TSGI requirements at bus stops.
8. Refer to MBRC adopted standard drawings for TSGI requirements at kerb ramps and other pedestrian crossings.
9. Minimum luminance contrast between the colour of the path and the colour of the TSGI shall be in accordance with AS1428.4.1 and the colour of TSGI's shall not be yellow.
Preferred TSGI type for:
- streetscapes and commercial zones to be ceramic or concrete.
- retrofits use polyurethane discrete type.
10. All dimensions are in millimetres unless noted otherwise.

REVISIONS	INT	DATE	SCALES	Drawn	Date
E				Coordinator	Date
D				AUTHORISED	
C				<i>[Signature]</i>	05/07/16
B				Manager Integrated Transport Planning & Design	RPEQ 6872
A					
X ORIGINAL ISSUE	BW	03/16			

DIRECTIONAL TSGI/WAYFINDING TRAILS PERMANENT CLEARANCES



DRG No. **PC-2160**

ORIGINAL SIZE **A3**

REVISION