
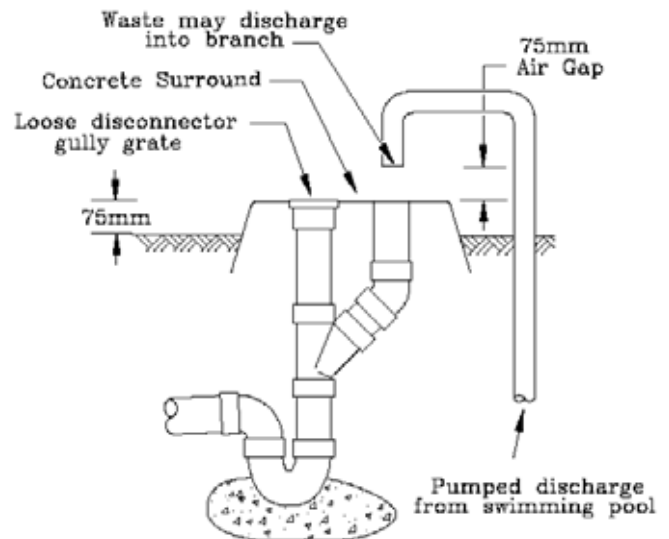
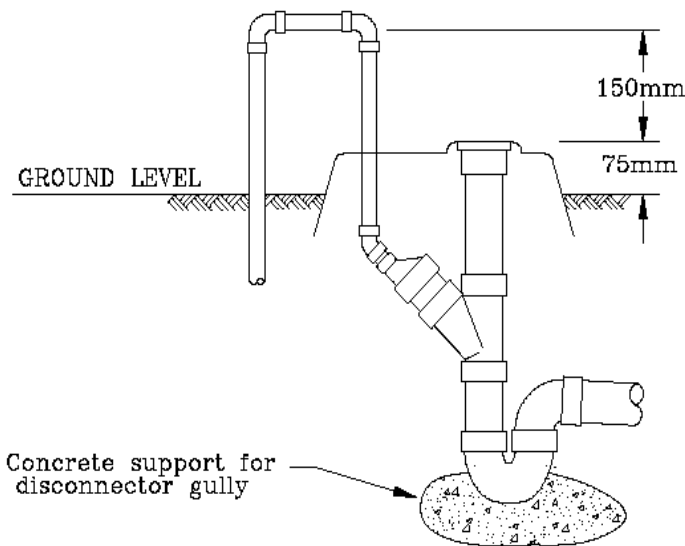


Detail of pool backwash connection in sewerred areas

1. Pool backwash is to discharge to sewer via an Overflow Relief Gully (ORG).
2. If it is not practical to use an existing ORG an alternate one may be installed on the house drain with a hose tap positioned above it.
3. When it is necessary to empty the pool, it must be discharged to sewer as per this detail.
4. Drainage of the overflow e.g. rainwater, is to discharge to the roof water system.
5. An acceptable alternative to the methods shown on this page is to use a temporary flexible connection to the ORG. To prevent sewerage entering the filtration unit this type of connection must be reinstated immediately the backwash session is completed.

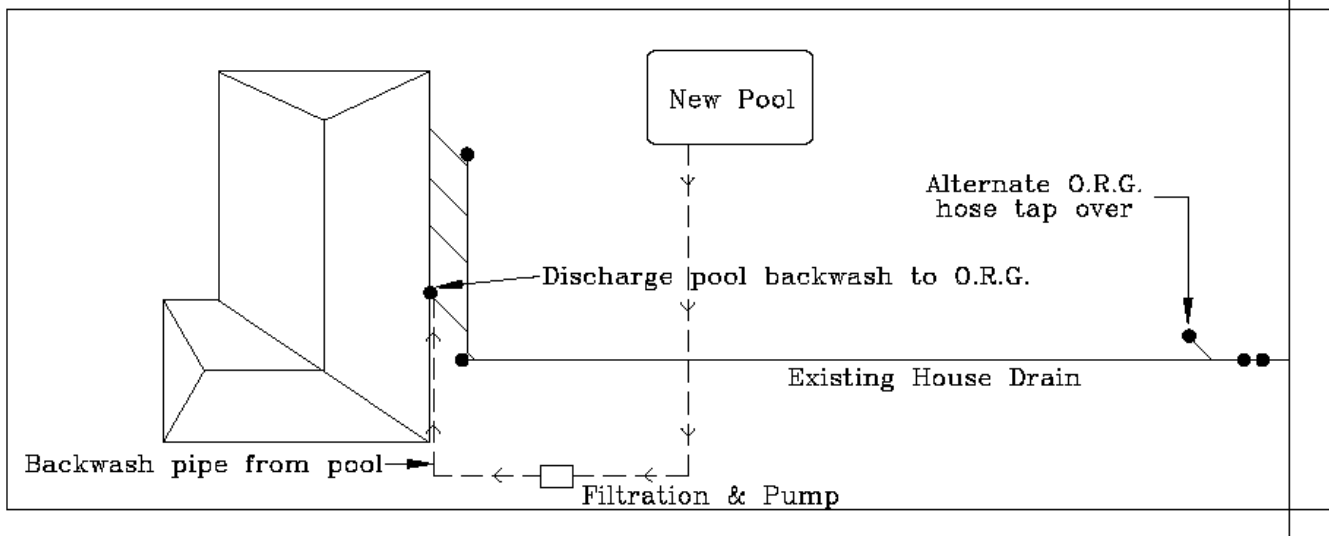

TYPICAL CONNECTION OF PUMPED WASTE DISCHARGE FROM SWIMMING POOLS