#### 6.2.6 General residential zone code

#### 6.2.6.1 Application - General residential zone

This code applies to undertaking development in the General residential zone, if:

- 1. the development has been categorised as either accepted development subject to requirements or assessable development code assessment, and this code is identified as applicable to that development in the assessment benchmarks for assessable development and requirements for accepted development column of a table of assessment (Part 5);
- 2. the development has been categorised as assessable development impact assessment (Part 5).

When using this code, reference should be made to section 5.3.2 Determining the category of development and category of assessment and, where applicable, section 5.3.3 Determining and applying the requirements for accepted development and the assessment benchmarks for assessable development located in Part 5.

For accepted development subject to requirements or assessable development under this Code:

- 1. Part A of the code applies only to accepted development subject to requirements in the 6.2.6.1 'Coastal communities precinct';
- 2. Part B of the code applies only to assessable development in the 6.2.6.1 'Coastal communities precinct';
- 3. Part C of the code applies only to accepted development subject to requirements in the 6.2.6.2 'Suburban neighbourhood precinct';
- 4. Part D of the code applies only to assessable development in the 6.2.6.2 'Suburban neighbourhood precinct';
- 5. Part E of the code applies only to accepted development subject to requirements in the 6.2.6.3 'Next generation neighbourhood precinct';
- 6. Part F of the code applies only to assessable development in the 6.2.6.3 'Next generation neighbourhood precinct';
- 7. Part G of the code applies only to accepted development subject to requirements in the 6.2.6.4 'Urban neighbourhood precinct';
- 8. Part H of the code applies only to assessable development in the 6.2.6.4 'Urban neighbourhood precinct'.

#### 6.2.6.2 Purpose - General residential zone

- 1. The purpose of the General residential zone code is to provide for residential activities supported by a range of community uses and small-scale services, facilities and infrastructure that cater for local residents.
- 2. The purpose of the General residential zone is to provide mechanisms to promote and implement an appropriate mix of dwelling types across the coastal communities, suburban neighbourhood, next generation neighbourhood and urban neighbourhood precincts to accommodate a range of household sizes, age groups, socio-economic groups, cultures and ability levels within the community.
- 3. The purpose of the General residential zone is to implement the policy direction set out in Part 3, Strategic framework.
- 4. The General residential zone includes 4 precincts which have the following purpose:
  - a. The Coastal Communities precinct provides for established coastal areas offering a lifestyle choice being characteristic of its location. New development will be generally infill; low-density scale and intensity, consistent with and complementary to the established settlement form prominent in these areas. These areas will have access to community services commensurate to the established populations.

- b. The Suburban neighbourhood precinct provides low density, low intensity development. Detached Dwelling houses<sup>(22)</sup> are therefore the predominant housing form. These areas will have access to community facilities and activities, day-to-day convenience retail and commercial uses, that are generally of a small scale and some public transport.
- c. The Next generation neighbourhood precinct provides the greatest mix of dwelling types to support densities that are moderately higher than traditional suburban areas. Housing forms include detached dwellings on a variety of lot sizes with a greater range of attached dwellings and low to medium rise apartment buildings. These areas will have convenient access to centres, community facilities and higher frequency public transport.
- d. The Urban neighbourhood precinct provides a mix of dwelling types and sizes with an emphasis on attached dwellings and apartment buildings. Medium to high density neighbourhoods are located within walking distance of a diverse range of services and facilities.

Editor's note - Subheadings may be used to differentiate between criteria for accepted development subject to requirements and assessable development. Alternatively, the code table may be broken up into further "parts" to assist with useability.

Editor's note - Further use of subheadings to identify criteria specific to a zone precinct or local plan precinct may be included.

Editor's note - Supporting material such as tables and figures may be used in support of the above assessment benchmark. These may be contained within the assessment column or referenced within the outcomes and located at the back of code.

Editor's note - Notes may be included within a performance outcome or acceptable example highlighting other legislation to be complied with. For example, an Australian standard to support an acceptable example or local laws, or providing guidance on interpretation of a performance outcome.

#### 6.2.6.1 Coastal communities precinct

#### 6.2.6.1.1 Purpose - Coastal communities precinct

The purpose of the code will be achieved through the following overall outcomes for the Coastal communities precinct:

- a. Residential development in the Coastal communities of Donnybrook, Toorbul, Meldale, Dohles Rocks and Beachmere maintain the small-scale, low density character of coastal communities. The predominant form of development is low rise, detached dwellings on large residential lots.
- b. Intensification of land uses in this precinct is not envisaged. Residential uses have a maximum site density of 15 dwellings per hectare.
- c. The form and nature of future development is compatible with and recognise the key characteristics of the precinct.
- d. New buildings within the Coastal communities precinct are provided with urban services.
- e. New buildings achieve a high standard of amenity for residents and neighbours and maintain and enhance the vegetated and low intensity built character of the precinct.
- f. Home based business can only be established where the scale and intensity of the activity does not detrimentally impact upon the character and amenity associated with the surrounding area. Specifically, Home based business does not include the sale or restoration of more than 4 vehicles in any calendar year or, undertake a mechanical repairs or panel beating activity associated with a business at the subject premises.
- g. Community activities:
  - i. do not negatively impact adjoining residents or the streetscape;
  - ii. do not undermine the viability of existing or future centres.
- h. Retail and commercial activities (excluding service stations):
  - i. are clustered with other non-residential uses forming a neighbourhood hub;
  - ii. are centred around a 'Main Street' central core fostering opportunities for social and economic exchange;
  - iii. are of a small scale, appropriate for a neighbourhood hub;
  - iv. do not negatively impact adjoining residents or the streetscape;
  - v. are subordinate in function and scale to all centres within the region.

Note - Retail and commercial uses expanding (into adjoining lots) into an existing local or district centre are to be assessed as out-of-centre development. Refer to the Centre zone code for relevant assessment criteria.

- i. Service stations:
  - i. establish where they will not disrupt, fragment or negatively impact active frontages (e.g. within a neighbourhood hub);
  - ii. establish on heavily trafficked roads where the amenity of surrounding residential uses is already subject to impacts by road vehicle noise;
  - iii. establish in locations that will not have a negative impact on the street environments intended to include active frontages (e.g. Neighbourhood hubs or centres);

- iv. do not negatively impact adjoining residents or the streetscape;
- v. ancillary uses or activities only service the convenience needs of users.
- j. The design, siting and construction of non-residential uses:
  - i. maintains a human scale, through appropriate building heights and form;
  - ii. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces (excluding Service stations);
  - iii. provides for active and passive surveillance of road frontages, movement corridors and public spaces;
  - iv. promotes active transport options and ensures an oversupply of car parking is not provided;
  - v. locates car parking so as not to dominate the street;
  - vi. does not result in large internalised shopping centres<sup>(76)</sup> (e.g. Large external blank walls with tenancies only accessible from within the building) surrounded by expansive areas of surface car parking.
- j. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity (underground wherever possible), water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. the development does not result in unacceptable impacts on the capacity and safety of the external road network;
  - iv. the development ensures the safety, efficiency and useability of access ways and parking areas;
  - v. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- k. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- I. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- m. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- n. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
  - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
  - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
  - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.

- iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
  - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
  - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
  - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
- v. protecting native species and protecting and enhancing species habitat;
- vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
- vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
- viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
- ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
- x. ensuring effective and efficient disaster management response and recovery capabilities;
- xi. where located in an overland flow path:
  - A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
  - B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
  - C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
  - D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- o. Development in the Coastal communities precinct includes one or more of the following:

<ul> <li>Club<sup>(14)</sup></li> <li>Community care centre<sup>(15)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Emergency services<sup>(33)</sup></li> <li>Health care services<sup>(35)</sup></li> <li>Home based business<sup>(35)</sup></li> <li>Place of worship<sup>(60)</sup></li> <li>Place of worship<sup>(60)</sup></li> <li>Service industry<sup>(73)</sup></li> <li>Shop<sup>(75)</sup></li> <li>Shopping centre<sup>(76)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Market<sup>(46)</sup></li> </ul>	Child care centre <sup>(13)</sup>	<ul> <li>Educational establishment<sup>(24)</sup></li> </ul>	Where in a Neighbourhood Hub:     (28)
<ul> <li>Community residence<sup>(16)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Home based business<sup>(35)</sup></li> <li>Place of worship<sup>(60)</sup></li> <li>Place of worship<sup>(60)</sup></li> <li>Service industry<sup>(73)</sup></li> <li>Shop <sup>(75)</sup></li> <li>Shopping centre<sup>(76)</sup></li> <li>Veterinary services<sup>(87)</sup></li> </ul>			- Hardware and trade supplies <sup>(32)</sup>
Dwelling house <sup>(22)</sup> Service industry <sup>(73)</sup> Shop <sup>(75)</sup> Shopping centre <sup>(76)</sup> Veterinary services <sup>(87)</sup>		<ul> <li>Home based business<sup>(35)</sup></li> </ul>	- Indoor sport and recreation <sup>(38)</sup> - for a gymnasium
	<ul> <li>Dwelling house<sup>(22)</sup></li> </ul>	<ul> <li>Place of worship</li> </ul>	- Service industry <sup>(73)</sup> - Shop <sup>(75)</sup> - Shopping centre <sup>(76)</sup> - Veterinary services <sup>(87)</sup>

p. Development in the Coastal communities precinct does not include any of the following:

•	Agricultural supplies store <sup>(2)</sup>	•	Hotel <sup>(37)</sup>	•	Residential care facility
•	Air services <sup>(3)</sup>	•	Intensive animal industry <sup>(39)</sup>	•	Resort complex <sup>(66)</sup>
•	Animal husbandry <sup>(4)</sup>	•	Intensive horticulture <sup>(40)</sup>	•	Retirement facility <sup>(67)</sup>
•	Animal keeping <sup>(5)</sup>	•	Low impact industry <sup>(42)</sup>	•	Roadside stall <sup>(68)</sup>
•	Aquaculture <sup>(6)</sup>	•	Major sport, recreation and	•	Rooming
•	Bar <sup>(7)</sup>		entertainment facility <sup>(44)</sup>		accommodation <sup>(69)</sup>
•	Brothel <sup>(8)</sup>	•	Marine industry <sup>(45)</sup>	•	Rural industry <sup>(70)</sup>
•	Bulk landscape supplies <sup>(9)</sup>	•	Medium impact industry <sup>(47)</sup>	•	Rural workers' accommodation <sup>(71)</sup>
•	Caretaker's	•	Motor sport facility <sup>(48)</sup>	•	Sales office <sup>(72)</sup>
	accommodation <sup>(10)</sup> Car wash <sup>(11)</sup>	•	Multiple dwelling - Where not on a lot identified on	•	Short-term
•	Cemetery <sup>(12)</sup>		'Figure 6.2.6.1.1 Main Street Area' <sup>(49)</sup>		accommodation <sup>(77)</sup> Showroom <sup>(78)</sup>
•	Crematorium <sup>(18)</sup>	•	Nature-based tourism <sup>(50)</sup>	•	Special industry <sup>(79)</sup>
	Cropping <sup>(19)</sup>	•	Nightclub entertainment facility <sup>(51)</sup>	•	Theatre <sup>(82)</sup>
•	Detention facility <sup>(20)</sup>	•	Non-resident workforce	•	Tourist attraction <sup>(83)</sup>
•	Environment facility <sup>(26)</sup>		accommodation <sup>(52)</sup>	•	Tourist park <sup>(84)</sup>
•	Extractive industry <sup>(27)</sup>	•	Outdoor sales <sup>(54)</sup>	•	Transport depot <sup>(85)</sup>
•	Function facility <sup>(29)</sup>	•	Parking station <sup>(58)</sup>	•	Warehouse <sup>(88)</sup>
•	Funeral parlour <sup>(30)</sup>	•	Permanent plantation <sup>(59)</sup>	•	Wholesale nursery <sup>(89)</sup>
•	Garden centre <sup>(31)</sup>	•	Port services <sup>(61)</sup>	•	Winery <sup>(90)</sup>
•	Hardware and trade	•	Relocatable home park <sup>(62)</sup>		
	supplies <sup>(32)</sup> - If more than 250m² GFA.	•	Renewable energy facility <sup>(63)</sup>		
•	High impact industry <sup>(34)</sup>		-		

q. Development not listed in the tables above may be considered on its merits and where it reflects and supports the outcomes of the zone.

#### 6.2.6.1.2 Accepted development subject to requirements

If development is to be categorised as accepted development subject to requirements it must comply with the requirements for accepted development set out in Part A, Table 6.2.6.1.1. Where the development does not meet a requirement for accepted development (RAD) within Part A Table 6.2.6.1.1, the category of development changes to assessable development under the rules outlined in section 5.3.3.(1), and assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a RAD is not met, and is therefore limited to the subject matter of the RADs that are not complied with. To remove any doubt, for those RADs that are complied with, there is no need for assessment against the corresponding PO.

Requirements for accepted development (RAD)	Corresponding PO
RAD1	PO2
RAD2	PO3
RAD3	PO5
RAD4	P07
RAD5	P011
RAD6	P014
RAD7	PO15
RAD8	P024
RAD9	P017
RAD10	PO18
RAD11	PO18
RAD12	PO18
RAD13	PO28
RAD14	PO30
RAD15	P027
RAD16	P027
RAD17	PO31
RAD18	PO34
RAD19	PO35
RAD20	PO36
RAD21	PO35
RAD22	PO42
RAD23	PO37
RAD24	PO37
RAD25	PO40
RAD26	PO40
RAD27	PO41
RAD28	PO43- PO47, PO49
RAD29	PO46
RAD30	PO43
RAD31	PO43
RAD32	PO43
RAD33	PO48
RAD34	PO43

Requirements for accepted development (RAD)	Corresponding PO
RAD35	PO43
RAD36	PO45
RAD37	PO45
RAD38	PO50
RAD39	PO50
RAD40	PO50
RAD41	PO51
RAD42	PO52
RAD43	P054
RAD44	PO54
RAD45	P054
RAD46	P054
RAD47	P054
RAD48	P054
RAD49	P054
RAD50	P054
RAD51	P054
RAD52	P074
RAD53	P075
RAD54	P076
RAD55	P076
RAD56	P076
RAD57	P076
RAD58	P078
RAD59	PO61
RAD60	PO65
RAD61	PO65
RAD62	PO68
RAD63	PO69
RAD64	P071
RAD65	P072
RAD66	PO61
RAD67	P079
RAD68	PO80- PO91

Requirements for accepted development (RAD)	Corresponding PO
RAD69	PO80-PO91
RAD70	PO92
RAD71	PO92
RAD72	PO95
RAD73	PO95
RAD74	PO95
RAD75	PO98
RAD76	PO97-PO99, PO101-PO103
RAD77	PO97-PO99
RAD78	PO100
RAD79	PO104
RAD80	PO105

#### Part A—Requirements for accepted development - Coastal communities precinct

#### Table 6.2.6.1.1 Requirements for accepted development - Coastal communities precinct

Requiren	Requirements for accepted development			
	General requirements			
Building	height (Residential uses)			
RAD1	Building height does not exceed:			
	<ul> <li>a. that shown on Overlay map - Building heights; or</li> <li>b. for lots identified on 'Figure 6.2.6.1.1 Main Street Area', 15 metres; or</li> <li>c. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>			
Building	height (Non-residential uses)			
RAD2	Building height does not exceed the maximum height identified on Overlay map - Building heights.			
Setbacks	(Residential uses)			
RAD3	Setbacks comply with Table 6.2.6.1.3 - Setbacks (Residential uses).			
	Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).			
Site cove	Site cover (Residential uses)			
RAD4	Site cover does not exceed 50% (excluding eaves, sun shading devices, patios, balconies and other unenclosed structures).			
Lighting				

RAD5	max Aus	ficial lighting on-site is directed and shielded in such a manner as not to exceed the recommended kimum values of light technical parameters for the control of obtrusive light given in Table 2.1 of stralian Standard AS4282 (1997) Control of Obtrusive Effects of Outdoor Lighting. te - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	
Clearing	of ha	bitat trees where not located in the Environmental areas overlay map	
RAD6	Development does not result in the damaging, destroyed or clearing of a habitat tree. This does not apply to:		
	a.	Clearing of a habitat tree located within an approved development footprint;	
	b.	Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;	
	c.	Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;	
	d.	Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;	
	e.	Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;	
	f.	Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;	
	g.	Clearing of a habitat tree associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;	
	h.	Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.	
	as a Info	tor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognised a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridors. ormation detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees Development Sites - Appendix A.	

	Works-requirements
Utilities	
RAD7	Development is provided with an appropriate level of service and infrastructure in accordance with Planning scheme policy - Integrated design (Appendix A).

Access	
RAD8	The frontage road is fully constructed to Council's standards.
	Note - Roads are considered to be constructed in accordance with Council standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. Testing of the existing pavement may be required to confirm whether the existing works meet the standards in Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.

Note - Frontage roads include streets where no direct lot access is provided.		
Any new or changes to existing direct vehicle access for residential development does not occur from arterial or sub-arterial roads.		
Any new or changes to existing crossovers and driveways are designed, located and constructed in accordance with:		
a. where for a Council-controlled road and associated with a Dwelling house:		
i. Planning scheme policy - Integrated design;		
b. where for a Council-controlled road and not associated with a Dwelling house:		
i. AS/NZS2890.1 Parking facilities Part 1: Off street car parking;		
ii. AS/NZS 2890.2 - Parking facilities Part 2: Off-street commercial vehicle facilities;		
iii. Planning scheme policy - Integrated design;		
iv. Schedule 8 - Service vehicle requirements;		
c. where for a State-Controlled road, the Safe Intersection Sight Distance requirements in Austroads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.		
Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS 2890.1 Parking Facilities Part 1: Off street car parking and the relevant standards in Planning scheme policy - Integrated design.		
Access driveways, manoeuvring areas and loading facilities are sealed and provide for service vehicles listed in Schedule 8 - Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 - Service vehicle requirements.		

Stormwa	ter
RAD13	Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing actionable nuisance to any person, property or premises in accordance with Planning scheme policy – Integrated design.
	Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.
RAD14	Development incorporates a 'deemed to comply solution' to manage stormwater quality where the development:
	<ul> <li>a. is for an urban purpose that involves a land area of 2500m<sup>2</sup> or greater; and</li> <li>b. will result in:</li> </ul>

	i. 6 or more dwellings; or	the net developpible grap
	ii. an impervious area greater than 25% of	the net developable area.
	Note - The deemed to comply solution is to be designed, cons requirements of Water by Design 'Deemed to Comply Solutions and Planning scheme policy - Integrated design.	tructed, established and maintained in accordance with the s - Stormwater Quality Management for South East Queensland'
RAD15	Development ensures that surface flows entering the diverted or concentrated.	e premises from adjacent properties are not blocked,
	Note - A report from a suitably qualified Registered Professior development does not increase the potential for significant ad premises.	
RAD16	Development ensures that works (e.g. fences and stormwater to adjoining properties.	walls) do not block, divert or concentrate the flow of
	Note - A report from a suitably qualified Registered Professior development does not increase the potential for significant ad premises.	
RAD17	Stormwater drainage infrastructure (excluding deternation of private land is protected by easements in favour of widths are as follows:	ention and bio-retention systems) through or within Council (at no cost to Council). Minimum easement
	Pipe Diameter	Minimum Easement Width (excluding access requirements)
	Stormwater Pipe up to 825mm diameter	3.0m
	Stormwater Pipe up to 825mm diameter with Sewer pipe up to 225m diameter	4.0m
	Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the pipe and clear of all pits.
	Note - Additional easement width may be required in certain c stormwater system.	ircumstances in order to facilitate maintenance access to the
	Note - Refer to Planning scheme policy - Integrated design (A	ppendix C) for easement requirements over open channels.
	1	

Site works and construction management	
RAD18	The site and any existing structures are to be maintained in a tidy and safe condition.
RAD19	Development does not cause erosion or allow sediment to leave the site.
	Note - The International Erosion Control Association (Australasia) Best Practice Erosion and Sediment Control provides guidance on strategies and techniques for managing erosion and sedimentation.

RAD20	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
RAD21	Existing street trees are protected and not damaged during works.
	Note - Where development occurs in the tree protection zone, measures and techniques as detailed in Australian Standard AS 4970 Protection of trees on developments sites are adopted and implemented.
RAD22	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
RAD23	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
RAD24	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
RAD25	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works
RAD26	Disposal of materials is managed in one or more of the following ways:
	a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
	b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.
	Note - No burning of cleared vegetation is permitted.
	Note - The chipped vegetation must be stored in an approved location.
RAD27	All development works are carried out within the following times:
	a. Monday to Saturday (other than public holidays) between 6:30am and 6:30pm on the same day;
	b. no work is to be carried out on Sundays or public holidays.

Earthworks	
RAD28	The total of all cut and fill on-site does not exceed 900mm in height.

	Figure - Cut and Fill
	Lot Boundaries
	Note - This is site earthworks not building work.
RAD29	<ul> <li>Cut and fill batters, (other than batters to dams and water impoundments), have a finished slope no steeper than the following:</li> <li>a. any cut batter is no steeper than 1V in 4H;</li> <li>b. any fill batter, (other than a compacted fill batter), is no steeper than 1V in 4H;</li> <li>c. any compacted fill batter is no steeper than 1V in 4H.</li> </ul>
RAD30	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.
RAD31	Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep slopes and batters. Note - Inspection and certification of steep slopes and batters may be required by a suitably qualified and experienced RPEQ.
RAD32	All fill and excavation is contained on-site and is free draining.
RAD33	<ul> <li>Earthworks undertaken on the development site are shaped in a manner which does not:</li> <li>a. prevent stormwater surface flow which, prior to commencement of the earthworks, passed onto the development site, from entering the land; or</li> <li>b. redirect stormwater surface flow away from existing flow paths; or</li> <li>c. divert stormwater surface flow onto adjacent land (other than a road) in a manner which:</li> </ul>
	<ul> <li>i. concentrates the flow; or</li> <li>ii. increases the flow rates of stormwater over the affected section of the adjacent land above the situation which existed prior to the diversion; or</li> </ul>
	iii. causes actionable nuisance to any person, property or premises.
RAD34	All fill placed on-site is: a. limited to that necessary for the approved use;
	b. clean and uncontaminated (i.e. no building waste, concrete, green waste, actual acid sulfate soils, potential acid sulfate soils or contaminated material etc.).

The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798. Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures
No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity. Note - Public sector entity is defined in Schedule 2 of the Act.
Filling or excavation that would result in any of the following is not carried out on site:
<ul> <li>a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken;</li> <li>c. prevent reasonable access to Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the site for monitoring, maintenance or replacement purposes.</li> </ul>
Note - Public sector entity is defined in Schedule 2 of the Act. Note - All building work covered by QDC MP1.4 is excluded from this provision.

#### **Fire services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - ii.
  - iii.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. iv.

#### AND

- b. none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated ii. water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

RAD38	External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .
	Note - For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005):

	a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks <sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
	b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
	c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
	i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
	ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
	iii for outdoor sales <sup>(54)</sup> , processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales <sup>(54)</sup> , outdoor processing and outdoor storage facilities; and
	d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.
RAD39	A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:
	a. an unobstructed width of no less than 3.5m;
	b. an unobstructed height of no less than 4.8m;
	c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
	d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.
RAD40	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>
RAD41	For development that contains on-site fire hydrants external to buildings:
	<ul><li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li><li>b. a sign identifying the following is provided at the vehicular entry point to the site:</li></ul>
	i. the overall layout of the development (to scale);
	<ul><li>ii. internal road names (where used);</li><li>iii. all communal facilities (where provided);</li></ul>
	iv. the reception area and on-site manager's office (where provided);
	<ul> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.</li> </ul>
	Note - The sign prescribed above, and the graphics used are to be:
	a. in a form;
	b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.

RAD42	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.

	Use specific requirements	
Home ba	Home based business <sup>(35)</sup>	
RAD43	Home based business(s) <sup>(35)</sup> are fully enclosed within the existing dwelling or on-site structure.	
RAD44	A maximum of 1 employee (not a resident) OR 2 customers OR customers from within 1 Small rigid vehicle (SRV) or smaller are permitted on the site at any one time.	
RAD45	Service and delivery vehicles do not exceed one Small rigid vehicle (SRV) at any one time.	
RAD46	Vehicle parking for the Home based business <sup>(35)</sup> on-site is limited to 1 car or Small rigid vehicle (SRV).	
RAD47	Home based business(s) <sup><math>(35)</math></sup> occupy an area of the existing dwelling or on-site structure not greater than $40m^2$ GFA.	
RAD48	Home based business(s) <sup>(35)</sup> do not involve manufacturing.	
	Note - Food businesses that are licensable by local government and only involve the manufacturing of non-potentially hazardous food are permitted. Definitions in the Food Act 2006 apply to this note.	
RAD49	The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.	
RAD50	The hours of operation do not exceed 8:00am to 6:00pm, Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday and Anzac Day.	
	Note - Office or administrative activities that do not generate non-residents visiting the site, such as book-keeping and computer work, may operate outside the hours of operation.	
RAD51	For a bed and breakfast, the use:	
	a. is fully contained within the existing dwelling on-site;	
	b. occupies a maximum of 2 bedrooms;	
	c. includes the provision of a minimum of 1 meal per day;	
	d. accommodates a maximum of 6 people at any one time.	
	Note - For a Bed and Breakfast RAD28 - RAD34 above do not apply.	
Telecom	munications facility <sup>(81)</sup>	


Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz.	
RAD52	A minimum area of 45m <sup>2</sup> is available to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
RAD53	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
RAD54	Equipment shelters and associated structures are located:
	a. directly beside the existing equipment shelter and associated structures;
	b. behind the main building line;
	c. further away from the frontage than the existing equipment shelter and associated structures;
	d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.
RAD55	Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.
RAD56	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
RAD57	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with Planning scheme policy - Integrated design.
RAD58	All equipment comprising the telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.
Retail, co	ommercial and community uses
RAD59	Where involving an extension (building work) in the front setback a minimum of 50% of the front facade of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied to a glazed facade located at ground floor is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.

	Figure - Glazing	
	rigure - Glazing	
	2m 1m 1m Minimum of 30% glazing Solution of and the solution of a s	
RAD60	Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction is required for the provision of cycle parking.	
RAD61	Where additional car parking spaces are provided they are not located between the frontage and the main building line.	
RAD62	Where involving an extension (building work), bins and bin storage area/s are provided, designed and managed in accordance with Planning scheme policy – Waste.	
RAD63	Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.	
RAD64	Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of <i>Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting</i> . Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	
RAD65	Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.	
RAD66	Development does not involve a drive-through facility.	

#### Values and constraints requirements

Note - The relevant values and constraints requirements do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following requirements apply)		
	nning scheme policy - Acid sulfate soils provides guidance for requirements for accepted development that has the potential to d sulfate soils i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.	
RAD67	Development does not involve:	

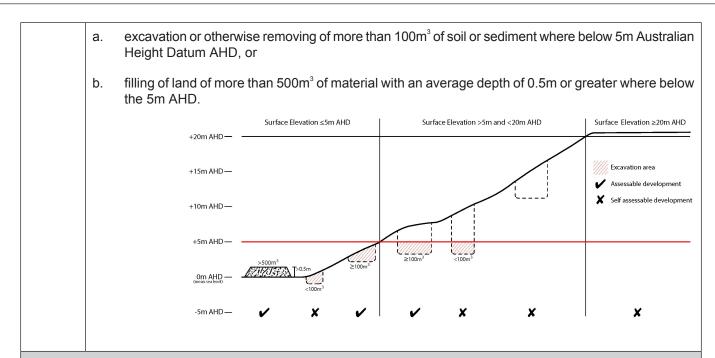

# Environmental areas (refer Overlay map - Environmental areas to determine if the following requirements apply)

Note - The following are excluded from the native clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this requirement primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.

RAD68	Where no suitable land cleared of native vegetation exists, clearing of native vegetation in a High Value Area or Value Area is for the purpose of a new dwelling house <sup>(22)</sup> or extension to an existing dwelling house <sup>(22)</sup> only on lots less than 750m <sup>2</sup> .	
	Editor's note - See in heading above for other uses excluded from native vegetation clearing requirements.	
	Editor's note - Where vegetation clearance is accepted development subject to requirements, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:	
	<ul> <li>i. co-locating all associated activities, infrastructure and access strips;</li> <li>ii. be the least valued area of koala habitat on the site;</li> <li>iii. minimise the footprint of the development envelope area;</li> <li>iv. minimise edge effects to areas external to the development envelope;</li> <li>v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy – Environmental areas;</li> <li>vi. sufficient area between the development and koala habitat trees to achieve their long-term viability.</li> </ul>	
	Editor's note - Where vegetation clearing is accepted development subject to requirements, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.	
RAD69	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.	
	This does not apply to the following:	
	<ul> <li>a. Clearing of native vegetation located within an approved development footprint;</li> <li>b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;</li> <li>c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;</li> </ul>	
	d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;	
	e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;	
	f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;	
	g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;	
	<ul><li>h. Grazing of native pasture by stock;</li><li>i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.</li></ul>	
Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following requirements apply)		
landscape heritage si	ces, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural gnificance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning plicy - Heritage and landscape character.	
RAD70	Development is for the preservation, maintenance, repair and restoration of the site, object or building.	
	This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.	

	Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions	
RAD71	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of an preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.	
	This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.	
RAD72	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.	
RAD73	<ul> <li>The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy Heritage and landscape character:</li> <li>a. construction of any building;</li> </ul>	
	<ul> <li>b. laying of overhead or underground services;</li> <li>c. any sealing, paving, soil compaction;</li> <li>d. any alteration of more than 75mm to the ground surface prior to work commencing.</li> </ul>	
RAD74	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning c Amenity Trees.	
Overland	flow path (refer Overlay map - Overland flow path to determine if the following requirements apply	
RAD75	Development for a material change of use or building work does not involve the construction of a buildin or structure in an Overland flow path area.	
RAD76	Development for a material change of use or operational work does not impede the flow of flood water through the premises or worsen flood flows to other premises.	
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.	
	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	
RAD77	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow Development for a material change of use or building work ensures that fencing in an overland flow pat area is at least 50% permeable.	
RAD77 RAD78	Development for a material change of use or building work ensures that fencing in an overland flow pat	

Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.

RAD80	No development is to occur within:		
	a. 50m from top of bank for W1 waterway and drainage line		
	b.	30m from top of bank for W2 waterway and drainage line	
	C.	20m from top of bank for W3 waterway and drainage line	
	d.	100m from the edge of a Ramsar wetland, 50m from all other wetlands.	
	Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps Riparian and wetland setbacks. Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations. Note - The minimum setback distance applies to the each side of waterway.		
Transpor	Transport noise corridors (refer Overlay map - Transport noise corridors)		
Note - This is for information purposes only. No requirements for accepted development or criteria for assessable development apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code			

#### Part B - Criteria for assessable development - Coastal communities precinct

Where development is categorised as assessable development - code assessment in the Table of Assessment, and located in a precinct, the assessment benchmarks are the criteria set out in Part B, Table 6.2.6.1.2 as well as the purpose statement and overall outcomes of this code.

Where development is categorised as assessable development - impact assessable, the assessment benchmarks become the whole of the planning scheme.

Performance outcomes		Examples that achieve aspects of the Performance Outcomes	
General criteria			
Density			
PO1		No example provided.	
Residential development:			
consisting prim	the coastal community character narily of low-density, detached ne predominant built form;		
(excluding dua on 'Figure 6.2.	m site density of 15 dwellings per ha Il occupancies) or for lots identified 6.1.1 Main Street Area' a maximum 75 dwellings per ha.		
Building height (Residential uses)			

PO2	2	E2
Build	dings and structures have a height that:	Building height does not exceed:
a. b. c. d.	<ul> <li>is consistent with the existing low rise character predominant in the Coastal communities precinct;</li> <li>responds to the topographic features of the site including slope and orientation;</li> <li>is not visually dominant or overbearing with respect to the streetscape and the wider receiving environment, street conditions (e.g. street width) or adjoining properties;</li> <li>positively contributes to the existing built form of the surrounding area;</li> <li>Note - To demonstrate compliance with the above a visual impact assessment may be required in accordance with Planning scheme policy - Residential design. Visual impact assessments will require the consideration of all built form matters (e.g. height, setbacks, site cover, building bulk and mass, articulation, roof form and other design aspects) from a variety of perspectives to ascertain if the proposal will result in a positive contribution.</li> <li>responds to the height of development on adjoining land where contained within another precinct or zone.</li> <li>e - Refer to Planning scheme policy - Residential design for and examples.</li> </ul>	<ul> <li>a. that shown on Overlay map - Building heights; or</li> <li>b. for lots identified on 'Figure 6.2.6.1.1 Main Street Area', 15 metres; or</li> <li>c. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>
Buil	ding height (Non-residential uses)	
PO3 The height of non-residential buildings does not adversely affect amenity of the area or of adjoining properties and positively contributes to the intended built form of the surrounding area. Note - To demonstrate compliance with the above a visual impact assessment may be required in accordance with Planning scheme policy - Residential design. Visual impact assessments will require the consideration of all built form matters (e.g. height, setbacks, site cover, building bulk and mass, articulation, roof form and other design aspects) from a variety of perspectives to ascertain if the proposal will result in a positive contribution.		<b>E3</b> Building height does not exceed the maximum height identified on Overlay map - Building heights except for architectural features associated with religious expression on Place of worship <sup>(60)</sup> and Educational establishment <sup>(24)</sup> buildings.
Sett	oacks (Residential uses)	
PO4		E4
Residential buildings and structures are setback to:		Setbacks comply with Table 6.2.6.1.3 'Setbacks' - Setbacks (Residential uses).

a.	be consistent with the predominant prevailing setbacks in the area where buildings are generally positioned further away from the street and further apart from each other;	Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).
b.	result in development not being visually dominant or overbearing with respect to the streetscape and the adjoining properties;	
C.	maintain private open space areas that are of a size and dimension to be usable and functional;	
d.	maintain the privacy of adjoining properties.	
	Note - Refer to Planning scheme policy - Residential design for details and examples.	
Sett	oacks (Non-residential uses)	
PO5		E5.1
Front setbacks ensure non-residential buildings address and actively interface with streets and public spaces.		<ul><li>For the primary street frontage, buildings are constructed:</li><li>a. to the property boundary; or</li><li>b. setback a maximum of 3m from the property boundary, where for the purpose of outdoor dining.</li></ul>
		<b>E5.2</b> For the secondary street frontage, setbacks are consistent with adjoining buildings.
PO6		No example provided.
utiliti adjo not k	and rear setbacks cater for driveway(s), services, ses and buffers required to protect the amenity of ining sensitive land uses and the development will be visually dominant or overbearing with respect to ining properties.	
Site	cover (Residential uses)	
<b>PO</b> 7		E7
Resi cove	dential buildings and structures will ensure that site	Site cover does not exceed 50% (excluding eaves, sun shading devices, patios, balconies and other unenclosed
a.	does not result in a site density that is inconsistent with the character of the area;	structures).
b.	does not result in an over development of the site;	
C.	does not result in other elements of the site being compromised (e.g. Setbacks, open space etc);	
d.	reflects the detached, low density, low intensity coastal community character.	

	,
Note - Refer to Planning scheme policy - Residential design for details and examples.	
Movement network	
PO8 Development is designed to connect to and form part of the surrounding neighbourhood by providing interconnected streets, pedestrian and cyclist pathways to adjoining development, nearby centres, neighbourhood hubs, community facilities, public transport nodes and open space.	No example provided.
Note - Refer to Planning scheme policy - Neighbourhood design for guidance on achieving the above outcome. Water sensitive urban design	
PO9	No example provided.
Best practice Water Sensitive Urban Design (WSUD) is incorporated within development sites adjoining street frontages to mitigate impacts of stormwater run-off in accordance with Planning scheme policy - Integrated design.	
Sensitive land use separation	
PO10 Sensitive land uses within 250m of land in the Industry zone - General industry precinct must mitigate any potential exposure to industrial air, noise or odour emissions that impact on human health, amenity and wellbeing. Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy – Noise.	<ul> <li>E10</li> <li>Development is designed and operated to ensure that:</li> <li>a. it meets the criteria outlined in the Planning Scheme Policy – Noise; and</li> <li>b. the air quality objectives in the <i>Environmental Protection (Air) Policy 2008</i>, are met.</li> </ul>
Amenity	
<b>PO11</b> The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.	No example provided.
Noise	
<b>PO12</b> Noise generating uses do not adversely affect existing or potential noise sensitive uses.	No example provided.
טר אסופרווומו רוטושב שברושווועב עשבש.	

T		
hat are visible from or ate noise attenuation rial road or rail line. equired to demonstrate essments are to be ne policy - Noise.		
	E42.4	
	E13.1	
h an appropriate ted external private eas while:	Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.	
public spaces,	E13.2	
of surveillance of erve active transport e pedestrian paths	Noise attenuation structures (e.g. walls, barriers or fences):	
streetscape.	a. are not visible from an adjoining road or public area unless:	
equired to demonstrate essments are to be ne policy - Noise. tegrated design for ructures.	<ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> <li>do not remove existing or prevent future active</li> </ul>	
	<ul> <li>transport routes or connections to the street network;</li> <li>are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> </ul>	
	Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.	
	Note - Refer to Overlay map – Active transport for future active transport routes.	
Clearing of habitat trees where not located within the Environmental areas overlay map		
	No example provided.	
biodiversity quality dversely impacted cted.		
the net loss of fauna bes result in the loss will provide es at the following w removed. Where		
	ate noise attenuation rial road or rail line. equired to demonstrate assments are to be ne policy - Noise. In an appropriate ted external private eas while: public spaces, of surveillance of rve active transport e pedestrian paths streetscape. equired to demonstrate assments are to be ne policy - Noise. tegrated design for ructures. t located within the biodiversity quality dversely impacted cted. the net loss of fauna will provide es at the following	

	hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.
c.	Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner
Note: Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas	

Works criteria		
Utilities		
PO15	No example provided.	
All services including water supply, sewage disposal, electricity, street lighting, telecommunications and gas (if available) are provided in accordance with Planning scheme policy - Integrated design (Appendix A).		

Access		
PO16	No example provided.	
Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.		
P017	E17.1	
The layout of the development does not compromise:	Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a	
a. the development of the road network in the area;	motorway.	
b. the function or safety of the road network;	Editor's note - Residential developments should consider	
c. the capacity of the road network.	amalgamation with the lot to the rear and gaining access via a laneway.	
Note - The road hierarchy is mapped on Overlay map - Road hierarchy.	Note - The road hierarchy is mapped on Overlay map - Road hierarchy.	
	E17.2	
	The development provides for the extension of the road network in the area in accordance with Council's road network planning.	
	E17.3	

	The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.	
	E17.4	
	The development layout allows forward vehicular access to and from the site.	
PO18	E18.1	
Safe access is provided for all vehicles required to access the site.	Site access and driveways are designed, located and constructed in accordance with:	
	a. where for a Council-controlled road and associated with a Dwelling house:	
	i. Planning scheme policy - Integrated design;	
	b. where for a Council-controlled road and not associated with a Dwelling house:	
	<ul> <li>AS/NZS2890.1 Parking facilities Part 1: Off street car parking;</li> </ul>	
	ii. AS 2890.2 - Parking facilities Part 2: Off-street commercial vehicle facilities;	
	iii. Planning scheme policy - Integrated design;	
	iv. Schedule 8 - Service vehicle requirements;	
	c. where for a State-Controlled road, the Safe Intersection Sight Distance requirements in Austroads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.	
	E18.2	
	Internal driveways, car parks and access ways are designed and constructed with a sealed pavement and in accordance with:	
	a. AS/NZS 2890.1 Parking Facilities Part 1: Off street car parking;	
	<ul> <li>AS 2890.2 Parking Facilities Part 2: Off street commercial vehicle facilities;</li> </ul>	
	c. Planning scheme policy - Integrated design; and	
	d. Schedule 8 - Service vehicle requirements.	

Note - This includes queue lengths (refer to Schedule 8 - Service vehicle requirements), pavement widths and construction.
E18.3
Access driveways, manoeuvring areas and loading facilities are sealed and provide for service vehicles listed in Schedule 8 - Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 - Service vehicle requirements.
E18.4
Landscaping (including shade trees) is provided within car parks in accordance with Planning scheme policy - Integrated design.
E19
Roads or streets giving access to the development from the nearest arterial or sub-arterial road are flood free during the minor storm event and are sealed.
Note - The road network is mapped on Overlay map - Road hierarchy.
E20.1
Access roads to the development have sufficient longitudinal and cross drainage to remain safely trafficable during major storm (1% AEP) events.
Note - The road network is mapped on Overlay map - Road hierarchy.
Note - Refer to QUDM for requirements regarding trafficability.
E20.2
Culverts and causeways do not increase inundation levels or increase velocities, for all events up to the defined

Street design and layout	
PO21	No example provided.
Streets are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. The street design and construction accommodates the following functions:	

a.	access to premises by providing convenient vehicular movement for residents between their homes and the major road network;	
b.	safe and convenient pedestrian and cycle movement;	
C.	adequate on street parking;	
d.	stormwater drainage paths and treatment facilities;	
e.	efficient public transport routes;	
f.	utility services location;	
g.	emergency access and waste collection;	
h.	setting and approach (streetscape, landscaping and street furniture) for adjoining residences;	
i.	expected traffic speeds and volumes; and	
j.	wildlife movement (where relevant).	
storn pede with Note corr	<ul> <li>e - Preliminary road design (including all services, street lighting, mwater infrastructure, access locations, street trees and estrian network) may be required to demonstrate compliance this PO.</li> <li>e - Refer to Planning scheme policy - Environmental areas and idors for examples of when and where wildlife movement structure is required.</li> </ul>	
PO2	2	E22.1
is up the c Note Tran	existing road network (whether trunk or non-trunk) graded where necessary to cater for the impact from development. e - An applicant may be required to submit an Integrated isport Assessment (ITA), prepared in accordance with Planning eme policy - Integrated transport assessment to demonstrate pliance with this PO, when any of the following occurs: Development is within 200m of a transport sensitive location such as a school, shopping centre, bus or train station or a large generator of pedestrian or vehicular traffic; Forecast traffic to/from the development exceeds 5% of the two way flow on the adjoining road or intersection in the morning or afternoon transport peak within 10 years of the development completion:	New intersections onto existing roads are designed to accommodate traffic volumes and traffic movements taken from a date 10 years from the date of completion of the last stage of the development. Detailed design is to be in accordance with Planning scheme policy - Integrated design. Note - All turns vehicular access to existing lots is to be retained at new road intersections wherever practicable. Note - Existing on-street parking is to be retained at new road intersections and along road frontages wherever practicable.
	development completion;	E22.2
		Existing intersections external to the site are upgraded as necessary to accommodate increased traffic from the development. Design is in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.

٠	Development access onto a sub arterial, or arterial road or within 100m of a signalised intersection;	Note - All turns vehicular access to existing lots is to be retained at new road intersections wherever practicable.
٠	Residential development greater than 50 lots or dwellings;	Note - Existing on-street parking is to be retained at upgraded road
•	Offices greater than 4,000m <sup>2</sup> Gross Floor Area (GFA);	intersections and along road frontages wherever practicable.
•	Retail activities including Hardware and trade supplies, Showroom, Shop or Shopping centre greater than 1,000m <sup>2</sup> GFA;	E22.3
٠	Warehouses and Industry greater than 6,000m <sup>2</sup> GFA;	The active transport network is extended in accordance with Planning scheme policy - Integrated design.
•	On-site carpark greater than 100 spaces;	
٠	Development has a trip generation rate of 100 vehicles or more within the peak hour;	
٠	Development which dissects or significantly impacts on an environmental area or an environmental corridor.	
road devel deter works a futu part c ITA is neces by the Note hierar	TA is to review the development's impact upon the external network for the period of 10 years from completion of the opment. The ITA is to provide sufficient information for mining the impact and the type and extent of any ameliorative a required to cater for the additional traffic. The ITA must include ure structural road layout of adjoining properties that will form of this catchment and road connecting to these properties. The to assess the ultimate developed catchment's impacts and asary ameliorative works, and the works or contribution required e applicant as identified in the study. - The road network is mapped on Overlay map - Road rchy.	
PO23	3	E23
and d	ntersections along all streets and roads are located esigned to provide safe and convenient movements	New intersection spacing (centreline – centreline) along a through road conforms with the following:
for all users. Note - Refer Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures for design and construction standards. Note - An Integrated Transport Assessment (ITA) including preliminary intersection designs, prepared in accordance with Planning scheme policy - Integrated transport assessment may be required to demonstrate compliance with this PO. Intersection spacing will be determined based on the deceleration and queue storage distances required for the intersection after considering vehicle speed and present/forecast turning and through volumes.	a. Where the through road provides an access or residential street function:	
	i. intersecting road located on same side = 60 metres; or	
	<ul><li>ii. intersecting road located on opposite side = 40 metres.</li></ul>	
	ng will be determined based on the deceleration and queue ge distances required for the intersection after considering	b. Where the through road provides a local collector or district collector function:
		i. intersecting road located on same side = 100 metres; or

	Where the throu function:	gh road provides a sub-arterial
	i. intersecting metres; or	road located on same side = 250
	ii. intersecting 100 metres	g road located on opposite side =
	Where the throu function:	gh road provides an arterial
	i. intersecting metres; or	road located on same side = 350
	ii. intersecting 150 metres	g road located on opposite side =
	Walkable block p	perimeter does not exceed:
		in the Coastal communities d Suburban neighbourhood
		in the Next generation lood precinct;
	iii. 400 metres precinct.	in the Urban neighbourhood
	oove, all turns access ma	te minimum intersection spacing identified ay not be permitted (ie. left in/left out only) rterial roads or arterial roads.
	ote - The road network is erarchy.	s mapped on Overlay map - Road
	eliminary intersection de	sport Assessment (ITA) including esigns, prepared in accordance with Integrated transport assessment may be ompliance with this PO.
PO24	4	
All Council controlled frontage roads adjoining the development are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. All new works are extended to join any existing works within 20m.	Design and construct all Council controlled from in accordance with Planning scheme policy - design, Planning scheme policy - Operational inspection, maintenance and bonding procedu the following:	
Note - Frontage roads include streets where no direct lot access is	ituation	Minimum construction
Note - The road network is mapped on Overlay map - Road	rontage road nconstructed or gra oad only;	and the carriageway
hierarchy.	R	(including development side kerb and channel) to

Note - The Primary and Secondary active transport network is mapped on Overlay map - Active transport. Note - Roads are considered to be constructed in accordance with Council's standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.	Frontage road sealed but not constructed* to Planning scheme policy - Integrated design standard; OR Frontage road partially constructed* to Planning scheme policy - Integrated design standard.	<ul> <li>a minimum sealed width containing near side parking lane (if required), cycle lane (if required), 2 travel lanes plus 1.5m wide (full depth pavement) gravel shoulder and table drainage to the opposite side.</li> <li>The minimum total travel lane width is:</li> <li>6m for minor roads;</li> <li>7m for major roads.</li> </ul>
	Note - Major roads are sub-arteri. roads are roads that are not majo	al roads and arterial roads. Minor or roads.
	Note - Construction includes all a lighting and linemarking).	ssociated works (services, street
	Note - Alignment within road rese	erves is to be agreed with Council.
	Council standards when there is so and depth to comply with the req policy - Integrated design and Pla works inspection, maintenance a of the existing pavement may be existing works meet the standard	nning scheme policy - Operational nd bonding procedures. Testing required to confirm whether the s in Planning scheme policy - cheme policy - Operational works

#### Stormwater

PO25	E25.1
Minor stormwater drainage systems (internal and external) have the capacity to convey stormwater flows from frequent storm events for the fully developed upstream catchment whilst ensuring pedestrian and	The capacity of all minor drainage systems are designed in accordance with Planning scheme policy - Integrated design.
vehicular traffic movements are safe and convenient.	E25.2
	Stormwater pipe network capacity is to be calculated in accordance with the Hydraulic Grade Line method as detailed in Australian Rainfall and Runoff or QUDM.
	E25.3
	Development ensures that inter-allotment drainage infrastructure is provided in accordance with the relevant level as identified in QUDM.

	Note - Development is to provide inter-allotment – QUDM level III drainage, , including bunds, to all lots that have a gradient less than 1 in 100 (for the whole of the allotment) to the road. The inter-allotment drainage system (including easements) is provided in accordance with Planning scheme policy - Integrated design (Appendix C).
PO26	E26.1
Major stormwater drainage system(s) have the capacity to safely convey stormwater flows for the 1% AEP event for the fully developed upstream catchment.	The internal drainage system safely and adequately conveys the stormwater flows for the 1% AEP event for the fully developed upstream catchment through the site.
	E26.2
	The external (downstream) drainage system safely conveys the stormwater flows for the 1% AEP event for the fully developed upstream catchment without allowing the flows to encroach upon private lots.
	E26.3
	Overland flow paths from roads and public open space areas do not pass through private lots. Drainage pathways are provided to accommodate overland flows from roads and public open space areas.
	E26.4
	The flow velocity in all unlined or soft faced open drains is kept within acceptable limits for the type of material or lining and condition of the channel.
	Note - Refer to QUDM for recommended average flow velocities.
PO27	E27
Provide measures to properly manage surface flows for the 1% AEP event (for the fully developed catchment) draining to and through the land to ensure no actionable nuisance is created to any person or premises as a result of the development. The development must not result in ponding on adjacent land, redirection of surface flows to other premises or blockage of a surface flow relief path for flows exceeding the design flows for any underground system within the development.	The stormwater drainage system is designed and constructed in accordance with Planning scheme policy - Integrated design.
PO28	No example provided.
Stormwater run-off from the site is conveyed to a point of lawful discharge without causing actionable nuisance to any person, property or premises.	
Note - Refer to Planning scheme policy - Integrated design for details.	

Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome. Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.	
PO29	No example provided.
Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site. Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
PO30	No example provided.
Where development:	
a. is for an urban purpose that involves a land area of 2500m <sup>2</sup> or greater; and	
b. will result in:	
i. 6 or more dwellings; or	
ii. an impervious area greater than 25% of the net developable area,	
stormwater quality management systems are designed, constructed, established and maintained to minimise the environmental impact of stormwater on surface, groundwater and receiving water environments and meet the design objectives outlined in Schedule 10 - Stormwater management design objectives. Note - A site based stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management. Stormwater quality infrastructure is to be designed in accordance with Planning scheme policy - Integrated design (Appendix C).	
PO31	E31
	Stormwater drainage infrastructure (excluding detention and bio-retention systems) through or within private land (including inter-allotment drainage) is protected by easements in favour of Council. Minimum easement widths are as follows:

Stormwater drainage pipes and structures through or within private land (including inter-allotment drainage) are protected by easements in favour of Council with sufficient area for practical access for maintenance purposes. Note - In order to achieve a lawful point of discharge, stormwater easements may also be required over temporary drainage channels/infrastructure where stormwater discharges to a balance lot prior to entering Council's stormwater drainage system.	Pipe Diameter	Minimum easement width (excluding access requirements)
	Stormwater pipe up to 825mm diameter	3.0m
	Stormwater pipe up to 825mm diameter with sewer pipe up to 225m diameter	4.0m
	Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the stormwater pipe (each side).
	Note - Additional easement width circumstances in order to facilitat stormwater system.	
	Note - Refer to Planning scheme p C) for easement requirements ov	policy - Integrated design (Appendix ver open channels.
<b>PO32</b> Stormwater management facilities (excluding outlets) are located outside of riparian areas and prevent increased channel bed and bank erosion.	No example provided.	
PO33	E33	
Council is provided with accurate representations of the completed stormwater management works within residential developments.		cifications of the stormwater ied by an RPEQ is provided.
	Note - Documentation is to inclue	de:
	a. photographic evidence an of approved underdrainag	d inspection date of the installation le;
		ter media delivery dockets/quality materials comply with specifications er Management Plan;
	c. date of the final inspectior	1.

Site works and construction management	
PO34	No example provided.
The site and any existing structures are maintained in a tidy and safe condition.	
PO35	E35.1

All v	vorks on-site are managed to:	Works incorporate temporary stormwater runoff, erosion
All v a. b. c. d.	vorks on-site are managed to: minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light; minimise as far as possible, impacts on the natural environment; ensure stormwater discharge is managed in a manner that does not cause actionable nuisance to any person or premises; avoid adverse impacts on street trees and their critical root zone.	<ul> <li>and sediment controls and trash removal devices designed in accordance with the Urban Stormwater Quality Planning Guidelines, State Planning Policy, Schedule 10 - Stormwater management design objectives, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour or erosion of any kind;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. minimum design storm for all temporary diversion drains and sedimentation basins in accordance with Schedule 10 - Stormwater management design objectives;</li> <li>e. ponding or concentration of stormwater does not occur on adjoining properties.</li> </ul>
		Stormwater runoff, erosion and sediment controls are constructed in accordance with Planning scheme policy - Integrated design (Appendix C) prior to commencement of any clearing or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing
		effectiveness. Note - The measures are adjusted on-site to maximise their effectiveness.
		E35.3
		The completed earthworks area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.
		E35.4
		Existing street trees are protected and not damaged during works.
		Note - Where development occurs in the tree protection zone, measures and techniques as detailed in Australian Standard AS 4970 Protection of trees on development sites are adopted and implemented.

PO36	E36
Dust suppression measures are implemented during soil disturbances and construction works to protect nearby premises from unreasonable dust impacts.	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
PO37	E37.1
All development works including the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
compliance with this PO. A Traffic Management Plan is to be prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).	E37.2 All contractor car parking is either provided on the
Note - A haulage route must be identified and approved by Council where imported or exported material is transported to the site via a road of Local Collector standard or less, and: a. the aggregate volume of imported or exported material is	development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads.
<ul> <li>greater than 1000m<sup>3</sup>; or</li> <li>b. the aggregate volume of imported or exported material is greater than 200m<sup>3</sup> per day; or</li> <li>c. the proposed haulage route involves a vulnerable land use or shopping centre.</li> </ul>	<b>E37.3</b> Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
Note - A dilapidation report (including photographs) may be required for the haulage route to demonstrate compliance with this PO. Editor's note - Where associated with a State-controlled road, further requirements may apply, and approval may be required from the Department of Transport and Main Roads.	E37.4 Construction traffic to and from the development site uses the highest classification streets or roads where a choice of access routes is available. Haul routes for the transport of imported or spoil material and gravel pavement material along Council roads below sub-arterial standard must be approved routes. Note - The road hierarchy is mapped on Overlay map - Road hierarchy. Note - A dilapidation report may be required to demonstrate compliance with this E.
	<b>E37.5</b> Where works are carried out in existing roads, the works must be undertaken so that the existing roads are maintained in a safe and usable condition. Practical access for residents, visitors and services (including postal deliveries and refuse collection) is retained to existing lots during the construction period and after completion of the works.

	Note - A traffic control plan prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) will be required for any works that will affect access, traffic movements or traffic safety in existing roads. E37.6 Access to the development site is obtained via an existing lawful access point.
PO38	E38
All disturbed areas are to be progressively stabilised during construction and the entire site rehabilitated and substantially stabilised at the completion of construction. Note - Refer to Planning scheme policy - Integrated design for details.	<ul> <li>At completion of construction all disturbed areas of the site are to be:</li> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques.</li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage.</li> </ul>
PO39	E39
Earthworks are undertaken to ensure that soil disturbances are staged into manageable areas. Note - A site specific Erosion and Sediment Control Plan (ESCP) will be required to demonstrate compliance with this PO. An ESCP is to be prepared in accordance with Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design (Appendix C).	Soil disturbances are staged into manageable areas of not greater than 3.5 ha.
PO40	E40.1
<ul> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> </ul>	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.
<ul> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> </ul>	<b>E40.2</b> Disposal of materials is managed in one or more of the following ways:
Note - No burning of cleared vegetation is permitted.	<ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> </ul>

	Note - The chipped vegetation must be stored in an approved location.
PO41	E41
All development works are carried out at times which minimise noise impacts to residents.	All development works are carried out within the following times:
	a. Monday to Saturday (other than public holidays) between 6:30am and 6:30pm on the same day;
	<ul> <li>no work is to be carried out on Sundays or public holidays.</li> </ul>
	Note - Work outside the above hours may be approved (in writing) where it can be demonstrated that the work will not cause significant inconvenience or disruption to the public, or the work is unlikely to cause annoyance or inconvenience to occupants of adjacent properties.
PO42	No example provided.
Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.	

### Earthworks


PO	43	E43.1
	site earthworks are designed to consider the visual amenity impact as they relate to:	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including
a.	the natural topographical features of the site;	catch drains at the top of batters and lined batter drains as necessary.
b.	short and long-term slope stability;	E43.2
c.	soft or compressible foundation soils;	Stabilisation measures are provided, as necessary, to
d.	reactive soils;	ensure long-term stability and low maintenance of steep slopes and batters.
e.	low density or potentially collapsing soils;	
f.	existing fill and soil contamination that may exist on-site;	E43.3 Inspection and certification of steep slopes and batters
g.	the stability and maintenance of steep slopes and batters;	is required by a suitably qualified and experienced RPEQ.
h.	excavation (cut) and fill and impacts on the amenity	E43.4
	of adjoining lots (e.g. residential).	All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.

	E43.5
	All filling or excavation is contained on-site and is free draining.
	E43.6
	All fill placed on-site is:
	a. limited to that area necessary for the approved use;
	b. clean and uncontaminated (i.e. no building waste, concrete, green waste, actual acid sulfate soils, potential acid sulfate soils or contaminated material etc.).
	E43.7
	The site is prepared and the fill placed on-site in accordance with AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
PO44	E44
Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the	Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.
surrounding area.	Figure - Embankment
	500mm min 1.5m min 1.5m min 1.5m min 1.5m min 1.5m min 1.5m min 1.5m min 1.5m min 1.5m min 1.5m
PO45	E45.1
Filling or excavation is undertaken in a manner that:	No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity.
<ul> <li>does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> </ul>	Note - Public sector entity is defined in Schedule 2 of the Act.
b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or	E45.2
any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.	Filling or excavation that would result in any of the following is not carried out on-site:
Note - Public sector entity is defined in Schedule 2 of the Act.	a. a reduction in cover over any Council or public sector entity infrastructure service to less than

	<ul> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken;</li> <li>c. prevent reasonable access to Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the site for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity is defined in Schedule 2 of the Act.</li> <li>Note - All building work covered by QDC MP1.4 is excluded from this provision.</li> </ul>
PO46	No example provided.
Filling or excavation does not result in land instability. Note - Steep slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.	
PO47	No example provided.
<ul> <li>Filling or excavation does not result in:</li> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements.	
PO48	E48
Filling or excavation on the development site is undertaken in a manner which does not create or accentuate problems associated with stormwater flows and drainage systems on land adjoining the site.	<ul> <li>Filling and excavation undertaken on the development site are shaped in a manner which does not:</li> <li>a. prevent stormwater surface flow which, prior to commencement of the earthworks, passed onto the development site, from entering the land; or</li> <li>b. redirect stormwater surface flow away from existing flow paths; or</li> <li>c. divert stormwater surface flow onto adjacent land, (other than a road), in a manner which:</li> </ul>

i. concentrates the flow; or
<li>increases the flow rates of stormwater over the affected section of the adjacent land above the situation which existed prior to the diversion; or</li>
<li>iii. causes actionable nuisance to any person, property or premises.</li>

PO49	E49
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents. Note - Refer to Planning scheme policy - Residential design for guidance on how to achieve compliance with this performance outcome.	<ul> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> <li>Figure - Retaining on boundary</li> </ul>
	Finished surface level Retaining
	<ul> <li>c. where height is greater than 900mm but no greater than 1.5m, are to be setback at least the equivalent height of the retaining structure from any property boundary;</li> <li>d. where height is greater than 1.5m, are to be setback and stepped 1.5m vertical: 1.5m horizontal, terraced, landscaped and drained as shown below.</li> </ul>

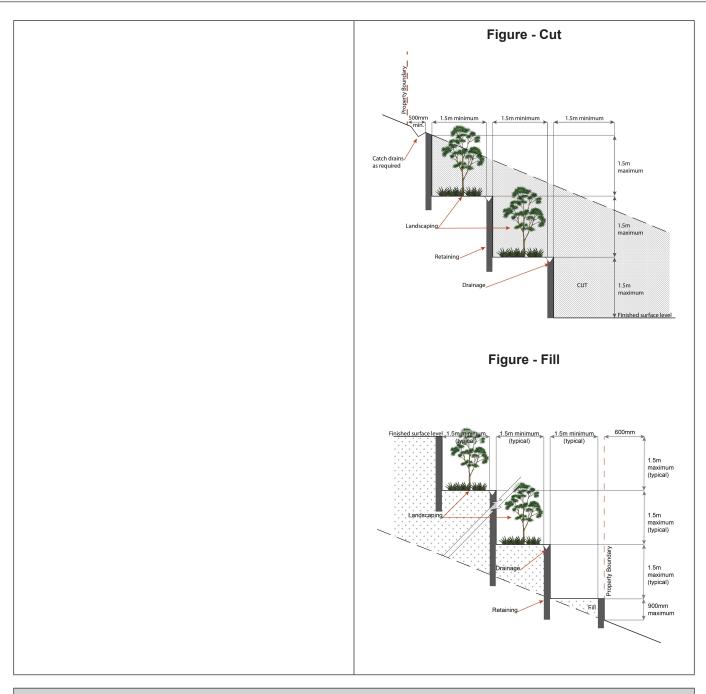

### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.
  - iv.

AND

- none of the following exceptions apply: b.
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated ii. water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

PO50	E50.1
<ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> </ul> Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.	<ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i>.</li> <li>Note - For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>164</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signopsted in-ground hydrants would be an acceptable alternative;</li> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: <ol> <li>for caravans and their associated outbuildings, hydrant coverage need only extend to the roof of those tents and caravans;</li> <li>for caravans and their, hydrant coverage need only extend to the roof of those tents and caravans;</li> <li>for outdoor sales<sup>154</sup>, processing or storage facilities, hydrant coverage facilities;</li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ol> </li> <li>E50.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land: <ul> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance; <ul> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.</li> </ul></li></ul></li></ul>
PO51	E51

On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.	<ul> <li>For development that contains on-site fire hydrants external to buildings:</li> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>b. a sign identifying the following is provided at the vehicular entry point to the site: <ul> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrants and hydrants</li> </ul> </li> <li>Note - The sign prescribed above, and the graphics used are to be: <ul> <li>a. in a form;</li> <li>b. of a size;</li> <li>c. illuminated to a level;</li> </ul> </li> </ul>	
PO52	E52	
Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads. Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.	
	fic criteria	
Dual occupancies <sup>(21)</sup>		
PO53	E53	

the Not	al Occupancies are infrequent and dispersed within streetscape. te - Refer to Planning scheme policy - Residential design for persal method and calculation.	Are located on lots with an area of 1000m <sup>2</sup> or greater.
alor		
Hor	ne based business <sup>(35)</sup>	
PO	54	No example provided.
The	scale and intensity of the Home based business <sup>(35)</sup> :	
a.	is compatible with the physical characteristics of the site and the character of the local area;	
<ul> <li>is able to accommodate anticipated car parking demand without negatively impacting the streetscape or road safety;</li> </ul>		
C.	does not adversely impact the amenity of adjoining and nearby premises;	
d. remains ancillary to the residential use of the dwelling;		
e.	does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;	
f.	ensures employees and visitors to the site do not negatively impact the expected amenity of adjoining properties;	
g.	ensures service and delivery vehicles do not negatively impact the amenity of the area.	
Мај	or electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and	Utility installation <sup>(86)</sup>
PO	55	E55.1
	development does not have an adverse impact on visual amenity of a locality and is:	Development is designed to minimise surrounding lan use conflicts by ensuring infrastructure, buildings, structures and other equipment:
a. b. c. d. e.	high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive; located behind the main building line; below the level of the predominant tree canopy or the level of the surrounding buildings and structures;	<ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied tall exterior walls.</li> </ul>
f.	camouflaged through the use of colours and materials which blend into the landscape;	E55.2

- g. treated to eliminate glare and reflectivity;
- h. landscaped;
- i. otherwise consistent with the amenity and character of the zone and surrounding area.

boundaries.

A minimum 3m wide strip of dense planting is provided

around the outside of the fenced area, between the

development and street frontage, side and rear

PO	56		E56
Infrastructure does not have an impact on pedestrian health and safety.			<ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>
PO	57		E57
ane	enviror facility gen whe mee	es associated with the development occur within nment incorporating sufficient controls to ensure y: erates no audible sound at the site boundaries ere in a residential setting; or et the objectives as set out in the Environmental tection (Noise) Policy 2008.	All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.
Ret	ail, co	ommercial and community uses	
PO	58		No example provided.
Cor	nmuni	ity activities:	
a.	are	located to:	
	i.	cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or	
	ii.	establishing a new neighbourhood hub (as described in the PO below) on a main street;	
b.		located on allotments that have appropriate a and dimensions for the siting of:	
	i.	buildings and structures;	
	ii.	vehicle servicing, deliveries, parking, manoeuvring and circulation;	
	iii.	landscaping and open space including buffering;	
C.		of a small scale, having regard to the ounding character;	
d. are serviced by public transport;		serviced by public transport;	
e. do not negatively impact adjoining residents or the streetscape.			

neig	e expansion (into adjoining lots) of existing ghbourhood hubs or the establishment of a new ghbourhood hub does not occur.	
<ul> <li>PO60</li> <li>Service stations are located, designed and orientated to:</li> <li>a. establish on heavily trafficked roads where the amenity of surrounding residential uses is already subject to impacts by road vehicle noise;</li> <li>b. be in proximity of a neighbourhood hub or centre;</li> <li>c. not negatively impact active streets, public spaces or hubs of activity where the pedestrian safety and</li> </ul>		<ul> <li>E60.1</li> <li>Service stations are located:</li> <li>a. adjoining or within 400m of: <ul> <li>i. a neighbourhood hub identified on Overlay map - Community activities and neighbourhood hubs (not on a neighbourhood hub lot); or</li> <li>ii. a centre zone;</li> </ul> </li> </ul>
d. e. f. g.	<ul> <li>site where active uses are located on adjoining lots);</li> <li>e. ensure the amenity of adjoining properties is protected;</li> <li>f. reduce the visual impact of the Service station from the streetscape while maintaining surveillance from the site to the street;</li> <li>g. minimise impacts on adjoining residential uses, to a level suitable relative to expected residential amenity of the area. (e.g. high order road in urban or next generation neighbourhood, likely to be noisy and not like suburban);</li> </ul>	<ul> <li>b. b. on the corner lot of an arterial or sub-arterial road.</li> <li>E60.2</li> <li>Service stations are designed and orientated on site to: <ul> <li>a. include a landscaping strip having a minimum depth of 1m adjoining all road frontages;</li> <li>b. building and structures (including fuel pump canopies) are setback a minimum of 3m from the primary and secondary frontage and a minimum of 5m from side and rear boundaries;</li> <li>c. include a screen fence, of a height and standard in accordance with a noise impact assessment (Note - Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise), on side and rear boundaries where adjoining land is able to contain a residential use;</li> <li>d. not include more than 2 driveway crossovers.</li> </ul> </li> </ul>
	61 n-residential uses (excluding a Service station) ress and activate streets and public spaces by:	No example provided.
a. b.	ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement; new buildings adjoin or are within 3m of the primary frontage(s), civic space or public open space;	
c. d.	locating car parking areas and drive-through facilities behind or under buildings to not dominate the street environment; establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing and avoiding blank walls with the use of sleeving);	

# 6 Zones

PO64		No example provided.
e.	is consolidated and shared with adjoining sites wherever possible.	
d.	does not impact on the safe and efficient movement of traffic external to the site;	
C.	does not impede active frontage and active transport options;	
b.	provides safety and security of people and property at all times;	
a.	prioritises the movement and safety of pedestrians between the street frontage and the entrance to the building;	
Dev	elopment provides functional and integrated car king and vehicle access, that:	
POe	63	No example provided.
h.	facilitate casual surveillance of all public spaces.	
g.	incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;	
f.	locate and orientate to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites;	
e.	Included building entrances that are readily identifiable from the road frontage;	
d.	incorporate architectural features within the building facade at the street level to create human scale (e.g. cantilevered awning);	
C.	contribute to a safe environment;	
b.	enable differentiation between buildings;	
a.	add visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, cantilevered awning);	
	ouildings exhibit a high standard of design and struction, which:	
POe	62	No example provided.
f.	establishing and maintaining human scale.	
e.	providing visual interest to the façade (e.g. Windows or glazing, variation in colours, materials, finishes, articulation, recesses or projections);	

prio	safety and efficiency of pedestrian movement is ritised in the design of car parking areas through viding pedestrian paths in car parking areas that are: located along the most direct route between building entrances, car parks and adjoining uses; protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc); are of a width to allow safe and efficient access for prams and wheelchairs.		
POe	55	E65.1	
a. b. c. d. e. Not	number of car parking spaces is managed to: avoid significant impacts on the safety and efficiency of the road network; avoid an oversupply of car parking spaces; avoid the visual impact of large areas of open car parking from road frontages and public areas; promote active and public transport options; promote innovative solutions, including on-street parking and shared parking areas.	- Car parking. Note - The above rates exclud a disability required by Disabili relevant disability discrimination E65.2 All car parking areas are	designed and constructed in an Standard AS2890.1 Parking
POe	66	E66.1	
a.	End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:	Minimum bicycle parking accordance with the table nearest whole number).	facilities are provided in below (rounded up to the
	i. adequate bicycle parking and storage	Use	Minimum Bicycle Parking
	<ul> <li>facilities; and</li> <li>ii. adequate provision for securing belongings; and</li> <li>iii. change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.</li> </ul>	Residential uses comprised of dwellings All other residential uses	Minimum 1 space per dwelling Minimum 1 space per 2 car parking spaces identified in Schedule 7 – car parking
		Non-residential uses	Minimum 1 space per 200m2 of GFA
b.	Notwithstanding a. there is no requirement to provide end of trip facilities if it would be unreasonable to provide these facilities having regard to:	the Queensland Development instrument to prescribe facility identified in those acceptable combination of the default leve	levels higher than the default levels

i. the projected population growth and forward planning for road upgrading and development		E66.2	
	of cycle paths; or		e parking is:
ii.	whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute distances and		provided in accordance with Austroads (2008), Guide to Traffic Management - Part 11: Parking;
	nature of the terrain; or		protected from the weather by its location or a dedicated roof structure;
iii.	the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.		located within the building or in a dedicated, secure structure for residents and staff;
			adjacent to building entrances or in public areas for customers and visitors.
for bicycle unreasonal	te - The intent of b above is to ensure the requirements parking and end of trip facilities are not applied in ble circumstances. For example these requirements and do not apply in the Rural zone or the Rural residential		- Bicycle parking structures are to be constructed to the ards prescribed in AS2890.3.
Performane the Queens	te - This performance outcome is the same as the ce Requirement prescribed for end of trip facilities under sland Development Code. For development incorporating	and no	Bicycle parking and end of trip facilities provided for residential on-residential activities may be pooled, provided they are within hetres of the entrance to the building.
building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the examples under this heading meet the current performance requirement prescribed in the Queensland Development Code.		the Quinstrui identif amalg	's note - The examples for end of trip facilities prescribed under ueensland Development Code permit a local planning ment to prescribe facility levels higher than the default levels fied in those acceptable solutions. This example is an gamation of the default levels set for end of trip facilities in the nsland Development Code and the additional facilities required uncil.
		E66.3	
		For no	on-residential uses, storage lockers:
			are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);
			have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).
		activit	- Storage lockers may be pooled across multiple sites and ies when within 100 metres of the entrance to the building and 50 metres of bicycle parking and storage facilities.
		the Quinstrui identif amalg	's note - The examples for end of trip facilities prescribed under ueensland Development Code permit a local planning ment to prescribe facility levels higher than the default levels fied in those acceptable solutions. This example is an gamation of the default levels set for end of trip facilities in the nsland Development Code and the additional facilities required uncil.
		E66.4	
		For no	on-residential uses, changing rooms:
			are provided at a rate of 1 per 10 bicycle parking spaces;

- b. are fitted with a lockable door or otherwise screened from public view;
- are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:

Bicycle spaces provided	Male/ Female	Change rooms required	Showers required	Sanitary compartments required	Washbasins required
1-5	Male and female	1 unisex change room	1	1 closet pan	1
6-19	Female	1	1	1 closet pan	1
20 or more	Male	1	1	1 closet pan	1
more	Female	1	2, plus 1 for every 20 bicycle spaces provided thereafter	2 closet pans, plus 1 sanitary compartment for every 60 bicycle parking spaces provided thereafter	1, plus 1 for every 60 bicycle parking spaces provided thereafter
	Male	1	2, plus 1 for every 20 bicycle spaces provided thereafter	1 urinal and 1 closet pans, plus 1 sanitary compartment at the rate of 1 closet pan or 1 urinal for every 60 bicycle space provided thereafter	1, plus 1 for every 60 bicycle parking spaces provided thereafter

Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.

Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).

#### d. are provided with:

- i. a mirror located above each wash basin;
- ii. a hook and bench seating within each shower compartment;
- iii. a socket-outlet located adjacent to each wash basin.

Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities

Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

Loading and servicing areas:

**PO67** 

No example provided.

# 6 Zones

a.	are not visible from the street frontage;	
b.	are integrated into the design of the building;	
C.	include screening and buffers to reduce negative impacts on adjoining sensitive land uses;	
d.	where possible loading and servicing areas are consolidated and shared with adjoining sites.	
PO6	8	E68
	and bin storage area/s are designed, located and aged to prevent amenity impacts on the locality.	Development is designed to meet the criteria in the Planning scheme policy - Waste and is demonstrated in a waste management program.
PO6	9	No example provided.
On-s	site landscaping is provided, that:	
a.	is incorporated into the design of the development;	
b.	reduces the dominance of car parking and servicing areas from the street frontage;	
C.	retains mature trees wherever possible;	
d.	does not create safety or security issues by creating potential concealment areas or interfering with sight lines;	
e.	maintains the achievement of active frontages and sight lines for casual surveillance.	
	e - All landscaping is to accord with Planning scheme policy - grated design.	
PO7	0	E70
	veillance and overlooking are maintained between road frontage and the main building line.	No fencing is provided forward of the building line.
PO7	1	No example provided.
illum safe	ting is designed to provide adequate levels of nination to public and communal spaces to maximise ty and minimise adverse impacts on residential and r sensitive land uses.	
PO7	2	E72
The hours of operation minimise adverse amenity impacts on adjoining sensitive land uses.		Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.
Tele	communications facility <sup>(81)</sup>	

Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner
that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
to 300Ghz.

PO73	E73.1		
Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area.	New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.		
	E73.2		
	If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.		
P074	E74		
A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.	A minimum area of 45m <sup>2</sup> is available to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.		
P075	E75		
Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.		
P076	E76.1		
<ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>	Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.		
<ul><li>c. not visually dominant or intrusive;</li><li>d. located behind the main building line;</li></ul>	E76.2		
e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;	In all other areas towers do not exceed 35m in height.		
f. camouflaged through the use of colours and	E76.3		
<ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li><li>h. landscaped;</li><li>i. otherwise consistent with the amenity and character</li></ul>	Towers, equipment shelters and associated structures are of a design, colour and material to:		
of the zone and surrounding area.	<ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>		
	E76.4		

	All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is	
	3m. Where there is no established building line the facility is located at the rear of the site.	
	E76.5	
	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.	
	E76.6	
	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.	
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.	
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.	
P077	E77	
Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.	An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.	
P078	E78	
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.	All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.	
Values and con	straints criteria	
Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.		
Acid sulfate soils - (refer Overlay map - Acid sulfate s apply)	soils to determine if the following assessment criteria	

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

P079	E79
<ul> <li>Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:</li> <li>a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;</li> <li>b. protects the environmental and ecological values and health of receiving waters;</li> <li>c. protects buildings and infrastructure from the effects of acid sulfate soils.</li> </ul>	<ul> <li>Development does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.</li> </ul>

# Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

- Note The following are excluded from the native vegetation clearing provisions of this planning scheme:
- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

Vegetation clearing, ecological value and connectivit	on clearing, ecological value and connectivity	
PO80	No example provided.	

<ul> <li>Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:</li> <li>a. the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded;</li> <li>b. on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded;</li> <li>b. on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*.</li> <li>* Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014.</li> </ul>	
PO81	No example provided.
<ul> <li>Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by:</li> <li>a. retaining habitat trees;</li> <li>b. providing contiguous patches of habitat;</li> <li>c. provide replacement and rehabilitation planting to improve connectivity;</li> <li>d. avoiding the creation of fragmented and isolated patches of habitat;</li> <li>e. providing wildlife movement infrastructure.</li> <li>Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy – Environmental areas.</li> </ul>	
Vegetation clearing and habitat protection	
<b>PO82</b> Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	No example provided.

Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development	
will:	
<ul> <li>a. rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a viable and healthy habitat area;</li> <li>b. provide replacement fauna nesting boxes in the event of habitat tree loss in accordance with Planning scheme policy - Environmental areas;</li> </ul>	
c. undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework.	
PO84	No example provided.
Development ensures safe, unimpeded, convenient and ongoing wildlife movement and habitat connectivity by:	
<ul> <li>a. providing contiguous patches of habitat;</li> <li>b. avoiding the creation of fragmented and isolated patches of habitat;</li> </ul>	
<ul><li>c. providing wildlife movement infrastructure;</li><li>d. providing replacement and rehabilitation planting to improve connectivity.</li></ul>	
Vegetation clearing and soil resource stability	
PO85	No example provided.
1000	
Development does not:	
Development does not: a. result in soil erosion or land degradation; b. leave cleared land exposed for an unreasonable	
<ul> <li>Development does not:</li> <li>a. result in soil erosion or land degradation;</li> <li>b. leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.</li> </ul>	No example provided.
<ul> <li>Development does not:</li> <li>a. result in soil erosion or land degradation;</li> <li>b. leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.</li> <li>Vegetation clearing and water quality</li> </ul>	
<ul> <li>Development does not:</li> <li>a. result in soil erosion or land degradation;</li> <li>b. leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.</li> <li>Vegetation clearing and water quality</li> <li>PO86</li> <li>Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by:</li> <li>a. ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads;</li> </ul>	
<ul> <li>Development does not:</li> <li>a. result in soil erosion or land degradation;</li> <li>b. leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.</li> <li>Vegetation clearing and water quality</li> <li>PO86</li> <li>Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by:</li> <li>a. ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve</li> </ul>	
<ul> <li>Development does not:</li> <li>a. result in soil erosion or land degradation;</li> <li>b. leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.</li> <li>Vegetation clearing and water quality</li> <li>PO86</li> <li>Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by:</li> <li>a. ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads;</li> <li>b. avoiding or minimising changes to landforms to</li> </ul>	
<ul> <li>Development does not:</li> <li>a. result in soil erosion or land degradation;</li> <li>b. leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.</li> <li>Vegetation clearing and water quality</li> <li>PO86</li> <li>Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by:</li> <li>a. ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads;</li> <li>b. avoiding or minimising changes to landforms to maintain hydrological water flows;</li> <li>c. adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry<sup>(4)</sup> and animal keeping<sup>(5)</sup></li> </ul>	

a. minimising flow velocity to reduce erosion;		
b. minimising hard surface areas;		
<ul><li>c. maximising the use of permeable surfaces;</li><li>d. incorporating sediment retention devices;</li></ul>		
e. minimising channelled flow.		
Vegetation clearing and access, edge effects and urban heat island effects		
PO88	No example provided.	
Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment.		
PO89	No example provided.	
Development minimises potential adverse 'edge effects' on ecological values by:		
a. providing dense planting buffers of native vegetation		
<ul> <li>between a development and environmental areas;</li> <li>retaining patches of native vegetation of greatest possible size where located between a development</li> </ul>		
and environmental areas ; c. restoring, rehabilitating and increasing the size of		
<ul><li>existing patches of native vegetation;</li><li>ensuring that buildings and access (public and</li></ul>		
vehicle) are setback as far as possible from		
environmental areas and corridors; e. landscaping with native plants of local origin.		
Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the groundwater and surface water flow.		
PO90	No example provided.	
Development avoids adverse microclimate change and does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by:		
a. pervious surfaces;		
<li>b. providing deeply planted vegetation buffers and green linkage opportunities;</li>		
c. landscaping with local native plant species to		
<ul><li>achieve well-shaded urban places;</li><li>d. increasing the service extent of the urban forest canopy.</li></ul>		
Vegetation clearing and Matters of Local Environmen	tal Significance (MLES) environmental offsets	
PO91	No example provided.	

## 6 Zones

Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas. Editor's note - For MSES Koala Offsets, the environmental offset provisions in schedule 11 of the Regulation, in combination with the requirements of the Environmental Offset Act 2014, apply.	
Heritage and landscape character (refer Overlay map the following assessment criteria apply)	- Heritage and landscape character to determine if

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

PO9	2	E92
Deve a.	elopment will: not diminish or cause irreversible damage to the	Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural
a.	cultural heritage values present on the site, and associated with a heritage site, object or building;	heritage value. Note - A cultural heritage conservation management plan for the
b.	protect the fabric and setting of the heritage site, object or building;	preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The
C.	be consistent with the form, scale and style of the heritage site, object or building;	plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.
d.	utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;	
e.	incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;	
f.	retain public access where this is currently provided.	
PO9	3	No example provided.
Dem	olition and removal is only considered where:	
a.	a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or	
b.	demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or	

c. d.	limited demolition is performed in the course of repairs, maintenance or restoration; or demolition is performed following a catastrophic event which substantially destroys the building or object.	
PO9	4	No example provided.
of cu sym valu bein	ere development is occurring on land adjoining a site ultural heritage value, the development is to be pathetic to and consistent with the cultural heritage es present on the site and not result in their values g eroded, degraded or unreasonably obscured from ic view.	
PO9	5	E95
and occu mea Prot ensu Sign poor safe repoor a tree	elopment does not adversely impact upon the health vitality of significant trees. Where development urs in proximity to a significant tree, construction sures and techniques as detailed in AS 4970-2009 ection of trees on development sites are adopted to ure a significant tree's health, wellbeing and vitality. ificant trees are only removed where they are in a state of health or where they pose a health and ty risk to persons or property. A Tree Assessment ort prepared by a suitably qualified arborist confirming ee's state of health is required to demonstrate evement of this performance outcome.	<ul> <li>Development does:</li> <li>a. not result in the removal of a significant tree;</li> <li>b. not occur within 20m of a protected tree;</li> <li>c. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 – Pruning of Amenity Trees.</li> </ul>
	astructure buffers (refer Overlay map - Infrastruct eria apply)	ure buffers to determine if the following assessment

**PO96** E96 Development within a Pumping station buffer is located, Development does not involve the construction of any designed and constructed to: buildings or structures within a Pumping station buffer. a. ensure that odour or other air pollutant impacts on the amenity of the development met the air quality of objectives in the Environmental Protection (Air) Policy 2008; b. ensure that noise impacts on the amenity of the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008. Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply) Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.

PO97	No example provided.

Dov	elopment:	
a. b.	minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.	
PO9	8	No example provided.
Deve	elopment:	
a. b.	maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment; does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.	
Eng doe: an u Note	<ul> <li>e - A report from a suitably qualified Registered Professional ineer Queensland is required certifying that the development s not increase the potential for significant adverse impacts on upstream, downstream or surrounding premises.</li> <li>e - Reporting to be prepared in accordance with Planning scheme cy – Flood hazard, Coastal hazard and Overland flow.</li> </ul>	
PO9	9	No example provided.
Deve	elopment does not:	
acce	directly, indirectly or cumulatively cause any increase in overland flow velocity or level; increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure. e - Open concrete drains greater than 1m in width are not an eptable outcome, nor are any other design options that may ease scouring.	
PO1	00	E100
the e detri	elopment ensures that public safety and the risk to environment are not adversely affected by a mental impact of overland flow on a hazardous nical located or stored on the premises.	Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.
PO1	01	E101

Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.	Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.
PO102	E102.1
<ul> <li>Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow</li> <li>PO103</li> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul>	Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM: a. Urban area – Level III; b. Rural area – N/A; c. Industrial area – Level V; d. Commercial area – Level V. <b>E102.2</b> Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment. No example provided.
Additional criteria for development for a Park <sup>(57)</sup>	
PO104	E104
Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:	Development for a Park <sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.
a. public benefit and enjoyment is maximised;	
<li>b. impacts on the asset life and integrity of park structures is minimised;</li>	
c. maintenance and replacement costs are minimised.	

Riparian and wetland setbacks		
PO105	E105	
Development provides and maintains a suitable setback from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following matters:	<ul><li>Development does not occur within:</li><li>a. 50m from top of bank for W1 waterway and drainage line</li></ul>	
<ul> <li>a. impact on fauna habitats;</li> <li>b. impact on wildlife corridors and connectivity;</li> <li>c. impact on stream integrity;</li> <li>d. impact of opportunities for revegetation and rehabilitation planting;</li> </ul>	<ul> <li>b. 30m from top of bank for W2 waterway and drainage line</li> <li>c. 20m from top of bank for W3 waterway and drainage line</li> <li>d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.</li> </ul>	
e. edge effects.	Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.	
Transport noise corridors (refer Overlay map - Transport noise corridors to determine if the following assessment criteria apply)		

Note - This is for information purposes only. No requirements for accepted development or criteria for assessable development apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code



## Table 6.2.6.1.3 Setbacks

Residential uses										
Height of wall	Frontage primary			Frontage secondary to street			Frontage secondary to lane	Side To OMP and wall	Rear To OMP and wall	Trafficable water body
	To wall	To OMP	To covered car parking space*	To wall	To OMP	To covered car parking space*	To OMP, wall and covered car parking space*			To OMP and wall
Less than 4.5m	Min 6m	Min 4.5m	Min 5.4m	Min 3m	Min 2m	Min 5.4m	Min 0.5m	Min 1.5m	Min 1.5m	Min 4.5m
4.5m to 8.5m	Min 6m	Min 4.5m	N/A	Min 3m	Min 2m	N/A	Min 0.5m	Min 2m	Min 2m	Min 4.5m
Greater than 8.5m	Min 6m	Min 4.5m	N/A	Min 3m	Min 2m	N/A	Min 0.5m	Min 2m up to 8.5m in height; plus 0.5m for every 3m in height (or storey) or part thereof over 8.5m	Min 2m up to 8.5m in height; plus 0.5m for every 3m in height (or storey) or part thereof over 8.5m	Min 4.5m

Note - Excludes pools and class 10 buildings. For requirements for pools and class 10 buildings and structures refer to the QDC.

Note - \* Does not apply to basement car parking areas.

## 6.2.6.2 Suburban neighbourhood precinct

### 6.2.6.2.1. Purpose - Suburban neighbourhood precinct

- 1. The purpose of the code will be achieved through the following overall outcomes for the Suburban neighbourhood precinct:
  - a. The suburban neighbourhood precinct consists of a primarily residential urban fabric providing predominantly low density, low rise, detached housing on a variety of lot sizes with a maximum site density of 15 dwellings per hectare or a maximum site density of 75 dwellings per hectare if complying with b. v. below.
  - b. Residential activities consist of:
    - i. Detached dwelling houses<sup>(22)</sup>, predominantly on traditional lots;
    - ii. Detached dwelling houses<sup>(22)</sup> on narrow lots and Dual Occupancies<sup>(21)</sup> where they are dispersed within the streetscape or are located within easy walking distance to services (centre, public transport node, community facilities) or park;
    - iii. Domestic outbuildings are subordinate in appearance and function to the dwelling;
    - iv. Retirement facilities<sup>(67)</sup>, Residential care facilities<sup>(65)</sup>, and Relocatable home parks<sup>(62)</sup> are located within easy walking distance of a centre;
    - v. Multiple dwellings<sup>(49)</sup>, Rooming accommodation<sup>(69)</sup>, short-term accommodation<sup>(77)</sup> and tourist park<sup>(84)</sup> only establish where they will support a higher order or district centre or a train station by being adjacent (within 400m walking distance) to that higher order or district centre or train station.
    - vi. The built form of concentrated residential uses and managed communities (e.g. multiple dwellings<sup>(49)</sup>, retirement facilities<sup>(67)</sup>, residential care facilities<sup>(65)</sup>, relocatable home parks<sup>(62)</sup>) are designed to integrate with the surrounding neighbourhood.
  - c. The design, siting and construction of residential uses are to:
    - i. contribute to an attractive streetscape with priority given to pedestrians;
    - ii. encourage passive surveillance of public spaces;
    - iii. result in privacy and residential amenity consistent with the low density residential character of the area;
    - iv. provide a diverse and attractive built form;
    - v. provide a low rise built form compatible with its surrounds;
    - vi. incorporate sub-tropical urban design principles that respond to local climatic conditions;
    - vii. incorporate sustainable practices including maximising energy efficiency and water conservation;
    - viii. incorporate natural features and respond to site topography;
    - ix. cater for appropriate car parking and manoeuvring areas on site;
    - x. be of a scale and density consistent with the low density residential character of the area;
    - xi. provide urban services such as reticulated water, sewerage, sealed roads, parks and other identified infrastructure.

- d. Home based business can only be established where the scale and intensity of the activity does not detrimentally impact upon the character and amenity associated with the surrounding area. Specifically, Home based business does not include the sale or restoration of more than 4 vehicles in any calendar year or, undertake a mechanical repairs or panel beating activity associated with a business at the subject premises.
- e. Non-residential uses in the suburban neighbourhood precinct take the form of community activities, corner stores, neighbourhood hubs or local centres.
- f. Community activities:
  - i. establish in a location that may be serviced by public transport;
  - ii. do not negatively impact adjoining residents or the streetscape;
  - iii. do not undermine the viability of existing or future centres.
- g. Corner stores may establish as standalone uses (not part of a neighbourhood hub) where:
  - i. the store is of a scale that remains subordinate to all centres and neighbourhood hubs within the region;
  - ii. clear separation from existing neighbourhood hubs and centres within the network are maintained to reduce catchment overlap. The corner store should not be within 1600m of another corner store, neighbourhood hub or centre measured from the centre of the corner store, neighbourhood hub or centre;
  - iii. they are appropriately designed and located to include active frontages.
- h. Retail and commercial activities (excluding Service stations):
  - i. cluster with other non-residential uses (excluding corner stores) forming a neighbourhood hub;
  - ii. are centred around a 'Main Street' central core fostering opportunities for social and economic exchange;
  - iii. are of a small scale, appropriate for a neighbourhood hub;

Note - Retail and commercial uses that will result in a new or existing neighbourhood hub expanding to a scale and function consistent with a Local centre are to be assessed as if establishing a new Local centre. Refer to the Centre zone code for relevant assessment benchmarks.

- iv. do not negatively impact adjoining residents or the streetscape;
- v. are subordinate in function and scale to all centres within the region.
- i. Service stations:
  - i. establish where they will not disrupt, fragment or negatively impact active frontages (e.g. within a neighbourhood hub);
  - ii. establish on heavily trafficked roads where the amenity of surrounding residential uses is already subject to impacts by road vehicle noise;
  - iii. establish in locations that will not have a negative impact on the street environments intended to include active frontages (e.g. Neighbourhood hubs or centres);
  - iv. do not negatively impact adjoining residents or the streetscape;

- v. ancillary uses or activities only service the convenience needs of users.
- j. The design, siting and construction of non-residential uses:
  - i. maintains a human scale, through appropriate building heights and form;
  - ii. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces (excluding Service stations);
  - iii. provides for active and passive surveillance of road frontages, movement corridors and public spaces;
  - iv. promotes active transport options and ensures an oversupply of car parking is not provided;
  - v. locates car parking so as not to dominate the street;
  - vi. does not result in large internalised shopping centres (e.g. large blank external walls with tenancies only accessible from within the building) surrounded by expansive areas of surface car parking.
- k. Neighbourhood hub expansion (into adjoining lots) or the establishment of a new neighbourhood hub only occurs where:
  - i. it is of a scale that remains subordinate to all centres within the region;

Note - Retail and commercial uses that will result in a new or existing neighbourhood hub expanding to a scale and function more consistent with a Local centre are to be assessed as if establishing a new Local centre. Refer to the Centre zone code for relevant assessment criteria.

- ii. the expansion (into adjoining lots) will strengthen the existing neighbourhood hub as an important neighbourhood activity node;
- clear separation from existing neighbourhood hubs and centres within the network are maintained to reduce catchment overlap. New neighbourhood hubs are to service a currently unserviced catchment. The centre of a neighbourhood hub should not be located within 1600m of another neighbourhood hub or centre measured from the centre of each hub or centre;
- iv. for a new neighbourhood hub, it is located on sub-arterial or collector road;
- v. they are appropriately designed and located to include active frontages around a 'main street' core and are staged where relevant to retain key (highly accessible) sites for long term development.
- I. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity (underground wherever possible), water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. the development does not result in unacceptable impacts on the capacity and safety of the external road network;

- iv. the development ensures the safety, efficiency and useability of access ways and parking areas;
- v. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- m. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- n. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- o. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- p. Development in a Water supply buffer is undertaken in a manner which contributes to the maintenance and enhancement where possible of water quality to protect the drinking water and aquatic ecosystem environmental values in those catchments.
- q. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
  - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
  - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
  - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
  - iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
    - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
    - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
    - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
  - v. protecting native species and protecting and enhancing species habitat;
  - vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
  - vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
  - viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
  - ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
  - x. ensuring effective and efficient disaster management response and recovery capabilities;
  - xi. where located in an overland flow path:

- A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
- B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
- C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
- D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- r. Development in the Suburban neighbourhood precinct includes 1 or more of the following:

<ul> <li>Child care centre<sup>(13)</sup></li> </ul>	•	Relocatable home park <sup>(62)</sup> - if within 800m walking	•	Sales office <sup>(72)</sup>
<ul> <li>Club<sup>(14)</sup></li> </ul>		distance of a higher order	•	Shop <sup>(75)</sup> - if for a corner
<ul> <li>Community care centre<sup>(15)</sup></li> </ul>		or district centre		store
<ul> <li>Community residence<sup>(16)</sup></li> </ul>	•	Residential care facility <sup>(65)</sup> - if within 800m walking	•	Where in a Neighbourhood hub:
<ul> <li>Community use<sup>(17)</sup></li> </ul>		distance of a higher order or district centre		- Food and drink outlet <sup>(28)</sup> - Hardware and trade
<ul> <li>Dual occupancy<sup>(21)</sup></li> </ul>	•	Retirement facility <sup>(67)</sup> - if		supplies <sup>(32)</sup> - Health care services <sup>(33)</sup>
<ul> <li>Dwelling house<sup>(22)</sup></li> </ul>		within 800m walking distance of a higher order		- Indoor sport and recreation <sup>(38)</sup> - for a
<ul> <li>Dwelling unit<sup>(23)</sup></li> </ul>		or district centre		gymnasium - Office <sup>(53)</sup>
<ul> <li>Educational establishment<sup>(24)</sup></li> </ul>				- Service industry <sup>(73)</sup> - Shop <sup>(75)</sup> - Shopping centre <sup>(76)</sup>
<ul> <li>Emergency services<sup>(25)</sup></li> </ul>				- Veterinary services <sup>(87)</sup>
<ul> <li>Health care services<sup>(33)</sup></li> </ul>				
<ul> <li>Home based business<sup>(35)</sup></li> </ul>				
<ul> <li>Multiple dwelling - if within 400m walking distance of a higher order or district centre or a train station</li> <li>Place of worship<sup>(60)</sup></li> </ul>				

s. Development in the Suburban neighbourhood precinct does not include any of the following:

•	Adult store <sup>(1)</sup>	•	Hotel <sup>(37)</sup>	•	Renewable energy facility <sup>(63)</sup>
•	Agricultural supplies store <sup>(2)</sup>		Intensive animal industry <sup>(39)</sup>	•	Research and technology
•	Air services <sup>(3)</sup>	•	Intensive horticulture <sup>(40)</sup>		industry <sup>(64)</sup>

•	Animal husbandry <sup>(4)</sup>	•	Low impact industry <sup>(42)</sup>	•	Rooming
•	Animal keeping <sup>(5)</sup>	•	Marine industry <sup>(45)</sup>		accommodation <sup>(69)</sup> - if not within 400m of a higher
•	Aquaculture <sup>(6)</sup>	•	Medium impact industry		order centre or district centre or a train station
•	Bar <sup>(7)</sup>	•	Motor sport facility <sup>(48)</sup>	•	Rural industry <sup>(70)</sup>
•	Brothel <sup>(8)</sup>	•	Multiple dwelling <sup>(49)</sup> - if not within 400m of a higher	•	Rural workers'
•	Cemetery <sup>(12)</sup>		order centre or district		accommodation <sup>(71)</sup>
•	Crematorium <sup>(18)</sup>		centre or a train station	•	Short-term accommodation <sup>(77)</sup> - if not
•	Cropping <sup>(19)</sup>	•	Nature-based tourism <sup>(50)</sup>		within 400m of a higher order centre or district
•	Detention facility <sup>(20)</sup>	•	Nightclub entertainment facility <sup>(51)</sup>		centre or a train station
•	Extractive industry <sup>(27)</sup>	•	Non-resident workforce	•	Showroom <sup>(78)</sup>
•	High impact industry <sup>(34)</sup>		accommodation <sup>(52)</sup>	•	Special industry <sup>(79)</sup>
•	Hardware and trade	•	Outdoor sales <sup>(54)</sup>	•	Theatre <sup>(82)</sup>
	supplies <sup>(32)</sup> - if 250m <sup>2</sup> GFA or more	•	Parking station <sup>(58)</sup>	•	Tourist attraction <sup>(83)</sup>
		•	Permanent plantation <sup>(59)</sup>	•	Tourist park <sup>(84)</sup> - if not within
		•	Port services <sup>(61)</sup>		400m of a higher order centre or district centre or a train station
				•	Transport depot <sup>(85)</sup>
				•	Warehouse <sup>(88)</sup>
				•	Wholesale nursery <sup>(89)</sup>
				•	Winery <sup>(90)</sup>

t. Development not listed in the tables above may be considered on its merits and where it reflects and supports the outcomes of the zone.

### 6.2.6.2.2 Accepted development subject to requirements

If development is to be categorised as accepted development subject to requirements it must comply with the requirements for accepted development set out in Part C, Table 6.2.6.2.1. Where the development does not meet a requirement for accepted development (RAD) within Part C Table 6.2.6.2.1, the category of development changes to assessable development under the rules outlined in section 5.3.3. (1), and assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a RAD is not met, and is therefore limited to the subject matter of the RADs that are not complied with. To remove any doubt, for those RADs that are complied with, there is no need for assessment against the corresponding PO.

Requirements for accepted development (RAD)	Corresponding PO
RAD1	PO2
RAD2	PO3
RAD3	PO4

RAD4PO4RAD5PO7RAD6PO13RAD7PO18RAD8PO17RAD9PO26RAD10PO19RAD11PO20RAD12PO20RAD13PO20RAD14PO30RAD15PO32RAD17PO29RAD18PO31RAD20PO34RAD21PO36RAD18PO37RAD21PO37RAD19PO37RAD21PO34RAD21PO37RAD21PO34RAD21PO34RAD22PO37RAD23PO44RAD24PO49RAD25PO42RAD26PO42RAD28PO42RAD30PO45RAD31PO45RAD32PO45RAD32PO45RAD34PO45RAD34PO45RAD34PO45RAD35PO45RAD37PO47	Requirements for accepted development (RAD)	Corresponding PO
RAD6         P013           RAD7         P016           RAD8         P017           RAD9         P026           RAD10         P020           RAD11         P020           RAD12         P020           RAD13         P020           RAD14         P030           RAD15         P032           RAD16         P029           RAD17         P029           RAD18         P033           RAD19         P030           RAD16         P039           RAD17         P029           RAD18         P033           RAD19         P036           RAD20         P037           RAD21         P038           RAD22         P037           RAD23         P044           RAD24         P039           RAD25         P043           RAD26         P042           RAD27         P042           RAD28         P045           RAD29         P045           RAD30         P045           RAD31         P045           RAD33         P045 <tr tbox<="" tr="">          RAD34         P0</tr>	RAD4	PO4
RAD7         P016           RAD8         P017           RAD9         P026           RAD10         P019           RAD11         P020           RAD12         P020           RAD13         P020           RAD14         P020           RAD15         P020           RAD14         P030           RAD15         P032           RAD16         P029           RAD17         P029           RAD18         P033           RAD19         P036           RAD20         P037           RAD21         P038           RAD22         P037           RAD23         P044           RAD24         P039           RAD25         P042           RAD26         P042           RAD27         P042           RAD28         P042           RAD29         P045           RAD30         P045           RAD31         P045           RAD33         P045           RAD34         P045           RAD33         P045           RAD34         P045	RAD5	PO7
RAD8PO17RAD9PO26RAD10PO19RAD11PO20RAD12PO20RAD13PO20RAD14PO30RAD15PO32RAD16PO29RAD17PO29RAD18PO36RAD20PO37RAD21PO37RAD22PO37RAD23PO44RAD24PO39RAD25PO42RAD27PO42RAD28PO45RAD29PO45RAD29PO45RAD30PO45RAD31PO45RAD33PO45RAD34PO50RAD34PO45RAD35PO45RAD34PO45RAD35PO45RAD34PO45RAD35PO45RAD36PO	RAD6	PO13
RAD9         PO26           RAD10         PO19           RAD11         PO20           RAD12         PO20           RAD13         PO20           RAD14         PO30           RAD15         PO32           RAD16         PO29           RAD17         PO29           RAD18         PO31           RAD19         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO37           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO42           RAD26         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45	RAD7	PO16
RAD10         PO19           RAD11         PO20           RAD12         PO20           RAD13         PO20           RAD14         PO20           RAD13         PO20           RAD14         PO30           RAD15         PO32           RAD16         PO29           RAD17         PO29           RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO37           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45	RAD8	P017
AD11         PO20           RAD12         PO20           RAD13         PO20           RAD13         PO20           RAD14         PO30           RAD15         PO32           RAD16         PO29           RAD17         PO29           RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO37           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO49           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO43           RAD29         PO45           RAD29         PO45           RAD29         PO45           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45	RAD9	PO26
AD12         PO20           RAD13         PO20           RAD14         PO30           RAD15         PO32           RAD15         PO32           RAD16         PO29           RAD17         PO29           RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO37           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO42           RAD21         PO42           RAD23         PO42           RAD24         PO39           RAD25         PO42           RAD26         PO42           RAD27         PO43           RAD28         PO44           RAD29         PO45           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO45 <tr td=""> <tr td="">          RAD35&lt;</tr></tr>	RAD10	PO19
RAD13         PO20           RAD14         PO30           RAD15         PO32           RAD16         PO29           RAD17         PO29           RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO37           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO44           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD34         PO50	RAD11	PO20
RAD14         PO30           RAD15         PO32           RAD16         PO29           RAD17         PO29           RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO37           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO44           RAD27         PO44           RAD26         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45	RAD12	PO20
RAD15         PO32           RAD16         PO29           RAD17         PO29           RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO37           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO44           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO42           RAD21         PO45           RAD22         PO45           RAD23         PO45           RAD24         PO45           RAD25         PO45           RAD26         PO45           RAD27         PO45           RAD28         PO45           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45	RAD13	PO20
RAD16         PO29           RAD17         PO29           RAD17         PO33           RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO38           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO43           RAD28         PO45           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45	RAD14	PO30
RAD17         PO29           RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO37           RAD22         PO37           RAD23         PO37           RAD24         PO37           RAD25         PO39           RAD26         PO39           RAD27         PO44           RAD26         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45	RAD15	PO32
RAD18         PO33           RAD19         PO36           RAD20         PO37           RAD21         PO38           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO45           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45	RAD16	PO29
RAD19         P036           RAD20         P037           RAD21         P038           RAD22         P037           RAD23         P044           RAD24         P039           RAD25         P039           RAD26         P042           RAD27         P042           RAD26         P042           RAD27         P042           RAD28         P042           RAD29         P043           RAD30         P045-P049, P051           RAD31         P045           RAD32         P045           RAD33         P045           RAD33         P045           RAD34         P050           RAD35         P045           RAD36         P045	RAD17	PO29
RAD20         P037           RAD21         P038           RAD22         P037           RAD23         P037           RAD24         P037           RAD23         P044           RAD24         P039           RAD25         P039           RAD26         P042           RAD27         P042           RAD28         P042           RAD29         P043           RAD30         P045-P049, P051           RAD31         P045           RAD32         P045           RAD33         P045           RAD34         P050           RAD35         P045           RAD36         P045	RAD18	PO33
RAD21         PO38           RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45           RAD34         PO50           RAD35         PO45	RAD19	PO36
RAD22         PO37           RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45	RAD20	PO37
RAD23         PO44           RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45           RAD35         PO45           RAD36         PO45	RAD21	PO38
RAD24         PO39           RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45	RAD22	PO37
RAD25         PO39           RAD26         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD34         PO45           RAD34         PO45           RAD34         PO45           RAD34         PO45           RAD35         PO45	RAD23	PO44
RAD26         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD34         PO45           RAD34         PO45           RAD34         PO45	RAD24	PO39
RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO48           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD34         PO45           RAD35         PO45	RAD25	PO39
RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO48           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD34         PO45           RAD35         PO45	RAD26	PO42
RAD29         PO45-PO49, PO51           RAD30         PO48           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45	RAD27	PO42
RAD30         PO48           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45	RAD28	PO43
RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45	RAD29	PO45-PO49, PO51
RAD32         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45	RAD30	PO48
RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45	RAD31	PO45
RAD34         PO50           RAD35         PO45           RAD36         PO45	RAD32	PO45
RAD35 PO45 RAD36 PO45	RAD33	PO45
RAD36 PO45	RAD34	PO50
	RAD35	PO45
RAD37 PO47	RAD36	PO45
	RAD37	PO47

Requirements for accepted development (RAD)	Corresponding PO
RAD38	PO47
RAD39	P052
RAD40	P052
RAD41	P052
RAD42	PO53
RAD43	P054
RAD44	PO56
RAD45	PO56
RAD46	PO56
RAD47	PO56
RAD48	PO56
RAD49	PO56
RAD50	PO56
RAD51	PO56
RAD52	PO56
RAD53	PO60
RAD54	PO60
RAD55	PO60
RAD56	PO60
RAD57	PO60
RAD58	PO60
RAD59	PO60
RAD60	PO62
RAD61	PO63
RAD62	PO64
RAD63	PO64
RAD64	PO64
RAD65	PO64
RAD66	PO66
RAD67	P072
RAD68	P076
RAD69	P076
RAD70	P079
RAD71	PO80

Requirements for accepted development (RAD)	Corresponding PO
RAD72	P082
RAD73	PO83
RAD74	P072
RAD75	P084
RAD76	PO85-PO96
RAD77	PO85-PO96
RAD78	PO97
RAD79	PO98
RAD80	PO99
RAD81	PO100
RAD82	PO101
RAD83	PO101
RAD84	PO102
RAD85	PO102
RAD86	PO105
RAD87	PO105
RAD88	PO105
RAD89	PO106
RAD90	PO107
RAD91	PO107
RAD92	PO110
RAD93	PO108
RAD94	PO108
RAD95	PO108
RAD96	PO107
RAD97	PO109
RAD98	PO109
RAD99	P0111
RAD100	PO112, PO113
RAD101	PO114
RAD102	PO117
RAD103	PO116-PO118, PO120-PO122
RAD104	PO116-PO118

Requirements for accepted development (RAD)	Corresponding PO
RAD106	PO123
RAD107	PO124
RAD108	PO125
RAD109	PO126
RAD110	PO127
RAD111	PO127
RAD112	PO128

## Part C—Requirements for accepted development - Suburban neighbourhood precinct

### Table 6.2.6.2.1 Requirements for accepted development - Suburban neighbourhood precinct

Requirem	nts for accepted development	
	General requirements	
Building	ight (Residential uses)	
RAD1	Building height does not exceed:	
	<ul> <li>that mapped on Overlay map – Building heights; or</li> <li>for domestic outbuildings, including free standing carports and garages, 4m and a mean heigh not exceeding 3.5m.</li> </ul>	ht
Building	ight (Non-residential uses)	
RAD2	Building height does not exceed the maximum height identified on Overlay map - Building heights.	
Setbacks	Residential uses)	
RAD3	Setbacks (excluding built to boundary walls) comply with Table 6.2.6.2.3 'Setbacks'- Setbacks (Residen uses).	ıtial
	Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constrair for details).	nts
RAD4	Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are:	
	<ul> <li>only established on lots having a primary frontage of 18m or less and where permitted in Tabl 6.2.6.2.4;</li> </ul>	е
	<ul> <li>of a length and height not exceeding that specified stated in Table 6.2.6.2.4 'Built to boundary walls (Residential uses)';</li> </ul>	
	s. setback from the side boundary:	
	i. if a plan of development provides for only one built to boundary wall on the one boundar not more than 200mm; or	у,
	ii. if a built to boundary wall may be built on each side of the same boundary, not more tha 20mm;	n
	I. on the low side of a sloping lot.	

Utilities

	Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls a 'easement for maintenance purposes' is recommended.
Site cove	r (Residential uses)
RAD5	Site cover does not exceed 50% (excluding eaves, sun shading devices, patios, balconies and other unenclosed structures).
Lighting	
RAD6	Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters of the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.
Clearing	of habitat trees where not located in the Environmental areas overlay map
RAD7	Development does not result in the damaging, destroyed or clearing of a habitat tree. This does not apply to:
	a. Clearing of a habitat tree located within an approved development footprint;
	b. Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
	c. Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
	d. Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
	e. Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
	f. Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
	g. Clearing of a habitat tree associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
	h. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.
	Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridors. Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.
	Works requirements

RAD8	Development is provided with an appropriate level of service and infrastructure in accordance with Planning scheme policy - Integrated design (Appendix A).
Access	
RAD9	The frontage road is fully constructed to Council's standards.
	Note - Roads are considered to be constructed in accordance with Council standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. Testing of the existing pavement may be required to confirm whether the existing works meet the standards in Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
	Note - Frontage roads include streets where no direct lot access is provided.
RAD10	Any new or changes to existing direct vehicle access for residential development does not occur from arterial or sub-arterial roads.
RAD11	Any new or changes to existing crossovers and driveways are designed, located and constructed in accordance with:
	a. where for a Council-controlled road and associated with a Dwelling house:
	i. Planning scheme policy - Integrated design;
	b. where for a Council-controlled road and not associated with a Dwelling house:
	i. AS/NZS2890.1 Parking facilities Part 1: Off street car parking;
	ii. AS/NZS 2890.2 - Parking facilities Part 2: Off-street commercial vehicle facilities;
	iii. Planning scheme policy - Integrated design;
	iv. Schedule 8 - Service vehicle requirements;
	c. where for a State-Controlled road, the Safe Intersection Sight Distance requirements in Austroads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
RAD12	Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS 2890.1 Parking Facilities Part 1: Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
RAD13	Access driveways, manoeuvring areas and loading facilities are sealed and provide for service vehicles listed in Schedule 8 - Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 - Service vehicle requirements.
Stormwat	er

RAD14	Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing actionable nuisance to any person, property or premises in accordance with Planning scheme policy – Integrated design.
-------	---

	Note - A watercourse as defined in the Water Act may be acc discharge from the site does not increase the downstream flo An afflux of +20mm may be accepted on Council controlled la stormwater is discharged into a catchment that includes State	od levels during events up to and including the 1% AEP storm. and and road infrastructure. No worsening is ensured when	
RAD15	Development incorporates a 'deemed to comply solution' to manage stormwater quality where the development: a. is for an urban purpose that involves a land area of 2500m <sup>2</sup> or greater; and		
	<ul> <li>b. will result in:</li> <li>i. 6 or more dwellings; or</li> <li>ii. an impervious area greater than 25% o</li> </ul>	f the net developable area.	
	Note - The deemed to comply solution is to be designed, con- requirements of Water by Design 'Deemed to Comply Solution and Planning scheme policy - Integrated design.	structed, established and maintained in accordance with the s - Stormwater Quality Management for South East Queensland'	
RAD16	Development ensures that surface flows entering th diverted or concentrated.	ne premises from adjacent properties are not blocked,	
	Note - A report from a suitably qualified Registered Professio development does not increase the potential for significant ac premises.		
RAD17	Development ensures that works (e.g. fences and stormwater to adjoining properties. Note - A report from a suitably qualified Registered Professio development does not increase the potential for significant ac premises.		
RAD18		ention and bio-retention systems) through or within Council (at no cost to Council). Minimum easement	
	Pipe Diameter	Minimum Easement Width (excluding access requirements)	
	Stormwater Pipe up to 825mm diameter	3.0m	
	Stormwater Pipe up to 825mm diameter with Sewer pipe up to 225m diameter	4.0m	
	Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the pipe and clear of all pits.	
	Note - Additional easement width may be required in certain of stormwater system.	circumstances in order to facilitate maintenance access to the	
	Note - Refer to Planning scheme policy - Integrated design (A	Appendix C) for easement requirements over open channels.	

Site work	s and construction management
Sile work	s and construction management
RAD19	The site and any existing structures are to be maintained in a tidy and safe condition.
RAD20	Development does not cause erosion or allow sediment to leave the site.
	Note - The International Erosion Control Association (Australasia) Best Practice Erosion and Sediment Control provides guidance on strategies and techniques for managing erosion and sedimentation.
RAD21	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
RAD22	Existing street trees are protected and not damaged during works.
	Note - Where development occurs in the tree protection zone, measures and techniques as detailed in Australian Standard AS 4970 Protection of trees on developments sites are adopted and implemented.
RAD23	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
RAD24	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
RAD25	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
RAD26	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works
RAD27	Disposal of materials is managed in one or more of the following ways:
	a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
	b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.
	Note - No burning of cleared vegetation is permitted.
	Note - The chipped vegetation must be stored in an approved location.
RAD28	All development works are carried out within the following times:

a.	Monday to Saturday (other than public holidays) between 6:30am and 6:30pm on the same day;
b.	no work is to be carried out on Sundays or public holidays.

Earthwor	ks	
RAD29	The total of all cut and fill on-site does not exceed 900mm in height.	
	Figure - Cut and Fill	
	Lot Boundaries	
	Note - This is site earthworks not building work.	
RAD30	Cut and fill batters, (other than batters to dams and water impoundments), have a finished slope no steeper than the following:	
	<ul> <li>a. any cut batter is no steeper than 1V in 4H;</li> <li>b. any fill batter, (other than a compacted fill batter), is no steeper than 1V in 4H;</li> <li>c. any compacted fill batter is no steeper than 1V in 4H.</li> </ul>	
RAD31	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.	
RAD32	Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep slopes and batters.	
	Note - Inspection and certification of steep slopes and batters may be required by a suitably qualified and experienced RPEQ.	
RAD33	All fill and excavation is contained on-site and is free draining.	
RAD34	Earthworks undertaken on the development site are shaped in a manner which does not:	
	<ul> <li>a. prevent stormwater surface flow which, prior to commencement of the earthworks, passed onto the development site, from entering the land; or</li> <li>b. redirect stormwater surface flow away from existing flow paths; or</li> </ul>	
	c. divert stormwater surface flow onto adjacent land (other than a road) in a manner which:	
	i. concentrates the flow; or	
	ii. increases the flow rates of stormwater over the affected section of the adjacent land above the situation which existed prior to the diversion; or	
	iii. causes actionable nuisance to any person, property or premises.	

RAD35	All fill placed on-site is:
	a. limited to that necessary for the approved use;
	b. clean and uncontaminated (i.e. no building waste, concrete, green waste, actual acid sulfate soils, potential acid sulfate soils or contaminated material etc.).
RAD36	The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures
RAD37	No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity.
	Note - Public sector entity is defined in Schedule 2 of the Act.
RAD38	Filling or excavation that would result in any of the following is not carried out on site:
	a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;
	b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken;
	c. prevent reasonable access to Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the site for monitoring, maintenance or replacement purposes.
	Note - Public sector entity is defined in Schedule 2 of the Act.
	Note - All building work covered by QDC MP1.4 is excluded from this provision.

## **Fire services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - ii.
  - iii.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. iv.


#### AND

- none of the following exceptions apply: b
  - i i the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated ii. water supply network, measured around all obstructions, either on or adjacent to the site.

	provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant nplying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent
RAD39	External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .
	Note - For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005):
	<ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul>
	b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
	c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
	i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
	ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
	iii for outdoor sales <sup>(54)</sup> , processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales <sup>(54)</sup> , outdoor processing and outdoor storage facilities; and
	d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.
RAD40	A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:
	a. an unobstructed width of no less than 3.5m;
	b. an unobstructed height of no less than 4.8m;
	c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
	d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.
RAD41	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment</i> .
RAD42	For development that contains on-site fire hydrants external to buildings:
	<ul><li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li><li>b. a sign identifying the following is provided at the vehicular entry point to the site:</li></ul>
	<ul> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrants and hydrants and hydrants within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.</li> </ul>

	Note - The sign prescribed above, and the graphics used are to be:
	a. in a form;
	b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.
RAD43	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.
	Use specific requirements
Home ba	sed business <sup>(35)</sup>
RAD44	Home based business(s) <sup>(35)</sup> are fully enclosed within the existing dwelling or on-site structure.
RAD45	A maximum of 1 employee (not a resident) OR 2 customers OR customers from within 1 Small rigid vehicle (SRV) or smaller are permitted on the site at any one time.
RAD46	Service and delivery vehicles do not exceed one Small rigid vehicle (SRV) at any one time.
RAD47	Vehicle parking for the Home based business <sup>(35)</sup> on-site is limited to 1 car or Small rigid vehicle (SRV).
RAD48	Home based business(s) <sup>(35)</sup> occupy an area of the existing dwelling or on-site structure not greater than 40m <sup>2</sup> gross floor area.
RAD49	Home based business(s) <sup>(35)</sup> do not involve manufacturing.
	Note - Food businesses that are licensable by local government and only involve the manufacturing of non-potentially hazardous food are permitted. Definitions in the Food Act 2006 apply to this note.
RAD50	The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.
RAD51	The hours of operation do not exceed 8:00am to 6:00pm, Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday and Anzac Day.
	Note - Office or administrative activities that do not generate non-residents visiting the site, such as book-keeping and computer work, may operate outside the hours of operation.
RAD52	For a bed and breakfast, the use:
	a. is fully contained within the existing dwelling on-site;
	b. occupies a maximum of 2 bedrooms;

	c. includes the provision of a minimum of 1 meal per day;
	d. accommodates a maximum of 6 people at any one time.
	Note - For a Bed and Breakfast SO29 - SO36 above do not apply.
Sales off	ice <sup>(72)</sup>
RAD53	Car parking spaces are provided in accordance with Schedule 7 - Car parking.
RAD54	Car parking and manoeuvring areas are designed and constructed in accordance with the Australian Standards AS2890.1.
RAD55	Sales office <sup>(72)</sup> has direct vehicular access to a dedicated road constructed in accordance with Planning scheme policy - Integrated design.
RAD56	Fencing adjoining a street (other than a laneway) or public open space does not exceed 1.2 metres in height.
RAD57	The sales office <sup>(72)</sup> is used for the sale of land or buildings on the same site as the sales office <sup>(72)</sup> or an adjoining site.
RAD58	The sales office <sup>(72)</sup> has a clearly identifiable pedestrian entry that is visible and accessible from the primary frontage.
RAD59	The use of the premises for a sales office <sup>(72)</sup> is for a maximum of 2 years after the commencement of the use.
Telecom	nunications facility <sup>(81)</sup>
that will no	te - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
RAD60	A minimum area of 45m <sup>2</sup> is available to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
RAD61	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
RAD62	Equipment shelters and associated structures are located: a. directly beside the existing equipment shelter and associated structures;
	<ul> <li>b. behind the main building line;</li> <li>c. further away from the frontage than the existing equipment shelter and associated structures;</li> <li>d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.</li> </ul>
RAD63	Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.
RAD64	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
RAD65	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, betweer the development and street frontage and adjoining uses.

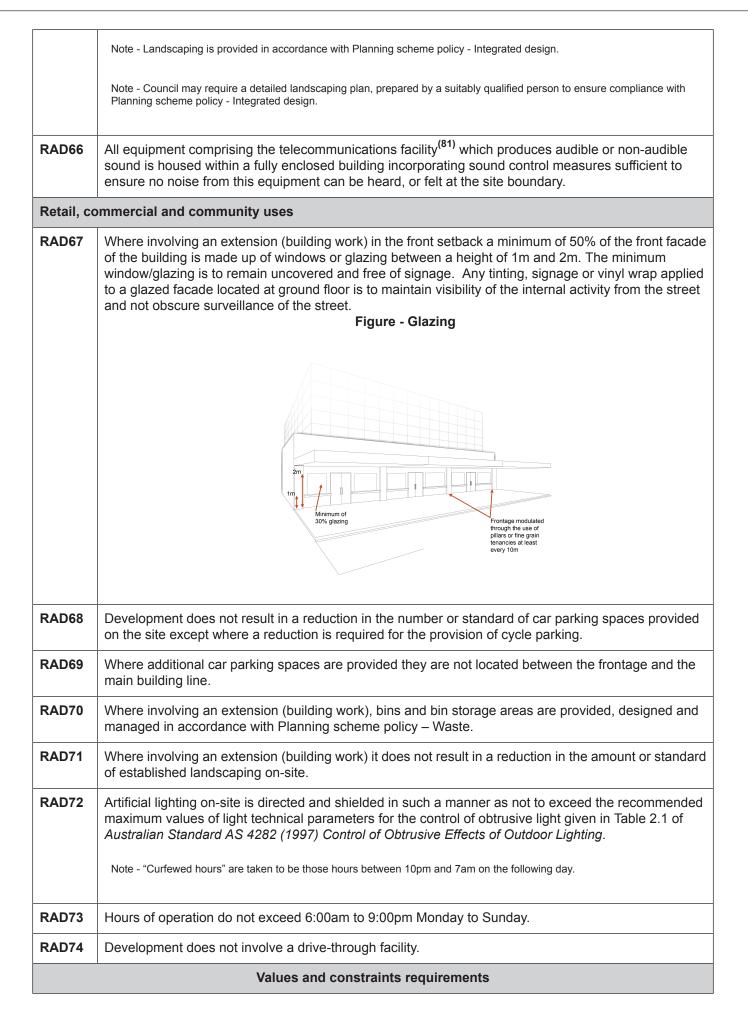

Recor develo	Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.			
Acid	Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following requirements apply)			
	Note - Planning scheme policy - Acid sulfate soils provides guidance for requirements for accepted development development that has the potential to disturb acid sulfate soils i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.			
RAD7	75 Development does not involve:			
	a. excavation or otherwise removing of more than 100m <sup>3</sup> of soil or sediment where below 5m Australian Height Datum AHD, or			
	b. filling of land of more than 500m <sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m AHD.			
	Surface Elevation ≤5m AHD     Surface Elevation >5m and <20m AHD			
	+15m AHD—			
	+10m AHD — K Self assessable development			
	+5m AHD			
	0m AHD>500m <sup>3</sup> ≥100m <sup>3</sup> ≥100m <sup>3</sup>			
	-5m AHD— 🗸 🗶 🖌 🖌 🖌 🖌			
apply				
Note · a.	The following are excluded from the native clearing provisions of this planning scheme: Clearing of native vegetation located within an approved development footprint;			
b.	Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately			
C.	required in response to an accident or emergency; Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage			
d.	to infrastructure; Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;			
e.	Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;			
f.	Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;			
g.	Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;			
h.	Grazing of native pasture by stock;			
i.	Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.			

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.


RAD76	Where no suitable land cleared of native vegetation exists, clearing of native vegetation in a High Value Area or Value Area is for the purpose of a new dwelling house <sup>(22)</sup> or extension to an existing dwelling house <sup>(22)</sup> only on lots less than 750m <sup>2</sup> .
	Editor's note - See in heading above for other uses excluded from native vegetation clearing requirements.
	Editor's note - Where vegetation clearance is accepted development subject to requirements, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:
	<ul> <li>i. co-locating all associated activities, infrastructure and access strips;</li> <li>ii. be the least valued area of koala habitat on the site;</li> <li>iii. minimise the footprint of the development envelope area;</li> <li>iv. minimise edge effects to areas external to the development envelope;</li> <li>v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design</li> </ul>
	Guideline and Planning scheme policy – Environmental areas;
	vi. sufficient area between the development and koala habitat trees to achieve their long-term viability.
	Editor's note - Where vegetation clearing is accepted development subject to requirements, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including
	sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.
RAD77	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.
	This does not apply to the following:
	a. Clearing of native vegetation located within an approved development footprint;
	<ul> <li>b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;</li> </ul>
	c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
	d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
	e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
	f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
	g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
	h. Grazing of native pasture by stock;
	i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.
•	

RAD78	Development does not result in more than one dwelling house <sup>(22)</sup> per lot within separation areas.
RAD79	Development within the separation area does not include the following uses:
	a. caretaker's accommodation <sup>(10)</sup> ;
	(21)
	(22)
	(00)
	(40)
	(52)
	(62)
	i. relocatable home park <sup>(62)</sup> ;
	<ul> <li>j. residential care facility<sup>(65)</sup>;</li> <li>k. resort complex<sup>(66)</sup>;</li> </ul>
	(67)
	(71)
	(77)
	(84)
	o. tourist park <sup>voy</sup> .
RAD80	All habitable rooms within the separation area are:
	a. acoustically insulated to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives
	Environmental Protection (Noise) Policy 2008;
	b provided with mechanical ventilation
to deterr	
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer:
to deterr	<ul> <li>re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply)</li> <li>The following uses are not located within the 100m wide transport route buffer:         <ul> <li>Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> </ul> </li> </ul>
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply)         The following uses are not located within the 100m wide transport route buffer:         a.       Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone;         b.       Community residence <sup>(16)</sup> ;
to deterr	<ul> <li>The following uses are not located within the 100m wide transport route buffer:         <ul> <li>Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>Community residence<sup>(16)</sup>;</li> <li>Dual occupancy<sup>(21)</sup>;</li> </ul> </li> </ul>
to deterr	<ul> <li>re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply)</li> <li>The following uses are not located within the 100m wide transport route buffer:         <ul> <li>a. Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>b. Community residence<sup>(16)</sup>;</li> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house;<sup>(22)</sup></li> </ul> </li> </ul>
	<ul> <li>The following uses are not located within the 100m wide transport route buffer:         <ul> <li>a. Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>b. Community residence<sup>(16)</sup>;</li> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house;<sup>(22)</sup></li> </ul> </li> </ul>
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply)         The following uses are not located within the 100m wide transport route buffer:         a.       Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone;         b.       Community residence <sup>(16)</sup> ;         c.       Dual occupancy <sup>(21)</sup> ;         d.       Dwelling house; <sup>(22)</sup> e.       Dwelling unit <sup>(23)</sup> ;         f.       Hospital <sup>(36)</sup> ;         g.       Rooming accommodation <sup>(69)</sup> ;
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply)         The following uses are not located within the 100m wide transport route buffer:         a.       Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone;         b.       Community residence <sup>(16)</sup> ;         c.       Dual occupancy <sup>(21)</sup> ;         d.       Dwelling house; <sup>(22)</sup> e.       Dwelling unit <sup>(23)</sup> ;         f.       Hospital <sup>(36)</sup> ;         g.       Rooming accommodation <sup>(69)</sup> ;
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ;
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ;
to deterr	<ul> <li>re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply)</li> <li>The following uses are not located within the 100m wide transport route buffer: <ul> <li>a. Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>b. Community residence<sup>(16)</sup>;</li> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house;<sup>(22)</sup></li> <li>e. Dwelling unit<sup>(23)</sup>;</li> <li>f. Hospital<sup>(36)</sup>;</li> <li>g. Rooming accommodation<sup>(69)</sup>;</li> <li>h. Multiple dwelling<sup>(49)</sup>;</li> <li>i. Non-resident workforce accommodation<sup>(52)</sup>;</li> <li>j. Relocatable home park<sup>(62)</sup>;</li> <li>k. Residential care facility<sup>(65)</sup>;</li> </ul> </li> </ul>
to deterr	<ul> <li>re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer inne if the following requirements apply)</li> <li>The following uses are not located within the 100m wide transport route buffer: <ul> <li>a. Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>b. Community residence<sup>(16)</sup>;</li> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house;<sup>(22)</sup>;</li> <li>e. Dwelling unit<sup>(23)</sup>;</li> <li>f. Hospital<sup>(36)</sup>;</li> <li>g. Rooming accommodation<sup>(69)</sup>;</li> <li>h. Multiple dwelling<sup>(49)</sup>;</li> <li>i. Non-resident workforce accommodation<sup>(52)</sup>;</li> <li>j. Relocatable home park<sup>(62)</sup>;</li> <li>k. Residential care facility<sup>(65)</sup>;</li> <li>l. Resort complex<sup>(66)</sup>;</li> </ul> </li> </ul>
to deterr	<ul> <li>re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply)</li> <li>The following uses are not located within the 100m wide transport route buffer: <ul> <li>a. Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>b. Community residence<sup>(16)</sup>;</li> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house;<sup>(22)</sup></li> <li>e. Dwelling unit<sup>(23)</sup>;</li> <li>f. Hospital<sup>(36)</sup>;</li> <li>g. Rooming accommodation<sup>(69)</sup>;</li> <li>h. Multiple dwelling<sup>(49)</sup>;</li> <li>i. Non-resident workforce accommodation<sup>(52)</sup>;</li> <li>j. Relocatable home park<sup>(62)</sup>;</li> <li>k. Residential care facility<sup>(65)</sup>;</li> </ul> </li> </ul>
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ; j. Relocatable home park <sup>(62)</sup> ; k. Residential care facility <sup>(65)</sup> ; l. Resort complex <sup>(66)</sup> ; m. Retirement facility <sup>(67)</sup> ; n. Rural workers' accommodation <sup>(71)</sup> ;
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ; j. Relocatable home park <sup>(62)</sup> ; k. Residential care facility <sup>(65)</sup> ; l. Resort complex <sup>(66)</sup> ; m. Retirement facility <sup>(67)</sup> ; n. Rural workers' accommodation <sup>(71)</sup> ; o. Short-term accommodation <sup>(77)</sup> ;
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ; j. Relocatable home park <sup>(62)</sup> ; k. Residential care facility <sup>(65)</sup> ; l. Resort complex <sup>(66)</sup> ; m. Retirement facility <sup>(67)</sup> ; n. Rural workers' accommodation <sup>(71)</sup> ;
to deterr	re resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply) The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ; j. Relocatable home park <sup>(62)</sup> ; k. Residential care facility <sup>(65)</sup> ; l. Resort complex <sup>(66)</sup> ; m. Retirement facility <sup>(67)</sup> ; n. Rural workers' accommodation <sup>(71)</sup> ; o. Short-term accommodation <sup>(77)</sup> ;


-	and landscape character (refer Overlay map - Heritage and landscape character to determine if ving requirements apply)
landscape heritage s	ces, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural gnificance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning plicy - Heritage and landscape character.
RAD84	Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant
	historical and cultural value of Planning scheme policy - Heritage and landscape character. Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions
RAD85	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.
	This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.
RAD86	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.
RAD87	The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character:
	<ul> <li>a. construction of any building;</li> <li>b. laying of overhead or underground services;</li> <li>c. any sealing, paving, soil compaction;</li> <li>d. any alteration of more than 75mm to the ground surface prior to work commencing.</li> </ul>
RAD88	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.
Infrastru apply)	cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements
RAD89	Development does not include the following uses within a Wastewater treatment site buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ; j. Relocatable home park <sup>(62)</sup> ; k. Residential care facility <sup>(65)</sup> ; l. Resort complex <sup>(66)</sup> ;

	m. Retirement facility <sup>(67)</sup> ;	
	n. Rural workers' accommodation <sup>(71)</sup> ; o. Short-term accommodation <sup>(77)</sup> ;	
	p. Tourist park <sup>(84)</sup> .	
RAD90	Development within a Water supply buffer does not include the incineration or burial of waste and all other waste is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.	
RAD91	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.	
RAD92	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):	
	a. buildings or structures;	
	b. gates and fences;	
	c. storage of equipment or materials;	
	d. landscaping or earthworks or stormwater or other infrastructure.	
RAD93	On-site sewerage facilities in a Water supply buffer produce a minimum secondary treated effluent (90th percentile) and effluent application to ensure water quality is maintained and protected.	
RAD94	On-site sewerage facilities in a Water supply buffer for a dwelling house <sup>(22)</sup> include:	
	<ul> <li>a. emergency storage capacity of 1,000 litres and adequate buffering for shock loading/down time;</li> <li>b. a reserve land application area of 100% of the effluent irrigation design area;</li> <li>c. land application areas that are vegetated;</li> <li>d. the base of the land application field is at least 2 metres above the seasonal high water table/bedrock (whichever is the closest to the base of the application area);</li> <li>e. wastewater collection and storage systems must have capacity to accommodate full load at peak times.</li> </ul>	
RAD95	On-site sewerage facilities in a Water supply buffer for development other than a dwelling house include emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies/overload with provision for de-sludging.	
RAD96	Development involving Permanent plantation <sup>(59)</sup> within a Water supply buffer maintains a minimum of 30% ground cover at all times.	
RAD97	Development does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer.	
RAD98	Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.	
RAD99	Development does not include the following uses located within a landfill site buffer:	
	<ul> <li>a. caretaker's accommodation<sup>(10)</sup>;</li> <li>b. community residence<sup>(16)</sup>;</li> <li>c. dual occupancy<sup>(21)</sup>;</li> <li>d. dwelling house;<sup>(22)</sup></li> <li>e. dwelling unit<sup>(23)</sup>;</li> <li>f. hospital<sup>(36)</sup>;</li> <li>g. rooming accommodation<sup>(69)</sup>;</li> </ul>	
	h. multiple dwelling <sup>(49)</sup> ;	

	<ul> <li>i. non-resident workforce accommodation<sup>(52)</sup>;</li> <li>j. relocatable home park<sup>(62)</sup>;</li> </ul>		
	k. residential care facility <sup>(65)</sup> ;		
	<ul> <li>k. residential care facility<sup>(65)</sup>;</li> <li>l. resort complex<sup>(66)</sup>;</li> <li>m. retirement facility<sup>(67)</sup>;</li> </ul>		
	n. rural workers' accommodation <sup>(71)</sup> ;		
	<ul> <li>o. short term accommodation<sup>(*)</sup>;</li> <li>p. tourist park<sup>(84)</sup>.</li> </ul>		
RAD100	All habitable rooms located within an Electricity supply substation buffer are:		
	a. located a minimum of 10m from an electricity supply substation <sup>(80)</sup> ; and		
	b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.		
RAD101	Development does not involve the construction of any buildings or structures containing habitable rooms or sensitive land uses within a High voltage electricity line buffer.		
Overland	flow path (refer Overlay map - Overland flow path to determine if the following requirements apply)		
RAD102	Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.		
RAD103	Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.		
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.		
	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow		
RAD104	<ul> <li>Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.</li> </ul>		
RAD105	5 Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area.		
RAD106	<b>6</b> Development for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.		
Riparian and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the following requirements apply)			
Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.			
RAD107	No development is to occur within:		
	a. 50m from top of bank for W1 waterway and drainage line		
	b. 30m from top of bank for W2 waterway and drainage line		
	c. 20m from top of bank for W3 waterway and drainage line		
	d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.		
	a. Toom nom the edge of a Ramsar wettand, som nom all other wettands.		

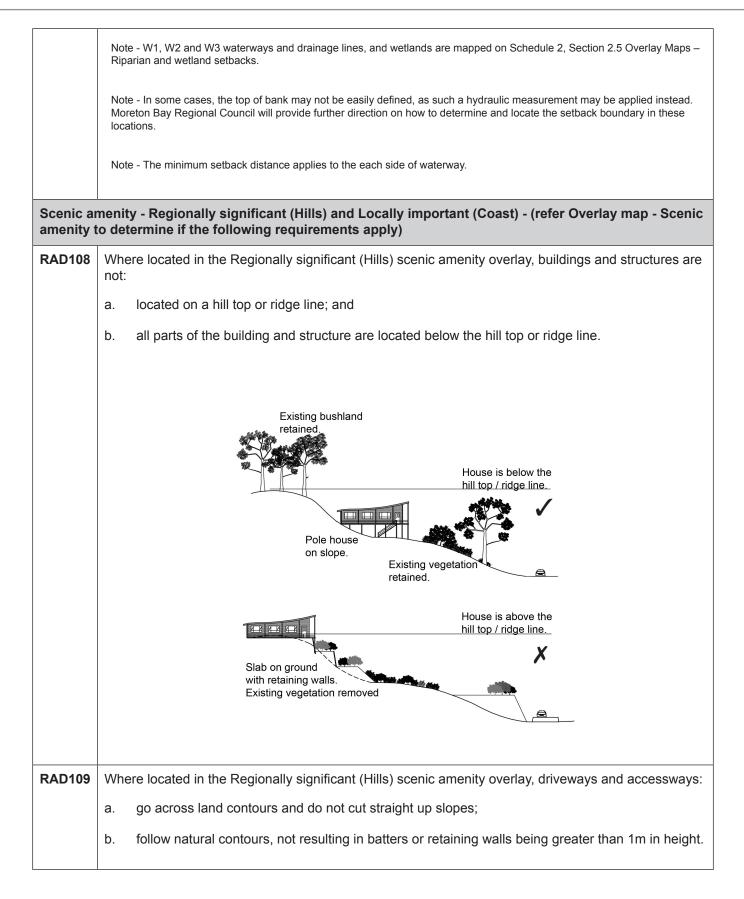

RAD110       Where located in the Regionally significant (Hills) scenic amenity overlay, roofs and wall surface			ity overlay, roofs and wall surfaces of
	buildings and structures adopt the following colours:		
	Colours from Australian Standard AS2700s – 1996		
	G12 – Holly	G53 – Banksia	N44 – Bridge Grey
	G13 – Emerald	G54 – Mist Green	N45 – Koala Grey
	G14 – Moss Green G55 – Lichen N52 – Mid Grey		N52 – Mid Grey
	G15 – Rainforest Green	G56 – Sage Green	N54 – Basalt
	G16 – Traffic Green	G62 – Rivergum	N55 – Lead Grey
	G17 – Mint Green	G64 – Slate	X54 – Brown
	G21 – Jade	G65 – Ti Tree	X61 – Wombat
	G22 – Serpentine	N25 – Birch Grey	X62 – Dark Earth
	G23 – Shamrock	N32 – Green Grey	X63 – Iron Bark
	G24 – Fern Green	N33 – Lightbox Grey	Y51 – Bronze Olive
	G25 – Olive	N35 – Light Grey	Y61 – Black Olive
	G34 – Avocado	N41 – Oyster	Y63 – Khaki
	G52 – Eucalyptus	N42 – Storm Grey	Y66 – Mudstone
		N43 – Pipeline Grey	
RAD111	Where located in the Regionally significant (Hills) scenic amenity overlay, roofs and wall surfaces of buildings and structures are painted or finished such that reflectivity is less than 35%.		
RAD112		Ily important (Coast) scenic amenity es indigenous coastal species;	/ overlay;

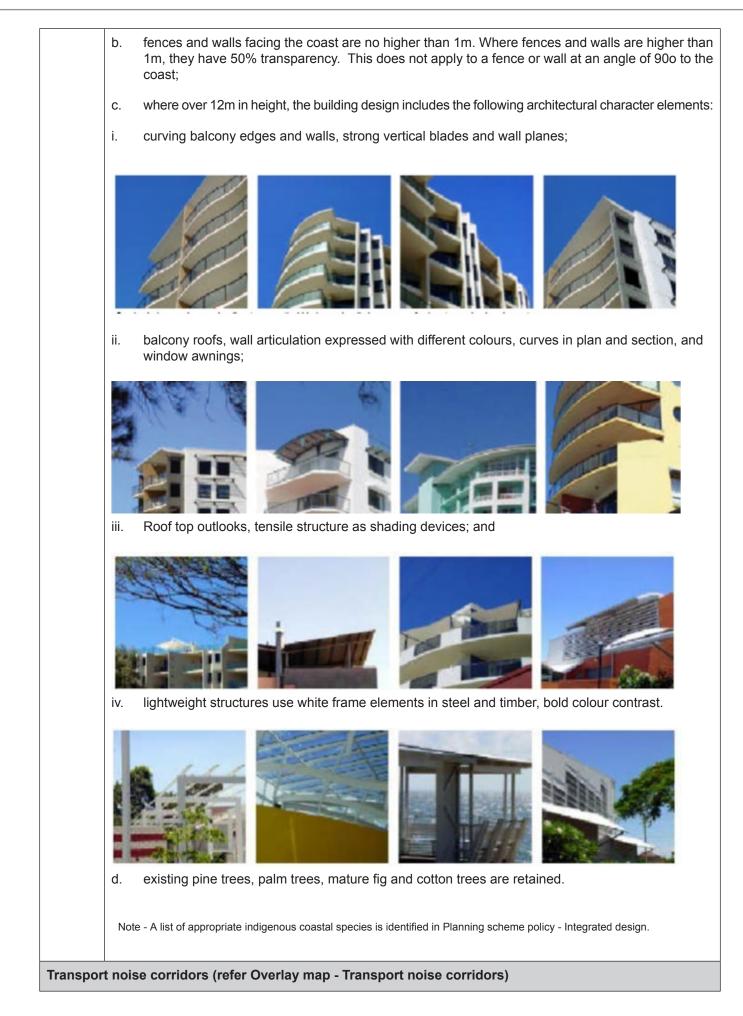

Note - This is for information purposes only. No requirements for accepted development or criteria for assessable development apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code

## Part D—Criteria for assessable development - Suburban neighbourhood precinct

Where development is categorised as assessable development - code assessment in the Table of Assessment, and located in a precinct, the assessment benchmarks are the criteria are set out in Part D, Table 6.2.6.2.2 as well as the purpose statement and overall outcomes of this code.

Where development is categorised as assessable development - impact assessable, the assessment beachmarks become the whole of the planning scheme.

Table 6.2.6.2.2 Assessable development - S	Suburban neighbourhood precinct
--	---------------------------------

Per	formance outcomes	Examples that achieve aspects of the Performance Outcomes
General		Il criteria
Den	sity	
PO1	I	No example provided.
The Suburban neighbourhood precinct has a low residential density of a maximum of 15 dwellings per hectare (site density) except for Dual occupancies <sup>(21)</sup> .		
OR		
Max	timum site density of 75 dwellings per ha if:	
a. b.	for Relocatable home park, Residential care facility or Retirement facility, within 800m walking distance of a higher order or district centre; or for Multiple dwelling, Rooming accommodation, Short-term accommodation or tourist park within 400m walking distance of a higher order or district centre or a train station.	
Bui	lding height (Residential uses)	
PO2	2	E2
Buil	dings and structures have a height that:	Building height does not exceed:
a.	is consistent with the low rise character of the Suburban neighbourhood precinct;	<ul> <li>a. that mapped on Overlay map – Building heights; or</li> <li>b. for domestic outbuildings, including free standing</li> </ul>
b.	responds to the topographic features of the site, including slope and orientation;	carports and garages, 4m and a mean height not exceeding 3.5m.
C.	is not visually dominant or overbearing with respect to the streetscape, street conditions (e.g. street width) or adjoining properties;	
d.	positively contributes to the existing built form of the surrounding area;	

<ul> <li>Note - To demonstrate compliance with the above a visual impact assessment may be required in accordance with Planning scheme policy - Residential design. Visual impact assessments will require the consideration of all built form matters (e.g. height, setbacks, site cover, building bulk and mass, articulation, roof form and other design aspects) from a variety of perspectives to ascertain if the proposal will result in a positive contribution.</li> <li>e. responds to the height of development on adjoining land where contained within another precinct or zone.</li> <li>Note - Refer to Planning scheme policy - Residential design for details and examples.</li> </ul>	
Building height (Non-residential uses)	
PO3	E3
The height of non-residential buildings does not adversely affect amenity of the area or of adjoining properties and positively contributes to the intended built form of the surrounding area.	Building height does not exceed the maximum height identified on Overlay map - Building heights except for architectural features associated with religious expression on Place of worship <sup>(60)</sup> and Educational establishment <sup>(24)</sup> buildings.
assessment may be required in accordance with Planning scheme policy - Residential design. Visual impact assessments will require the consideration of all built form matters (e.g. height, setbacks, site cover, building bulk and mass, articulation, roof form and other design aspects) from a variety of perspectives to ascertain if the proposal will result in a positive contribution.	
Setbacks (Residential uses)	
PO4	E4.1
<ul> <li>Residential buildings and structures are setback to:</li> <li>a. be consistent with the low density suburban character where buildings are positioned further away from footpaths and further apart from each other and maximise private open space at the rear;</li> </ul>	Setbacks (excluding built to boundary walls) comply with Table 6.2.6.3 - Setback (Residential uses). Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).
<li>result in development not being visually dominant or overbearing with respect to the streetscape and the adjoining sites;</li>	
<ul> <li>maintain private open space areas that are of a size and dimension to be usable and functional;</li> </ul>	<ul><li>Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are:</li><li>a. only established on lots having a primary frontage</li></ul>
d. maintain the privacy of adjoining properties;	of 18m or less and where permitted in Table 6.2.6.2.4;
<ul><li>e. ensure parked vehicles do not restrict pedestrian and traffic movement and safety;</li><li>f. limit the length, height and opening of boundary walls to maximise privacy and amenity on adjoining</li></ul>	<ul> <li>of a length and height not exceeding that specified in Table 6.2.6.2.4 'Built to boundary walls (Residential uses)';</li> </ul>
properties;	c. setback from the side boundary:

<ul> <li>g. provide adequate separation to particular infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure;</li> <li>h. built to boundary walls do not create unusable or inaccessible spaces and do not negatively impact the streetscape character, amenity or functionality of adjoining properties.</li> <li>Note - Refer to Planning scheme policy - Residential design for details and examples.</li> </ul>	<ul> <li>i. if a plan of development provides for only one built to boundary wall on the one boundary, not more than 200mm; or</li> <li>ii. if a built to boundary wall may be built on each side of the same boundary, not more than 20mm;</li> <li>d. on the low side of a sloping lot.</li> <li>Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls a 'easement for maintenance purposes' is recommended.</li> </ul>
Setbacks (Non-residential uses)	
PO5	E5.1
Front setbacks ensure non-residential buildings address and actively interface with streets and public spaces. <b>PO6</b> Side and rear setbacks cater for driveway(s), services, utilities and buffers requires to protect the amenity of adjoining sensitive land uses and the development will not be visually dominant or overbearing with respect to adjoining properties.	<ul> <li>For the primary street frontage buildings are constructed:</li> <li>a. to the property boundary; or</li> <li>b. setback a maximum of 3m from the property boundary, where for the purpose of outdoor dining.</li> <li>E5.2</li> <li>For the secondary street frontage, setbacks are consistent with adjoining buildings.</li> <li>No example provided.</li> </ul>
Site cover (Residential uses)	
PO7	E7
Residential buildings and structures will ensure that site cover:	Site cover does not exceed 50% (excluding eaves, sun shading devices, patios, balconies and other unenclosed structures).
<ul><li>a. does not result in a site density that is inconsistent with the character of the area;</li><li>b. does not result in an over development of the site;</li></ul>	
c. does not result in other elements of the site being compromised (e.g. Setbacks, open space etc);	
d. reflects the low density character of the area.	

Note - Refer to Planning scheme policy - Residential design for details and examples.	
Movement network	
PO8	E8.1
Development is designed to connect to and form part of the surrounding neighbourhood by providing interconnected streets, pedestrian and cyclist pathways to adjoining development, nearby centres, neighbourhood hubs, community facilities, public transport nodes and open space. Note - Refer to Planning scheme policy - Neighbourhood design for guidance on achieving the above outcome.	<ul> <li>Development provides and maintains the connections shown on the following movement figures:</li> <li>a. Figure 1 - Elimbah - Beerburrum Road</li> <li>b. Figure 2 - Bellmere - Guilford Court</li> <li>c. Figure 3 - Narangba - Youngs Road / Oakey Flat Road</li> <li>d. Figure 4 - Dakabin</li> <li>e. Figure 5 - Mango Hill - Johns Road</li> <li>f. Figure 6 - Lawnton - Akers Road / Isis Road</li> <li>g. Figure 7 - Albany Creek - Morgan Road</li> <li>h. Figure 8 - Deception Bay - Bailey Road / Park Road</li> <li>i. Figure 9 - Rothwell - Whitlock Drive</li> </ul> E8.2 For areas not shown on the above movement figures, no example provided. Note - Refer to Planning scheme policy - Neighbourhood design for guidance on achieving the Performance outcome.
Built form	
PO9	No example provided.
The development has a built form consistent with a low rise detached dwelling house <sup>(22)</sup> that addresses the street.	Note - Refer to Planning scheme policy - Residential design for details and examples.
Water sensitive urban design	
<b>PO10</b> Best practice Water Sensitive Urban Design (WSUD) is incorporated within development sites adjoining street frontages to mitigate impacts of stormwater run-off in accordance with Planning scheme policy - Integrated design.	No example provided.
Sensitive land use separation	
P011	E11
Sensitive land uses within 250m of land in the Industry zone - General industry precinct must mitigate any potential exposure to industrial air, noise or odour emissions that impact on human health, amenity and wellbeing.	Development is designed and operated to ensure that:

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy – Noise <b>PO12</b> Vulnerable land uses within 1,500m of any existing Tier 1, 2 or 3 MHF is compatible with MHF risks.	<ul> <li>a. it meets the criteria outlined in the Planning Scheme Policy – Noise;</li> <li>b. the air quality objectives in the <i>Environmental</i> <i>Protection (Air) Policy 2008</i>, are met.</li> <li>No example provided.</li> </ul>
Note - To demonstrate compliance with this performance outcome a impact assessment report may be required.	
Amenity	
<b>PO13</b> The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.	No example provided.
Noise	
PO14 Noise generating uses do not adversely affect existing or potential noise sensitive uses. Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line. Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.	No example provided.
<ul> <li>PO15</li> <li>Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:</li> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of</li> </ul>	E15.1 Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise. E15.2
<ul> <li>b. maintaining the amenity of the streetscape.</li> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> </ul>	<ul> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public area unless: <ol> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> </ol> </li> </ul>

		<ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul>
Clea	aring of habitat trees where not located within the	Environmental areas overlay map
PO1	6	No example provided.
a.	Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	
b.	Development does not result in the net loss of fauna habitat. Where development does result in the loss of a habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.	
C.	Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner	
Note: Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas		

## Works criteria

Utilities		
P017	No example provided.	
All services including water supply, sewage disposal, electricity, street lighting, telecommunications and gas (if available) are provided in accordance with Planning scheme policy - Integrated design (Appendix A).		

Access		
PO18	No example provided.	

	1
Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.	
PO19	E19.1
The layout of the development does not compromise:	Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a
a. the development of the road network in the area;	motorway.
b. the function or safety of the road network;	Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a
c. the capacity of the road network.	laneway.
Note - The road hierarchy is mapped on Overlay map - Road hierarchy.	Note - The road hierarchy is mapped on Overlay map - Road hierarchy.
	E19.2
	The development provides for the extension of the road network in the area in accordance with Council's road network planning.
	E19.3
	The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.
	E19.4
	The development layout allows forward vehicular access to and from the site.
PO20	E20.1
Safe access is provided for all vehicles required to access the site.	Site access and driveways are designed, located and constructed in accordance with:
	a. where for a Council-controlled road and associated with a Dwelling house:
	i. Planning scheme policy - Integrated design;
	b. where for a Council-controlled road and not associated with a Dwelling house:
	i. AS/NZS2890.1 Parking facilities Part 1: Off street car parking;
	ii. AS 2890.2 - Parking facilities Part 2: Off-street

	iii. Planning scheme policy - Integrated design;
	iv. Schedule 8 - Service vehicle requirements;
	c. where for a State-Controlled road, the Safe Intersection Sight Distance requirements in Austroads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
	E20.2
	Internal driveways, car parks and access ways are designed and constructed with a sealed pavement and in accordance with:
	a. AS/NZS 2890.1 Parking Facilities Part 1: Off street car parking;
	<ul> <li>AS 2890.2 Parking Facilities Part 2: Off street commercial vehicle facilities;</li> </ul>
	c. Planning scheme policy - Integrated design; and
	d. Schedule 8 - Service vehicle requirements.
	Note - This includes queue lengths (refer to Schedule 8 - Service vehicle requirements), pavement widths and construction.
	E20.3
	Access driveways, manoeuvring areas and loading facilities are sealed and provide for service vehicles listed in Schedule 8 - Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 - Service vehicle requirements.
	E20.4
	Landscaping (including shade trees) is provided within car parks in accordance with Planning scheme policy - Integrated design.
PO21	E21
Sealed and flood free road access during the minor storm event is available to the site from the nearest arterial or sub-arterial road.	Roads or streets giving access to the development from the nearest arterial or sub-arterial road are flood free during the minor storm event and are sealed.
Editor's note - Where associated with a State-controlled road, further requirements may apply, and approvals may be required from the Department of Transport and Main Roads.	Note - The road network is mapped on Overlay map - Road hierarchy.

PO22	E22.1
Roads which provide access to the site from an arterial or sub-arterial road remain trafficable during major storm events without flooding or impacting upon residential properties or other premises.	Access roads to the development have sufficient longitudinal and cross drainage to remain safely trafficable during major storm (1% AEP) events.
	Note - The road network is mapped on Overlay map - Road hierarchy.
	Note - Refer to QUDM for requirements regarding trafficability.
	E22.2
	Culverts and causeways do not increase inundation levels or increase velocities, for all events up to the defined flood event, to upstream or downstream properties.

Street design and layout		
PO2	3	No example provided.
Plan sche mair	ets are designed and constructed in accordance with ning scheme policy - Integrated design and Planning eme policy - Operational works inspection, ntenance and bonding procedures. The street design construction accommodates the following functions:	
a.	access to premises by providing convenient vehicular movement for residents between their homes and the major road network;	
b.	safe and convenient pedestrian and cycle movement;	
C.	adequate on street parking;	
d.	stormwater drainage paths and treatment facilities;	
e.	efficient public transport routes;	
f.	utility services location;	
g.	emergency access and waste collection;	
h.	setting and approach (streetscape, landscaping and street furniture) for adjoining residences;	
i.	expected traffic speeds and volumes; and	
j.	wildlife movement (where relevant).	
stor ped	e - Preliminary road design (including all services, street lighting, mwater infrastructure, access locations, street trees and estrian network) may be required to demonstrate compliance this PO.	

corri	<ul> <li>Refer to Planning scheme policy - Environmental areas and dors for examples of when and where wildlife movement structure is required.</li> </ul>	
PO2	4	E24.1
is up the d Note Tran sche	existing road network (whether trunk or non-trunk) graded where necessary to cater for the impact from levelopment. - An applicant may be required to submit an Integrated sport Assessment (ITA), prepared in accordance with Planning me policy - Integrated transport assessment to demonstrate pliance with this PO, when any of the following occurs: Development is within 200m of a transport sensitive location such as a school, shopping centre, bus or train station or a large generator of pedestrian or vehicular traffic; Forecast traffic to/from the development exceeds 5% of the	New intersections onto existing roads are designed to accommodate traffic volumes and traffic movements taken from a date 10 years from the date of completion of the last stage of the development. Detailed design is to be in accordance with Planning scheme policy - Integrated design. Note - All turns vehicular access to existing lots is to be retained at new road intersections wherever practicable. Note - Existing on-street parking is to be retained at new road intersections and along road frontages wherever practicable.
	two way flow on the adjoining road or intersection in the morning or afternoon transport peak within 10 years of the development completion;	
•	Development access onto a sub arterial, or arterial road or	E24.2
	within 100m of a signalised intersection;	Existing intersections external to the site are upgraded as necessary to accommodate increased traffic from the
•	Residential development greater than 50 lots or dwellings;	development. Design is in accordance with Planning scheme policy - Operational works inspection,
•	Offices greater than 4,000m <sup>2</sup> Gross Floor Area (GFA);	maintenance and bonding procedures.
•	Retail activities including Hardware and trade supplies, Showroom, Shop or Shopping centre greater than 1,000m <sup>2</sup> GFA;	Note - All turns vehicular access to existing lots is to be retained at new road intersections wherever practicable.
•	Warehouses and Industry greater than 6,000m <sup>2</sup> GFA;	Note - Existing on-street parking is to be retained at upgraded road
•	On-site carpark greater than 100 spaces;	intersections and along road frontages wherever practicable.
•	Development has a trip generation rate of 100 vehicles or more within the peak hour;	E24.3
•	Development which dissects or significantly impacts on an environmental area or an environmental corridor.	The active transport network is extended in accordance with Planning scheme policy - Integrated design.
road deve dete work a fut part ITA is nece	ITA is to review the development's impact upon the external network for the period of 10 years from completion of the elopment. The ITA is to provide sufficient information for rmining the impact and the type and extent of any ameliorative is required to cater for the additional traffic. The ITA must include ure structural road layout of adjoining properties that will form of this catchment and road connecting to these properties. The s to assess the ultimate developed catchment's impacts and essary ameliorative works, and the works or contribution required he applicant as identified in the study.	
	- The road network is mapped on Overlay map - Road archy.	
	e - The primary and secondary active transport network is ped on Overlay map - Active transport.	

PO25	E25
New intersections along all streets and roads are located and designed to provide safe and convenient movements for all users. Note - Refer Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures for design and construction standards. Note - An Integrated Transport Assessment (ITA) including preliminary intersection designs, prepared in accordance with Planning scheme policy - Integrated transport assessment may be required to demonstrate compliance with this PO. Intersection spacing will be determined based on the deceleration and queue storage distances required for the intersection after considering vehicle speed and present/forecast turning and through volumes.	New intersection spacing (centreline – centreline) along a through road conforms with the following:
	a. Where the through road provides an access or residential street function:
	i. intersecting road located on same side = 60 metres; or
	<ul><li>ii. intersecting road located on opposite side = 40 metres.</li></ul>
	b. Where the through road provides a local collector or district collector function:
	i. intersecting road located on same side = 100 metres; or
	<ul><li>ii. intersecting road located on opposite side = 60 metres.</li></ul>
	c. Where the through road provides a sub-arterial function:
	i. intersecting road located on same side = 250 metres; or
	ii. intersecting road located on opposite side = 100 metres.
	d. Where the through road provides an arterial function:
	i. intersecting road located on same side = 350 metres; or
	ii. intersecting road located on opposite side = 150 metres.
	e. Walkable block perimeter does not exceed:
	<ul> <li>600 metres in the Coastal communities precinct and Suburban neighbourhood precinct;</li> </ul>
	ii. 500 metres in the Next generation neighbourhood precinct;
	iii. 400 metres in the Urban neighbourhood precinct.
	Note - Based on the absolute minimum intersection spacing identified above, all turns access may not be permitted (ie. left in/left out only) at intersections with sub-arterial roads or arterial roads.
	Note - The road network is mapped on Overlay map - Road hierarchy.

Note - The Primary and Secondary active transport accelerate design, present of the contraction design, present of the social acceleration acceleration design, present of the social acceleration		
All Council controlled frontage roads adjoining the development are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. All new works are extended to join any existing works within 20m.       Design and construct all Council controlled frontage roads include streets where no direct of access is provided.         Note - The road network is mapped on Overlay map - Road hierarchy.       Situation       Minimum construction         Note - The road network is mapped on Overlay map - Road hierarchy.       Situation       Construct the verge and on the development and the carling example of the development is deferred to be constructed in accordance with planning scheme policy - Integrated design and Plan		preliminary intersection designs, prepared in accordance with Planning scheme policy - Integrated transport assessment may be
development are designed and constructed in accordance with Planning scheme policy - Integrated design, and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. All new works are extended to join any existing works within 20m.       In accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures. All new works are extended to join any existing works within 20m.         Note - Frontage roads include streets where no direct tot access is provided.       Situation       Minimum construction         Note - The road network is mapped on Overlay map - Road hierarchy.       Note - The Primary and Secondary active transport network is mapped on Overlay map - Active transport.       Situation       Construct the verge and the constructed in accordance with Courol's standards when there is sufficient pavement with, goment y and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Integrated design standard;       Construct the verge and the complex of the explored design and Planning scheme policy - Integrated design and and and its is a sociated works (services, street lighting and line arrival).         OR       Frontage road partially constructed* to Planning scheme policy - Integrated design and Planning scheme policy - Integrated design	PO26	E26
Note - Frontage roads include streets where no direct lot access is provided.       Construct the verge adjoining the development and the carriageway (including development is de kerb and channel) to a minimum sealed width not constructed to prave a minimum sealed width not constructed to planning scheme policy - Integrated design and Planning scheme policy - Integrated design and Planning scheme policy - Integrated design standard.       Construct the verge adjoining the development is de kerb and channel) to a minimum sealed width not constructed to planning scheme policy - Integrated design and Planning scheme policy - Integrated design standard.         OR       Frontage road sealed but not constructed in accordance with Council's standard werks inspection, maintenance and bonding procedures.       OR         Prontage road sare sub-arterial roads and arterial roads.       Some of the opposite side.       The minimum total travel lane witch is:         0       R       Frontage roads are sub-arterial roads and arterial roads.       Minor roads;         0       R       Frontage roads are considered to be constructed in accordance with council.         0       R       Frontage road sare sub-arterial roads and arterial roads.         0       R       Frontage roads are considered to be constructed in accordance with council.         0       R       Frontage roads are considered to be constructed in accordance with council.         0       R       Frontage roads are considered to be constructed in accordance with council.         0       R       Frontage roads are cono	development are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. All new works	in accordance with Planning scheme policy - Integrated design, Planning scheme policy - Operational works inspection, maintenance and bonding procedures and
provided.       Frontage road only;       Construct the verge adjoining the development and the carriageway (including development) and the carriageway (including development) or onstructed to gravel is development and the carriageway (including development) to constructed transport.       Construct the verge adjoining the development and the carriageway (including development) to constructed to praving and the carriageway (including development) to a minimum sealed width containing near side provided.         Note - The Primary and Secondary active transport network is mapped on Overlay map - Active transport.       Frontage road sealed but, not constructed' to Planning scheme policy- Integrated design and Planning scheme policy - Detained were submatrial roads.	Note - Frontage roads include streets where no direct lot access is	Situation Minimum construction
	<ul> <li>provided.</li> <li>Note - The road network is mapped on Overlay map - Road hierarchy.</li> <li>Note - The Primary and Secondary active transport network is mapped on Overlay map - Active transport.</li> <li>Note - Roads are considered to be constructed in accordance with Council's standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy -</li> </ul>	<ul> <li>unconstructed or gravel road only;</li> <li>OR</li> <li>Frontage road sealed but not constructed* to Planning scheme policy-Integrated design standard;</li> <li>OR</li> <li>Frontage road partially constructed* to Planning scheme policy - Integrated design standard.</li> <li>OR</li> <li>Frontage road partially constructed* to Planning scheme policy - Integrated design standard.</li> <li>OR</li> <li>Frontage road partially constructed* to Planning scheme policy - Integrated design standard.</li> <li>The minimum total travel lane width is:</li> <li>6m for minor roads;</li> <li>7m for major roads.</li> </ul> Note - Major roads are sub-arterial roads and arterial roads. Minor roads are roads that are not major roads. Note - Alignment within road reserves is to be agreed with Council. Note - Alignment within road reserves is to be agreed with Council. Note - *Roads are considered to be constructed in accordance with Council standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. Testing of the existing pavement may be required to confirm whether the existing works meet the standards in Planning scheme policy -

Stormwater

PO27	E27.1
Minor stormwater drainage systems (internal and external) have the capacity to convey stormwater flows from frequent storm events for the fully developed upstream catchment whilst ensuring pedestrian and	The capacity of all minor drainage systems are designed in accordance with Planning scheme policy - Integrated design.
vehicular traffic movements are safe and convenient.	E27.2
	Stormwater pipe network capacity is to be calculated in accordance with the Hydraulic Grade Line method as detailed in Australian Rainfall and Runoff or QUDM.
	E27.3
	Development ensures that inter-allotment drainage infrastructure is provided in accordance with the relevant level as identified in QUDM.
	Note - Development provides inter-allotment – QUDM level III drainage, including bunds, to all lots that have a gradient less than 1 in 100 (for the whole of the allotment) to the road. The inter-allotment drainage system (including easements) is provided in accordance with Planning scheme policy - Integrated design (Appendix C).
PO28	E28.1
Major stormwater drainage system(s) have the capacity to safely convey stormwater flows for the 1% AEP event for the fully developed upstream catchment.	The internal drainage system safely and adequately conveys the stormwater flows for the 1% AEP event for the fully developed upstream catchment through the site.
	E28.2
	The external (downstream) drainage system safely conveys the stormwater flows for the 1% AEP event for the fully developed upstream catchment without allowing the flows to encroach upon private lots.
	E28.3
	Overland flow paths from roads and public open space areas do not pass through private lots. Drainage pathways are provided to accommodate overland flows from roads and public open space areas.
	E28.4
	The flow velocity in all unlined or soft faced open drains is kept within acceptable limits for the type of material or lining and condition of the channel.
	Note - Refer to QUDM for recommended average flow velocities.
PO29	E29

Provide measures to properly manage surface flows for the 1% AEP event (for the fully developed catchment) draining to and through the land to ensure no actionable nuisance is created to any person or premises as a result of the development. The development must not result in ponding on adjacent land, redirection of surface flows to other premises or blockage of a surface flow relief path for flows exceeding the design flows for any underground system within the development.	The stormwater drainage system is designed and constructed in accordance with Planning scheme policy - Integrated design.
PO30	No example provided.
Stormwater run-off from the site is conveyed to a point of lawful discharge without causing actionable nuisance to any person, property or premises.	
Note - Refer to Planning scheme policy - Integrated design for details.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.	
PO31	No example provided.
Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
PO32	No example provided.
Where development:	
a. is for an urban purpose that involves a land area of 2500m <sup>2</sup> or greater; and	
b. will result in:	
i. 6 or more dwellings; or	
ii. an impervious area greater than 25% of the net developable area,	

stormwater quality management systems are designed, constructed, established and maintained to minimise the environmental impact of stormwater on surface, groundwater and receiving water environments and meet the design objectives outlined in Schedule 10 - Stormwater management design objectives. Note - A site based stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management. Stormwater quality infrastructure is to be designed in accordance with Planning scheme policy - Integrated design (Appendix C).		
<b>PO33</b> Stormwater drainage pipes and structures through or within private land (including inter-allotment drainage) are protected by easements in favour of Council with sufficient area for practical access for maintenance purposes.		
Note - In order to achieve a lawful point of discharge, stormwater easements may also be required over temporary drainage channels/infrastructure where stormwater discharges to a balance lot prior to entering Council's stormwater drainage system.	Pipe Diameter	Minimum easement width (excluding access requirements)
	Stormwater pipe up to 825mm diameter	3.0m
	Stormwater pipe up to 825mm diameter with sewer pipe up to 225m diameter	4.0m
	Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the stormwater pipe (each side).
	Note - Additional easement width circumstances in order to facilitat stormwater system.	
	Note - Refer to Planning scheme p C) for easement requirements ov	oolicy - Integrated design (Appendix /er open channels.
PO34	No example provided.	
Stormwater management facilities (excluding outlets) are located outside of riparian areas and prevent increased channel bed and bank erosion.		
PO35	E35	
Council is provided with accurate representations of the completed stormwater management works within residential developments.		cifications of the stormwater ied by an RPEQ is provided. de:

|--|

<ul> <li>a. photographic evidence and inspection date of the installation of approved underdrainage;</li> </ul>
<li>copy of the bioretention filter media delivery dockets/quality certificates confirming the materials comply with specifications in the approved Stormwater Management Plan;</li>
c. date of the final inspection.

Site works and construction management		
PO36	No example provided.	
The site and any existing structures are maintained in a tidy and safe condition.		
PO37	E37.1	
<ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause actionable nuisance to any person or premises;</li> <li>d. avoid adverse impacts on street trees and their critical root zone.</li> </ul>	<ul> <li>Works incorporate temporary stormwater runoff, erosion and sediment controls and trash removal devices designed in accordance with the Urban Stormwater Quality Planning Guidelines, State Planning Policy, Schedule 10 - Stormwater management design objectives, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour or erosion of any kind;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. minimum design storm for all temporary diversion drains and sedimentation basins in accordance with Schedule 10 - Stormwater management design objectives;</li> <li>e. ponding or concentration of stormwater does not occur on adjoining properties.</li> </ul>	

	Note - The measures are adjusted on-site to maximise their effectiveness.
	<b>E37.3</b> The completed earthworks area is stabilised using turf,
	established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.
	E37.4
	Existing street trees are protected and not damaged during works.
	Note - Where development occurs in the tree protection zone, measures and techniques as detailed in Australian Standard AS 4970 Protection of trees on development sites are adopted and implemented.
PO38	E38
Dust suppression measures are implemented during soil disturbances and construction works to protect nearby premises from unreasonable dust impacts.	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
PO39	E39.1
All development works including the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
Note - A Traffic Management Plan may be required to demonstrate compliance with this PO. A Traffic Management Plan is to be prepared in accordance with the Manual of Uniform Traffic Control	E39.2
Devices (MUTCD).	All contractor car parking is either provided on the
Note - A haulage route must be identified and approved by Council where imported or exported material is transported to the site via a road of Local Collector standard or less, and:	development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in
a. the aggregate volume of imported or exported material is greater than 1000m <sup>3</sup> ; or	existing roads.
<li>b. the aggregate volume of imported or exported material is greater than 200m<sup>3</sup> per day; or</li>	E39.3
<ul> <li>c. the proposed haulage route involves a vulnerable land use or shopping centre.</li> </ul>	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
<b></b>	E39.4
Note - A dilapidation report (including photographs) may be required for the haulage route to demonstrate compliance with this PO.	Construction traffic to and from the development site uses the highest classification streets or roads where a
Editor's note - Where associated with a State-controlled road, further requirements may apply, and approval may be required from the Department of Transport and Main Roads.	choice of access routes is available. Haul routes for the

<ul> <li>materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> </ul>	<ul> <li>E42.2</li> <li>Disposal of materials is managed in one or more of the following ways:</li> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> <li>Note - The chipped vegetation must be stored in an approved location.</li> </ul>
PO43 All development works are carried out at times which minimise noise impacts to residents.	<ul> <li>E43</li> <li>All development works are carried out within the following times: <ul> <li>a. Monday to Saturday (other than public holidays) between 6:30am and 6:30pm on the same day;</li> <li>b. no work is to be carried out on Sundays or public holidays.</li> </ul> </li> <li>Note - Work outside the above hours may be approved (in writing) where it can be demonstrated that the work will not cause significant inconvenience or disruption to the public, or the work is unlikely to cause annoyance or inconvenience to occupants of adjacent properties.</li> </ul>
PO44 Any alteration or relocation in connection with or arising from the development to any service, installation, plant equipment or other item belonging to or under the contro of the telecommunications authority, electricity authorities the Council or other person engaged in the provision or public utility services is to be carried with the developmen and at no cost to Council.	


Earthworks	
PO45	E45.1


On-	site earthworks are designed to consider the visual	All cut and fill batters are provided with appropriate scour,
and amenity impact as they relate to:		erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains
a.	the natural topographical features of the site;	as necessary.
b.	short and long-term slope stability;	<b>F45.0</b>
c.	soft or compressible foundation soils;	E45.2
d.	reactive soils;	Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep
e.	low density or potentially collapsing soils;	slopes and batters.
f.	existing fill and soil contamination that may exist on-site;	E45.3
g.	the stability and maintenance of steep slopes and batters;	Inspection and certification of steep slopes and batters is required by a suitably qualified and experienced RPEQ.
h.	excavation (cut) and fill and impacts on the amenity	E45.4
	of adjoining lots (e.g. residential).	All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.
		E45.5
		All filling or excavation is contained on-site and is free draining.
		E45.6
		All fill placed on-site is:
		a. limited to that area necessary for the approved use;
		b. clean and uncontaminated (i.e. no building waste, concrete, green waste, actual acid sulfate soils, potential acid sulfate soils or contaminated material etc.).
		E45.7
		The site is prepared and the fill placed on-site in accordance with AS3798.
		Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
PO4	16	E46
not	bankments are stepped, terraced and landscaped to adversely impact on the visual amenity of the ounding area.	Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.

	Figure - Embankment
	5500mm
PO47	E47.1
<ul> <li>Filling or excavation is undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity is defined in Schedule 2 of the Act.</li> </ul>	<ul> <li>No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity.</li> <li>Note - Public sector entity is defined in Schedule 2 of the Act.</li> <li>E47.2</li> <li>Filling or excavation that would result in any of the following is not carried out on-site: <ul> <li>a. a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken;</li> <li>c. prevent reasonable access to Council or public</li> </ul> </li> </ul>
	<ul> <li>sector entity maintained infrastructure or any drainage feature on, or adjacent to the site for monitoring, maintenance or replacement purposes</li> <li>Note - Public sector entity is defined in Schedule 2 of the Act.</li> <li>Note - All building work covered by QDC MP1.4 is excluded from this provision.</li> </ul>
PO48 Filling or excavation does not result in land instability. Note - Steep slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.	No example provided.
PO49 Filling or excavation does not result in:	No example provided.

outcome.

<ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements.	
PO50	E50
Filling or excavation on the development site is undertaken in a manner which does not create or accentuate problems associated with stormwater flows and drainage systems on land adjoining the site.	<ul> <li>Filling and excavation undertaken on the development site are shaped in a manner which does not:</li> <li>a. prevent stormwater surface flow which, prior to commencement of the earthworks, passed onto the development site, from entering the land; or</li> <li>b. redirect stormwater surface flow away from existing flow paths; or</li> <li>c. divert stormwater surface flow onto adjacent land, (other than a road), in a manner which: <ul> <li>i. concentrates the flow; or</li> <li>ii. increases the flow rates of stormwater over the affected section of the adjacent land above the situation which existed prior to the diversion; or</li> <li>iii. causes actionable nuisance to any person, property or premises.</li> </ul> </li> </ul>
PO51	E51
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents.	<ul> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are</li> </ul>
Note - Refer to Planning scheme policy - Residential design for guidance on how to achieve compliance with this performance outcome	provided in accordance with Figure - Retaining on a boundary;

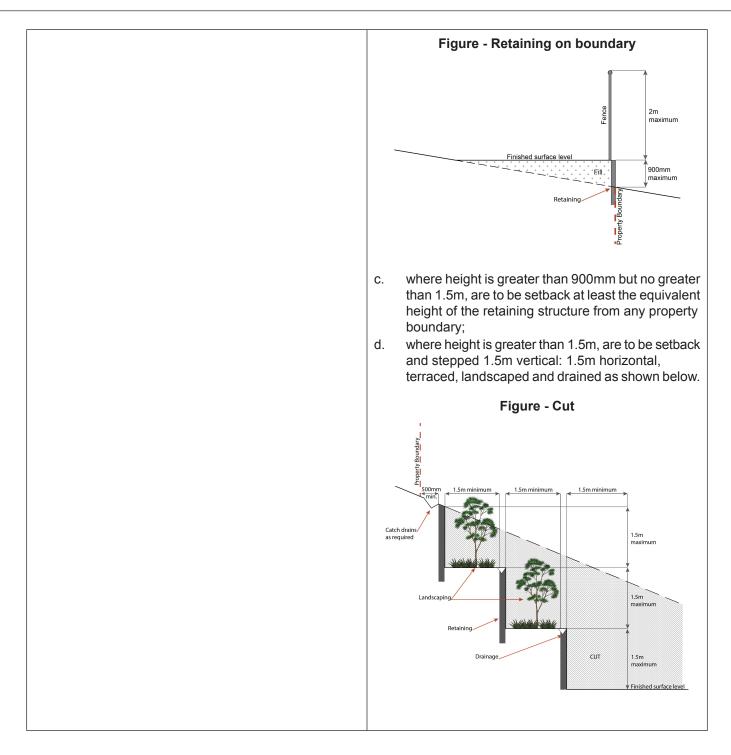

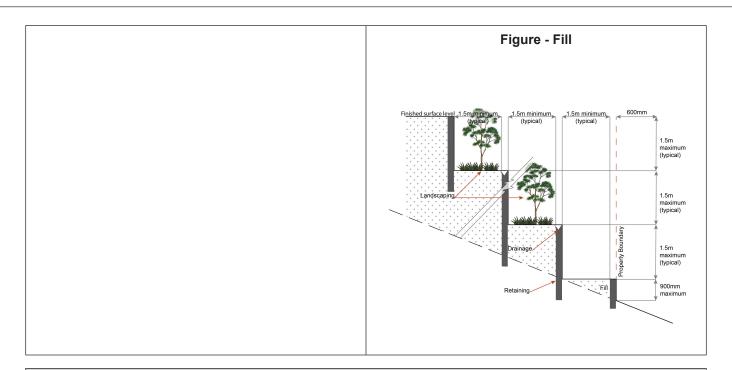

#### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - i. reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.
  - iv

#### AND

- b. none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

PO52	E52.1
<ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul>	<ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.</li> <li>Note - For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul>

<ul> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> <li>Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.</li> </ul>	<ul> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: <ol> <li>i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>iii. for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;</li> <li>iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> </ol> </li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul>
	<ul> <li>E52.2</li> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:</li> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.</li> </ul>
	<b>E52.3</b> On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian</i> <i>Standard AS1851 (2012) – Routine service of fire</i> <i>protection systems and equipment.</i>
P053	E53
On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times	For development that contains on-site fire hydrants external to buildings:
from, or at, the vehicular entry point to the development site.	a. those external hydrants can be seen from the vehicular entry point to the site; or
	<ul> <li>a sign identifying the following is provided at the vehicular entry point to the site:</li> </ul>
	<ul> <li>the overall layout of the development (to scale);</li> </ul>
	ii. internal road names (where used);
	iii. all communal facilities (where provided);
	<ul> <li>iv. the reception area and on-site manager's office (where provided);</li> </ul>

	v. external hydrants and hydrant booster points;
	vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
	Note - The sign prescribed above, and the graphics used are to be:
	a. in a form;
	b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.
PO54	E54
Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.
Use speci	fic criteria
Dual occupancies <sup>(21)</sup>	
PO55	E55
Dual Occupancies <sup>(21)</sup> are infrequent and dispersed within the streetscape and are not located within 200m (measured along the street alignment) of a lot containing an existing, approved or a properly made application for a Dual Occupancy <sup>(21)</sup> .	Are located on lots with an area of 1000m <sup>2</sup> or greater.
Note - Refer to Planning scheme policy - Residential design for dispersal method and calculation.	
Home based business <sup>(35)</sup>	
PO56	No example provided.
The scale and intensity of the Home Based Business <sup>(35)</sup> :	
a. is compatible with the physical characteristics of the site and the character of the local area;	

b.	is able to accommodate anticipated car parking demand without negatively impacting the streetscape or road safety;	
C.	does not adversely impact on the amenity of adjoining and nearby premises;	
d.	remains ancillary to the residential use of the dwelling;	
e.	does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;	
f.	ensures employees and visitors to the site do not negatively impact the expected amenity of adjoining properties;	
g.	ensures service and delivery vehicles do not negatively impact the amenity of the area.	
Maj	or electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and	Utility installation <sup>(86)</sup>
PO5	57	E57.1
The development does not have an adverse impact on the visual amenity of a locality and is: a. high quality design and construction;		Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:
b. c. d. e.	visually integrated with the surrounding area; not visually dominant or intrusive; located behind the main building line; below the level of the predominant tree canopy or	<ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> </ul>
	the level of the surrounding buildings and structures;	d. have horizontal and vertical articulation applied to all exterior walls.
f.	camouflaged through the use of colours and materials which blend into the landscape;	E57.2
g. h. i.	treated to eliminate glare and reflectivity; landscaped; otherwise consistent with the amenity and character of the zone and surrounding area.	A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.
PO5	58	E58
Infrastructure does not have an impact on pedestrian health and safety.		Access control arrangements:
nealth and salety.		<ul><li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li><li>b. minimise the number and width of crossovers and</li></ul>
		b. minimise the number and width of crossovers and
		<ul><li>entry points;</li><li>c. provide safe vehicular access to the site;</li><li>d. do not utilise barbed wire or razor wire.</li></ul>

an e	activities associated with the development occur within environment incorporating sufficient controls to ensure facility: generates no audible sound at the site boundaries where in a residential setting; or meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.	All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.
Sal	es office <sup>(72)</sup>	
PO	60	No example provided.
The	Sales office <sup>(72)</sup> is:	
a.	designed to provide functional and safe access, manoeuvring areas and car parking spaces for the number and type of vehicles anticipated to access the site;	
b.	temporary in nature;	
C.	not be isolated or separated from land being displayed for sale within the office.	
Note - Refer to Planning scheme policy - Integrated design for access and crossover requirements.		
Telecommunications facility <sup>(81)</sup>		
Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz.		

PO61	E61.1
Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area.	New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.
	E61.2
	If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.
PO62	E62
A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.	A minimum area of 45m <sup>2</sup> is available to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
PO63	E63

Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
PO64	E64.1
<ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>	Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.
<ul><li>c. not visually dominant or intrusive;</li><li>d. located behind the main building line;</li></ul>	E64.2
<ul> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> </ul>	In all other areas towers do not exceed 35m in height.
f. camouflaged through the use of colours and	E64.3
<ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li><li>h. landscaped;</li></ul>	Towers, equipment shelters and associated structures are of a design, colour and material to:
i. otherwise consistent with the amenity and character of the zone and surrounding area.	<ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>
	E64.4
	All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.
	Where there is no established building line the facility is located at the rear of the site.
	E64.5
	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
	E64.6
	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.
PO65	E65

	<i>c</i> ·		
Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.			An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.
POe	66		E66
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.		nment incorporating sufficient controls to ensure y generates no audible sound at the site	All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.
Ret	ail, co	ommercial and community uses	
POe	67		No example provided.
Con	nmuni	ity activities:	
a.	are	located to:	
	i.	cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or	
	ii.	if establishing a new neighbourhood hub (as described in the PO below) be on a main street;	
b. are located on allotments that have appropriate area and dimensions for the siting of:			
	i.	buildings and structures;	
	ii.	vehicle servicing, deliveries, parking, manoeuvring and circulation;	
	iii.	landscaping and open space including buffering;	
c. are of a small scale, having regard to the surrounding character;			
d. are serviced by public transport;		serviced by public transport;	
e. do not negatively impact adjoining residents or the streetscape.			
POe	68		E68
are loca	of a s ilised	d commercial uses within a neighbourhood hub cale that provide for the convenience needs or services of the immediate neighbourhood and nstitute the scale or function of a Local centre.	Retail and commercial uses within a neighbourhood hub consist of no more than:

Note - For the function and scale of a Local centre refer to Table 6.2.1.1 Moreton Bay centres network.	<ul> <li>a. 1 small format supermarket with a maximum GFA of 1200m<sup>2</sup>;</li> <li>b. 10 small format retail or commercial tenancies with a maximum GFA of 100m<sup>2</sup> each.</li> </ul>	
<ul> <li>PO69</li> <li>The expansion (into adjoining lots) of existing neighbourhood hubs or the establishment of a new neighbourhood hub must: <ul> <li>a. adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m<sup>2</sup>;</li> <li>b. be located on the corner of a sub-arterial or collector road;</li> <li>c. form a 'Main street' having a maximum length of 200m;</li> <li>d. be centrally located within an 800m radial catchment;</li> <li>e. be separated from other neighbourhood hubs and centres by 1600m, measured from the centre of each neighbourhood hub or centre.</li> </ul> </li> </ul>	No example provided.	
<ul> <li>PO70</li> <li>Corner stores may establish as standalone uses where:</li> <li>a. having a maximum GFA of 250m<sup>2</sup>;</li> <li>b. the building adjoins the street frontage and has its main pedestrian entrance from the street frontage;</li> <li>c. Not within 1600m of another corner store, neighbourhood hub or centre.</li> </ul>	No example provided.	
<ul> <li>PO71</li> <li>Service stations are located, designed and orientated to: <ul> <li>a. establish on heavily trafficked roads where the amenity of surrounding residential uses is already subject to impacts by road vehicle noise;</li> </ul> </li> <li>b. be in proximity of a neighbourhood hub or centre;</li> <li>c. not negatively impact active streets, public spaces or hubs of activity where the pedestrian safety and comfort is of high importance (e.g. in neighbourhood hubs and centres);</li> <li>d. not result in the fragmentation of active streets (e.g. site where active uses are located on adjoining lots);</li> </ul>	<ul> <li>E71.1</li> <li>Service stations are located: <ul> <li>a. adjoining or within 400m of:</li> <li>i. a neighbourhood hub identified on Overlay map - Community activities and neighbourhood hubs (not on a neighbourhood hub lot); or</li> <li>ii. a centre zone;</li> </ul> </li> <li>b. on the corner lot of an arterial or sub-arterial road.</li> </ul>	

е. f. g.	ensure the amenity of adjoining properties is protected; reduce the visual impact of the Service station from the streetscape while maintaining surveillance from the site to the street; minimise impacts on adjoining residential uses, to a level suitable relative to expected residential amenity of the area. (e.g. high order road in urban or next generation neighbourhood, likely to be noisy and not like suburban); provide ancillary uses that meet the convenience needs of users.	<ul> <li>Service stations are designed and orientated on site to:</li> <li>a. include a landscaping strip having a minimum depth of 1m adjoining all road frontages;</li> <li>b. building and structures (including fuel pump canopies) are setback a minimum of 3m from the primary and secondary frontage and a minimum of 5m from side and rear boundaries;</li> <li>c. include a screen fence, of a height and standard in accordance with a noise impact assessment (Note - Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise), on side and rear boundaries where adjoining land is able to contain a residential use;</li> <li>d. not include more than 2 driveway crossovers.</li> </ul>
PO7	22	No example provided.
	<ul> <li>-residential uses (excluding a Service station) ress and activate streets and public spaces by:</li> <li>ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement;</li> <li>new buildings adjoin or are within 3m of the primary frontage(s), civic space or public open space;</li> <li>locating car parking areas and drive-through facilities behind or under buildings to not dominate the street environment;</li> <li>establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing and avoiding blank walls with the use of sleeving);</li> <li>providing visual interest to the façade (e.g. Windows or glazing, variation in colours, materials, finishes, articulation, recesses or projections);</li> <li>establishing and maintaining human scale.</li> </ul>	
P073		No example provided.
<ul> <li>All buildings exhibit a high standard of design and construction, which:</li> <li>a. add visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, cantilevered awning);</li> </ul>		
	enable differentiation between buildings;	
b.	enable anelenaden betreen bananige,	

d.	incorporate architectural features within the building facade at the street level to create human scale (e.g. cantilevered awning);	
e.	include building entrances that are readily identifiable from the road frontage;	
f.	locate and orientate to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites;	
g.	incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;	
h.	facilitate casual surveillance of all public spaces.	
PO7	74	No example provided.
	elopment provides functional and integrated car sing and vehicle access, that:	
a.	prioritises the movement and safety of pedestrians between the street frontage and the entrance to the building;	
b.	provides safety and security of people and property at all times;	
C.	does not impede active frontage and active transport options;	
d.	does not impact on the safe and efficient movement of traffic external to the site;	
e.	is consolidated and shared with adjoining sites wherever possible.	
PO7	75	No example provided.
prio	safety and efficiency of pedestrian movement is ritised in the design of car parking areas through riding pedestrian paths in car parking areas that are:	
a.	located along the most direct route between building entrances, car parks and adjoining uses;	
b.	protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);	
C.	are of a width to allow safe and efficient access for prams and wheelchairs.	
PO7	76	E76.1
The	number of car parking spaces is managed to:	Car parking is provided in accordance with Schedule 7
a.	avoid significant impacts on the safety and efficiency of the road network;	- Car parking.

b. c.	avoid an oversupply of car parking spaces; avoid the visual impact of large areas of open car parking from road frontages and public areas;		Note - The above rates exclude car parking spaces for people with a disability required by Disability Discrimination Act 1992 or the relevant disability discrimination legislation and standards.		
d.	proi	note active and public transport options;	E76.2		
e.		note innovative solutions, including on-street king and shared parking areas.		designed and constructed in an Standard AS2890.1 Parking t car parking.	
ass		fer to Planning scheme policy - Integrated transport nt for guidance on how to achieve compliance with this			
PO7	77		E77.1		
a.	000	l of trip facilities are provided for employees or upants, in the building or on-site within a sonable walking distance, and include:	Minimum bicycle parking accordance with the table nearest whole number).	facilities are provided in e below (rounded up to the	
	i.	adequate bicycle parking and storage facilities; and	Use	Minimum Bicycle Parking	
	ii.	adequate provision for securing belongings;	Residential uses comprised of dwellings	Minimum 1 space per dwelling	
	iii.	<ul><li>and</li><li>iii. change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.</li></ul>	All other residential uses	Minimum 1 space per 2 car parking spaces identified in Schedule 7 – car parking	
			Non-residential uses	Minimum 1 space per 200m2 of GFA	
D.	Notwithstanding a. there is no requirement to provide end of trip facilities if it would be unreasonable to provide these facilities having regard to:		Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is a combination of the default levels set for end of trip facilities in the		
	i.	the projected population growth and forward planning for road upgrading and development of cycle paths; or			
	ii.	whether it would be practical to commute to	E77.2		
		and from the building on a bicycle, having regard to the likely commute distances and	Bicycle parking is:		
		nature of the terrain; or		nce with Austroads (2008), nagement - Part 11: Parking;	
	iii.	the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.	b. protected from the v dedicated roof struc	veather by its location or a ture;	
			c. located within the bu structure for residen	uilding or in a dedicated, secure	
for unr sho	bicycle easona	ote - The intent of b above is to ensure the requirements parking and end of trip facilities are not applied in able circumstances. For example these requirements , and do not apply in the Rural zone or the Rural residential	d. adjacent to building customers and visite	entrances or in public areas for ors.	
Per	formar	ote - This performance outcome is the same as the nce Requirement prescribed for end of trip facilities under Island Development Code. For development incorporating	Note - Bicycle parking structur standards prescribed in AS28	res are to be constructed to the 90.3.	

building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the examples under this heading meet the current performance requirement prescribed in the Queensland Development Code. Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.

Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### E77.3

For non-residential uses, storage lockers:

- a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);
- b. have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).

Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.

Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### E77.4

For non-residential uses, changing rooms:

- a. are provided at a rate of 1 per 10 bicycle parking spaces;
- b. are fitted with a lockable door or otherwise screened from public view;
- are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:

Bicycle spaces provided	Male/ Female	Change rooms required	Showers required	Sanitary compartments required	Washbasins required
1-5	Male and female	1 unisex change room	1	1 closet pan	1
6-19	Female	1	1	1 closet pan	1
20 or more	Male	1	1	1 closet pan	1
	Female	1	2, plus 1 for every 20 bicycle spaces provided thereafter	2 closet pans, plus 1 sanitary compartment for every 60 bicycle parking spaces provided thereafter	1, plus 1 for every 60 bicycle parking spaces provided thereafter

PO80	No example provided.
<b>PO79</b> Bins and bin storage area/s are designed, located and managed to prevent amenity impacts on the locality.	<b>E79</b> Development is designed to meet the criteria in the Planning scheme policy - Waste and is demonstrated in a waste management program.
<ul> <li>b. are integrated into the design of the building;</li> <li>c. include screening and buffers to reduce negative impacts on adjoining sensitive land uses;</li> <li>d. where possible loading and servicing areas are consolidated and shared with adjoining sites.</li> </ul>	
Loading and servicing areas: a. are not visible from the street frontage;	
P078	by Council. No example provided.
	<ul> <li>compartment;</li> <li>iii. a socket-outlet located adjacent to each wash basin.</li> <li>Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities</li> <li>Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is an amalgamation of the default levels set for end of trip facilities required</li> </ul>
	<ul> <li>Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.</li> <li>Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).</li> <li>d. are provided with: <ul> <li>i. a mirror located above each wash basin;</li> <li>ii. a hook and bench seating within each shower</li> </ul> </li> </ul>
	Male12, plus 1 for every 20 bicycle spaces provided thereafter1 urinal and 1 closet pans, plus 1 sanitary compartment at urinal for every 60 bicycle parking spaces provided thereafter1, plus 1 for every 60 

a.	is incorporated into the design of the development;			
b.	reduces the dominance of car parking and servicing areas from the street frontage;			
C.	retains mature trees wherever possible;			
d.	does not create safety or security issues by creating potential concealment areas or interfering with sightlines;			
e.	maintains the achievement of active frontages and sight lines for casual surveillance.			
	e - All landscaping is to accord with Planning scheme policy - grated design.			
PO8	1	E81		
	eillance and overlooking are maintained between oad frontage and the main building line.	No fencing is provided forward of the building line.		
PO8	2	No example provided.		
Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety and minimise adverse impacts on residential and other sensitive land uses.				
PO8	3	E83		
The hours of operation minimise adverse amenity impacts on adjoining sensitive land uses.		Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.		
	Values and con	straints criteria		
Rec deve	Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.			
	Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)			
is pr	Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.			
PO8	4	E84		
Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:		Development does not involve:		

is managed to avoid or minimise the release of a. excavation or otherwise removing of more than a. 100m<sup>3</sup> of soil or sediment where below than 5m surface or groundwater flows containing acid and metal contaminants into the environment; Australian Height datum AHD; or filling of land of more than 500m<sup>3</sup> of material with b. protects the environmental and ecological values b. an average depth of 0.5m or greater where below and health of receiving waters; protects buildings and infrastructure from the effects the 5m Australian Height datum AHD. C. of acid sulfate soils.

# Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note - The following are excluded from the native vegetation clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

Vegetation clearing, ecological value and connectivity		
PO85	No example provided.	
Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:		

a. b.	the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded; on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*.	
	itor's note - This is not a requirement for an environmental offset er the Environmental Offsets Act 2014.	
PO8	6	No example provided.
and	elopment provides for safe, unimpeded, convenient ongoing wildlife movement and establishes and itains habitat connectivity by:	
a.	retaining habitat trees;	
b. c.	providing contiguous patches of habitat; provide replacement and rehabilitation planting to	
d.	improve connectivity; avoiding the creation of fragmented and isolated	
u.	patches of habitat;	
e.	providing wildlife movement infrastructure.	
pole tunn unde	or's note - Wildlife movement infrastructure may include refuge s, tree boulevarding, 'stepping stone' vegetation plantings, els, appropriate wildlife fencing; culverts with ledges, erpasses, overpasses, land bridges and rope bridges. Further mation is provided in Planning scheme policy – Environmental s.	
Vege	etation clearing and habitat protection	
PO8	7	No example provided.
Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.		
PO8	8	No example provided.
degr Valu	elopment does not result in the net loss or adation of habitat value in a High Value Area or a e Offset Area. Where development does result in oss or degradation of habitat value, development	

a. b. c.	rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a viable and healthy habitat area; provide replacement fauna nesting boxes in the event of habitat tree loss in accordance with Planning scheme policy - Environmental areas; undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework.	
PO	9	No example provided.
	elopment ensures safe, unimpeded, convenient and bing wildlife movement and habitat connectivity by:	
a. b. c. d.	providing contiguous patches of habitat; avoiding the creation of fragmented and isolated patches of habitat; providing wildlife movement infrastructure; providing replacement and rehabilitation planting to improve connectivity.	
Veg	etation clearing and soil resource stability	
POS	0	No example provided.
Dev	elopment does not:	
a. b.	result in soil erosion or land degradation; leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.	
Vegetation clearing and water quality		
POS	11	No example provided.
grou	elopment maintains or improves the quality of indwater and surface water within, and downstream, site by:	
a. b. c.	ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads; avoiding or minimising changes to landforms to maintain hydrological water flows; adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry <sup>(4)</sup> and animal keeping <sup>(5)</sup> activities.	
POS	2	No example provided.
	elopment minimises adverse impacts of stormwater off on water quality by:	
a. b. c. d. e.	minimising flow velocity to reduce erosion; minimising hard surface areas; maximising the use of permeable surfaces; incorporating sediment retention devices; minimising channelled flow.	

Vegetation clearing and access, edge effects and urban heat island effects				
PO93	No example provided.			
Development retains safe and convenient public acce in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity value within the environment.				
PO94	No example provided.			
Development minimises potential adverse 'edge effec on ecological values by:	s'			
<ul> <li>a. providing dense planting buffers of native vegetation between a development and environmental area</li> <li>b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas ;</li> <li>c. restoring, rehabilitating and increasing the size of the</li></ul>	s; t nt			
<ul><li>existing patches of native vegetation;</li><li>d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors;</li></ul>				
e. landscaping with native plants of local origin.				
Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise an light pollution, increased fire frequency and changes in the groundwater and surface water flow.	E			
PO95	No example provided.			
Development avoids adverse microclimate change ar does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by:				
<ul><li>a. pervious surfaces;</li><li>b. providing deeply planted vegetation buffers and green linkage opportunities;</li><li>c. landscaping with local native plant species to</li></ul>				
<ul><li>achieve well-shaded urban places;</li><li>d. increasing the service extent of the urban forest canopy.</li></ul>				
Vegetation clearing and Matters of Local Environm	nental Significance (MLES) environmental offsets			
PO96	No example provided.			
Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas.				

prov	tor's note - For MSES Koala Offsets, the environmental offset visions in schedule 11 of the Regulation, in combination with the uirements of the Environmental Offset Act 2014, apply.	
<b>if th</b>	ne following assessment criteria apply)	<b>p - Extractive resources (separation area) to determine</b> noise impact assessment report is prepared by a suitably qualified vided in Planning scheme policy – Noise.
POS	97	E97
	velopment does not increase the number of people ig in the Extractive Resources separation area.	One dwelling house <sup>(22)</sup> permitted per lot within separation area.
POS	98	E98
Dev a. b. c.	velopment: does not introduce or increase uses that are sensitive to the impacts of an Extractive industry <sup>(27)</sup> ; is compatible with the operation of an Extractive industry <sup>(27)</sup> ; does not comprise or undermine the function and integrity of the separation area in providing a buffer between key extractive and processing activities and sensitive, incompatible uses outside the separation area.	Development within the separation area does not include the following activities: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling unit <sup>(23)</sup> ; e. Hospital <sup>(36)</sup> ; f. Rooming accommodation <sup>(69)</sup> ; g. Multiple dwelling <sup>(49)</sup> ; h. Non-resident workforce accommodation <sup>(52)</sup> ; i. Relocatable home park <sup>(62)</sup> ; j. Residential care facility <sup>(65)</sup> ; k. Resort complex <sup>(66)</sup> ; l. Retirement facility <sup>(67)</sup> ; m. Rural workers' accommodation <sup>(71)</sup> ; o. Tourist park <sup>(84)</sup> .
Sch Prot	bitable rooms achieve the noise levels listed in redule 1 Acoustic Quality Objectives, Environmental tection (Noise) Policy 2008 and provides a safe, lthy and disturbance free living environment.	<ul> <li>E99</li> <li>All habitable rooms within the separation area are:</li> <li>a. acoustically insulated to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008;</li> <li>b. provided with mechanical ventilation.</li> </ul>
	ractive resources transport route (refer Overlay m letermine if the following assessment criteria app	ap - Extractive resources (transport route and buffer) ly)
PO1	100	E100
Dev a.	velopment: does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route;	<ul> <li>The following uses are not located within the 100m wide transport route buffer:</li> <li>a. Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>b. Community residence<sup>(16)</sup>;</li> </ul>

b. c.	<ul> <li>does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes;</li> <li>adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to:</li> <li>i. locating the furthest distance possible from the transportation route;</li> <li>ii. habitable rooms being located the furthest from the transportation route;</li> <li>iii. shielding and screening private outdoor recreation space from the transportation</li> </ul>	<ul> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house<sup>(22)</sup>;</li> <li>e. Dwelling unit<sup>(23)</sup>;</li> <li>f. Hospital<sup>(36)</sup>;</li> <li>g. Rooming accommodation<sup>(69)</sup>;</li> <li>h. Multiple dwelling<sup>(49)</sup>;</li> <li>i. Non-resident workforce accommodation<sup>(52)</sup>;</li> <li>j. Relocatable home park<sup>(62)</sup>;</li> <li>k. Residential care facility<sup>(65)</sup>;</li> <li>l. Resort complex<sup>(66)</sup>;</li> <li>m. Retirement facility<sup>(67)</sup>;</li> <li>n. Rural workers' accommodation<sup>(71)</sup>;</li> <li>o. Short-term accommodation<sup>(77)</sup>;</li> <li>p. Tourist park<sup>(84)</sup>.</li> </ul>
	routes.	
PO1	01	E101.1
Deve a.	elopment: does not adversely impact upon the efficient and	Development does not create a new vehicle access point onto an Extractive resources transport route.
<ul> <li>effective transportation of extractive material along a transportation route;</li> <li>ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility;</li> <li>utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.</li> </ul>		E101.2 A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.
Note by a Note acco adop	<ul> <li>To assist in demonstrating achievement of heritage performance suitably qualified person verifying the proposed development is in e - To assist in demonstrating achievement of this performance our ordance with Planning scheme policy – Heritage and landscape cloted in accordance with AS 4970-2009 Protection of trees on development</li> </ul>	tcome, a Tree assessment report is prepared by a qualified arborist in haracter. The Tree assessment report will also detail the measures
land: heriti sche	scape character and listed in Schedule 1 of Planning scheme pol age significance at a State level and being entered in the Queens me policy - Heritage and landscape character.	icy - Heritage and landscape character. Places also having cultural sland Heritage Register, are also identified in Schedule 1 of Planning
PO1	02	E102
Deve a.	elopment will: not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building; protect the fabric and setting of the heritage site	Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value.

b.

c.

object or building;

heritage site, object or building;

protect the fabric and setting of the heritage site,

be consistent with the form, scale and style of the

Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The

e. f.	incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building; retain public access where this is currently provided.	
PO	103	No example provided.
Der	nolition and removal is only considered where:	
a. b. c. d.	a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or limited demolition is performed in the course of repairs, maintenance or restoration; or demolition is performed following a catastrophic event which substantially destroys the building or object.	
<b>PO</b> <sup>2</sup>	104	No example provided.
of c sym valu beir	ere development is occurring on land adjoining a site ultural heritage value, the development is to be apathetic to and consistent with the cultural heritage les present on the site and not result in their values and eroded, degraded or unreasonably obscured from lic view.	
PO	105	E105
and occi mea Prot ens Sign poo safe repoo a tre	velopment does not adversely impact upon the health vitality of significant trees. Where development urs in proximity to a significant tree, construction asures and techniques as detailed in AS 4970-2009 tection of trees on development sites are adopted to ure a significant tree's health, wellbeing and vitality. hificant trees are only removed where they are in a r state of health or where they pose a health and ety risk to persons or property. A Tree Assessment ort prepared by a suitably qualified arborist confirming ee's state of health is required to demonstrate ievement of this performance outcome.	<ul> <li>Development does:</li> <li>a. not result in the removal of a significant tree;</li> <li>b. not occur within 20m of a protected tree;</li> <li>c. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 – Pruning of Amenity Trees.</li> </ul>
	astructure buffers (refer Overlay map - Infrastruct eria apply)	ture buffers to determine if the following assessmen
PO		E106
	our sensitive development is separated from	The following uses are not located within a wastewate

treatment site buffer:

Wastewater treatment plants so they are not adversely

affected by odour emission or other air pollutant impacts.

	Constaliaria constaliaria (10)
	<ul> <li>a. Caretaker's accommodation<sup>(10)</sup>;</li> <li>b. Community residence<sup>(16)</sup>;</li> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house<sup>(22)</sup></li> <li>e. Dwelling unit<sup>(23)</sup>;</li> <li>f. Hospital<sup>(36)</sup>;</li> <li>g. Rooming accommodation<sup>(69)</sup>;</li> <li>h. Multiple dwelling<sup>(49)</sup>;</li> <li>i. Non-resident workforce accommodation<sup>(52)</sup>;</li> <li>j. Relocatable home park<sup>(62)</sup>;</li> <li>k. Residential care facility<sup>(65)</sup>;</li> <li>l. Resort complex<sup>(66)</sup>;</li> <li>m. Retirement facility<sup>(67)</sup>;</li> <li>n. Rural workers' accommodation<sup>(71)</sup>;</li> <li>o. Short-term accommodation<sup>(77)</sup>;</li> <li>p. Tourist park<sup>(84)</sup>.</li> </ul>
PO107	E107.1
Development within a Water supply buffer captures solid or liquid waste from all land use, development and activities is designed, constructed and managed to prevent the release of contaminants to surface water or groundwater bodies.	Run-off and sediment from roadways and impervious surfaces within a Water supply buffer are intercepted and treated on-site to remove oil, grease, chemicals, silt, trace metals and nutrients such as nitrogen and phosphorous.
	E107.2
	Incineration or burial of waste within a Water supply buffer is not undertaken onsite.
	E107.3
	Solid waste within a Water supply buffer is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.
	E107.4
	Holding tanks within a Water supply buffer are used for all liquid waste and provide for the separation of oils/solvents and solids prior to pump-out and collection by a licenced contractor.
	E107.5
	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.
PO108	E108
On-site sewerage systems within a Water supply buffer are designed and operated to ensure there is no worsening or adverse impacts to health risks, environmental risks and water quality.	Secondary treated wastewater treatment systems within a Water supply buffer include:

Editor's Note - For guidance refer to the Seq water Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.	<ul> <li>a. emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies or overload with provision for de-sludging;</li> <li>b. back up pump installation and backup power;</li> <li>c. MEDLI modelling to determine irrigation rates and sizing of irrigation areas;</li> <li>d. vegetated land application areas are not located in overland flow paths or on areas that perform groundwater recharge or discharge functions; and</li> <li>e. wastewater collection and storage systems have a capacity to accommodate full load at peak times and includes temporary facilities.</li> </ul>
PO109	E109
<ul> <li>Development within a Bulk water supply infrastructure buffer is located, designed and constructed to:</li> <li>a. protect the integrity of the water supply pipeline;</li> <li>b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline;</li> </ul>	<ul> <li>Development:</li> <li>a. does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer;</li> <li>b. involving a major hazard facility or environmentally relevant activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.</li> </ul>
PO110	E110
Development is located and designed to maintain required access to Bulk water supply infrastructure.	<ul> <li>Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):</li> <li>a. buildings or structures;</li> <li>b. gates and fences;</li> <li>c. storage of equipment or materials;</li> <li>d. landscaping or earthworks or stormwater or other infrastructure.</li> </ul>
PO111	E111
Odour sensitive development is separated from landfill sites so they are not adversely affected by odour emission or other air pollutant impacts.	The following uses are not located within a Landfill buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house <sup>(22)</sup> ; e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ; j. Relocatable home park <sup>(62)</sup> ; k. Residential care facility <sup>(65)</sup> ; l. Resort complex <sup>(66)</sup> ; m. Retirement facility <sup>(67)</sup> ; n. Rural workers' accommodation <sup>(71)</sup> ;

	<ul> <li>o. Short-term accommodation<sup>(77)</sup>;</li> <li>p. Tourist park<sup>(84)</sup>.</li> </ul>
PO112 Habitable rooms within an Electricity supply substation buffer are located a sufficient distance from substations <sup>(80)</sup> to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields. Note - Habitable room is defined in the Building Code of Australia (Volume 1)	<ul> <li>E112</li> <li>Habitable rooms:</li> <li>a. are not located within an Electricity supply substation buffer; and</li> <li>b. proposed on a site subject to an Electricity supply supply substation<sup>(80)</sup>are acoustically insulted to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.</li> <li>Note - Habitable room is defined in the Building Code of Australia (Volume 1)</li> </ul>
<ul> <li>PO113</li> <li>Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation<sup>(80)</sup> to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment.</li> <li>Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy – Noise.</li> <li>Note - Habitable room is defined in the Building Code of Australia (Volume 1)</li> </ul>	No example provided.
<ul> <li>PO114</li> <li>Development within a High voltage electricity line buffer provides adequate buffers to high voltage electricity lines to protect amenity and health by ensuring development:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields in accordance with the principle of prudent avoidance;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and design so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> </ul>	E114 Development does not involve the construction of any buildings or structures within a High voltage electricity line buffer.
PO115 Development within a Pumping station buffer is located, designed and constructed to:	<b>E115</b> Development does not involve the construction of any buildings or structures within a Pumping station buffer.

a.	ensure that odour or other air pollutant impacts on the amenity of the development met the air quality of objectives in the Environmental Protection (Air) Policy 2008;	
b.	ensure that noise impacts on the amenity of the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008.	

# Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)

Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.

P01	16	No example provided.
Deve	elopment:	
a. b.	minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.	
P01	17	No example provided.
Deve	elopment:	
a. b.	maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment; does not concentrate, intensify or divert overland	
5.	flow onto an upstream, downstream or surrounding property.	
Eng doe	e - A report from a suitably qualified Registered Professional ineer Queensland is required certifying that the development s not increase the potential for significant adverse impacts on ipstream, downstream or surrounding premises.	
	e - Reporting to be prepared in accordance with Planning scheme cy – Flood hazard, Coastal hazard and Overland flow.	
PO1	18	No example provided.
Deve	elopment does not:	
a. b.	directly, indirectly or cumulatively cause any increase in overland flow velocity or level; increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.	

Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.	
PO119	E119
Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.	Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.
PO120	E120
Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.	Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.
PO121	E121.1
Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM: a. Urban area – Level III; b. Rural area – N/A; c. Industrial area – Level V; d. Commercial area – Level V. <b>E121.2</b> Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.
PO122	No example provided.
Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:	
a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;	
b. an overland flow path where it crosses more than one premises;	
c. inter-allotment drainage infrastructure.	
Note - Refer to Planning scheme policy - Integrated design for details and examples.	

	e - Stormwater Drainage easement dimensions are provided in ordance with Section 3.8.5 of QUDM.	
Add	litional criteria for development for a Park <sup>(57)</sup>	
PO1	23	E123
layo	elopment for a Park <sup>(57)</sup> ensures that the design and ut responds to the nature of the overland flow cting the premises such that: public benefit and enjoyment is maximised; impacts on the asset life and integrity of park	Development for a Park <sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.
C.	structures is minimised; maintenance and replacement costs are minimised.	
Ripa	arian and wetland setbacks	
<b>PO</b> 1	24	E124
from envi and a. b. c. d. e.	elopment provides and maintains a suitable setback waterways and wetlands that protects natural and ironmental values. This is achieved by recognising responding to the following matters: impact on fauna habitats; impact on wildlife corridors and connectivity; impact on stream integrity; impact of opportunities for revegetation and rehabilitation planting; edge effects.	<ul> <li>Development does not occur within:</li> <li>a. 50m from top of bank for W1 waterway and drainage line</li> <li>b. 30m from top of bank for W2 waterway and drainage line</li> <li>c. 20m from top of bank for W3 waterway and drainage line</li> <li>d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.</li> <li>Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.</li> </ul>
	nic amenity - Regionally significant (Hills) and Lo enity to determine if the following assessment cri	cally important (Coast) (refer Overlay map - Scenic teria apply)
<b>PO</b> 1	25	E125
Dev a. b. c.	elopment: avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; retain the natural character or bushland settings as the dominant landscape characteristic; is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the	<ul> <li>Where located in the Regionally significant (Hills) scenic amenity overlay, buildings and structures are not:</li> <li>a. located on a hill top or ridge line;</li> <li>b. all parts of the building and structure are located below the hill top or ridge line.</li> </ul>
	environment.	

Dev	elopment:				ficant (Hills) scenic		
a. b.	does not adversely detract or degrade the quality of views, vista or key landmarks; retains the natural character or bushland settings as the dominant landscape characteristic.	<ul> <li>amenity overlay, driveways and accessways:</li> <li>a. go across land contours, and do not cut straight up slopes;</li> <li>b. follow natural contours, not resulting in batters or retaining walls being greater than 900mm in height.</li> </ul>					
PO1	27	E127.1					
Build that: a.	dings and structures incorporate colours and finishes are consistent with a natural, open space character	amenity ov	verlay, ro	0 , 0	ficant (hills) scenic es of buildings and ::		
	and bushland environment;	Colours fro	om Austra	lian Standard AS2700	s – 1996		
b.	do not produce glare or appear visual incompatible with the surrounding natural character and bushland	G12 – Holly	ý	G54 – Mist Green	N 44 – Bridge Grey		
c.	environment; are not visually dominant or detract from the natural	G13 – Eme	erald	G55 – Lichen	N45 – Koala Grey		
0.	qualities of the landscape.	G14 – Mos	s Green	G56 – Sage Green	N52 – Mid Grey		
		G15 – Rain Green	forest	G62 – Rivergum	N54 – Basalt		
		G16 – Traff	fic Green	N55 – Lead Grey			
		G17 – Mint	Green	G65 – Ti Tree	X54 – Brown		
		G21 – Jade	9	N25 – Birch Grey	X61 – Wombat		
		G22 – Serp	pentine	N32 – Green Grey	X62 – Dark Earth		
		G23 – Shai	mrock	N33 – Lightbox Grey	X63 – Iron Bark		
		G24 – Fern	Green	N35 – Light Grey	Y51 – Bronze Olive		
		G25 – Olive	9	N41 – Oyster	Y61 – Black Olive		
		G34 – Avoo	cado	N42 – Storm Grey	Y63 – Khaki		
		G52 – Euca	alyptus	N43 – Pipeline Grey	Y66 – Mudstone		
		G53 – Banl	ksia				
		<b>E127.2</b> Where located in the Regionally significant (hills) scenic amenity overlay, roofs and wall surfaces of buildings and structures are painted or finished such that reflectivity is					
PO1	28	less than 3	35%.				
	dscaping complements the coastal landscape character and			ne Locally Importa	nt (Coast) scenic		
b.	amenity; has known resilience and robustness in the coastal environment;	<ul><li>a. landscaping comprises indigenous coastal species;</li><li>b. fences and walls are no higher than 1m; and</li></ul>					

Fences and walls:	c. existing pine trees, palm trees, mature fig and cotton trees are retained.
<ul> <li>a. do not appear visually dominant or conspicuous within its setting;</li> <li>b. reduce visual appearance through the use of built form articulation, setbacks, and plant screening;</li> <li>c. use materials and colours that are complementary to the coastal environment.</li> <li>Building design responds to the bayside location and complements the particular bayside character and amenity by adopting and incorporating a range of architectural character elements.</li> <li>Vegetation that contributes to bayside character and identity are: <ul> <li>a. retained;</li> <li>b. protected from development diminishing their significance.</li> </ul> </li> </ul>	<ul> <li>d. where over 12m in height, the building design includes the following architectural character elements:</li> <li>i. curving balcony edges and walls, strong vertical blades and wall planes;</li> <li>ii. balcony roofs, wall articulation expressed with different colours, curves in plan and section, and window awnings;</li> <li>iii. roof top outlooks, tensile structures as shading devices;</li> <li>iv. lightweight structures use white frame elements in steel and timber, bold colour contrast.</li> </ul>

# Transport noise corridors (refer Overlay map - Transport noise corridors to determine if the following assessment criteria apply)

Note - This is for information purposes only. No requirements for accepted development or criteria for assessable development apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code

#### Table 6.2.6.2.3 Setbacks

	Residential uses									
Height of wall	Frontage primary			see	Frontage secondary to street			Side non-built to	Rear To OMP	Trafficable water body
	To wall	То ОМР	To covered car parking space*	To wall	To OMP	To covered car parking space*	To OMP, wall and covered car parking space*	boundary wall To OMP and wall	and wall	To OMP and wall
Less than 4.5m	Min 4.5m	Min 3m	Min 5.4m	Min 3m	Min 2m	Min 5.4m	Min 0.5m	Min 1.5m	Min 1.5m	Min 4.5m
4.5m to 8.5m	Min 4.5m	Min 3m	N/A	Min 3m	Min 2m	N/A	Min 0.5m	Min 2m	Min 2m	Min 4.5m
Greater than 8.5	Min 4.5m	Min 3m	N/A	Min 3m	Min 2m	N/A	Min 0.5m	Min 2m up to 8.5m in height; plus 0.5m for every 3m in height (or storey) or part thereof over 8.5m	Min 2m up to 8.5m in height; plus 0.5m for every 3m in height (or storey) or part thereof over 8.5m	Min 4.5m

Note - \* Does not apply to basement car parking areas

#### Table 6.2.6.2.4 Built to boundary walls (Residential uses)

Lot frontage width	Mandatory / Optional	Length and height of built to boundary wall	
		Suburban neighbourhood precinct	
Less than 7.5m	Mandatory - both sides unless a corner lot	As per QDC	
7.5m to 12.5m	Mandatory - one side	As per QDC	
Greater than 12.5m to 18m	Optional:	As per QDC	
	i. on 1 boundary only;		
	ii. where the built to boundary wall adjoins a lot with a frontage less than 18m		
Greater than 18m	Not permitted.		

#### **Movement network figures**



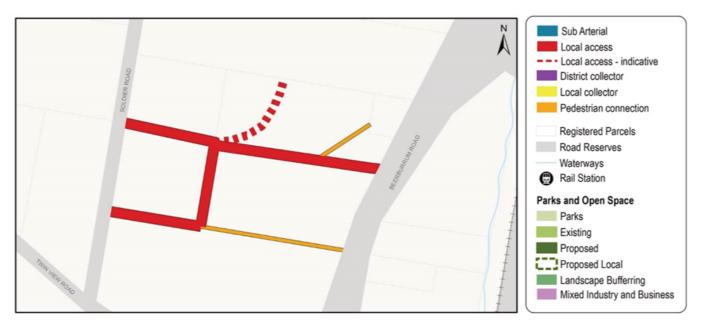
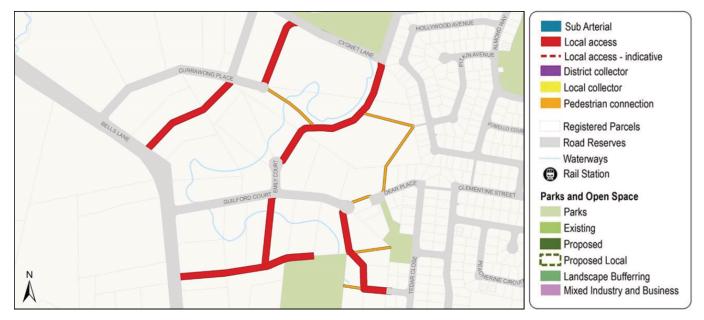


Figure 2 - Bellmere - Guilford Court





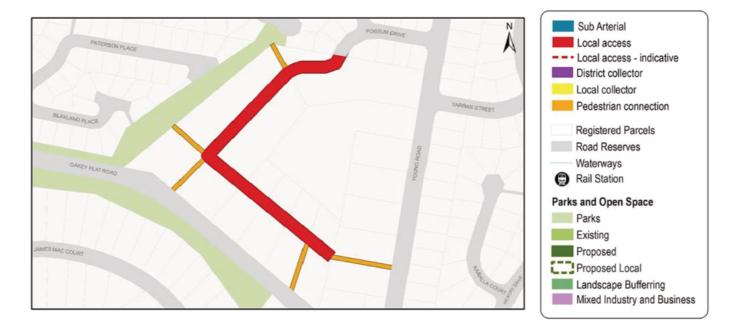


Figure 3 - Narangba - Youngs Road / Oakey Flat Road

Figure 4 - Dakabin

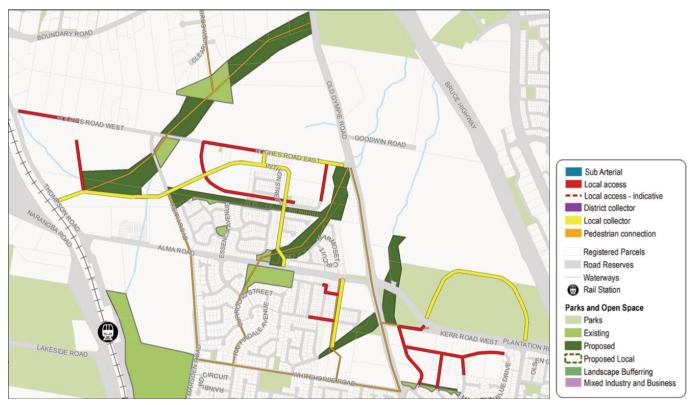

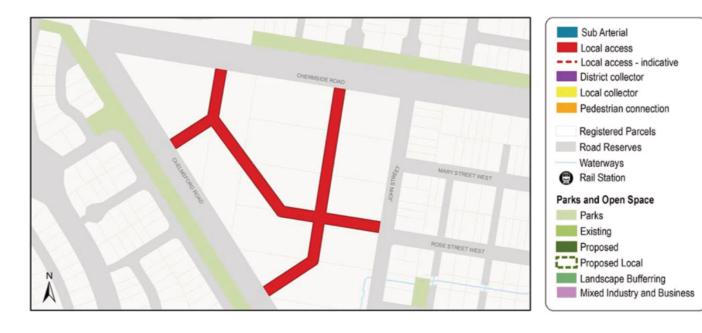

### Figure 5 - Mango Hill - Johns Road

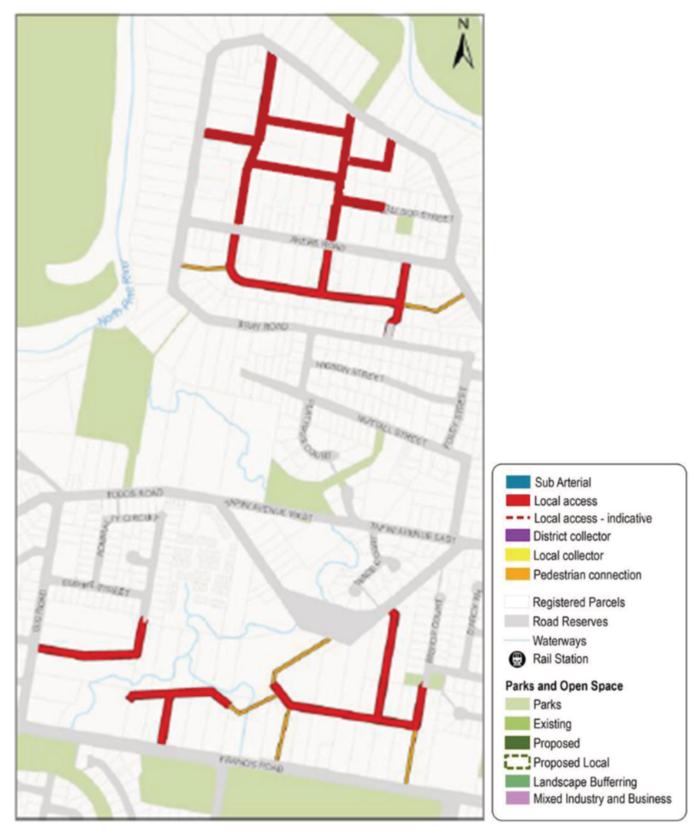


Figure 6 - Lawnton - Akers Road / Isis Road



Figure 7 - Albany Creek - Morgan Road

Figure 8 - Deception Bay - Bailey Road / Park Road







### 6.2.6.3 Next generation neighbourhood precinct

#### 6.2.6.3.1 Purpose - Next generation neighbourhood precinct

- 1. The purpose of the code will be achieved through the following overall outcomes for the Next generation neighbourhood precinct:
  - a. The Next generation neighbourhood precinct supports site densities between 15 and 75 dwellings per hectare.
  - b. Neighbourhoods will have a mix of residential uses, tenure and densities on a variety of lot sizes providing housing choice and affordability for different lifestyle choices and life stages to meet diverse community needs.
  - c. Neighbourhoods are designed to provide well-connected, safe and convenient movement and open space networks through interconnected streets and active transport linkages that provide high levels of accessibility between residences, open space areas and places of activity.
  - d. Medium to high density uses (e.g. Multiple dwelling<sup>(49)</sup>, Relocatable home park<sup>(62)</sup>, Residential care facility<sup>(65)</sup>, Retirement facility<sup>(67)</sup>, Rooming accommodation<sup>(69)</sup>, Short-term accommodation<sup>(77)</sup>) are located in proximity to a range of services and public transport stops(s) or station(s).
  - e. The design, siting and construction of residential uses are to:
    - i. contribute to an attractive streetscape with priority given to pedestrians;
    - ii. encourage passive surveillance of public spaces;
    - iii. results in privacy and residential amenity consistent with the low to medium density residential character intended for the area;
    - iv. provide a diverse and attractive built form;
    - v. orientate to integrate with the street and surrounding neighbourhood;
    - vi. incorporate sub-tropical urban design principles that respond to local climatic conditions;
    - vii. incorporate sustainable practices including maximising energy efficiency and water conservation;
    - viii. incorporate natural features and respond to site topography;
    - ix. cater for appropriate car parking and manoeuvring areas on-site;
    - x. be of a scale and density consistent with the low to medium density residential character intended for the area;
    - xi. provide urban services such as reticulated water, sewerage, sealed roads, parks and other identified infrastructure;
    - xii. ensure domestic outbuildings are subordinate in appearance and function to the dwelling.
  - f. Home based business can only be established where the scale and intensity of the activity does not detrimentally impact upon the character and amenity associated with the surrounding area. Specifically, Home based business does not include the sale or restoration of more than 4 vehicles in any calendar year or, undertake a mechanical repairs or panel beating activity associated with a business at the subject premises.
  - g. Non-residential uses in the next generation neighbourhood precinct take the form of community activities, corner stores, neighbourhood hubs or local centres.
  - h. Community activities:

- i. establish in a location that may be serviced by public transport;
- ii. do not negatively impact adjoining residents or the streetscape;
- iii. do not undermine the viability of existing or future centres.
- i. Corner stores may establish as a standalone use (not part of a neighbourhood hub)where:
  - i. the store is of a scale that remains subordinate to all centres and neighbourhood hubs within the region;
  - ii. clear separation from existing neighbourhood hubs and centres within the network are maintained to reduce catchment overlap. The corner store should not be within 1600m of another corner store, neighbourhood hub or centre measured from the centre of the corner store, neighbourhood hub or centre;
  - iii. they are appropriately designed and located to include active frontages.
- j. Retail and commercial activities (excluding Service stations):
  - i. cluster with other non-residential uses (excluding corner stores) forming a neighbourhood hub;
  - ii. are centred around a 'Main Street' central core fostering opportunities for social and economic exchange;
  - iii. are of a small scale, appropriate for a neighbourhood hub;

Note - Retail and commercial uses that will result in a new or existing neighbourhood hub expanding to a scale and function consistent with a Local centre are to be assessed as if establishing a new Local centre. Refer to the Centre zone code for relevant assessment benchmarks.

- iv. do not negatively impact adjoining residents or the streetscape;
- v. are subordinate in function and scale to all centres within the region.
- k. Service stations:
  - i. establish where they will not disrupt, fragment or negatively impact active frontages (e.g. within a neighbourhood hub);
  - ii. establish on heavily trafficked roads where the amenity of surrounding residential uses is already subject to impacts by road vehicle noise;
  - iii. establish in locations that will not have a negative impact on the street environments intended to include active frontages (e.g. Neighbourhood hubs or centres);
  - iv. do not negatively impact adjoining residents or the streetscape;
  - v. ancillary uses or activities only service the convenience needs of users.
- I. The design, siting and construction of non-residential uses:
  - i. maintains a human scale, through appropriate building heights and form;
  - ii. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces (excluding Service stations);
  - iii. provides for active and passive surveillance of road frontages, movement corridors and public spaces;

- iv. promotes active transport options and ensures an oversupply of car parking is not provided;
- v. locates car parking so as not to dominate the street;
- vi. does not result in large internalised shopping centres<sup>(76)</sup> (e.g. large blank external walls with tenancies only accessible from within the building) surrounded by expansive areas of surface car parking.
- m. Neighbourhood hub expansion (into adjoining lots) or the establishment of a new neighbourhood hub only occurs where:
  - i. it is of a scale that remains subordinate to all centres within the region;

Note - Retail and commercial uses that will result in a new or existing neighbourhood hub expanding to a scale and function more consistent with a Local centre are to be assessed as if establishing a new Local centre. Refer to the Centre zone code for relevant assessment criteria.

- ii. the expansion (into adjoining lots) will strengthen the existing neighbourhood hub as an important neighbourhood activity node;
- clear separation from existing neighbourhood hubs and centres within the network are maintained to reduce catchment overlap. New neighbourhood hubs are to service a currently unserviced catchment. The centre of a neighbourhood hub should not be located within 1600m of another neighbourhood hub or centre measured from the centre of each hub or centre;
- iv. for a new neighbourhood hub, it is located on sub-arterial or collector road;
- v. they are appropriately designed and located to include active frontages around a 'main street' core and are staged where relevant to retain key (highly accessible) sites for long term development.
- n. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity (underground wherever possible), water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. the development does not result in unacceptable impacts on the capacity and safety of the external road network;
  - iv. the development ensures the safety, efficiency and useability of access ways and parking areas;
  - v. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- o. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- p. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- q. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- r. Development in a Water supply buffer is undertaken in a manner which contributes to the maintenance and enhancement where possible of water quality to protect the drinking water and aquatic ecosystem environmental values in those catchments.

- s. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
  - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
  - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
  - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
  - iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
    - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
    - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
    - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
  - v. protecting native species and protecting and enhancing species habitat;
  - vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
  - vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
  - viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
  - ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
  - x. ensuring effective and efficient disaster management response and recovery capabilities;
  - xi. where located in an overland flow path:
    - A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
    - B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
    - C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
    - D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- t. Development in the Next generation neighbourhood precinct includes 1 or more of the following:

•	Child care centre <sup>(13)</sup>	•	Home based business <sup>(35)</sup>	•	Sales office <sup>(72)</sup>
•	Clubs <sup>(14)</sup>	•	Multiple dwelling <sup>(49)</sup>	•	Shop <sup>(75)</sup> - if for a corner
•	Community care centre <sup>(15)</sup>	•	Place of worship <sup>(60)</sup>		store
•	Community residence <sup>(16)</sup>	•	Relocatable home park <sup>(62)</sup>	•	Short-term accommodation <sup>(77)</sup> - if within
•	Community use <sup>(17)</sup>	•	Residential care facility <sup>(65)</sup>		800m walking distance of a higher order or district
					centre

•	Dual occupancy <sup>(21)</sup>	•	Retirement facility <sup>(67)</sup>	•	Where in a Neighbourhood															
•	Dwelling house <sup>(22)</sup>	•	Rooming		hub: - Food and drink outlet <sup>(28)</sup>															
•	Dwelling unit <sup>(23)</sup>	800m walking distance of a	800m walking distance of a	800m walking distance of a	800m walking distance of a	800m walking distance of a supplies <sup>(32)</sup>	5	800m walking distance of a	800m walking distance of a	- Hardware and trade supplies <sup>(32)</sup>										
•	Educational establishment <sup>(24)</sup>		higher order or district centre		- Health care services <sup>(33)</sup> - Indoor sport and recreation <sup>(38)</sup> - for a															
•	Emergency services <sup>(25)</sup>			gymnasium - Office <sup>(53)</sup>																
•	Health care services <sup>(33)</sup>																			

u. Development in the Next generation neighbourhood precinct does not include any of the following:

•	Adult store <sup>(1)</sup>	•	High impact industry <sup>(34)</sup>	•	Port services <sup>(61)</sup>
•	Agricultural supplies store <sup>(1)</sup>	•	Hotel <sup>(37)</sup>	•	Renewable energy facility <sup>(63)</sup>
•	Air services <sup>(3)</sup>	•	Intensive animal industry <sup>(39)</sup>		-
•	Animal husbandry <sup>(4)</sup>	•	Intensive horticulture <sup>(40)</sup>	•	Research and technology industry <sup>(64)</sup>
•	Animal keeping <sup>(5)</sup>	•	Low impact industry <sup>(42)</sup>	•	Rural industry <sup>(70)</sup>
•	Aquaculture <sup>(6)</sup>	•	Marine industry <sup>(45)</sup>	•	Rural workers'
•	Bar <sup>(7)</sup>	•	Medium impact industry <sup>(47)</sup>		accommodation <sup>(71)</sup>
•	Brothel <sup>(8)</sup>	•	Motor sport facility <sup>(48)</sup>	•	Showroom <sup>(78)</sup>
•	Cemetery <sup>(12)</sup>	•	Nature-based tourism <sup>(50)</sup>	•	Special industry <sup>(79)</sup>
•	Crematorium <sup>(18)</sup>	•	Nightclub entertainment	•	Theatre <sup>(82)</sup>
•	Cropping <sup>(19)</sup>		facility <sup>(51)</sup>	•	Tourist attraction <sup>(83)</sup>
•	Detention facility <sup>(20)</sup>	•	Non-resident workforce accommodation <sup>(52)</sup>	•	Transport depot <sup>(85)</sup>
•	Extractive industry <sup>(27)</sup>	•	Outdoor sales <sup>(54)</sup>	•	Warehouse <sup>(88)</sup>
•	Hardware and trade supplies <sup>(32)</sup> - if 250m <sup>2</sup> GFA or more	•	Permanent plantation <sup>(59)</sup>	•	Wholesale nursery <sup>(89)</sup> Winery <sup>(90)</sup>

v. Development not listed in the tables above may be considered on its merits and where it reflects and supports the outcomes of the zone.

#### 6.2.6.3.2 Accepted development subject to requirements

If development is to be categorised as accepted development subject to requirements it must comply with the requirements for accepted development set out in Part E, Table 6.2.6.3.1. Where the development does not meet a requirement for accepted development (RAD) within Part E Table 6.2.6.3.1, the category of development changes to assessable development under the rules outlined in section 5.3.3. (1), and assessment is against the corresponding

performance outcome (PO) identified in the table below. This only occurs whenever a RAD is not met, and is therefore limited to the subject matter of the RADs that are not complied with. To remove any doubt, for those RADs that are complied with, there is no need for assessment against the corresponding PO.

Requirements for accepted development (RAD)	Corresponding PO
RAD1	PO2
RAD2	PO3
RAD3	PO4
RAD4	PO4
RAD5	P07
RAD6	PO11
RAD7	PO14
RAD8	PO15
RAD9	PO24
RAD10	P017
RAD11	PO18
RAD12	PO18
RAD13	PO18
RAD14	PO28
RAD15	PO30
RAD16	P027
RAD17	P027
RAD18	PO31
RAD19	PO34
RAD20	PO35
RAD21	PO36
RAD22	PO35
RAD23	PO42
RAD24	PO37
RAD25	PO37
RAD26	PO40
RAD27	PO40
RAD28	PO41
RAD29	PO43-PO47, PO49
RAD30	PO46
RAD31	PO43
RAD32	PO43

# 6 Zones

RAD33PO43RAD34PO48RAD35PO43RAD36PO43RAD37PO45RAD38PO45RAD39PO50RAD40PO50RAD41PO50RAD42PO51RAD43PO52RAD44PO53RAD45PO55RAD47PO55RAD48PO55RAD49PO55RAD49PO55RAD47PO55RAD48PO55RAD49PO55RAD50PO55RAD51PO55RAD53PO59RAD54PO59RAD55PO59RAD56PO59RAD57PO59RAD58PO59RAD59PO59RAD61PO61RAD62PO63RAD63PO63RAD64PO63RAD64PO63RAD64PO63	Requirements for accepted development (RAD)	Corresponding PO
RAD35         PO43           RAD36         PO43           RAD37         PO45           RAD38         PO45           RAD39         PO50           RAD40         PO50           RAD40         PO50           RAD40         PO50           RAD41         PO50           RAD42         PO51           RAD43         PO52           RAD44         PO53           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO63           RAD63         PO59           RAD64         PO61           RAD63         PO61 </td <td>RAD33</td> <td>PO43</td>	RAD33	PO43
RAD36         PO43           RAD37         PO45           RAD38         PO45           RAD39         PO50           RAD40         PO50           RAD40         PO50           RAD41         PO50           RAD42         PO51           RAD43         PO52           RAD44         PO53           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD54         PO55           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD59         PO59           RAD59         PO59           RAD59         PO59           RAD61         PO61           RAD62         PO62 </td <td>RAD34</td> <td>PO48</td>	RAD34	PO48
RAD37         PO45           RAD38         PO45           RAD39         PO50           RAD40         PO50           RAD41         PO50           RAD42         PO51           RAD43         PO52           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD58         PO59           RAD59         PO59           RAD59         PO59           RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63	RAD35	PO43
RAD38         PO45           RAD39         PO50           RAD40         PO50           RAD41         PO50           RAD42         PO51           RAD43         PO52           RAD44         PO53           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD51         PO59           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD61         PO61           RAD62         PO63           RAD63         PO63           RAD63         PO63           RAD64         PO63 </td <td>RAD36</td> <td>PO43</td>	RAD36	PO43
RAD39         PO50           RAD40         PO50           RAD41         PO50           RAD42         PO51           RAD43         PO52           RAD44         PO53           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD54         PO55           RAD55         PO55           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD50         PO59           RAD61         PO61           RAD62         PO63           RAD63         PO63           RAD64         PO63	RAD37	PO45
RAD40         PO50           RAD41         PO50           RAD42         PO51           RAD43         PO52           RAD44         PO53           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD56         PO55           RAD57         PO55           RAD58         PO59           RAD59         PO59           RAD59         PO59           RAD50         PO59           RAD51         PO59           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO69           RAD59         PO69           RAD61         PO61           RAD62         PO63           RAD63         PO63           RAD64         PO63 </td <td>RAD38</td> <td>PO45</td>	RAD38	PO45
RAD41         PO50           RAD42         PO51           RAD43         PO52           RAD43         PO53           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD54         PO55           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63           RAD65         PO63	RAD39	PO50
RAD42         PO51           RAD43         PO52           RAD44         PO53           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD58         PO59           RAD59         PO59           RAD59         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63           RAD65         PO63	RAD40	PO50
RAD43         PO52           RAD44         PO53           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD54         PO55           RAD55         PO55           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD51         PO59           RAD52         PO59           RAD54         PO59           RAD55         PO59           RAD56         PO59           RAD51         PO59           RAD52         PO59           RAD54         PO59           RAD55         PO59           RAD60         PO63           RAD61         PO63           RAD62         PO63 <tr tbox<="" td="">           RAD64</tr>	RAD41	PO50
RAD44         PO53           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD54         PO55           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO63           RAD64         PO63           RAD64         PO63	RAD42	PO51
RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO55           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD50         PO59           RAD51         PO59           RAD53         PO59           RAD54         PO59           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63           RAD65         PO63	RAD43	PO52
RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO55           RAD53         PO55           RAD54         PO59           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD50         PO59           RAD51         PO59           RAD53         PO59           RAD54         PO59           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO61           RAD60         PO61           RAD61         PO62           RAD63         PO63           RAD64         PO63	RAD44	PO53
RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD53         PO55           RAD54         PO55           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD50         PO59           RAD51         PO59           RAD52         PO59           RAD54         PO59           RAD55         PO59           RAD56         PO59           RAD59         PO59           RAD61         PO61           RAD62         PO63           RAD63         PO63           RAD64         PO63	RAD45	PO55
RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD54         PO59           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO63           RAD63         PO63	RAD46	P055
RAD49         PO55           RAD50         PO55           RAD51         PO55           RAD52         PO55           RAD53         PO55           RAD53         PO55           RAD54         PO59           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO63           RAD63         PO63           RAD64         PO63	RAD47	PO55
RAD50       P055         RAD51       P055         RAD52       P055         RAD53       P055         RAD54       P059         RAD55       P059         RAD56       P059         RAD57       P059         RAD58       P059         RAD59       P059         RAD60       P059         RAD61       P061         RAD63       P063         RAD64       P063	RAD48	PO55
RAD51         P055           RAD52         P055           RAD53         P059           RAD54         P059           RAD55         P059           RAD56         P059           RAD57         P059           RAD58         P059           RAD59         P059           RAD60         P059           RAD61         P061           RAD62         P063           RAD64         P063           RAD65         P063	RAD49	PO55
RAD52       P055         RAD53       P059         RAD54       P059         RAD55       P059         RAD56       P059         RAD57       P059         RAD58       P059         RAD59       P059         RAD60       P059         RAD61       P061         RAD62       P063         RAD63       P063         RAD64       P063	RAD50	PO55
RAD53       P055         RAD54       P059         RAD55       P059         RAD56       P059         RAD57       P059         RAD58       P059         RAD59       P059         RAD60       P059         RAD61       P061         RAD62       P063         RAD64       P063	RAD51	PO55
RAD54         PO59           RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO63           RAD64         PO63	RAD52	PO55
RAD55         PO59           RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO63           RAD64         PO63	RAD53	PO55
RAD56         PO59           RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO63           RAD64         PO63	RAD54	PO59
RAD57         PO59           RAD58         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63	RAD55	PO59
RAD58         PO59           RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63	RAD56	PO59
RAD59         PO59           RAD60         PO59           RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63	RAD57	PO59
RAD60         PO59           RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63           RAD65         PO63	RAD58	PO59
RAD61         PO61           RAD62         PO62           RAD63         PO63           RAD64         PO63           RAD65         PO63	RAD59	PO59
RAD62         PO62           RAD63         PO63           RAD64         PO63           RAD65         PO63	RAD60	PO59
RAD63         PO63           RAD64         PO63           RAD65         PO63	RAD61	PO61
RAD64 PO63 RAD65 PO63	RAD62	PO62
RAD65 PO63	RAD63	PO63
	RAD64	PO63
RAD66 PO63	RAD65	PO63
	RAD66	PO63

Requirements for accepted development (RAD)	Corresponding PO
RAD67	P058
RAD68	P071
RAD69	P075
RAD70	P075
RAD71	P078
RAD72	P079
RAD73	P081
RAD74	P082
RAD75	P071
RAD76	P083
RAD77	P084-P097
RAD78	P084-P095
RAD79	PO96
RAD80	PO97
RAD81	PO98
RAD82	PO99
RAD83	PO100
RAD84	PO100
RAD85	PO101
RAD86	PO101
RAD87	PO104
RAD88	PO104
RAD89	PO104
RAD90	PO105
RAD91	PO106
RAD92	PO106
RAD93	PO109
RAD94	PO107
RAD95	PO107
RAD96	PO107
RAD97	PO106
RAD98	PO108
RAD99	PO108
RAD100	PO110

Requirements for accepted development (RAD)	Corresponding PO
RAD101	PO111, PO112
RAD102	PO113
RAD103	PO116
RAD104	PO115-PO117, PO119-PO121
RAD105	PO115-PO117
RAD106	PO118
RAD107	PO122
RAD108	PO123
RAD109	PO124

### Part E—Requirements for accepted development - Next generation neighbourhood precinct

#### Table 6.2.6.3.1 Requirements for accepted development - Next generation neighbourhood precinct

Requirements for accepted development		
	General requirements	
Building he	eight (Residential uses)	
RAD1	<ul> <li>Building height does not exceed:</li> <li>a. that mapped on Overlay map – Building heights; or</li> <li>b. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>	
Building he	eight (Non-residential uses)	
RAD2	Building height does not exceed the maximum height identified on Overlay map - Building heights.	
Setbacks (	Residential uses)	
RAD3	Setbacks (excluding built to boundary walls) comply with Table 6.2.6.3.3 'Setbacks' - Setback (Residential uses). Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).	
RAD4	<ul> <li>Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are:</li> <li>a. only established on lots having a primary frontage of 18m or less and where permitted in Table 6.2.6.3.4;</li> <li>b. of a length and height not exceeding that specified in Table 6.2.6.3.4 'Built to boundary walls (Residential uses)';</li> <li>c. setback from the side boundary: <ul> <li>i. if a plan of development provides for only one built to boundary wall on the one boundary, not more than 200mm; or</li> </ul> </li> </ul>	

	ii. if a built 20mm;	t to boundary	wall may be	built on each	side of the sar	me boundary, I	not more thai
	d. on the low sid	de of a sloping	g lot.				
Site cover	Editor's note - Lots cor of any wall within 600 Development Easeme recommended.	mm of a boundar	ry. For boundar	ies with built to be	oundary walls on	adjacent lots a 'Hi	gh Density
RAD5	Site cover (excludi does not exceed th	-	-	•		other unenclos	ed structures
	Building height			Lo	t Size		
		300m <sup>2</sup> or less	301- 400m <sup>2</sup>	401- 500m <sup>2</sup>	501- 1000m <sup>2</sup>	1001-2500m <sup>2</sup>	Greater than 2501m <sup>2</sup>
	8.5m or less	75%	70%	60%	60%	60%	60%
	>8.5m - 12.0m	50%	50%	60%	50%	50%	50%
	Greater than 12.0m	N/A	N/A	N/A	50%	40%	40%
	Artificial lighting on maximum values o Australian Standar	of light technic	al parameter	rs for the cont	rol of obtrusive	e light given in	
	maximum values o	of light technic rd AS 4282 (1	al parameter 997) Control	rs for the cont of Obtrusive	rol of obtrusive Effects of Oute	e light given in door Lighting.	
RAD6	maximum values o Australian Standar	of light technic rd AS 4282 (1 ırs" are taken to b	cal parameter 997) Control be those hours b	rs for the cont of Obtrusive petween 10pm ar	rol of obtrusive Effects of Outo	e light given in door Lighting. owing day.	
RAD6	maximum values of Australian Standar	of light technic rd AS 4282 (1 urs" are taken to b re not located	cal parameter 997) Control pe those hours b d in the Envi	rs for the cont of Obtrusive petween 10pm ar ironmental ar	rol of obtrusive Effects of Outo d 7am on the follo reas overlay r	e light given in door Lighting. owing day. <b>map</b>	Table 2.1 of
RAD6	maximum values of Australian Standar Note - "Curfewed hou of habitat trees wher Development does apply to:	of light technic rd AS 4282 (1 ars" are taken to b re not located is not result in	al parameter 997) Control be those hours b d in the Envi the damagin	rs for the cont of Obtrusive between 10pm ar <b>ironmental a</b> g, destroyed o	rol of obtrusive Effects of Outo d 7am on the follo reas overlay r	e light given in door Lighting. owing day. <b>map</b> a habitat tree.	Table 2.1 of
RAD6	maximum values of Australian Standar Note - "Curfewed hou of habitat trees wher Development does apply to: a. Clearing of a b. Clearing of a	of light technic rd AS 4282 (1 rrs" are taken to b re not located is not result in habitat tree k habitat tree v	al parameter 997) Control be those hours to d in the Envi the damagin pocated within	rs for the cont of Obtrusive petween 10pm ar <b>ironmental a</b> g, destroyed on an approved om a lawfully o	rol of obtrusive Effects of Outo d 7am on the follo reas overlay r or clearing of a development established bu	e light given in door Lighting. owing day. <b>map</b> a habitat tree.	Table 2.1 of This does no bly necessar
RAD6	maximum values of Australian Standar Note - "Curfewed hou of habitat trees wher Development does apply to: a. Clearing of a b. Clearing of a for emergeno c. Clearing of a	of light technic rd AS 4282 (1 ars" are taken to b re not located is not result in habitat tree k habitat tree v cy access or in habitat tree re	cal parameter 997) Control be those hours b d in the Envi the damagin bocated within vithin 10m fro mmediately n easonably ne	rs for the cont of Obtrusive petween 10pm ar <b>ironmental a</b> g, destroyed a an approved om a lawfully o required in res	rol of obtrusive Effects of Outo d 7am on the follo reas overlay r or clearing of a development established bu ponse to an a move or reduc	e light given in door Lighting. owing day. <b>map</b> a habitat tree. footprint; ilding reasona	Table 2.1 of This does no bly necessar ergency;
Lighting RAD6	maximum values of Australian Standar Note - "Curfewed hou of habitat trees wher Development does apply to: a. Clearing of a b. Clearing of a for emergence c. Clearing of a to serious pe d. Clearing of a fence and no and Environn	of light technic rd AS 4282 (1 ars" are taken to b re not located a not result in habitat tree k habitat tree v cy access or in habitat tree ro habitat tree ro habitat tree ro habitat tree ro habitat tree ro	al parameter 997) Control be those hours b d in the Envi the damagin bocated within cocated within ocated within bocated within cocated within bocated within cocated within bocated within cocated within bocated within cocated within cocated within bocated within cocated withi	rs for the cont of Obtrusive between 10pm ar <b>ironmental ar</b> g, destroyed of an approved om a lawfully of required in res eccessary to re o infrastructure eccessary to co er side of the f	rol of obtrusive Effects of Outo d 7am on the follo reas overlay r or clearing of a development established bu ponse to an a move or reduce; onstruct and m ence where in	e light given in door Lighting. owing day. map a habitat tree. footprint; ilding reasona ccident or eme	Table 2.1 of This does not bly necessar ergency; etation poses erty boundar iral residentia
RAD6	maximum values of Australian Standar Note - "Curfewed hou of habitat trees wher Development does apply to: a. Clearing of a b. Clearing of a for emergeno c. Clearing of a to serious pe d. Clearing of a fence and no and Environn exceed 2m ir e. Clearing of a	of light technic rd AS 4282 (1 ars" are taken to b re not located is not result in habitat tree k habitat tree k cy access or in habitat tree r rsonal injury of habitat tree r of exceed 4m in nental manag n width either habitat tree re	al parameter 997) Control be those hours b d in the Envi the damagin bocated within within 10m fro mmediately r easonably ne or damage to easonably ne in width either ement and c side of the fe	rs for the cont of Obtrusive petween 10pm ar <b>ironmental an</b> g, destroyed of an approved om a lawfully of equired in res eccessary to re o infrastructure eccessary to co er side of the f conservation z ence; eccessary for th	rol of obtrusive Effects of Outo d 7am on the follo reas overlay r or clearing of a development established bu ponse to an a move or reduce; onstruct and m ence where in ones. In any o	e light given in door Lighting. owing day. <b>map</b> a habitat tree. footprint; ilding reasona ccident or eme ce the risk veg naintain a prop the Rural , Ru other zone, cle	Table 2.1 of This does nor bly necessar ergency; etation poses erty boundar iral residentia earing is not t

g. Clearing of a habitat tree associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
h. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.
Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridors. Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.
Works requirements

Utilities	
RAD8	Development is provided with an appropriate level of service and infrastructure in accordance with Planning scheme policy - Integrated design (Appendix A).

The	frontage road is fully constructed to Council's standards.
geo poli to c	e - Roads are considered to be constructed in accordance with Council standards when there is sufficient pavement width, ometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme icy - Operational works inspection, maintenance and bonding procedures. Testing of the existing pavement may be required confirm whether the existing works meet the standards in Planning scheme policy - Integrated design and Planning scheme icy - Operational works inspection, maintenance and bonding procedures.
Not	e - Frontage roads include streets where no direct lot access is provided.
	new or changes to existing direct vehicle access for residential development does not occur from rial or sub-arterial roads.
-	new or changes to existing crossovers and driveways are designed, located and constructed in ordance with:
a.	where for a Council-controlled road and associated with a Dwelling house:
	i. Planning scheme policy - Integrated design;
b.	where for a Council-controlled road and not associated with a Dwelling house:
	i. AS/NZS2890.1 Parking facilities Part 1: Off street car parking;
	ii. AS/NZS 2890.2 - Parking facilities Part 2: Off-street commercial vehicle facilities;
	iii. Planning scheme policy - Integrated design;
	iv. Schedule 8 - Service vehicle requirements;
C.	where for a State-Controlled road, the Safe Intersection Sight Distance requirements in Austroads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
	geo poli to c poli Not Any acte a. b.

RAD12	Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS 2890.1 Parking Facilities Part 1: Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
RAD13	Access driveways, manoeuvring areas and loading facilities are sealed and provide for service vehicles listed in Schedule 8 - Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 - Service vehicle requirements.

Stormwa	ter			
RAD14	Any new or changes to existing stormwater run-off fr without causing actionable nuisance to any person scheme policy – Integrated design.			
	Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.			
RAD15	Development incorporates a 'deemed to comply so development:	lution' to manage stormwater quality where the		
	<ul><li>a. is for an urban purpose that involves a land a</li><li>b. will result in:</li></ul>	rea of 2500m <sup>2</sup> or greater; and		
	<ul><li>i. 6 or more dwellings; or</li><li>ii. an impervious area greater than 25% of</li></ul>	the net developable area.		
	Note - The deemed to comply solution is to be designed, cons requirements of Water by Design 'Deemed to Comply Solutions and Planning scheme policy - Integrated design.			
RAD16	Development ensures that surface flows entering the diverted or concentrated.	e premises from adjacent properties are not blocked,		
	Note - A report from a suitably qualified Registered Professional Engineer Queensland may be required certifying that t development does not increase the potential for significant adverse impacts on an upstream, downstream or surroundir premises.			
RAD17	Development ensures that works (e.g. fences and stormwater to adjoining properties.	walls) do not block, divert or concentrate the flow of		
	Note - A report from a suitably qualified Registered Professional Engineer Queensland may be required certifying that development does not increase the potential for significant adverse impacts on an upstream, downstream or surroun premises.			
RAD18	Stormwater drainage infrastructure (excluding deternation private land is protected by easements in favour of widths are as follows:	ntion and bio-retention systems) through or within Council (at no cost to Council). Minimum easement		
	Pipe Diameter	Minimum Easement Width (excluding access requirements)		

## 6 Zones

Stormwater Pipe up to 825mm diameter	3.0m
Stormwater Pipe up to 825mm diameter with Sewer pipe up to 225m diameter	4.0m
Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the pipe and clear of all pits.
Note - Additional easement width may be required in certain c stormwater system.	ircumstances in order to facilitate maintenance access to the
Note - Refer to Planning scheme policy - Integrated design (A	ppendix C) for easement requirements over open channels.

Site work	rs and construction management
RAD19	The site and any existing structures are to be maintained in a tidy and safe condition.
RAD20	Development does not cause erosion or allow sediment to leave the site.
	Note - The International Erosion Control Association (Australasia) Best Practice Erosion and Sediment Control provides guidance on strategies and techniques for managing erosion and sedimentation.
RAD21	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
RAD22	Existing street trees are protected and not damaged during works.
	Note - Where development occurs in the tree protection zone, measures and techniques as detailed in Australian Standard AS 4970 Protection of trees on developments sites are adopted and implemented.
RAD23	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
RAD24	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
RAD25	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
RAD26	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works
RAD27	Disposal of materials is managed in one or more of the following ways:
RAU21	

	a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
	b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.
	Note - No burning of cleared vegetation is permitted.
	Note - The chipped vegetation must be stored in an approved location.
RAD28	All development works are carried out within the following times:
	a. Monday to Saturday (other than public holidays) between 6:30am and 6:30pm on the same day;
	b. no work is to be carried out on Sundays or public holidays.

Earthwor	ks
RAD29	The total of all cut and fill on-site does not exceed 900mm in height.
	Figure - Cut and Fill
	Lot Boundaries
	Note - This is site earthworks not building work.
RAD30	<ul> <li>Cut and fill batters, (other than batters to dams and water impoundments), have a finished slope no steeper than the following:</li> <li>a. any cut batter is no steeper than 1V in 4H;</li> <li>b. any fill batter, (other than a compacted fill batter), is no steeper than 1V in 4H;</li> <li>c. any compacted fill batter is no steeper than 1V in 4H.</li> </ul>
RAD31	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.
RAD32	Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep slopes and batters.         Note - Inspection and certification of steep slopes and batters may be required by a suitably qualified and experienced RPEQ.
RAD33	All fill and excavation is contained on-site and is free draining.
RAD34	Earthworks undertaken on the development site are shaped in a manner which does not:

	a. b. c.	the oredin dive i. ii.	vent stormwater surface flow which, prior to commencement of the earthworks, passed onto development site, from entering the land; or rect stormwater surface flow away from existing flow paths; or rt stormwater surface flow onto adjacent land (other than a road) in a manner which: concentrates the flow; or increases the flow rates of stormwater over the affected section of the adjacent land above the situation which existed prior to the diversion; or
		iii.	causes actionable nuisance to any person, property or premises.
RAD35	All f	ill plac	ced on-site is:
	a.	limit	ed to that necessary for the approved use;
	b.		n and uncontaminated (i.e. no building waste, concrete, green waste, actual acid sulfate soils, ential acid sulfate soils or contaminated material etc.).
RAD36	The	site is	s prepared and the fill placed on-site in accordance with Australian Standard AS3798.
			fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, ce and bonding procedures
RAD37	No f entit	-	or excavation is undertaken in an easement issued in favour of Council or a public sector
	Not	e - Pub	lic sector entity is defined in Schedule 2 of the Act.
RAD38	Fillir	ng or e	excavation that would result in any of the following is not carried out on site:
	a.	a ree	duction in cover over any Council or public sector entity infrastructure to less than 600mm;
	b.	sect	ncrease in finished surface grade over, or within 1.5m on each side of, the Council or public or entity infrastructure above that which existed prior to the filling or excavation works being ertaken;
	C.	•	vent reasonable access to Council or public sector entity maintained infrastructure or any nage feature on, or adjacent to the site for monitoring, maintenance or replacement purposes.
	Not	e - Pub	lic sector entity is defined in Schedule 2 of the Act.
	Not	e - All t	building work covered by QDC MP1.4 is excluded from this provision.

#### **Fire services**

Note - The provisions under this heading only apply if:

- a. the development is for, or incorporates:
  - i. reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or

- material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
- iii.
- iv.

#### AND

- b. none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated ii. water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

RAD39	External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .
	Note - For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005):
	<ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul>
	b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
	c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
	i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
	ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
	<ul> <li>iii for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities; and</li> </ul>
	d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.
RAD40	A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:
	a. an unobstructed width of no less than 3.5m;
	b. an unobstructed height of no less than 4.8m;
	c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
	d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.
RAD41	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment</i> .
RAD42	For development that contains on-site fire hydrants external to buildings:

those external hydrants can be seen from the vehicular entry point to the site; or a. b. a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); all communal facilities (where provided); iii. the reception area and on-site manager's office (where provided); iv V. external hydrants and hydrant booster points; physical constraints within the internal roadway system which would restrict access by fire vi. fighting appliances to external hydrants and hydrant booster points. Note - The sign prescribed above, and the graphics used are to be: in a form; а. b. of a size; illuminated to a level: C. which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign. **RAD43** For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note Fire hydrant indication system produced by the Queensland Department of Transport and Main Roads. Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads. Use specific requirements Dual occupancies<sup>(21)</sup> Dual Occupancies<sup>(21)</sup> are located on lots with a total road frontage of 25m or greater. RAD44 Home based business<sup>(35)</sup> Home based business(s)<sup>(35)</sup> are fully enclosed within the existing dwelling or on-site structure. RAD45 RAD46 A maximum of 1 employee (not a resident) OR 2 customers OR customers from within 1 Small rigid vehicle (SRV) or smaller are permitted on the site at any one time. RAD47 Service and delivery vehicles do not exceed one Small rigid vehicle (SRV) at any one time. Vehicle parking for the Home based business<sup>(35)</sup> on-site is limited to 1 car or Small rigid vehicle (SRV). RAD48 Home based business(s)<sup>(35)</sup> occupy an area of the existing dwelling or on-site structure not greater than **RAD49** 40m<sup>2</sup> gross floor area. Home based business(s)<sup>(35)</sup> do not involve manufacturing. **RAD50** Note - Food businesses that are licensable by local government and only involve the manufacturing of non-potentially hazardous food are permitted. Definitions in the Food Act 2006 apply to this note.

RAD51	The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.
RAD52	The hours of operation do not exceed 8:00am to 6:00pm, Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday and Anzac Day.
	Note - Office or administrative activities that do not generate non-residents visiting the site, such as book-keeping and computer work, may operate outside the hours of operation.
RAD53	For a bed and breakfast, the use:
	a. is fully contained within the existing dwelling on-site;
	b. occupies a maximum of 2 bedrooms;
	c. includes the provision of a minimum of 1 meal per day;
	d. accommodates a maximum of 6 people at any one time.
	Note - For a Bed and Breakfast SO31 - SO37 above do not apply.
Sales off	ice <sup>(72)</sup>
RAD54	Car parking spaces are provided in accordance with Table 6.2.6.3.5 'Car parking spaces'.
RAD55	Car parking and manoeuvring areas are designed and constructed in accordance with the Australian Standards AS2890.1.
RAD56	Sales office <sup>(72)</sup> has direct vehicular access to a dedicated road constructed in accordance with Planning scheme policy - Integrated design.
RAD57	Fencing adjoining a street (other than a laneway) or public open space does not exceed 1.2 metres in height.
RAD58	30% of the front façade of the building (excluding the garage and front door) is made up of windows/glazing.
RAD59	The Sales office <sup>(72)</sup> has a clearly identifiable pedestrian entry that is visible and accessible from the primary frontage.
RAD60	The use of the premises for a Sales office <sup>(72)</sup> is for a maximum of 2 years after the commencement of the use.
Telecom	nunications facility <sup>(81)</sup>
that will no	te - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
RAD61	A minimum area of 45m <sup>2</sup> is available to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
	The development would be an extended from the the extension over the end of the development
RAD62	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.

## 6 Zones

	<ul> <li>a. directly beside the existing equipment shelter and associated structures;</li> <li>b. behind the main building line;</li> <li>c. further away from the frontage than the existing equipment shelter and associated structures;</li> <li>d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.</li> </ul>
RAD64	Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.
RAD65	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
RAD66	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with Planning scheme policy - Integrated design.
RAD67	All equipment comprising the telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.
Retail, co	mmercial and community uses
RAD68	Where involving an extension (building work) in the front setback a minimum of 50% of the front facade of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied to a glazed facade located at ground floor is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.
	Figure - Glazing
	2m 1 1 1 1 1 1 1 1 1 1 1 1 1
RAD69	
	Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction is required for the provision of cycle parking.

RAD71	Where involving an exten managed in accordance			areas are prov	ided, designed and
RAD72	Where involving an exten of established landscapin		oes not result in a r	eduction in the	amount or standard
RAD73	Artificial lighting on-site is maximum values of light Australian Standard AS 4 Note - "Curfewed hours" are ta	technical parameters fo 282 (1997) Control of (	or the control of obt Obtrusive Effects of	rusive light give f Outdoor Light	en in Table 2.1 of
			·		
RAD74	Hours of operation do not	t exceed 6:00am to 9:0	0pm Monday to Su	nday.	
RAD75	Development does not in	volve a drive-through fa	acility.		
for Reconf	relevant values and constraints red iguring a lot or Material change of ent footprint plan (or similar in the o cheme.	use or Operational work, whe	ere that approval has co	onsidered and addr	ressed (e.g. through a
disturb aci	d sulfate soils i.e. development inv	rolving filling or excavation w	equirements for accepte orks below the threshold		00m <sup>3</sup> respectively.
	Development does not in a. excavation or otherw Height Datum AHD,	volve: vise removing of more th or	orks below the threshold	ediment where	below 5m Australiar
	Development does not in a. excavation or otherw Height Datum AHD,	volve: vise removing of more th or e than 500m³ of material	orks below the threshold an 100m <sup>3</sup> of soil or s	eediment where	below 5m Australiar greater where below
	Development does not in a. excavation or otherw Height Datum AHD, b. filling of land of more	volve: vise removing of more th or	orks below the threshold	eediment where	below 5m Australiar
	<ul> <li>Development does not in</li> <li>a. excavation or otherw Height Datum AHD,</li> <li>b. filling of land of more the 5m AHD.</li> <li>+20m AHD</li> </ul>	volve: vise removing of more th or e than 500m³ of material	orks below the threshold an 100m <sup>3</sup> of soil or s	eediment where	below 5m Australiar greater where below Surface Elevation ≥20m AHD Excavation area ✓ Assessable development
disturb acio	<ul> <li>Development does not in:</li> <li>a. excavation or otherw Height Datum AHD,</li> <li>b. filling of land of more the 5m AHD.</li> </ul>	volve: vise removing of more th or e than 500m³ of material	orks below the threshold an 100m <sup>3</sup> of soil or s	eediment where	below 5m Australiar greater where below Surface Elevation ≥20m AHD Excavation area ✓ Assessable development
	Development does not in a. excavation or otherw Height Datum AHD, b. filling of land of more the 5m AHD. +20m AHD- +15m AHD- +10m AHD-	volve: vise removing of more th or e than 500m³ of material	orks below the threshold an 100m <sup>3</sup> of soil or s	eediment where	below 5m Australiar greater where below Surface Elevation ≥20m AHD
	Development does not in a. excavation or otherw Height Datum AHD, b. filling of land of more the 5m AHD. +20m AHD- +15m AHD- +10m AHD- +5m AHD-	volve: vise removing of more th or e than 500m <sup>3</sup> of material Surface Elevation ≤5m AHD	an 100m <sup>3</sup> of soil or s	eediment where	below 5m Australian greater where below Surface Elevation ≥20m AHD Excavation area
RAD76	Development does not in a. excavation or otherw Height Datum AHD, b. filling of land of more the 5m AHD. +20m AHD- +15m AHD- +5m AHD- - - - - - - - - - - - - -	volve: vise removing of more th or e than 500m <sup>3</sup> of material Surface Elevation <5m AHD Surface Elevation <5m AHD	an 100m <sup>3</sup> of soil or s	ediment where epth of 0.5m or g	below 5m Australiar greater where below Surface Elevation ≥20m AHD Excavation area Assessable development ★ Self assessable development
RAD76 Environn apply)	Development does not in a. excavation or otherw Height Datum AHD, b. filling of land of more the 5m AHD. +20m AHD- +15m AHD- +10m AHD- -5m AHD- -5m AHD-	volve: vise removing of more th or e than 500m <sup>3</sup> of material Surface Elevation <5m AHD Surface Elevation <5m AHD	an 100m <sup>3</sup> of soil or s	ediment where epth of 0.5m or g	below 5m Australia greater where belo Surface Elevation ≥20m AHI Excavation area M Assessable development Self assessable developm

- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this requirement primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.

**RAD77** Where no suitable land cleared of native vegetation exists, clearing of native vegetation in a High Value Area or Value Area is for the purpose of a new dwelling house<sup>(22)</sup> or extension to an existing dwelling house<sup>(22)</sup> only on lots less than 750m<sup>2</sup>.

Editor's note - See in heading above for other uses excluded from native vegetation clearing requirements.

Editor's note - Where vegetation clearance is accepted development subject to requirements, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:

- i. co-locating all associated activities, infrastructure and access strips;
- ii. be the least valued area of koala habitat on the site;
- iii. minimise the footprint of the development envelope area;
- iv. minimise edge effects to areas external to the development envelope;
- v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy Environmental areas;
- vi. sufficient area between the development and koala habitat trees to achieve their long-term viability.

Editor's note - Where vegetation clearing is accepted development subject to requirements, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.

**RAD78** No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.

	This does not apply to the following:
	<ul> <li>a. Clearing of native vegetation located within an approved development footprint;</li> <li>b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;</li> <li>c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;</li> <li>d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;</li> <li>e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;</li> <li>f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;</li> <li>g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;</li> <li>h. Grazing of native pasture by stock;</li> <li>i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.</li> </ul>
	e resources separation area (refer Overlay map - Extractive resources (separation area) to determine owing requirements apply)
RAD79	Development does not result in more than one dwelling house <sup>(22)</sup> per lot within separation areas.
RAD80	Development within the separation area does not include the following uses:
	a. caretaker's accommodation <sup>(10)</sup> ;
	b. community residence <sup>(16)</sup> ;
	c. dual occupancy <sup>(21)</sup> ;
	d. dwelling unit <sup>(23)</sup> ;
	e. hospital <sup>(36)</sup> ;
	f. rooming accommodation <sup>(69)</sup> ;
	g. multiple dwelling <sup>(49)</sup> ;
	h. non-resident workforce accommodation <sup>(52)</sup> ;
	i. relocatable home park <sup>(62)</sup> ;
	j. residential care facility <sup>(65)</sup> ;
	k. resort complex <sup>(66)</sup> ;
	I. retirement facility <sup>(67)</sup> ;
	m. rural workers' accommodation <sup>(71)</sup> ;
	n. short-term accommodation <sup>(77)</sup> ;
	o. tourist park <sup>(84)</sup> .


RAD85	Development is for the preservation, maintenance, repair and restoration of the site, object or building
Note - Plac landscape heritage sig	and landscape character (refer Overlay map - Heritage and landscape character to determine if ving requirements apply) ees, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural gnificance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning licy - Heritage and landscape character.
RAD84	A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.
RAD83	Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive resources transport route.
	p. Tourist park <sup>(84)</sup> .
	o. Short-term accommodation <sup>(77)</sup> ;
	n. Rural workers' accommodation <sup>(71)</sup> ;
	m. Retirement facility <sup>(67)</sup> ;
	I. Resort complex <sup>(66)</sup> ;
	k. Residential care facility <sup>(65)</sup> ;
	j. Relocatable home park <sup>(62)</sup> ;
	i. Non-resident workforce accommodation <sup>(52)</sup> ;
	h. Multiple dwelling <sup>(49)</sup> ;
	g. Rooming accommodation <sup>(69)</sup> ;
	f. Hospital <sup>(36)</sup> ;
	e. Dwelling unit <sup>(23)</sup> ;
	d. Dwelling house; <sup>(22)</sup>
	c. Dual occupancy <sup>(21)</sup> ;
	b. Community residence <sup>(16)</sup> ;
	a. Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone;
RAD82	The following uses are not located within the 100m wide transport route buffer:
	e resources transport routes (refer Overlay map - Extractive resources (transport route and buffer nine if the following requirements apply)
	b. provided with mechanical ventilation.
	Environmental Protection (Noise) Policy 2008;

	This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character. Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions
RAD86	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.
	This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.
RAD87	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.
RAD88	The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character:
	a. construction of any building;
	b. laying of overhead or underground services;
	c. any sealing, paving, soil compaction;
	d. any alteration of more than 75mm to the ground surface prior to work commencing.
RAD89	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.
	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.
Infrastrue apply)	Amenity Trees.
Infrastrue apply)	Amenity Trees.
Infrastrue apply)	Amenity Trees. cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements Development does not include the following uses within a Wastewater treatment site buffer:
Infrastrue apply)	Amenity Trees. <b>cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements</b> Development does not include the following uses within a Wastewater treatment site buffer: a. Caretaker's accommodation <sup>(10)</sup> ;
Infrastrue apply)	Amenity Trees. <b>cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements</b> Development does not include the following uses within a Wastewater treatment site buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ;
Infrastru	Amenity Trees. <b>cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements</b> Development does not include the following uses within a Wastewater treatment site buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ;
Infrastrue apply)	Amenity Trees. cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements Development does not include the following uses within a Wastewater treatment site buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup>
Infrastrue apply)	Amenity Trees.         cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements         Development does not include the following uses within a Wastewater treatment site buffer:         a.       Caretaker's accommodation <sup>(10)</sup> ;         b.       Community residence <sup>(16)</sup> ;         c.       Dual occupancy <sup>(21)</sup> ;         d.       Dwelling house; <sup>(22)</sup> e.       Dwelling unit <sup>(23)</sup> ;
Infrastrue apply)	Amenity Trees. cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements Development does not include the following uses within a Wastewater treatment site buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ;
Infrastrue apply)	Amenity Trees. <b>cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements</b> Development does not include the following uses within a Wastewater treatment site buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house; <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ;
Infrastrue apply)	Amenity Trees.         cture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements         Development does not include the following uses within a Wastewater treatment site buffer:         a.       Caretaker's accommodation <sup>(10)</sup> ;         b.       Community residence <sup>(16)</sup> ;         c.       Dual occupancy <sup>(21)</sup> ;         d.       Dwelling house; <sup>(22)</sup> e.       Dwelling unit <sup>(23)</sup> ;         f.       Hospital <sup>(36)</sup> ;         g.       Rooming accommodation <sup>(69)</sup> ;         h.       Multiple dwelling <sup>(49)</sup> ;

	I. Resort complex <sup>(66)</sup> ;		
	m. Retirement facility <sup>(67)</sup> ;		
	n. Rural workers' accommodation <sup>(71)</sup> ;		
	o. Short-term accommodation <sup>(77)</sup> ;		
	p. Tourist park <sup>(84)</sup> .		
RAD91	Development within a Water supply buffer does not include the incineration or burial of waste and all other waste is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.		
RAD92	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.		
RAD93	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):		
	a. buildings or structures;		
	b. gates and fences;		
	c. storage of equipment or materials;		
	d. landscaping or earthworks or stormwater or other infrastructure.		
RAD94	On-site sewerage facilities in a Water supply buffer produce a minimum secondary treated effluent (90th percentile) and effluent application to ensure water quality is maintained and protected.		
RAD95	On-site sewerage facilities in a Water supply buffer for a dwelling house <sup>(22)</sup> include:		
	a. emergency storage capacity of 1,000 litres and adequate buffering for shock loading/down time;		
	b. a reserve land application area of 100% of the effluent irrigation design area;		
	c. land application areas that are vegetated;		
	d. the base of the land application field is at least 2 metres above the seasonal high water table/bedrock (whichever is the closest to the base of the application area);		
	e. wastewater collection and storage systems must have capacity to accommodate full load at peak times.		
RAD96	On-site sewerage facilities in a Water supply buffer for development other than a dwelling house include emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies/overload with provision for de-sludging.		
RAD97	Development involving Permanent plantation <sup>(59)</sup> within a Water supply buffer maintains a minimum of 30% ground cover at all times.		
RAD98	Development does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer.		
RAD99	Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback		

RAD100	Development does not include the following uses located within a landfill site buffer:			
	a. caretaker's accommodation <sup>(10)</sup> ;			
	b. community residence <sup>(16)</sup> ;			
	c. dual occupancy <sup>(21)</sup> ;			
	d. dwelling house; <sup>(22)</sup>			
	e. dwelling unit <sup>(23)</sup> ;			
	f. hospital <sup>(36)</sup> ;			
	g. rooming accommodation <sup>(69)</sup> ;			
	h. multiple dwelling <sup>(49)</sup> ;			
	i. non-resident workforce accommodation <sup>(52)</sup> ;			
	<ul> <li>j. relocatable home park<sup>(62)</sup>;</li> </ul>			
	<ul> <li>residential care facility<sup>(65)</sup>;</li> </ul>			
	I. resort complex <sup>(66)</sup> ;			
	m. retirement facility <sup>(67)</sup> ;			
	<ul> <li>short term accommodation<sup>(77)</sup>;</li> <li>term activ<sup>(84)</sup></li> </ul>			
	p. tourist park <sup>(84)</sup> .			
	Editor's note - For clarification purposes, it is noted that Lots 102 to 121 in Stage 2 of DA/26954/2012/VCHG/1 are not subject to the land buffer overlay.			
RAD101	All habitable rooms located within an Electricity supply substation buffer are:			
	<ul> <li>a. located a minimum of 10m from an electricity supply substation<sup>(80)</sup>; and</li> <li>b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.</li> </ul>			
RAD102	Development does not involve the construction of any buildings or structures containing habitable rooms or sensitive land uses within a High voltage electricity line buffer.			
Overland	flow path (refer Overlay map - Overland flow path to determine if the following requirements apply)			
RAD103	Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.			
RAD104	Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.			
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.			
	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland			

RAD105	Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.		
RAD106	Development for a material change of use or building work that involves a hazardous chemical ensure the hazardous chemicals is not located within an overland flow path area.		
RAD107	Development for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.		
	and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the requirements apply)		
Note - W1, wetland set	W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and backs.		
RAD108	No development is to occur within:		
	a. 50m from top of bank for W1 waterway and drainage line		
	b. 30m from top of bank for W2 waterway and drainage line		
	c. 20m from top of bank for W3 waterway and drainage line		
	d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.		
	Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.		
	Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations.		
	Note - The minimum setback distance applies to the each side of waterway.		
	nenity - Regionally significant (Hills) and Locally important (Coast) - (refer Overlay map - Scenic o determine if the following requirements apply)		
RAD109	Where located in the Locally important (Coast) scenic amenity overlay;		
	a. landscaping comprises indigenous coastal species;		
	<ul> <li>fences and walls facing the coast are no higher than 1m. Where fences and walls are higher tha 1m, they have 50% transparency. This does not apply to a fence or wall at an angle of 90o to th coast;</li> </ul>		
	c. where over 12m in height, the building design includes the following architectural character elements:		
	i. curving balcony edges and walls, strong vertical blades and wall planes;		

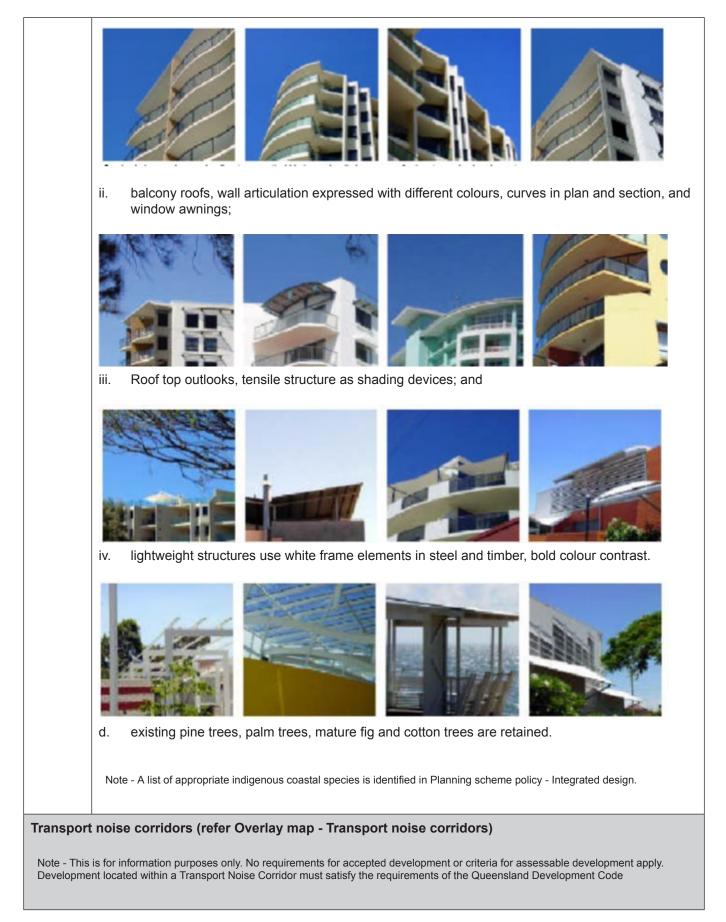

Part F—Criteria for assessable development - Next generation neighbourhood precinct

Where development is categorised as assessable development - code assessment in the Table of Assessment, and located in a precinct, the assessment benchmarks are the criteria set out in Part F, Table 6.2.6.3.2 as well as the purpose statement and overall outcomes of this code.

Where development is categorised as assessable development - impact assessment, the assessment benchmarks become the whole of the planning scheme.

#### Table 6.2.6.3.2 Assessable development - Next generation neighbourhood precinct

Performance outcomes		Examples that achieve aspects of the Performance Outcomes			
General criteria					
Der	nsity				
PO	1	No example provided.			
The Next generation neighbourhood precinct has a low to medium residential density of between 15 and 75 dwellings per ha (site density).					
Bui	lding height (Residential uses)				
PO2		E2			
Buil	dings and structures have a height that:	Building height does not exceed:			
a. b. c. d.	<ul> <li>is consistent with the low to medium rise character of the Next Generation Neighbourhood precinct;</li> <li>Editor's note - There are circumstances where the Next generation neighbourhood precinct is intended to have a low rise character or a medium to high rise character. These circumstances are identified as having a maximum building height less than 12m or more than 12m on Overlay map - Building heights respectively. Alternatives are to be considered in relation to the intended low rise or medium to high rise character for that specific area.</li> <li>responds to the topographic features of the site, including slope and orientation;</li> <li>is not visually dominant or overbearing with respect to the streetscape, street conditions (e.g. street width) or adjoining properties;</li> <li>positively contributes to the intended built form of the surrounding area;</li> <li>Note - To demonstrate compliance with the above a visual impact assessment may be required in accordance with Planning scheme policy - Residential design. Visual impact assessments will require the consideration of all built form matters (e.g. height, setbacks, site cover, building bulk and mass, articulation, roof form and other design aspects) from a variety of perspectives to ascertain if the proposal will result in a positive contribution.</li> </ul>	<ul> <li>a. that mapped on Overlay map – Building heights; or</li> <li>b. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>			
e.	responds to the height of development on adjoining land where contained within another precinct or zone.				

Note - Refer to Planning scheme policy - Residential design for details and examples.			
Bui	Iding height (Non-residential uses)		
PO3		E3	
The height of non-residential buildings does not adversely affect amenity of the area or of adjoining properties and positively contributes to the intended built form of the surrounding area. Note - To demonstrate compliance with the above a visual impact assessment may be required in accordance with Planning scheme policy - Residential design. Visual impact assessments will require the consideration of all built form matters (e.g. height, setbacks, site cover, building bulk and mass, articulation, roof form and other design aspects) from a variety of perspectives to ascertain if the proposal will result in a positive contribution.		identified on Overlay map - Building heights except architectural features associated with religious expression on Place of worship <sup>(60)</sup> and Educationa establishment <sup>(24)</sup> buildings.	
Set	backs (Residential uses)		
PO	4	E4.1	
Res a. b.	sidential buildings and structures are setback to: be consistent with the low to medium density next generation neighbourhood character intended for the area, where buildings are positioned closer to the footpath to create more active frontages and maximise private open space at the rear; result in development not being visually dominant or overbearing with respect to the streetscape and	Setbacks (excluding built to boundary walls) comply with Table 6.2.6.3.3 'Setbacks' - Setback (Residential uses). Note - greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).	
c. d.	the adjoining sites; maintain private open space areas that are of a size and dimension to be usable and functional; maintain the privacy of adjoining properties;	<ul> <li>Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are:</li> <li>a. only established on lots having a primary frontage of 18m or less and where permitted in Table 6.2.6.3.4;</li> </ul>	
e. f.	ensure parked vehicles do not restrict pedestrian and traffic movement and safety; limit the length, height and openings of boundary walls to maximise privacy and amenity on adjoining properties;	<ul> <li>b. of a length and height not exceeding that specified in Table 6.2.6.3.4 'Built to boundary walls (Residential uses)';</li> <li>c. setback from the side boundary: <ol> <li>i. if a plan of development provides for only one</li> </ol> </li> </ul>	
g. h.	provide adequate separation to particular infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure; ensure built to boundary walls do not create unusable or inaccessible spaces and do not negatively impact the streetscape character, amenity or functionality of adjoining properties.	<ul> <li>in a plan of development provides for only one built to boundary wall on the one boundary, not more than 200mm; or</li> <li>ii. if a built to boundary wall may be built on each side of the same boundary, not more than 20mm;</li> <li>d. on the low side of a sloping lot.</li> </ul>	

Note - Refer to Planning scheme policy - Residential design for details and examples.		Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls a 'easement for maintenance purposes' is recommended.					
Setbacks (Non-residential uses)							
PO5	E5.1						
Front setbacks ensure non-residential buildings address and actively interface with streets and public spaces.		rimary fr he prope back a m indary, w	erty bou naximur	ndary; c n of 3m	or from the	e propei	rty
	For the se adjoining			ge, setba	acks are	consist	ent witl
PO6	No exam	ple prov	ided.				
Side and rear setbacks cater for driveway(s), services, utilities and buffers required to protect the amenity of adjoining sensitive land uses and the development will not be visually dominant or overbearing with respect to adjoining properties.							
Site cover (Residential uses)							
P07	E7						
Residential buildings and structures will ensure that site cover:		r (exclud s and oth he speci	ner une	nclosed	structur	es) doe	s not
<ul> <li>does not result in a site density that is inconsistent with the character of the area;</li> </ul>	Building						
b. does not result in an over development of the site;	height	300m <sup>2</sup> or less	301- 400m <sup>2</sup>	401- 500m <sup>2</sup>	501- 1000m <sup>2</sup>	1001- 2500m <sup>2</sup>	Greater
c. does not result in other elements of the site being compromised (e.g. Setbacks, open space etc);	8.5m or less	75%	70%	60%	60%	60%	<b>2501m<sup>2</sup></b> 60%
<ul> <li>reflects the low to medium density character intended for the area.</li> </ul>	>8.5m -12.0m	50%	50%	60%	50%	50%	50%
Note - Refer to Planning scheme policy - Residential design for details and examples.	Greater than 12.0m	N/A	N/A	N/A	50%	40%	40%
		fer to Plan f calculatio		eme policy	/ - Resider	ntial desig	gn for

PO8	E8.1	
PO8 Development is designed to connect to and form part of the surrounding neighbourhood by providing interconnected street, pedestrian and cyclist pathways to adjoining development, nearby centres, neighbourhood hubs, community facilities, public transport nodes and open space. Note - Refer to Planning scheme policy - Neighbourhood design for guidance on achieving the above outcome.	<ul> <li>Development provides and maintains the connections shown on the following movement figures:</li> <li>a. Figure 6.2.6.3.1 - Dakabin</li> <li>b. Figure 6.2.6.3.2 - Griffin</li> <li>c. Figure 6.2.6.3.3 - Mango Hill East</li> <li>d. Figure 6.2.6.3.4 - Caboolture - Pumicestone Road</li> <li>e. Figure 6.2.6.3.5 - Caboolture - Smiths Road</li> <li>f. Figure 6.2.6.3.6 - Caboolture South - River Drive</li> <li>g. Figure 6.2.6.3.7 - Morayfield - Visentin Road</li> <li>h. Figure 6.2.6.3.9 - Morayfield - Caboolture River Road</li> <li>i. Figure 6.2.6.3.10 - Deception Bay - Bailey Road / Park Road</li> <li>k. Figure 6.2.6.3.12 - Bray Park - Samsonvale Road</li> <li>m. Figure 6.2.6.3.13 - Rothwell - Whitlock Drive</li> </ul>	
	Note - Refer to Planning scheme policy - Neighbourhood design for guidance on achieving the Performance outcome.	
Water sensitive urban design		
<b>PO9</b> Best practice Water Sensitive Urban Design (WSUD) is incorporated within development sites adjoining street frontages to mitigate impacts of stormwater run-off in accordance with Planning scheme policy - Integrated design.	No example provided.	
Sensitive land use separation		
PO10	E10	
	Development is designed and operated to ensure that:	

<ul> <li>a. it meets the criteria outlined in the Planning Scheme Policy – Noise; and</li> <li>b. the air quality objectives in the <i>Environmental</i> <i>Protection (Air) Policy 2008</i>, are met.</li> </ul> No example provided. No example provided.
No example provided.
No example provided.
No example provided.
E13.1
Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.
<ul> <li>E13.2</li> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public area unless: <ol> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location</li> </ol> </li> </ul>

		<ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul>
Clearing of habitat trees where not located within the		Environmental areas overlay map
PO14		No example provided.
a.	Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	
b.	Development does not result in the net loss of fauna habitat. Where development does result in the loss of a habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.	
C.	Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner	
	e: Further guidance on habitat trees is provided in Planning eme policy - Environmental areas	

Works criteria			
Utilities			
PO15	No example provided.		
All services including water supply, sewage disposal, electricity, street lighting, telecommunications and gas (if available) are provided in accordance with Planning scheme policy - Integrated design (Appendix A).			

Access		
PO16	No example provided.	

Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.	
PO17	E17.1
<ul> <li>The layout of the development does not compromise:</li> <li>a. the development of the road network in the area;</li> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> </ul> Note - The road hierarchy is mapped on Overlay map - Road hierarchy.	Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a motorway. Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway. Note - The road hierarchy is mapped on Overlay map - Road hierarchy. <b>E17.2</b> The development provides for the extension of the road
	network in the area in accordance with Council's road network planning. E17.3 The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning. E17.4 The development layout allows forward vehicular access to and from the site.
PO18 Safe access is provided for all vehicles required to access the site.	<ul> <li>E18.1</li> <li>Site access and driveways are designed, located and constructed in accordance with:</li> <li>a. where for a Council-controlled road and associated with a Dwelling house: <ul> <li>i. Planning scheme policy - Integrated design;</li> </ul> </li> <li>b. where for a Council-controlled road and not associated with a Dwelling house: <ul> <li>i. AS/NZS2890.1 Parking facilities Part 1: Off street car parking;</li> <li>ii. AS 2890.2 - Parking facilities Part 2: Off-street commercial vehicle facilities;</li> </ul> </li> </ul>

	iii. Planning scheme policy - Integrated design;
	iv. Schedule 8 - Service vehicle requirements;
	c. where for a State-Controlled road, the Safe Intersection Sight Distance requirements in Austroads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
	E18.2
	Internal driveways, car parks and access ways are designed and constructed with a sealed pavement and in accordance with:
	a. AS/NZS 2890.1 Parking Facilities Part 1: Off street car parking;
	<ul> <li>AS 2890.2 Parking Facilities Part 2: Off street commercial vehicle facilities;</li> </ul>
	c. Planning scheme policy - Integrated design; and
	d. Schedule 8 - Service vehicle requirements.
	Note - This includes queue lengths (refer to Schedule 8 - Service vehicle requirements), pavement widths and construction.
	E18.3
	Access driveways, manoeuvring areas and loading facilities are sealed and provide for service vehicles listed in Schedule 8 - Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 - Service vehicle requirements.
	E18.4
	Landscaping (including shade trees) is provided within car parks in accordance with Planning scheme policy - Integrated design.
PO19	E19
Sealed and flood free road access during the minor storm event is available to the site from the nearest arterial or sub-arterial road.	Roads or streets giving access to the development from the nearest arterial or sub-arterial road are flood free during the minor storm event and are sealed.
Editor's note - Where associated with a State-controlled road, further requirements may apply, and approvals may be required from the Department of Transport and Main Roads.	Note - The road network is mapped on Overlay map - Road hierarchy.

PO20	E20.1
Roads which provide access to the site from an arterial or sub-arterial road remain trafficable during major storm events without flooding or impacting upon residential properties or other premises.	Access roads to the development have sufficient longitudinal and cross drainage to remain safely trafficable during major storm (1% AEP) events.
	Note - The road network is mapped on Overlay map - Road hierarchy.
	Note - Refer to QUDM for requirements regarding trafficability.
	E20.2
	Culverts and causeways do not increase inundation levels or increase velocities, for all events up to the defined flood event, to upstream or downstream properties.

Stre	Street design and layout		
PO2	1	No example provided.	
Plar sche mair	ets are designed and constructed in accordance with ning scheme policy - Integrated design and Planning eme policy - Operational works inspection, ntenance and bonding procedures. The street design construction accommodates the following functions:		
a.	access to premises by providing convenient vehicular movement for residents between their homes and the major road network;		
b.	safe and convenient pedestrian and cycle movement;		
C.	adequate on street parking;		
d.	stormwater drainage paths and treatment facilities;		
e.	efficient public transport routes;		
f.	utility services location;		
g.	emergency access and waste collection;		
h.	setting and approach (streetscape, landscaping and street furniture) for adjoining residences;		
i.	expected traffic speeds and volumes; and		
j.	wildlife movement (where relevant).		
stor ped	e - Preliminary road design (including all services, street lighting, mwater infrastructure, access locations, street trees and estrian network) may be required to demonstrate compliance this PO.		

corrio	- Refer to Planning scheme policy - Environmental areas and dors for examples of when and where wildlife movement structure is required.	
PO22	2	E22.1
is upg the d Note Trans	existing road network (whether trunk or non-trunk) graded where necessary to cater for the impact from evelopment. - An applicant may be required to submit an Integrated sport Assessment (ITA), prepared in accordance with Planning me policy - Integrated transport assessment to demonstrate bliance with this PO, when any of the following occurs: Development is within 200m of a transport sensitive location such as a school, shopping centre, bus or train station or a large generator of pedestrian or vehicular traffic; Forecast traffic to/from the development exceeds 5% of the two way flow on the adjoining road or intersection in the morning or afternoon transport peak within 10 years of the development completion;	New intersections onto existing roads are designed to accommodate traffic volumes and traffic movements taken from a date 10 years from the date of completion of the last stage of the development. Detailed design is to be in accordance with Planning scheme policy - Integrated design. Note - All turns vehicular access to existing lots is to be retained at new road intersections wherever practicable. Note - Existing on-street parking is to be retained at new road intersections and along road frontages wherever practicable.
•	Development access onto a sub arterial, or arterial road or within 100m of a signalised intersection;	Existing intersections external to the site are upgraded as necessary to accommodate increased traffic from the
•	Residential development greater than 50 lots or dwellings; Offices greater than 4,000m <sup>2</sup> Gross Floor Area (GFA);	development. Design is in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
•	Retail activities including Hardware and trade supplies, Showroom, Shop or Shopping centre greater than 1,000m <sup>2</sup> GFA;	Note - All turns vehicular access to existing lots is to be retained at new road intersections wherever practicable.
•	Warehouses and Industry greater than 6,000m <sup>2</sup> GFA; On-site carpark greater than 100 spaces;	Note - Existing on-street parking is to be retained at upgraded road intersections and along road frontages wherever practicable.
٠	Development has a trip generation rate of 100 vehicles or more within the peak hour;	E22.3
•	Development which dissects or significantly impacts on an environmental area or an environmental corridor.	The active transport network is extended in accordance with Planning scheme policy - Integrated design.
road deve deter work a futu part o ITA is nece	TA is to review the development's impact upon the external network for the period of 10 years from completion of the lopment. The ITA is to provide sufficient information for mining the impact and the type and extent of any ameliorative s required to cater for the additional traffic. The ITA must include ure structural road layout of adjoining properties that will form of this catchment and road connecting to these properties. The s to assess the ultimate developed catchment's impacts and ssary ameliorative works, and the works or contribution required e applicant as identified in the study.	
Note hiera	- The road network is mapped on Overlay map - Road rchy.	
	- The primary and secondary active transport network is bed on Overlay map - Active transport.	

PO23	E23	
New intersections along all streets and roads are located and designed to provide safe and convenient movements	New intersection spacing (centreline – centreline) along a through road conforms with the following:	
for all users. Note - Refer Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures for design and construction standards.	<ul> <li>Where the through road provides an access or residential street function:</li> </ul>	
	i. intersecting road located on same side = 60 metres; or	
Note - An Integrated Transport Assessment (ITA) including preliminary intersection designs, prepared in accordance with Planning scheme policy - Integrated transport assessment may be required to demonstrate compliance with this PO. Intersection	<ul><li>ii. intersecting road located on opposite side = 40 metres.</li></ul>	
spacing will be determined based on the deceleration and queue storage distances required for the intersection after considering vehicle speed and present/forecast turning and through volumes.	<ul> <li>Where the through road provides a local collector or district collector function:</li> </ul>	
	i. intersecting road located on same side = 100 metres; or	
	<ul><li>ii. intersecting road located on opposite side = 60 metres.</li></ul>	
	<ul> <li>Where the through road provides a sub-arterial function:</li> </ul>	
	i. intersecting road located on same side = 250 metres; or	
	<ul><li>ii. intersecting road located on opposite side = 100 metres.</li></ul>	
	d. Where the through road provides an arterial function:	
	i. intersecting road located on same side = 350 metres; or	
	<ul> <li>intersecting road located on opposite side = 150 metres.</li> </ul>	
	e. Walkable block perimeter does not exceed:	
	<ul> <li>i. 600 metres in the Coastal communities precinct and Suburban neighbourhood precinct;</li> <li>ii. 500 metres in the Next generation</li> </ul>	
	<ul><li>neighbourhood precinct;</li><li>iii. 400 metres in the Urban neighbourhood precinct.</li></ul>	
	Note - Based on the absolute minimum intersection spacing identified above, all turns access may not be permitted (ie. left in/left out only) at intersections with sub-arterial roads or arterial roads.	
	Note - The road network is mapped on Overlay map - Road hierarchy.	

	Note - An Integrated Transport A preliminary intersection designs, Planning scheme policy - Integra required to demonstrate complia	prepared in accordance with ted transport assessment may be
PO24 All Council controlled frontage roads adjoining the development are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. All new works are extended to join any existing works within 20m. Note - Frontage roads include streets where no direct lot access is provided. Note - The road network is mapped on Overlay map - Road hierarchy. Note - The Primary and Secondary active transport network is mapped on Overlay map - Road streates when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.	in accordance with Planning design, Planning scheme p inspection, maintenance and the following: Situation Frontage road unconstructed or gravel road only; OR Frontage road sealed but not constructed* to Planning scheme policy - Integrated design standard; OR Frontage road partially constructed* to Planning scheme policy - Integrated design standard. Note - Major roads are sub-arteri roads are roads that are not major Note - Construction includes all a lighting and linemarking). Note - Alignment within road rese Note - *Roads are considered to Council standards when there is s and depth to comply with the req policy - Integrated design and Pla works inspection, maintenance a of the existing pavement may be existing works meet the standard	<ul> <li>Minimum construction</li> <li>Construct the verge adjoining the development and the carriageway (including development side kerb and channel) to a minimum sealed width containing near side parking lane (if required), cycle lane (if required), 2 travel lanes plus 1.5m wide (full depth pavement) gravel shoulder and table drainage to the opposite side.</li> <li>The minimum total travel lane width is:</li> <li>6m for minor roads;</li> <li>7m for major roads.</li> </ul>

Stormwater

PO25	E25.1	
Minor stormwater drainage systems (internal and external) have the capacity to convey stormwater flows from frequent storm events for the fully developed upstream catchment whilst ensuring pedestrian and	The capacity of all minor drainage systems are designe in accordance with Planning scheme policy - Integrate design.	
vehicular traffic movements are safe and convenient.	E25.2	
	Stormwater pipe network capacity is to be calculated in accordance with the Hydraulic Grade Line method as detailed in Australian Rainfall and Runoff or QUDM.	
	E25.3	
	Development ensures that inter-allotment drainage infrastructure is provided in accordance with the relevant level as identified in QUDM.	
	Note - Development provides inter-allotment – QUDM level III drainage, including bunds, to all lots that have a gradient less than 1 in 100 (for the whole of the allotment) to the road. The inter-allotment drainage system (including easements) is provided in accordance with Planning scheme policy - Integrated design (Appendix C).	
PO26	E26.1	
Major stormwater drainage system(s) have the capacity to safely convey stormwater flows for the 1% AEP event for the fully developed upstream catchment.	The internal drainage system safely and adequately conveys the stormwater flows for the 1% AEP event for the fully developed upstream catchment through the site.	
	E26.2	
	The external (downstream) drainage system safely conveys the stormwater flows for the 1% AEP event for the fully developed upstream catchment without allowing the flows to encroach upon private lots.	
	E26.3	
	Overland flow paths from roads and public open space areas do not pass through private lots. Drainage pathways are provided to accommodate overland flows from roads and public open space areas.	
	E26.4	
	The flow velocity in all unlined or soft faced open drains is kept within acceptable limits for the type of material or lining and condition of the channel.	
	Note - Refer to QUDM for recommended average flow velocities.	
P027	E27	

Provide measures to properly manage surface flows for the 1% AEP event (for the fully developed catchment) draining to and through the land to ensure no actionable nuisance is created to any person or premises as a result of the development. The development must not result in ponding on adjacent land, redirection of surface flows to other premises or blockage of a surface flow relief path for flows exceeding the design flows for any underground system within the development.	The stormwater drainage system is designed and constructed in accordance with Planning scheme policy - Integrated design.
PO28	No example provided.
Stormwater run-off from the site is conveyed to a point of lawful discharge without causing actionable nuisance to any person, property or premises.	
Note - Refer to Planning scheme policy - Integrated design for details.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.	
PO29	No example provided.
Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site. Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be	
required to demonstrate achievement of this performance outcome.	
PO30	No example provided.
Where development:	
a. is for an urban purpose that involves a land area of 2500m <sup>2</sup> or greater; and	
b. will result in:	
i. 6 or more dwellings; or	
ii. an impervious area greater than 25% of the net developable area,	

stormwater quality management systems are designed, constructed, established and maintained to minimise the environmental impact of stormwater on surface, groundwater and receiving water environments and meet the design objectives outlined in Schedule 10 - Stormwater management design objectives. Note - A site based stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management. Stormwater quality infrastructure is to be designed in accordance with Planning scheme policy - Integrated design (Appendix C).		
<b>PO31</b> Stormwater drainage pipes and structures through or within private land (including inter-allotment drainage) are protected by easements in favour of Council with sufficient area for practical access for maintenance purposes.	E31 Stormwater drainage infrastructure (excluding detention and bio-retention systems) through or within private lan (including inter-allotment drainage) is protected by easements in favour of Council. Minimum easement widths are as follows:	
Note - In order to achieve a lawful point of discharge, stormwater easements may also be required over temporary drainage channels/infrastructure where stormwater discharges to a balance lot prior to entering Council's stormwater drainage system.	Pipe Diameter	Minimum easement width (excluding access requirements)
	Stormwater pipe up to 825mm diameter	3.0m
	Stormwater pipe up to 825mm diameter with sewer pipe up to 225m diameter	4.0m
	Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the stormwater pipe (each side).
	Note - Additional easement width circumstances in order to facilitat stormwater system.	
	Note - Refer to Planning scheme p C) for easement requirements ov	policy - Integrated design (Appendix ver open channels.
PO32	No example provided.	
Stormwater management facilities (excluding outlets) are located outside of riparian areas and prevent increased channel bed and bank erosion.		
PO33	E33	
Council is provided with accurate representations of the completed stormwater management works within residential developments.	<ul> <li>"As Built" drawings and specifications of the stormwater management devices certified by an RPEQ is provided.</li> <li>Note - Documentation is to include:</li> </ul>	

a. photographic evidence and inspection date of the installation of approved underdrainage;
<ul> <li>copy of the bioretention filter media delivery dockets/quality certificates confirming the materials comply with specifications in the approved Stormwater Management Plan;</li> </ul>
c. date of the final inspection.

Site works and construction management	
PO34	No example provided.
The site and any existing structures are maintained in a tidy and safe condition.	
PO35	E35.1
<ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause actionable nuisance to any person or premises;</li> <li>d. avoid adverse impacts on street trees and their critical root zone.</li> </ul>	<ul> <li>Works incorporate temporary stormwater runoff, erosion and sediment controls and trash removal devices designed in accordance with the Urban Stormwater Quality Planning Guidelines, State Planning Policy, Schedule 10 - Stormwater management design objectives, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharge to adjoining and downstream properties does not cause scour or erosion of any kind;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. minimum design storm for all temporary diversion drains and sedimentation basins in accordance with Schedule 10 - Stormwater management design objectives;</li> <li>e. ponding or concentration of stormwater does not occur on adjoining properties.</li> </ul> E35.2 E35.2 Stormwater runoff, erosion and sediment controls are constructed in accordance with Planning scheme policy - Integrated design (Appendix C) prior to commencement of any clearing or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.

	Note - The measures are adjusted on-site to maximise their effectiveness.
	E35.3
	The completed earthworks area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.
	E35.4
	Existing street trees are protected and not damaged during works.
	Note - Where development occurs in the tree protection zone, measures and techniques as detailed in Australian Standard AS 4970 Protection of trees on development sites are adopted and implemented.
PO36	E36
Dust suppression measures are implemented during soil disturbances and construction works to protect nearby premises from unreasonable dust impacts.	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
PO37	E37.1
All development works including the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
Note - A Traffic Management Plan may be required to demonstrate compliance with this PO. A Traffic Management Plan is to be	
prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).	E37.2
Note - A haulage route must be identified and approved by Council where imported or exported material is transported to the site via a road of Local Collector standard or less, and:	All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads.
a. the aggregate volume of imported or exported material is greater than 1000m <sup>3</sup> ; or	
<li>b. the aggregate volume of imported or exported material is greater than 200m<sup>3</sup> per day; or</li>	E37.3
<ul> <li>c. the proposed haulage route involves a vulnerable land use or shopping centre.</li> </ul>	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
Note - A dilapidation report (including photographs) may be required for the haulage route to demonstrate compliance with this PO.	<b>E37.4</b> Construction traffic to and from the development site uses the highest classification streets or roads where a
Editor's note - Where associated with a State-controlled road, further requirements may apply, and approval may be required from the Department of Transport and Main Roads.	choice of access routes is available. Haul routes for the

PO40	E40.1
PO39 Earthworks are undertaken to ensure that soil disturbances are staged into manageable areas. Note - A site specific Erosion and Sediment Control Plan (ESCP) will be required to demonstrate compliance with this PO. An ESCP is to be prepared in accordance with Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design (Appendix C).	E39 Soil disturbances are staged into manageable areas of not greater than 3.5 ha.
PO38 All disturbed areas are to be progressively stabilised during construction and the entire site rehabilitated and substantially stabilised at the completion of construction. Note - Refer to Planning scheme policy - Integrated design for details.	<ul> <li>Access to the development site is obtained via an existing lawful access point.</li> <li>E38</li> <li>At completion of construction all disturbed areas of the site are to be: <ul> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques.</li> </ul> </li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage.</li> </ul>
	transport of imported or spoil material and gravel pavement material along Council roads below sub-arterial standard must be approved routes. Note - The road hierarchy is mapped on Overlay map - Road hierarchy. Note - A dilapidation report may be required to demonstrate compliance with this E. <b>E37.5</b> Where works are carried out in existing roads, the works must be undertaken so that the existing roads are maintained in a safe and usable condition. Practical access for residents, visitors and services (including postal deliveries and refuse collection) is retained to existing lots during the construction period and after completion of the works. Note - A traffic control plan prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) will be required for any works that will affect access, traffic movements or traffic safety in existing roads.

<ul> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> </ul>	<ul> <li>All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.</li> <li>Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.</li> <li><b>E40.2</b></li> <li>Disposal of materials is managed in one or more of the following ways: <ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> </ul> </li> <li>Note - The chipped vegetation must be stored in an approved location.</li> </ul>
PO41 All development works are carried out at times which minimise noise impacts to residents.	<ul> <li>E41</li> <li>All development works are carried out within the following times:</li> <li>a. Monday to Saturday (other than public holidays) between 6:30am and 6:30pm on the same day;</li> <li>b. no work is to be carried out on Sundays or public holidays.</li> <li>Note - Work outside the above hours may be approved (in writing) where it can be demonstrated that the work will not cause significant inconvenience or disruption to the public, or the work is unlikely to cause annoyance or inconvenience to occupants of adjacent properties.</li> </ul>
<b>PO42</b> Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.	No example provided.
Earthworks	

Earthworks	
PO43	E43.1

	site earthworks are designed to consider the visual amenity impact as they relate to:	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains
a.	the natural topographical features of the site;	as necessary.
b.	short and long-term slope stability;	E43.2
C.	soft or compressible foundation soils;	Stabilisation measures are provided, as necessary, to
d.	reactive soils;	ensure long-term stability and low maintenance of steep slopes and batters.
e.	low density or potentially collapsing soils;	
f.	existing fill and soil contamination that may exist on-site;	E43.3 Inspection and certification of steep slopes and batters
g.	the stability and maintenance of steep slopes and batters;	is required by a suitably qualified and experienced RPEQ.
h.	excavation (cut) and fill and impacts on the amenity	E43.4
	of adjoining lots (e.g. residential).	All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.
		E43.5
		All filling or excavation is contained on-site and is free draining.
		E43.6
		All fill placed on-site is:
		a. limited to that area necessary for the approved use;
		b. clean and uncontaminated (i.e. no building waste, concrete, green waste, actual acid sulfate soils, potential acid sulfate soils or contaminated material etc.).
		E43.7
		The site is prepared and the fill placed on-site in accordance with AS3798.
		Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
PO4	14	E44
not	bankments are stepped, terraced and landscaped to adversely impact on the visual amenity of the ounding area.	Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.


		Figure - Embankment
		5500mm 500mm 15m 15m 15m 15m 15m 15m 15m 1
PO4	15	E45.1
Fillir	ng or excavation is undertaken in a manner that:	No filling or excavation is undertaken in an easement
a.	does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;	issued in favour of Council or a public sector entity. Note - Public sector entity is defined in Schedule 2 of the Act.
b.	does not preclude reasonable access to a Council or public sector entity maintained infrastructure or	E45.2
	any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.	Filling or excavation that would result in any of the following is not carried out on-site:
Not	e - Public sector entity is defined in Schedule 2 of the Act.	<ul> <li>a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm;</li> </ul>
		<ul> <li>an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken;</li> </ul>
		c. prevent reasonable access to Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the site for monitoring, maintenance or replacement purposes.
		Note - Public sector entity is defined in Schedule 2 of the Act.
		Note - All building work covered by QDC MP1.4 is excluded from this provision.
PO4	46	No example provided.
Fillir	ng or excavation does not result in land instability.	
long geo mea	e - Steep slopes and batters are inspected and certified for g-term stability by a suitably qualified and experienced technical engineer with RPEQ qualifications. Stabilisation asures are provided, as necessary, to ensure long-term stability I low maintenance.	
<b>PO4</b> Fillir	<b>17</b> ng or excavation does not result in:	No example provided.


<ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements.	
PO48	E48
Filling or excavation on the development site is undertaken in a manner which does not create or accentuate problems associated with stormwater flows and drainage systems on land adjoining the site.	<ul> <li>Filling and excavation undertaken on the development site are shaped in a manner which does not:</li> <li>a. prevent stormwater surface flow which, prior to commencement of the earthworks, passed onto the development site, from entering the land; or</li> <li>b. redirect stormwater surface flow away from existing flow paths; or</li> <li>c. divert stormwater surface flow onto adjacent land, (other than a road), in a manner which: <ul> <li>i. concentrates the flow; or</li> <li>ii. increases the flow rates of stormwater over the affected section of the adjacent land above the situation which existed prior to the diversion; or</li> <li>iii. causes actionable nuisance to any person, property or premises.</li> </ul> </li> </ul>
PO49	E49
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents.	<ul> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary:</li> </ul>

a boundary;

guidance on how to achieve compliance with this performance

outcome.

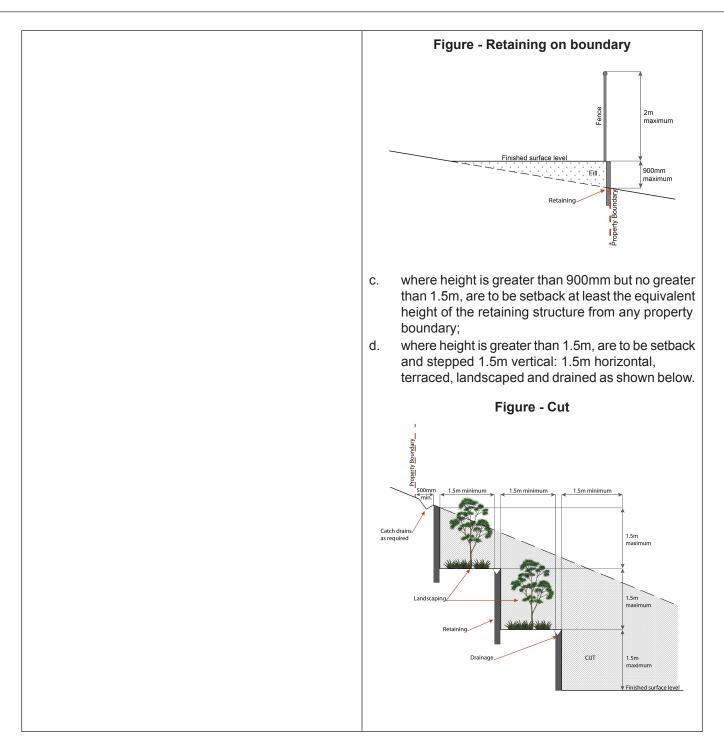

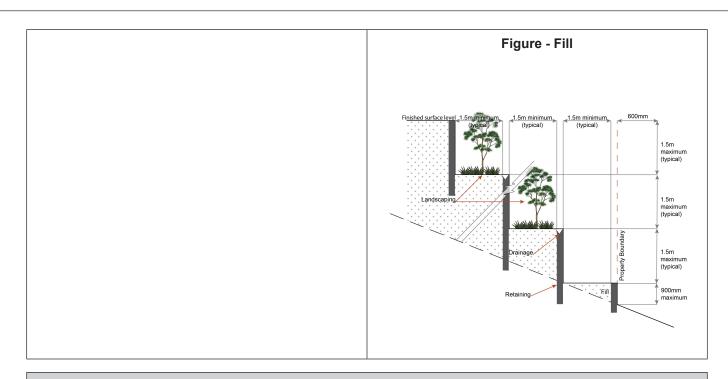

#### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: а
  - i. reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.
  - iv

#### AND

- none of the following exceptions apply: b.
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

PO	50	E50.1
Development incorporates a fire fighting system that: a. satisfies the reasonable needs of the fire fighting		External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .
b.	entity for the area; is appropriate for the size, shape and topography of the development and its surrounds;	Note - For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:
c. d.	is compatible with the operational equipment available to the fire fighting entity for the area; considers the fire hazard inherent in the	<ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably</li> </ul>
	materials comprising the development and their proximity to one another;	signposted in-ground hydrants would be an acceptable alternative;

<ul> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> <li>Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.</li> </ul>	<ul> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: <ol> <li>for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;</li> <li>for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> </ol> </li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul> E50.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land: <ul> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance; d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point. E50.3 On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian</i> <i>Standard AS1851 (2012) – Routine service of fire protection</i> <i>systems and equipment</i>.</li></ul>
BO51	<b>E</b> 51
PO51 On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.	<ul> <li>E51</li> <li>For development that contains on-site fire hydrants external to buildings:</li> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>b. a sign identifying the following is provided at the vehicular entry point to the site: <ul> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> </ul> </li> </ul>

	v. external hydrants and hydrant booster points;
	vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
	Note - The sign prescribed above, and the graphics used are to be: a. in a form; b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.
PO52	E52
Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.
Use sp	ecific criteria
Dual occupancies <sup>(21)</sup>	
PO53	E53
Dual Occupancies <sup>(21)</sup> :	Dual occupancies <sup>(21)</sup> are dispersed within the streetscape in accordance with one or more of the following:
<ul> <li>a. are dispersed within the streetscape;</li> <li>b. contribute to the diversity of dwelling types and forms;</li> <li>c. are not the predominant built form.</li> </ul>	a. no more than 20% of sites within a block contain an existing, approved or properly made application for a dual occupancy <sup>(21)</sup> and Dual occupancy lots (running along the street frontage) are separated by a minimum of one lot not containing an existing, approved or properly made application for a Dual occupancy; or
Note - Refer to Planning scheme policy - Residential design for dispersal methods and calculation.	<ul> <li>a dual occupancy<sup>(21)</sup> is separated by a minimum of 6 lots (running along the street frontage) from another lot containing an existing, approved or properly made application for a dual occupancy<sup>(21)</sup>; or</li> </ul>

		Note - Laneway lots may contain Dual occupancies <sup>(21)</sup> (lofts) on the end two lots within a laneway.	
		Note - Refer to Planning scheme policy - Residential design for dispersal methods and calculation.	
Roo	ming accommodation and Short-term accomn	nodation	
PO	4	No example provided.	
acco	ming accommodation <sup>(69)</sup> and Short-term ommodation <sup>(77)</sup> are located within 800m walking ance of a higher order, district or local centre.		
Hon	ne based business <sup>(35)</sup>		
PO	5	No example provided.	
The Bus	scale and intensity of the Home Based ness <sup>(35)</sup> :		
a.	is compatible with the physical characteristics of the site and the character of the local area;		
b.	is able to accommodate anticipated car parking demand and on-site manoeuvring without negatively impacting the streetscape or road safety;		
C.	does not adversely impact on the amenity of the adjoining and nearby premises;		
d.	remains ancillary to the residential use of the dwelling house <sup>(22)</sup> ;		
e.	does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;		
f.	ensure employees and visitor to the site do not negatively impact the expected amenity of adjoining properties;		
g.	ensure service and delivery vehicles do not negatively impact the amenity of the area.		
Maj	or electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> a	nd Utility installation <sup>(86)</sup>	
POS	6	E56.1	
on tl	development does not have an adverse impact ne visual amenity of a locality and is:	Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:	
a. b. c.	high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive;	<ul><li>a. are enclosed within buildings or structures;</li><li>b. are located behind the main building line;</li></ul>	

<ul> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>	<ul> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> <li>E56.2</li> <li>A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.</li> </ul>
PO57	E57
Infrastructure does not have an impact on pedestrian health and safety.	<ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>
PO58	E58
<ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>	All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.
Sales office <sup>(72)</sup>	
<ul> <li>PO59</li> <li>The sales office<sup>(72)</sup> is designed to:</li> <li>a. provide functional and safe access, manoeuvring areas and car parking spaces for the number and type of vehicles anticipated to access the site;</li> <li>b. complement the streetscape character while maintaining surveillance between buildings and public spaces;</li> <li>c. be temporary in nature.</li> </ul> Note - Refer to Planning scheme policy - Integrated design for access and crossover requirements.	No example provided.
Telecommunications facility <sup>(81)</sup>	

that will not cause human exposure to electromagnetic radiation b	munications facilities <sup>(81)</sup> must be constructed and operated in a manner beyond the limits outlined in the Radiocommunications (Electromagnetic n Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
PO60	E60.1
Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area.	New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.
	E60.2
	If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.
PO61	E61
A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.	A minimum area of 45m <sup>2</sup> is available to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
PO62	E62
Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
PO63	E63.1
The Telecommunications facility <sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is: a. high quality design and construction;	Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.
b. visually integrated with the surrounding area;	E63.2
<ul> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy</li> </ul>	In all other areas towers do not exceed 35m in height.
or the level of the surrounding buildings and structures;	E63.3
<ul><li>f. camouflaged through the use of colours and materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li></ul>	Towers, equipment shelters and associated structures are of a design, colour and material to:
<ul><li>h. landscaped;</li><li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li></ul>	<ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>
	E63.4

PO64       E64         Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.       E64         An Access and Landscape Plan demonstrates how 24 hor vehicular access will be obtained and maintained to the site stat all times that does not alter the amenity of the landscape or surrounding uses.       E64         An Access and Landscape Plan demonstrates how 24 hor vehicular access will be obtained and maintained to the site stat all times that does not alter the amenity of the landscape or surrounding uses.       E64         All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at       All equipment comprising the Telecommunications facility <sup>(6)</sup> which produces audible or non-audible sound at		All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m. Where there is no established building line the facility is located at the rear of the site.
A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facilit and street frontage and adjoining uses.         Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.         Note - Council may require a detailed landscaping plan, prepared by i suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.         PO64       E64         Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.       An Access and Landscape Plan demonstrates how 24 ho vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's contex facility generates no audible sound at the site boundaries where in a residential setting.         PO65       All equipment comprising the Telecommunications facility <sup>64</sup> All equipment comprising the Telecommunications facility <sup>64</sup> to ensure the facility generates no audible sound at the site boundaries where in a residential setting.         PO66       No example provided.         Community activities:       a. are located to:         i.       cluster with other non-residential activities to form a neighbourhood hub; or         ii.       if establishing a new neighbourhood hub         iii.		The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
around the perimeter of the fenced area, between the facili         and street frontage and adjoining uses.         Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.         Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.         P064       E64         Lawful access is maintained to the site at all times that does not after the amenity of the landscape or surrounding uses.       An Access and Landscape Plan demonstrates how 24 how vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context facility in a manner that is appropriate to the site's context the site boundaries where in a residential setting.         P065       E65         All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.       All equipment comprising the Telecommunications facility <sup>[6]</sup> Retail, commercial and community uses       No example provided.       Community activities:         a. are located to:       i. cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or       No example provided.         ii. if establishing a new neighbourhood hub (as described in the PO below); be on a       an eligibourhood hub <th></th> <th>E63.6</th>		E63.6
policy - Integrated design.         Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.         PO64       E64         Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.       An Access and Landscape Plan demonstrates how 24 how vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's contex facility in a manner that is appropriate to the site's contex within a nervironment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.       E65         All activities associated with the development occur within a fully enclosed building incorporating sound control to ensure the facility generates no audible sound at the site boundaries where in a residential setting.       All equipment comprising the Telecommunications facility <sup>(6)</sup> PO66       All equipment comprising the toensure no noise from this equipme can be heard, or felt at the site boundary.         Retail, commercial and community uses       No example provided.         PO66       No example provided.         i. cluster with other non-residential activities to form a neighbourhood hub (its may include being located within or adjacent to an existing neighbourhood hub); or       i. if establishing a new neighbourhood hub (as described in the PO below;) be on a		around the perimeter of the fenced area, between the facility
suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.         P064       E64         Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.       An Access and Landscape Plan demonstrates how 24 how vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's contex         P065       E65         All activities associated with the development occurr within a nenvironment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.       All equipment comprising the Telecommunications facility <sup>(6</sup> P066       All equipment comprising the the site boundary.       Retail, commercial and community uses         P066       No example provided.         Community activities:       a. are located to:       i. cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or       No example provided.         ii. if establishing a new neighbourhood hub (as described in the PO below); be on a       Poil of the provided hub (the side set of the provided hub (the set of the provided hub (the set of the provided hub (the provided hub); or		
Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.       An Access and Landscape Plan demonstrates how 24 hor vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context service of the facility in a manner that is appropriate to the site's context within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.       E65         Retail, commercial and community uses       An excess and Landscape Plan demonstrates how 24 hor vehicular access will be obtained and maintained to the facility (in a manner that is appropriate to the site's context within a neuvronment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.       E65         Retail, commercial and community uses       An excess and Landscape Plan demonstrates how 24 hor vehicular access will be obtained and maintained to the facility (in a manner that is appropriate to the site's context within a fully enclosed building incorporating sound controls to ensure the facility generates no audible sound at the site boundary.         Retail, commercial and community uses       No example provided.         Community activities:       No example provided.         a. are located to:       i. cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or       ii. if establishing a new neighbourhood hub (as described in the PO below); be on a		Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.
that does not alter the amenity of the landscape or surrounding uses.       vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context facility in a manner that is appropriate to the site's context facility in a manner that is appropriate to the site's context facility in a manner that is appropriate to the site's context facility in a manner that is appropriate to the site's context facility in a manner that is appropriate to the site's context facility in a manner that is appropriate to the site's context within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.       E65         Retail, commercial and community uses       All equipment comprising the Telecommunications facility <sup>(6)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound contributes and be heard, or felt at the site boundary.         Retail, commercial and community uses       No example provided.         PO66       No example provided.         Community activities:       a. are located to:         i.       cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or         ii.       if establishing a new neighbourhood hub (as described in the PO below); be on a	PO64	E64
All activities associated with the development occur       All equipment comprising the Telecommunications facility <sup>(R)</sup> Which produces audible or non-audible sound is housed       which produces audible or non-audible sound is housed         the site boundaries where in a residential setting.       All equipment comprising the Telecommunications facility <sup>(R)</sup> Retail, commercial and community uses       measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.         PO66       No example provided.         Community activities:       a.         a.       are located to:         i.       cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or         ii.       if establishing a new neighbourhood hub (as described in the PO below); be on a	that does not alter the amenity of the landscape or	An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.
<ul> <li>within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.</li> <li>which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound contremeasures sufficient to ensure no noise from this equipme can be heard, or felt at the site boundary.</li> <li>Retail, commercial and community uses</li> <li>PO66</li> <li>Community activities:         <ul> <li>a. are located to:                 <ul> <li>i. cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or</li> <li>ii. if establishing a new neighbourhood hub (as described in the PO below); be on a</li> <li>which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound contremeasures sufficient to ensure no noise from this equipme can be heard, or felt at the site boundary.</li> </ul> </li> </ul></li></ul>	PO65	E65
PO66       No example provided.         Community activities:       a. are located to:         i. cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or         ii. if establishing a new neighbourhood hub (the po below); be on a	within an environment incorporating sufficient controls to ensure the facility generates no audible sound at	within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment
Community activities: a. are located to: i. cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or ii. if establishing a new neighbourhood hub (as described in the PO below); be on a	Retail, commercial and community uses	
<ul> <li>a. are located to:</li> <li>i. cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or</li> <li>ii. if establishing a new neighbourhood hub (as described in the PO below); be on a</li> </ul>	PO66	No example provided.
<ul> <li>i. cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or</li> <li>ii. if establishing a new neighbourhood hub (as described in the PO below); be on a</li> </ul>	Community activities:	
<ul> <li>to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or</li> <li>ii. if establishing a new neighbourhood hub (as described in the PO below); be on a</li> </ul>	a. are located to:	
(as described in the PO below); be on a	to form a neighbourhood hub (this may include being located within or adjacent to	
	(as described in the PO below); be on a	

b.		
	are located on allotments that have appropriate area and dimensions for the siting of:	
	i. buildings and structures;	
	ii. vehicle servicing, deliveries, parking, manoeuvring and circulation;	
	<li>iii. landscaping and open space including buffering;</li>	
C.	are of a small scale, having regard to the surrounding character;	
d.	are serviced by public transport;	
e.	do not negatively impact adjoining residents or the streetscape.	
PO6	7	E67
Retail and commercial uses within a neighbourhood hub are of a scale that provide for the convenience needs or localised services of the immediate neighbourhood and do not constitute the scale or function of a Local centre. Note - For the function and scale of a Local centre refer to Table 6.2.1.1 Moreton Bay centres network.		<ul> <li>Retail and commercial uses within a neighbourhood hub consist of no more than:</li> <li>a. 1 small format supermarket with a maximum GFA of 1200m<sup>2</sup>;</li> <li>b. 10 small format retail or commercial tenancies with a maximum GFA of 100m<sup>2</sup> each.</li> </ul>
PO6	8	No exemple provided
		No example provided.
neig	expansion (into adjoining lots) of existing hbourhood hubs or the establishment of a new hbourhood hub must:	No example provided.
neig	expansion (into adjoining lots) of existing hourhood hubs or the establishment of a new	No example provided.
neig neig	expansion (into adjoining lots) of existing hbourhood hubs or the establishment of a new hbourhood hub must: adjoin or address a park, public open space or include privately owned civic or forecourt space	No example provided.
neig neig a.	expansion (into adjoining lots) of existing hbourhood hubs or the establishment of a new hbourhood hub must: adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m <sup>2</sup> ; be located on the corner of a sub-arterial or	No example provided.
neig neig a. b.	expansion (into adjoining lots) of existing hbourhood hubs or the establishment of a new hbourhood hub must: adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m <sup>2</sup> ; be located on the corner of a sub-arterial or collector road; form a 'Main street' having a maximum length	No example provided.
neig neig a. b. c.	expansion (into adjoining lots) of existing hbourhood hubs or the establishment of a new hbourhood hub must: adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m <sup>2</sup> ; be located on the corner of a sub-arterial or collector road; form a 'Main street' having a maximum length of 200m; be centrally located within an 800m radial	No example provided.
neig neig a. b. c. d.	<ul> <li>expansion (into adjoining lots) of existing hbourhood hubs or the establishment of a new hbourhood hub must:</li> <li>adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m<sup>2</sup>;</li> <li>be located on the corner of a sub-arterial or collector road;</li> <li>form a 'Main street' having a maximum length of 200m;</li> <li>be centrally located within an 800m radial catchment;</li> <li>be separated from other neighbourhood hubs and centres by 1600m, measured from the centre of each neighbourhood hub or centre.</li> </ul>	No example provided.

a.	having a maximum GFA of 250m <sup>2</sup> ;	
b.	the building adjoins the street frontage and has its main pedestrian entrance from the street frontage;	
C.	not within 1600m of another corner store, neighbourhood hub or centre.	
PO	70	E70.1
Ser to:	vice stations are located, designed and orientated	Service stations are located:
а. b. c.	establish on heavily trafficked roads where the amenity of surrounding residential uses is already subject to impacts by road vehicle noise; be in proximity of a neighbourhood hub or centre; not negatively impact active streets, public spaces or hubs of activity where the pedestrian safety and comfort is of high importance (e.g. in neighbourhood hubs and centres);	<ul> <li>a. adjoining or within 400m of:</li> <li>i. a neighbourhood hub identified on Overlay map <ul> <li>Community activities and neighbourhood hubs <ul> <li>(not on a neighbourhood hub lot); or</li> </ul> </li> <li>b. on the corner lot of an arterial or sub-arterial road.</li> </ul></li></ul>
d. e. f.	<ul> <li>not result in the fragmentation of active streets (e.g. site where active uses are located on adjoining lots);</li> <li>ensure the amenity of adjoining properties is protected;</li> <li>reduce the visual impact of the Service station from the streetscape while maintaining surveillance from the site to the street;</li> <li>minimise impacts on adjoining residential uses,</li> </ul>	<ul> <li>E70.2</li> <li>Service stations are designed and orientated on site to: <ul> <li>a. include a landscaping strip having a minimum depth of 1m adjoining all road frontages;</li> </ul> </li> <li>b. building and structures (including fuel pump canopies) are setback a minimum of 3m from the primary and secondary frontage and a minimum of 5m from side and rear boundaries;</li> </ul>
h.	to a level suitable relative to expected residential amenity of the area. (e.g. high order road in urban or next generation neighbourhood, likely to be noisy and not like suburban); provide ancillary uses that meet the convenience needs of users.	<ul> <li>c. include a screen fence, of a height and standard in accordance with a noise impact assessment (Note - Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise), on side and rear boundaries where adjoining land is able to contain a residential use;</li> <li>d. not include more than 2 driveway crossovers.</li> </ul>
PO	71	No example provided.
	n-residential uses (excluding a Service station) ress and activate streets and public spaces by:	
a.	ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement;	
b.	new buildings adjoin or are within 3m of the primary frontage(s), civic space or public open space;	

C.	locating car parking areas and drive-through facilities behind or under buildings to not dominate the street environment;	
d.	establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing and avoiding blank walls with the use of sleeving);	
e.	providing visual interest to the façade (e.g. Windows or glazing, variation in colour, materials, finishes, articulation, recesses or projections);	
f.	establishing and maintaining human scale.	
PO7	2	No example provided.
	uildings exhibit a high standard of design and struction, which:	
a.	add visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, cantilevered awning);	
b.	enable differentiation between buildings;	
c.	contribute to a safe environment;	
d.	incorporate architectural features within the building facade at the street level to create human scale (e.g. cantilevered awning);	
e.	include building entrances that are readily identifiable from the road frontage;	
f.	locate and orientate to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites;	
g.	incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;	
h.	facilitate casual surveillance of all public spaces.	
PO7	3	No example provided.
	elopment provides functional and integrated car ing and vehicle access, that:	
a.	prioritises the movement and safety of pedestrians between the street frontage and the entrance to the building;	
b.	provides safety and security of people and property at all times;	

		Residential uses comprised of dwellings	Minimum 1 space per dwelling
	<ul> <li>adequate bicycle parking and storage facilities; and</li> </ul>	Use	Minimum Bicycle Parking
<b>PO7</b> a.	End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:	E76.1 Minimum bicycle parking fa accordance with the table b whole number).	acilities are provided in elow (rounded up to the nearest
asse this	e - Refer to Planning scheme policy - Integrated transport essment for guidance on how to achieve compliance with outcome.		
e.	promote innovative solutions, including on-street parking and shared parking areas.		
d.	promote active and public transport options;	Car parking is provided in accordance with Table 6.2.6.3.5 'Car parking spaces'. Note - The above rates exclude car parking spaces for people with a disability required by Disability Discrimination Act 1992 or the releva disability discrimination legislation and standards. <b>E75.2</b> All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1 Parking facilities Part 1: Off-street car parking.	Standard AS2890.1 Parking
C.	avoid the visual impact of large areas of open car parking from road frontages and public areas;		
b.	efficiency of the road network; avoid an oversupply of car parking spaces;		Discrimination Act 1992 or the relevant
a.	number of car parking spaces is managed to: avoid significant impacts on the safety and		
PO7		E75.1	accordance with Table
C.	are of a width to allow safe and efficient access for prams and wheelchairs.		
b.	protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);		
a.	located along the most direct route between building entrances, car parks and adjoining uses;		
prior	safety and efficiency of pedestrian movement is itised in the design of car parking areas through iding pedestrian paths in car parking areas that		
PO7	4	No example provided.	
e.	is consolidated and shared with adjoining sites wherever possible.		
d.	does not impact on the safe and efficient movement of traffic external to the site;		
C.	does not impede active frontage and active transport options;		

			1	
	ii.	adequate provision for securing belongings; and	All other residential uses	Minimum 1 space per 2 car parking spaces identified in Schedule 7 – car parking
	iii.	change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.	Non-residential uses	Minimum 1 space per 200m2 of GFA
b.	Notwithstanding a. there is no requirement to provide end of trip facilities if it would be unreasonable to provide these facilities having regard to:		Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is a combination of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.	
	i.	the projected population growth and forward planning for road upgrading and development of cycle paths; or	E76.2 Bicycle parking is:	
	ii.	whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute		ce with Austroads (2008), Guide nt - Part 11: Parking;
	iii.	distances and nature of the terrain; or the condition of the road and the nature	b. protected from the we dedicated roof struct	eather by its location or a ure;
		and amount of traffic potentially affecting the safety of commuters.	c. located within the bu structure for resident	ilding or in a dedicated, secure s and staff;
Editor's note - The intent of b above is to ensure the requirements for bicycle parking and end of trip facilities are not applied in unreasonable circumstances. For example these requirements should not, and do not apply in the Rural zone or the Rural residential zone etc.			d. adjacent to building e customers and visito	entrances or in public areas for rs.
		able circumstances. For example these requirements t, and do not apply in the Rural zone or the Rural	Note - Bicycle parking structures prescribed in AS2890.3.	s are to be constructed to the standards
Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the examples under this heading meet the current performance requirement prescribed in the Queensland		ICE Requirement prescribed for end of trip facilities Queensland Development Code. For development ing building work, that Queensland Development Code	Note - Bicycle parking and end and non-residential activities ma 100 metres of the entrance to th	of trip facilities provided for residential ay be pooled, provided they are within ne building.
		t and has been reproduced here solely for information Council's assessment in its building work concurrence le for end of trip facilities will be against the ce requirement in the Queensland Development Code. ject to change at any time, applicants for development ing building work should ensure that proposals that nply with the examples under this heading meet the rformance requirement prescribed in the Queensland	the Queensland Development C to prescribe facility levels highe those acceptable solutions. This	r end of trip facilities prescribed under Code permit a local planning instrument r than the default levels identified in s example is an amalgamation of the acilities in the Queensland Development s required by Council.
Dev	velopm	ent Code.	E76.3	
			For non-residential uses, s	storage lockers:
				of 1.6 per bicycle parking space earest whole number);
			b. have minimum dimer 300mm (width) x 450	nsions of 900mm (height) x 0mm (depth).
				ooled across multiple sites and activities entrance to the building and within 50 torage facilities.

Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

#### E76.4

For non-residential uses, changing rooms:

- a. are provided at a rate of 1 per 10 bicycle parking spaces;
- b. are fitted with a lockable door or otherwise screened from public view;
- c. are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:

Bicycle spaces provided	Male/ Female	Change rooms required	Showers required	Sanitary compartments required	Washbasins required
1-5	Male and female	1 unisex change room	1	1 closet pan	1
6-19	Female	1	1	1 closet pan	1
20 or more	Male	1	1	1 closet pan	1
	Female	1	2, plus 1 for every 20 bicycle spaces provided thereafter	2 closet pans, plus 1 sanitary compartment for every 60 bicycle parking spaces provided thereafter	1, plus 1 for every 60 bicycle parking spaces provided thereafter
	Male	1	2, plus 1 for every 20 bicycle spaces provided thereafter	1 urinal and 1 closet pans, plus 1 sanitary compartment at the rate of 1 closet pan or 1 urinal for every 60 bicycle space provided thereafter	1, plus 1 for every 60 bicycle parking spaces provided thereafter

Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.

Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).

- d. are provided with:
  - i. a mirror located above each wash basin;
  - ii. a hook and bench seating within each shower compartment;
  - iii. a socket-outlet located adjacent to each wash basin.

Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities

		Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.
PO7	7	No example provided.
Loa	ding and servicing areas:	
a.	are not visible from the street frontage;	
b.	are integrated into the design of the building;	
C.	include screening and buffers to reduce negative impacts on adjoining sensitive land uses;	
d.	where possible loading and servicing areas are consolidated and shared with adjoining sites.	
PO7	/8	E78
	and bin storage area/s are designed, located and aged to prevent amenity impacts on the locality.	Development is designed to meet the criteria in the Planning scheme policy - Waste and is demonstrated in a waste management program.
P079		No example provided.
On-	site landscaping is provided, that:	
a.	is incorporated into the design of the development;	
b.	reduces the dominance of car parking and servicing areas from the street frontage;	
c.	retains mature trees wherever possible;	
d.	does not create safety or security issues by creating potential concealment areas or interfering with sight lines;	
e.	maintains the achievement of active frontages and sight lines for casual surveillance.	
	e - All landscaping is to accord with Planning scheme policy egrated design.	
PO80		E80
	veillance and overlooking are maintained between road frontage and the main building line.	No fencing is provided forward of the building line.
PO	1	No example provided.

Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety and minimise adverse impacts on residential and other sensitive land uses.			
PO82	E82		
The hours of operation minimise adverse amenity impacts on adjoining sensitive land uses.	Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.		
Values and o	constraints criteria		
Reconfiguring a lot or Material change of use or Operational work	here the development is consistent with a current Development permit for where that approval has considered and addressed (e.g. through a eard) or conditions of approval) the identified value or constraint under this		
Acid sulfate soils - (refer Overlay map - Acid sulfat apply)	te soils to determine if the following assessment criteria		
	an Acid sulfate soils (ASS) investigation report and soil management plan an ASS investigation report and soil management plan is provided in		
PO83	E83		
Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:	Development does not involve: a. excavation or otherwise removing of more than 100m <sup>3</sup>		
a. is managed to avoid or minimise the release of surface or groundwater flows containing acid	of soil or sediment where below than 5m Australian Height datum AHD; or b. filling of land of more than 500m <sup>3</sup> of material with an		
<ul><li>and metal contaminants into the environment;</li><li>protects the environmental and ecological values</li></ul>	average depth of 0.5m or greater where below the 5m Australian Height datum AHD.		
<ul><li>and health of receiving waters;</li><li>c. protects buildings and infrastructure from the effects of acid sulfate soils.</li></ul>			
Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)			
Note – The following are excluded from the native vegetation clea	aring provisions of this planning scheme:		
a. Clearing of native vegetation located within an approved de	evelopment footprint;		
b. Clearing of native vegetation within 10m from a lawfully estat required in response to an accident or emergency;	blished building reasonably necessary for emergency access or immediately		
c. Clearing of native vegetation reasonably necessary to remo to infrastructure;	ve or reduce the risk vegetation poses to serious personal injury or damage		
	struct and maintain a property boundary fence and not exceed 4m in width al and Environmental Management and Conservation zones. In any other ue fence;		

e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;

f.

	and accepted by Council;		
g.	Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;		
h.	Grazing of native pasture by stock;		
i.	Native forest practice where accepted development under I	Part 1, 1.7.7 Accepted development.	
Note	- Definition for native vegetation is located in Schedule 1 Def	initions.	
enviro Sche	onmental significance (MSES). They also comprise some ma	of matters of national environmental significance (MNES), matters of state atters of local environmental significance (MLES). A MLES is defined in t apply to the mapped MSES and MLES is provided in Appendix 1 of the	
	rs' Note - The accuracy of overlay mapping can be challenge opment) or by way of a planning scheme amendment. See C	ed through the development application process (code assessable Council's website for details.	
mana		an ecological assessment, vegetation management plan and fauna d person. Guidance for the preparation of above mentioned reports is	
Vege	tation clearing, ecological value and connect	ivity	
PO84	l de la constante de	No example provided.	
Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:			
<ul> <li>a. the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded;</li> <li>b. on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*.</li> <li>* Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014.</li> </ul>			
PO85	5	No example provided.	
conve	lopment provides for safe, unimpeded, enient and ongoing wildlife movement and lishes and maintains habitat connectivity by:		

Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to

<ul> <li>a. retaining habitat trees;</li> <li>b. providing contiguous patches of habitat;</li> <li>c. provide replacement and rehabilitation planting to improve connectivity;</li> <li>d. avoiding the creation of fragmented and isolated patches of habitat;</li> <li>e. providing wildlife movement infrastructure.</li> <li>Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges.</li> </ul>	
Further information is provided in Planning scheme policy – Environmental areas.	
Vegetation clearing and habitat protection	
PO86	No example provided.
Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	
P087	No example provided.
Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development will:	
<ul> <li>a. rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a viable and healthy habitat area;</li> <li>b. provide replacement fauna nesting boxes in the event of habitat tree loss in accordance with Planning scheme policy - Environmental areas;</li> <li>c. undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework.</li> </ul>	
PO88	No example provided.
Development ensures safe, unimpeded, convenient and ongoing wildlife movement and habitat connectivity by:	
<ul> <li>a. providing contiguous patches of habitat;</li> <li>b. avoiding the creation of fragmented and isolated patches of habitat;</li> <li>c. providing wildlife movement infrastructure;</li> <li>d. providing replacement and rehabilitation planting to improve connectivity.</li> </ul>	
Vegetation clearing and soil resource stability	
PO89	No example provided.
Development does not:	

a. b.	result in soil erosion or land degradation; leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.	
Veg	etation clearing and water quality	
POS	00	No example provided.
Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by:		
a. b. c.	ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads; avoiding or minimising changes to landforms to maintain hydrological water flows; adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry <sup>(4)</sup> and animal keeping <sup>(5)</sup> activities.	
POS	91	No example provided.
	elopment minimises adverse impacts of mwater run-off on water quality by:	
a. b. c. d. e.	minimising flow velocity to reduce erosion; minimising hard surface areas; maximising the use of permeable surfaces; incorporating sediment retention devices; minimising channelled flow.	
Veg	etation clearing and access, edge effects and	urban heat island effects
PO92		No example provided.
Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment.		
POS	)3	No example provided.
Development minimises potential adverse 'edge effects' on ecological values by:		
a. b. c.	providing dense planting buffers of native vegetation between a development and environmental areas; retaining patches of native vegetation of greatest possible size where located between a development and environmental areas ; restoring, rehabilitating and increasing the size of existing patches of native vegetation;	

<ul> <li>d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors;</li> <li>e. landscaping with native plants of local origin.</li> <li>Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the groundwater and surface water flow.</li> </ul>		
PO9	4	No example provided.
and offect	elopment avoids adverse microclimate change does not result in increased urban heat island ts. Adverse urban heat island effects are nised by:	
a. b.	pervious surfaces; providing deeply planted vegetation buffers and green linkage opportunities;	
c. d.	landscaping with local native plant species to achieve well-shaded urban places; increasing the service extent of the urban forest canopy.	
Vege	etation clearing and Matters of Local Environm	nental Significance (MLES) environmental offsets
PO9	5	No example provided.
Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas.		
prov	or's note - For MSES Koala Offsets, the environmental offset isions in schedule 11 of the Regulation, in combination with equirements of the Environmental Offset Act 2014, apply.	
	active resources separation area (refer Overlay e following assessment criteria apply)	map - Extractive resources (separation area) to determine
	<ul> <li>To demonstrate achievement of the performance outcomes on. Guidance to preparing noise impact assessment report is</li> </ul>	s, a noise impact assessment report is prepared by a suitably qualified provided in Planning scheme policy – Noise.
PO9	6	E96
	elopment does not increase the number of people in the Extractive Resources separation area.	One dwelling house <sup>(22)</sup> permitted per lot within separation area.
PO9	7	E97

<ul> <li>Development:</li> <li>a. does not introduce or increase uses that are sensitive to the impacts of an Extractive industry<sup>(27)</sup>;</li> <li>b. is compatible with the operation of an Extractive industry<sup>(27)</sup>;</li> <li>c. does not comprise or undermine the function and integrity of the separation area in providing a buffer between key extractive and processing activities and sensitive, incompatible uses outside the separation area.</li> </ul>	Development within the separation area does not include the following activities: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling unit <sup>(23)</sup> ; e. Hospital <sup>(36)</sup> ; f. Rooming accommodation <sup>(69)</sup> ; g. Multiple dwelling <sup>(49)</sup> ; h. Non-resident workforce accommodation <sup>(52)</sup> ; i. Relocatable home park <sup>(62)</sup> ; j. Residential care facility <sup>(65)</sup> ; k. Resort complex <sup>(66)</sup> ; l. Retirement facility <sup>(67)</sup> ; m. Rural workers' accommodation <sup>(71)</sup> ; n. Short-term accommodation <sup>(77)</sup> ; o. Tourist park <sup>(84)</sup> .
<b>PO98</b> Habitable rooms achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment.	<ul> <li>E98</li> <li>All habitable rooms within the separation area are:</li> <li>a. acoustically insulated to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008;</li> <li>b. provided with mechanical ventilation.</li> </ul>
Extractive resources transport route (refer Overlay to determine if the following assessment criteria a PO99	y map - Extractive resources (transport route and buffer) apply) E99
<ul> <li>Development:</li> <li>a. does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route;</li> <li>b. does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes;</li> <li>c. adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to: <ol> <li>locating the furthest distance possible from the transportation route;</li> <li>habitable rooms being located the furthest from the transportation route;</li> <li>shielding and screening private outdoor recreation space from the transportation routes.</li> </ol> </li> </ul>	<ul> <li>The following uses are not located within the 100m wide transport route buffer:</li> <li>a. Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>b. Community residence<sup>(16)</sup>;</li> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house<sup>(22)</sup>;</li> <li>e. Dwelling unit<sup>(23)</sup>;</li> <li>f. Hospital<sup>(36)</sup>;</li> <li>g. Rooming accommodation<sup>(69)</sup>;</li> <li>h. Multiple dwelling<sup>(49)</sup>;</li> <li>i. Non-resident workforce accommodation<sup>(52)</sup>;</li> <li>j. Relocatable home park<sup>(62)</sup>;</li> <li>k. Residential care facility<sup>(65)</sup>;</li> <li>l. Resort complex<sup>(66)</sup>;</li> <li>m. Retirement facility<sup>(67)</sup>;</li> <li>n. Rural workers' accommodation<sup>(77)</sup>;</li> <li>p. Tourist park<sup>(84)</sup>.</li> </ul>
PO100	E100.1

Dev a.	a. does not adversely impact upon the efficient and	Development does not create a new vehicle access point onto an Extractive resources transport route.
b.	effective transportation of extractive material along a transportation route; ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility;	E100.2 A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.
c.	utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.	

# Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

PO101		E101				
Dev a. b. c. d. e. f.	elopment will: not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building; protect the fabric and setting of the heritage site, object or building; be consistent with the form, scale and style of the heritage site, object or building; utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes; incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building; retain public access where this is currently provided.	Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value. Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.				
PO1	102	No example provided.				
Demolition and removal is only considered where:						
a.	a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or					

<ul> <li>b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or</li> <li>c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic event which substantially destroys the building or object.</li> </ul>				
PO103	No example provided.			
Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.				
PO104	E104			
Development does not adversely impact upon the health and vitality of significant trees. Where development occurs in proximity to a significant tree, construction measures and techniques as detailed in AS 4970-2009 Protection of trees on development sites are adopted to ensure a significant tree's health, wellbeing and vitality. Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably qualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome.	<ul> <li>Development does:</li> <li>a. not result in the removal of a significant tree;</li> <li>b. not occur within 20m of a protected tree;</li> <li>c. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 – Pruning of Amenity Trees.</li> </ul>			
Infrastructure buffers (refer Overlay map - Infrastr criteria apply)	ucture buffers to determine if the following assessment			

PO105	E105						
Odour sensitive development is separated from Wastewater treatment plants so they are not adversely affected by odour emission or other air pollutant impacts.	The following uses are not located within a wastewater treatment site buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house <sup>(22)</sup> e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ; j. Relocatable home park <sup>(62)</sup> ; k. Residential care facility <sup>(65)</sup> ; l. Resort complex <sup>(66)</sup> ; m. Retirement facility <sup>(67)</sup> ; n. Rural workers' accommodation <sup>(71)</sup> ;						

	<ul> <li>o. Short-term accommodation<sup>(77)</sup>;</li> <li>p. Tourist park<sup>(84)</sup>.</li> </ul>
PO106 Development within a Water supply buffer captures solid or liquid waste from all land use, development and activities is designed, constructed and managed to prevent the release of contaminants to surface water or groundwater bodies.	<ul> <li>E106.1</li> <li>Run-off and sediment from roadways and impervious surfaces within a Water supply buffer are intercepted and treated on-site to remove oil, grease, chemicals, silt, trace metals and nutrients such as nitrogen and phosphorous.</li> <li>E106.2</li> <li>Incineration or burial of waste within a Water supply buffer is not undertaken onsite.</li> <li>E106.3</li> <li>Solid waste within a Water supply buffer is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.</li> <li>E106.4</li> <li>Holding tanks within a Water supply buffer are used for all liquid waste and provide for the separation of oils/solvents and solids prior to pump-out and collection by a licenced contractor.</li> <li>E106.5</li> <li>Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.</li> </ul>
PO107 On-site sewerage systems within a Water supply buffer are designed and operated to ensure there is no worsening or adverse impacts to health risks, environmental risks and water quality. Editor's Note - For guidance refer to the Seq water Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.	<ul> <li>E107</li> <li>Secondary treated wastewater treatment systems within a Water supply buffer include:</li> <li>a. emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies or overload with provision for de-sludging;</li> <li>b. back up pump installation and backup power;</li> <li>c. MEDLI modelling to determine irrigation rates and sizing of irrigation areas;</li> <li>d. vegetated land application areas are not located in overland flow paths or on areas that perform groundwater recharge or discharge functions; and</li> <li>e. wastewater collection and storage systems have a capacity to accommodate full load at peak times and includes temporary facilities.</li> </ul>

PO108	E108
<ul> <li>Development within a Bulk water supply infrastructure buffer is located, designed and constructed to:</li> <li>a. protect the integrity of the water supply pipeline;</li> <li>b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline;</li> </ul>	<ul> <li>Development:</li> <li>a. does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer;</li> <li>b. involving a major hazard facility or environmentally relevant activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.</li> </ul>
PO109	E109
Development is located and designed to maintain required access to Bulk water supply infrastructure.	<ul> <li>Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):</li> <li>a. buildings or structures;</li> <li>b. gates and fences;</li> <li>c. storage of equipment or materials;</li> <li>d. landscaping or earthworks or stormwater or other infrastructure.</li> </ul>
PO110	E110
Odour sensitive development is separated from landfill sites so they are not adversely affected by odour emission or other air pollutant impacts.	The following uses are not located within a Landfill buffer: a. Caretaker's accommodation <sup>(10)</sup> ; b. Community residence <sup>(16)</sup> ; c. Dual occupancy <sup>(21)</sup> ; d. Dwelling house <sup>(22)</sup> ; e. Dwelling unit <sup>(23)</sup> ; f. Hospital <sup>(36)</sup> ; g. Rooming accommodation <sup>(69)</sup> ; h. Multiple dwelling <sup>(49)</sup> ; i. Non-resident workforce accommodation <sup>(52)</sup> ; j. Relocatable home park <sup>(62)</sup> ; k. Residential care facility <sup>(65)</sup> ; l. Resort complex <sup>(66)</sup> ; m. Retirement facility <sup>(67)</sup> ; n. Rural workers' accommodation <sup>(71)</sup> ; o. Short-term accommodation <sup>(77)</sup> ; p. Tourist park <sup>(84)</sup> .
PO111	E111
Habitable rooms within an Electricity supply substation buffer are located a sufficient distance from substations <sup>(80)</sup> to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields. Note - Habitable room is defined in the Building Code of Australia (Volume 1)	<ul> <li>Habitable rooms:</li> <li>a. are not located within an Electricity supply substation buffer; and</li> <li>b. proposed on a site subject to an Electricity supply supply substation<sup>(80)</sup> are acoustically insulted to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.</li> </ul>

	Note - Habitable room is defined in the Building Code of Australia (Volume 1)			
PO112	No example provided.			
Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation <sup>(80)</sup> to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment.				
Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy – Noise.				
Note - Habitable room is defined in the Building Code of Australia (Volume 1)				
PO113	E113			
Development within a High voltage electricity line buffer provides adequate buffers to high voltage electricity lines to protect amenity and health by ensuring development:	Development does not involve the construction of any buildings or structures within a High voltage electricity line buffer.			
<ul> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields in accordance with the principle of prudent avoidance;</li> </ul>				
<ul> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> </ul>				
c. is located and design so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.				
PO114	E114			
Development within a Pumping station buffer is located, designed and constructed to:	Development does not involve the construction of any buildings or structures within a Pumping station buffer.			
a. ensure that odour or other air pollutant impacts on the amenity of the development met the air quality of objectives in the Environmental Protection (Air) Policy 2008;				
b. ensure that noise impacts on the amenity of the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008.				
Overland flow path (refer Overlay map - Overland fl apply)	ow path to determine if the following assessment criteria			

Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.					
PO115	No example provided.				
Development:					
a. minimises the risk to persons from overland flow;					
<ul> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>					
PO116	No example provided.				
Development:					
<ul> <li>maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> </ul>					
<ul> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> </ul>					
Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.					
Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.					
PO117	No example provided.				
Development does not:					
a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;					
<ul> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> </ul>					
Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.					
PO118	E118				
	Development ensures that a hazardous chemical is not located or stored in an Overland flow path area.				

Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.	Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.
<b>PO119</b> Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.	<b>E119</b> Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.
PO120 Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	<ul> <li>E120.1</li> <li>Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:</li> <li>a. Urban area – Level III;</li> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul> E120.2 Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.
<ul> <li>PO121</li> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over: <ul> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> </ul> </li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul> <li>Additional criteria for development for a Park<sup>(57)</sup></li>	No example provided.

PO122			E122			
Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:		Development for a Park <sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.				
a.	public benefit and enjoyment is maximised;					
<li>b. impacts on the asset life and integrity of park structures is minimised;</li>						
C.	<ul> <li>maintenance and replacement costs are minimised.</li> </ul>					
Rip	arian and wetland setbacks					
РО	123	E12	3			
	velopment provides and maintains a suitable	Dev	elopment does not occur within:			
setback from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following		a.	50m from top of bank for W1 waterway and drainag line			
a.	impact on fauna habitats;	b.	30m from top of bank for W2 waterway and drainag line			
b.	impact on wildlife corridors and connectivity;	c.	20m from top of bank for W3 waterway and drainag line			
c. d.	impact on stream integrity; impact of opportunities for revegetation and rehabilitation planting;	d.	100m from the edge of a Ramsar wetland, 50m from all other wetlands.			
e.			e - W1, W2 and W3 waterway and drainage lines, and wetlands are oped on Schedule 2, Section 2.5 Overlay Maps – Riparian and land setbacks.			
	enic amenity - Regionally significant (Hills) and enity to determine if the following assessment		Illy important (Coast) (refer Overlay map - Scenic ria apply)			
PO	124	E12	4			
Landscaping			ere located in the Locally Important (Coast) scenic enity overlay:			
a.	complements the coastal landscape character and amenity;	a.	landscaping comprises indigenous coastal species;			
b.	has known resilience and robustness in the coastal environment;	b.	fences and walls are no higher than 1m; and			
Fences and walls:		c.	existing pine trees, palm trees, mature fig and cotto trees are retained.			
a. do not appear visually dominant or conspicuous		d. where over 12m in height, the building design includes				

a. do not appear visually dominant or conspicuous within its setting;

the following architectural character elements:

<li>balcony roofs, wall articulation expressed with different colours, curves in plan and section, and window awnings;</li>
iii. roof top outlooks, tensile structures as shading devices;
<ul> <li>iv. lightweight structures use white frame elements in steel and timber, bold colour contrast.</li> </ul>

Note - This is for information purposes only. No requirements for accepted development or criteria for assessable development apply.

Note - This is for information purposes only. No requirements for accepted development or criteria for assessable development apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code

	Residential uses									
Height of wall			Frontage secondary to street		Frontage secondary to lane	Side non-built to boundary wall	Rear To OMP and wall	Trafficable water body To OMP		
	To wall	To OMP	To covered car parking space*	To wall	То ОМР	To covered car parking space*	To OMP, wall and covered car parking space*	To OMP and wall		and wall
Less than 4.5m	Min 3m	Min 2m	Min 5.4m	Min 2m	Min 1m	Min 5.4m	Min 0.5m	Min 1.5m	Min 1.5m	Min 4.5m
4.5m to 8.5m	Min 3m	Min 2m	N/A	Min 2m	Min 1m	N/A	Min 0.5m	Min 2m	Min 2m	Min 4.5m
Greater than 8.5m	Min 6m	Min 5m	N/A	Min 3m	Min 2m	N/A	Min 0.5m	Min 2m up to 8.5m in height; plus 0.5m for every 3m in height (or storey) or part thereof over 8.5m	Min 5m	Min 4.5m

#### Table 6.2.6.3.3 Setbacks

assessment criteria apply)

Note - \* Does not apply to basement car parking areas.

#### Table 6.2.6.3.4 Built to boundary walls (Residential uses)

Lot frontage width	Mandatory / optional	Length and height of built to boundary wall		
		Next generation neighbourhood		
Less than 7.5m	Mandatory - both sides unless a corner lot	Max Length: 80% of the length of the boundary Max Height: 7.5m		
7.5m to 12.5m	Mandatory - one side	Max Length: 60% of the length of the boundary OR 80% if the lot adjoining that boundary has a frontage of 7.5m or less. Max Height: 7.5m		
Greater than 12.5m to 18m	Optional: i. on 1 boundary only; ii. where the built to boundary wall adjoins a lot with a frontage less than 18m.	Max Length: the lesser of 15m or 60% of the length of the boundary Max Height: 7.5m		
Greater than 18m	Not permitted.			

#### Table 6.2.6.3.5 Car parking spaces

Site proximity	Land use	Maximum number of car spaces to be provided	Minimum number of car spaces to be provided
Within 800m walking distance	Non-residential	1 per 30m <sup>2</sup> GFA	1 per 50m <sup>2</sup> GFA
of a higher order centre	Residential – permanent/long term	N/A	1 per dwelling*
	Residential – serviced/short term	3 per 4 dwellings* + staff spaces	1 per 5 dwellings* + staff spaces
Other (Wider catchment)	Non-residential	1 per 20m <sup>2</sup> GFA	1 per 30m <sup>2</sup> GFA
catchinenty	Residential – permanent/long term	N/A	1 per dwelling*
	Residential – serviced/short term	1 per dwelling* + staff spaces	1 per 5 dwellings* + staff spaces

Note - Car parking rates are to be rounded up to the nearest whole number.

Note -\* Where Dwellings are not being established (e.g. beds and communal area) the car parking rate specified above is to be provided per Non-residential GFA.

Note - Allocation of car parking spaces to dwellings is at the discretion of the developer.

Note - Residential - Permanent/long term includes: Multiple dwelling<sup>(49)</sup>, Relocatable home park<sup>(62)</sup>, Residential care facility<sup>(65)</sup>, Retirement facility<sup>(67)</sup>.

Note - Residential - Serviced/short term includes: Rooming accommodation<sup>(69)</sup> or Short-term accommodation<sup>(77)</sup>.

#### Movement network figures

Figure 6.2.6.3.1 - Dakabin



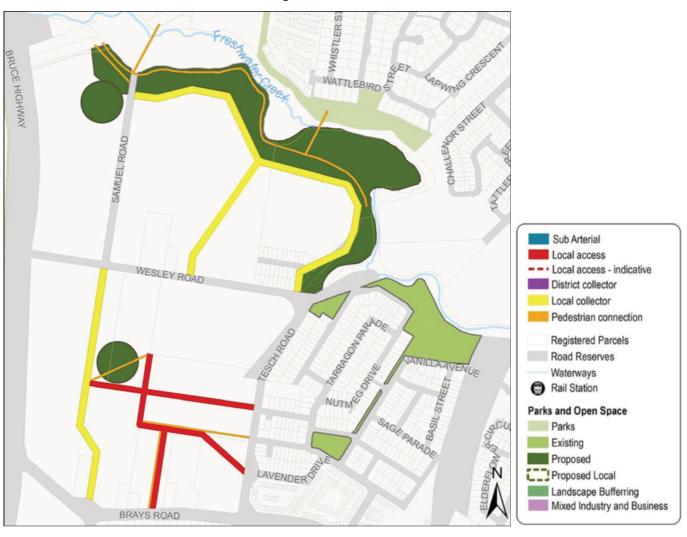

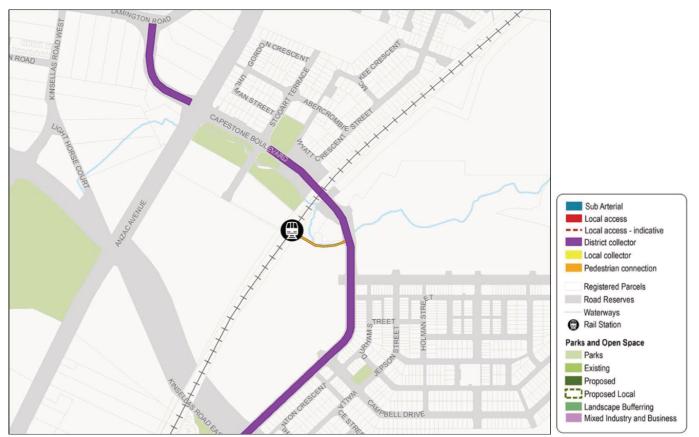


Figure 6.2.6.3.2 - Griffin





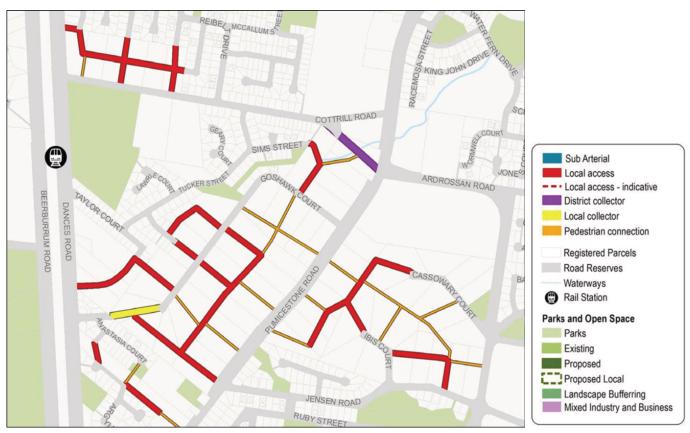


Figure 6.2.6.3.4 - Caboolture - Pumicestone Road

Figure 6.2.6.3.5 - Caboolture - Smiths Road

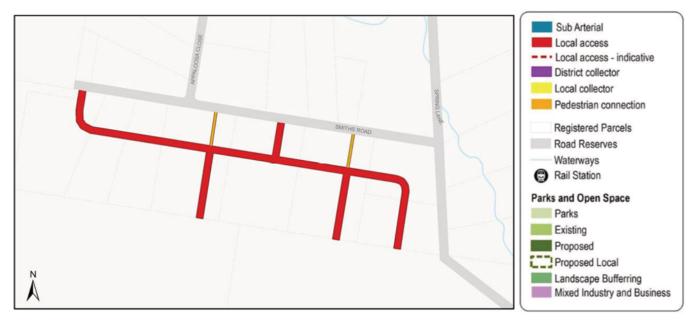






Figure 6.2.6.3.7 - Morayfield - Visentin Road

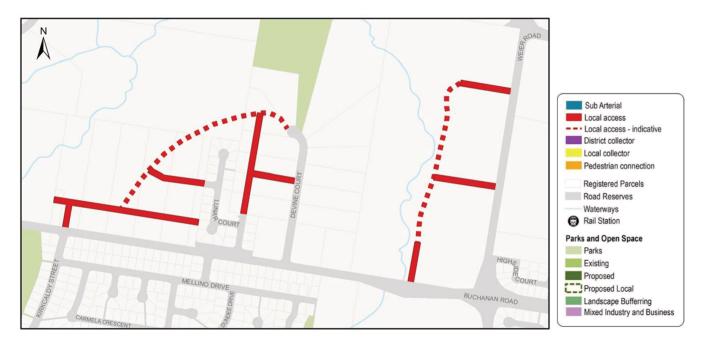




Figure 6.2.6.3.8 - Morayfield - Caboolture River Road

Figure 6.2.6.3.9 - Morayfield - Anderson Road





Figure 6.2.6.3.10 - Deception Bay - Bailey Road / Park Road

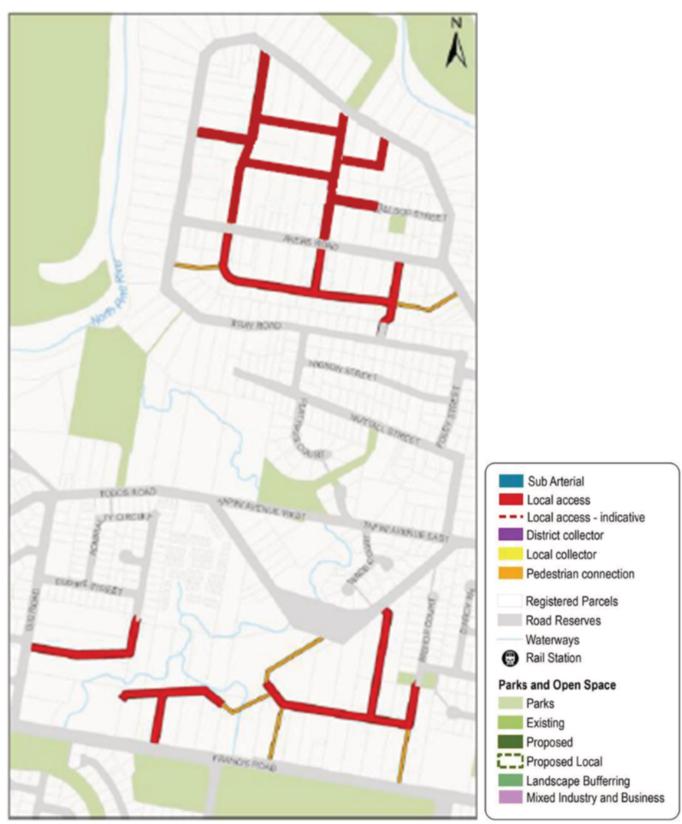


Figure 6.2.6.3.11 - Lawnton - Akers Road / Isis Road

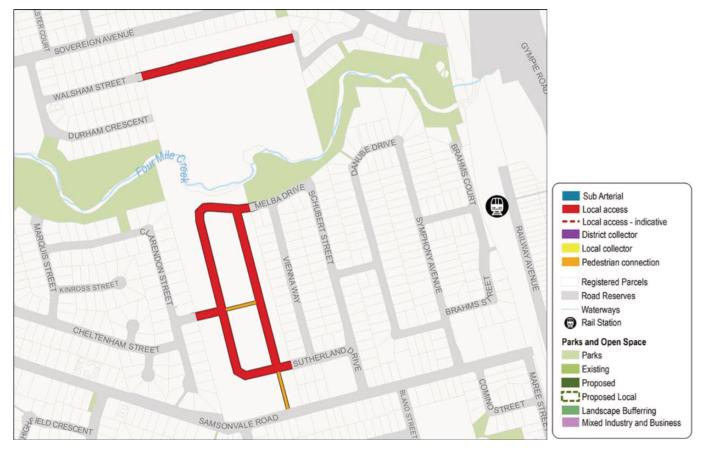


Figure 6.2.6.3.12 - Bray Park - Samsonvale Road

Figure 6.2.6.3.13 - Rothwell - Whitlock Drive



#### 6.2.6.4 Urban neighbourhood precinct

#### 6.2.6.4.1 Purpose - Urban neighbourhood precinct

- 1. The purpose of the code will be achieved through the following overall outcomes for the Urban neighbourhood precinct:
  - a. The Urban neighbourhood precinct will mainly comprise of a series of residential neighbourhoods that will each achieve a site density of at least 45 dwellings per hectare and can support the provision of local services.
  - b. Development in the urban neighbourhood precinct maximises the efficient use of land through appropriate built form and land use intensity. Land is to be developed to an intensity that will capitalise on the sites proximity to services and public transport or seaside amenity aspects.
  - c. Neighbourhoods will have a mix of residential uses (e.g. apartments, plexes, terrace etc), tenure and densities providing housing choice and affordability for different lifestyle choices and life stages to meet diverse community needs.
  - d. The scale and density of development facilitates an efficient land use pattern that supports compact, walkable and sustainable communities that are well connected to centres, community and social infrastructure.
  - e. Neighbourhoods are designed to provide well-connected, safe and convenient movement and open space networks through interconnected streets and active transport linkages that provide high levels of accessibility between residences, open space areas and places of activity.
  - f. Home based business can only be established where the scale and intensity of the activity does not detrimentally impact upon the character and amenity associated with the surrounding area. Specifically, Home based business does not include the sale or restoration of more than 4 vehicles in any calendar year or, undertake a mechanical repairs or panel beating activity associated with a business at the subject premises.
  - g. The design siting and construction of residential uses are to:
    - i. contribute to an attractive streetscape with priority given to pedestrians;
    - ii. encourage passive surveillance of public spaces;
    - iii. result in privacy and residential amenity consistent with the medium to high density residential character of the area;
    - iv. orientate to integrate with the street and surrounding neighbourhood;
    - v. provide a diverse and attractive built form where buildings are located closer to the street and encourage active frontages;
    - vi. incorporate sub-tropical urban design principles that respond to local climatic conditions;
    - vii. incorporate sustainable practices including maximising energy efficiency and water conservation;
    - viii. incorporate natural features and respond to site topography;
    - ix. be of a scale and density consistent with the medium to high density residential character of the area;
    - x. locate car parking so as not to dominate the street;
    - xi. cater for appropriate car parking and manoeuvring areas on-site;
    - xii. provide urban services such as reticulated water, sewerage, sealed roads, parks and other identified infrastructure.

- h. Non-residential uses in the urban neighbourhood precinct take the form of community activities, large-medium scale office activities, corner stores, mixed use buildings or neighbourhood hubs.
- i. Community activities:
  - i. establish in a location that may be serviced by public transport;
  - ii. do not negatively impact adjoining residents or the streetscape;
  - iii. do not undermine the viability of existing or future centres.
- j. Corner stores may establish as stand alone uses (not part of a neighbourhood hub) where:
  - i. the store is of a scale that remains subordinate to all centres and neighbourhood hubs within the region;
  - ii. clear separation from existing neighbourhood hubs and centres within the network are maintained to reduce catchment overlap. The corner store should not be within 1600m of another corner store, neighbourhood hub or centre measured from the centre of the corner store, neighbourhood hub or centre;
  - iii. they are appropriately designed and located to include active frontages.
- k. Mixed use buildings provide for a mix of uses that activate the precinct at different times of the day and week to create a vibrant environment and may incorporate large-medium scale office activities and some retail and commercial activities (not part of a neighbourhood hub or a corner store) where:
  - i. forming part of a mixed use building with residential uses;
  - ii. within 800m walking distance of high frequency public transport (e.g. train station);
  - iii. the office component is of a large-medium scale providing an employment rate of at least 57 jobs per 1000m<sup>2</sup>;
  - retail uses are located at the ground level to service convenience needs only, they are of a small scale to complement rather than compete with centres and consist of food and drink outlet, a small convenience store, personal services, speciality stores and do not include a full-line supermarket, department store (including a discount department store) or showroom<sup>(78)</sup>;
  - v. development for uses that support high dependency on cars is not accommodated;
  - vi. development protects residential amenity commensurate with its location;
  - vii. they are appropriately designed and located to include an active frontage.
- I. New retail and commercial uses (other than a stand-alone large-medium scale office, corner store or mixed use building) only establish within this precinct if:
  - i. within an existing or future neighbourhood hub identified in the planning scheme (e.g. Overlay map Neighbourhood hubs and community activities); or
  - ii. the urban neighbourhood precinct does not adjoin a higher order or district centre (e.g. Clontarf, Woody Point, Scarborough); or
  - iii. on land adjoining or opposite a train station.
- m. Retail and commercial activities (excluding Service stations, and not for a stand-alone large-medium scale office, corner store or mixed use building):

- i. cluster with other non-residential uses forming a neighbourhood hub;
- ii. are centred around a 'Main Street' central core, that is adjoining or adjacent to a train station (platform entrance/exit) fostering opportunities for social and economic exchange;
- iii. are of a small scale, appropriate for a neighbourhood hub;

Note - Retail and commercial uses that will result in a new or existing neighbourhood hub expanding to a scale and function consistent with a Local centre are to be assessed as if establishing a new Local centre. Refer to the Centre zone code for relevant assessment benchmark.

- iv. do not negatively impact adjoining residents or the streetscape;
- v. are subordinate in function and scale to all centres within the region.
- n. Large-medium scale offices may establish as stand-alone uses providing local employment opportunities where within easy walking distance of high frequency public transport.
- o. Service stations:
  - i. establish where they will not disrupt, fragment or negatively impact active frontages (e.g. within a neighbourhood hub);
  - ii. establish on heavily trafficked roads where the amenity of surrounding residential uses is already subject to impacts by road vehicle noise;
  - iii. establish in locations that will not have a negative impact on the street environments intended to include active frontages (e.g. Neighbourhood hubs or centres);
  - iv. do not negatively impact adjoining residents or the streetscape;
  - v. ancillary uses or activities only service the convenience needs of users.
- p. The design, siting and construction of non-residential uses:
  - i. maintains a human scale, through appropriate building heights and form;
  - ii. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces (excluding Service stations);
  - iii. provides for active and passive surveillance of road frontages, movement corridors and public spaces;
  - iv. promotes active transport options and ensures an oversupply of car parking is not provided;
  - v. locates car parking so as not to dominate the street;
  - vi. does not result in large internalised shopping centres<sup>(76)</sup> (e.g. large blank external walls with tenancies only accessible from within the building) surrounded by expansive areas of surface car parking.
- q. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity (underground wherever possible), water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;

- C. maintain or improve the structure and condition of drainage lines and riparian areas;
- D. avoid off-site adverse impacts from stormwater.
- iii. the development does not result in unacceptable impacts on the capacity and safety of the external road network;
- iv. the development ensures the safety, efficiency and useability of access ways and parking areas;
- v. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- r. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- s. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- t. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- u. Development in a Water supply buffer is undertaken in a manner which contributes to the maintenance and enhancement where possible of water quality to protect the drinking water and aquatic ecosystem environmental values in those catchments.
- v. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
  - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
  - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
  - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
  - iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
    - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
    - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
    - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
  - v. protecting native species and protecting and enhancing species habitat;
  - vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
  - vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
  - viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
  - ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
  - x. ensuring effective and efficient disaster management response and recovery capabilities;
  - xi. where located in an overland flow path:
    - A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
    - B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;

- C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
- D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- w. Development in the Urban neighbourhood precinct includes one or more of the following:

•	Bar <sup>(7)</sup>	•	Home based business <sup>(35)</sup>	•	Tourist park <sup>(84)</sup>
•	Child care centre <sup>(13)</sup>	•	Hotel <sup>(37)</sup>	•	Where in a Neighbourhood
•	Club <sup>(14)</sup>	•	Multiple dwelling <sup>(49)</sup>		hub or part of a mixed use building:
•	Community care centre <sup>(15)</sup>	•	Office <sup>(53)</sup>		- Food and drink outlet <sup>(28)</sup> - Hardware and trade
•	Community residence <sup>(16)</sup>	•	Place of worship <sup>(60)</sup>		supplies <sup>(32)</sup> - Health care service <sup>(33)</sup>
•	Community use <sup>(17)</sup>	•	Residential care facility <sup>(65)</sup>		- Indoor sport and recreation <sup>(38)</sup> - for a
•	Dwelling unit <sup>(23)</sup>	•	Retirement facility <sup>(67)</sup>		gymnasium - Office <sup>(53)</sup>
•	Educational establishment <sup>(24)</sup>	•	Rooming accommodation <sup>(69)</sup>		- Service industry <sup>(73)</sup> - Shop <sup>(75)</sup> - Shopping centre <sup>(76)</sup>
•	Emergency services <sup>(25)</sup>	•	Shop <sup>(75)</sup> - if for a corner		- Veterinary services <sup>(87)</sup>
•	Health care services <sup>(33)</sup>		store or part of a mixed use building		
		•	Short-term accommodation <sup>(77)</sup>		

x. Development in the Urban neighbourhood precinct does not include any of the following:

•	Adult store <sup>(1)</sup>	•	Intensive animal industry <sup>(39)</sup>	•	Port services <sup>(61)</sup>
•	Agricultural supplies store <sup>(2)</sup>	•	Intensive horticulture <sup>(40)</sup>	•	Renewable energy facility <sup>(63)</sup>
•	Air services <sup>(3)</sup>	•	Low impact industry <sup>(42)</sup>		
•	Animal husbandry <sup>(4)</sup>	•	Marine industry <sup>(45)</sup>	•	Research and technology industry <sup>(64)</sup>
•	Animal keeping <sup>(5)</sup>	•	Medium impact industry <sup>(47)</sup>	•	Rural industry <sup>(70)</sup>
•	Aquaculture <sup>(6)</sup>	•	Motor sport facility <sup>(48)</sup>	•	Special industry <sup>(79)</sup>
•	Cemetery <sup>(12)</sup>	•	Nature-based tourism <sup>(50)</sup>	•	Tourist attraction <sup>(83)</sup>
•	Crematorium <sup>(18)</sup>	•	Nightclub entertainment facility <sup>(51)</sup>	•	Transport depot <sup>(85)</sup>
•	Cropping <sup>(19)</sup>		2	•	Warehouse <sup>(88)</sup>
		•	Non-resident workforce accommodation <sup>(52)</sup>		

•	Detention facility <sup>(20)</sup>	•	Office <sup>(53)</sup>	•	Wholesale nursery <sup>(89)</sup>
•	Dual Occupancy <sup>(21)</sup> - other than part of a mixed use building	•	Permanent plantation <sup>(59)</sup>	•	Winery <sup>(90)</sup>
•	Extractive industry <sup>(27)</sup>				
•	High impact industry <sup>(34)</sup>				

y. Development not listed in the tables above may be considered on its merits and where it reflects and supports the outcomes of the zone.

#### 6.2.6.4.2 Accepted development subject to requirements

If development is to be categorised as accepted development subject to requirements it must comply with the requirements for accepted development set out in Part G, Table 6.2.6.4.1. Where the development does not meet a requirement for accepted development (RAD) within Part G Table 6.2.6.4.1, the category of development changes to assessable development under the rules outlined in section 5.3.3. (1), and assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a RAD is not met, and is therefore limited to the subject matter of the RADs that are not complied with. To remove any doubt, for those RADs that are complied with, there is no need for assessment against the corresponding PO.

Requirements for accepted development (RAD)	Corresponding PO
RAD1	PO4
RAD2	PO5
RAD3	PO6
RAD4	PO6
RAD5	PO9
RAD6	PO13
RAD7	PO16
RAD8	PO17
RAD9	PO26
RAD10	PO19
RAD11	PO20
RAD12	PO20
RAD13	PO20
RAD14	PO30
RAD15	PO32
RAD16	PO29
RAD17	PO29
RAD18	PO33
RAD19	PO36

RAD20PO37RAD21PO38RAD22PO37RAD23PO44RAD24PO39RAD25PO42RAD26PO42RAD27PO42RAD28PO45-PO49, PO51RAD30PO45RAD31PO45RAD32PO45RAD33PO45RAD34PO45RAD35PO45RAD36PO45RAD36PO45RAD37PO45RAD38PO45RAD39PO45RAD39PO45RAD34PO52RAD40PO52RAD41PO52RAD42PO55RAD43PO55RAD43PO55RAD44PO55RAD45PO55RAD47PO55RAD49PO55RAD49PO55RAD49PO55RAD50PO55RAD51PO55RAD51PO55RAD51PO55RAD52PO55	Requirements for accepted development (RAD)	Corresponding PO
RAD22         PO37           RAD23         PO44           RAD23         PO39           RAD24         PO39           RAD25         PO42           RAD26         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO45-PO49, PO51           RAD30         PO45-PO49, PO51           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO45           RAD39         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO47           RAD39         PO47           RAD30         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47	RAD20	PO37
RAD23PO44RAD24PO39RAD25PO39RAD26PO42RAD27PO42RAD28PO43RAD29PO45-PO49, PO51RAD30PO45RAD31PO45RAD32PO45RAD33PO45RAD34PO50RAD35PO47RAD37PO47RAD38PO47RAD39PO52RAD34PO52RAD35PO52RAD40PO52RAD41PO53RAD43PO55RAD44PO55RAD45PO55RAD46PO55RAD47PO55RAD49PO55RAD49PO55RAD49PO55RAD49PO55RAD49PO55RAD49PO55RAD49PO55RAD49PO55RAD49PO55RAD50PO55RAD	RAD21	PO38
AD24         PO39           RAD24         PO39           RAD25         PO42           RAD27         PO42           RAD28         PO42           RAD29         PO43           RAD30         PO48           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO45           RAD39         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45           RAD37         PO47           RAD38         PO47           RAD40         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55 <tr td=""> <tr td="">          RAD49&lt;</tr></tr>	RAD22	PO37
RAD25         PO39           RAD25         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45-PO49, PO51           RAD30         PO45           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO45           RAD39         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO47           RAD39         PO47           RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50	RAD23	PO44
RAD26         PO42           RAD27         PO42           RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45-PO49, PO51           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO45           RAD39         PO45           RAD30         PO45           RAD31         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO47           RAD36         PO47           RAD37         PO47           RAD38         PO47           RAD40         PO52           RAD41         PO52           RAD41         PO52           RAD43         PO54           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49	RAD24	PO39
AD27         P042           RAD27         P043           RAD28         P045-P049, P051           RAD29         P045-P049, P051           RAD30         P045           RAD31         P045           RAD32         P045           RAD33         P045           RAD34         P045           RAD35         P045           RAD34         P045           RAD35         P045           RAD36         P045           RAD37         P045           RAD36         P045           RAD37         P047           RAD38         P047           RAD39         P052           RAD40         P052           RAD41         P052           RAD42         P053           RAD43         P055           RAD44         P055           RAD45         P055           RAD46         P055           RAD47         P055           RAD48         P055           RAD49         P055           RAD49         P055           RAD50         P055	RAD25	PO39
RAD28         PO43           RAD29         PO45-PO49, PO51           RAD30         PO45-PO49, PO51           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO45           RAD35         PO45           RAD36         PO45           RAD37         PO45           RAD36         PO45           RAD37         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO47           RAD39         PO47           RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55	RAD26	PO42
RAD29         P045-P049, P051           RAD30         P048           RAD31         P045           RAD32         P045           RAD33         P045           RAD33         P045           RAD34         P045           RAD35         P045           RAD36         P045           RAD37         P045           RAD38         P047           RAD39         P047           RAD39         P052           RAD40         P052           RAD41         P052           RAD42         P053           RAD43         P054           RAD44         P055           RAD45         P055           RAD46         P055           RAD47         P055           RAD48         P055           RAD49         P055           RAD49         P055           RAD49         P055           RAD49         P055           RAD49         P055           RAD49         P055           RAD50         P055	RAD27	PO42
RAD30         PO48           RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45           RAD37         PO45           RAD36         PO47           RAD37         PO47           RAD38         PO47           RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD28	PO43
RAD31         PO45           RAD32         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45           RAD37         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO47           RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD43         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD29	PO45-PO49, PO51
RAD32         PO45           RAD33         PO45           RAD34         PO50           RAD35         PO45           RAD36         PO45           RAD37         PO45           RAD38         PO47           RAD38         PO47           RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD45         PO55           RAD45         PO55           RAD45         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55	RAD30	PO48
RAD33         P045           RAD34         P050           RAD35         P045           RAD36         P045           RAD37         P047           RAD38         P047           RAD39         P052           RAD40         P052           RAD41         P052           RAD42         P053           RAD43         P054           RAD43         P052           RAD41         P052           RAD43         P054           RAD43         P055           RAD44         P055           RAD45         P055           RAD46         P055           RAD47         P055           RAD48         P055           RAD49         P055           RAD49         P055           RAD49         P055           RAD50         P055           RAD51         P055	RAD31	PO45
RAD34         PO50           RAD35         PO45           RAD36         PO45           RAD37         PO47           RAD38         PO47           RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55           RAD50         PO55	RAD32	PO45
RAD35         PO45           RAD36         PO45           RAD37         PO47           RAD38         PO47           RAD39         PO52           RAD40         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55	RAD33	PO45
RAD36         PO45           RAD37         PO47           RAD38         PO47           RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55	RAD34	PO50
RAD37         PO47           RAD38         PO47           RAD38         PO47           RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD43         PO55           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55	RAD35	PO45
RAD38         P047           RAD39         P052           RAD40         P052           RAD41         P052           RAD42         P053           RAD43         P054           RAD44         P055           RAD45         P055           RAD46         P055           RAD47         P055           RAD48         P055           RAD49         P055           RAD49         P055           RAD50         P055	RAD36	PO45
RAD39         PO52           RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD37	PO47
RAD40         PO52           RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD49         PO55           RAD50         PO55           RAD50         PO55	RAD38	PO47
RAD41         PO52           RAD42         PO53           RAD43         PO54           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD39	PO52
RAD42         PO53           RAD43         PO54           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD40	PO52
RAD43         PO54           RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD41	PO52
RAD44         PO55           RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD42	PO53
RAD45         PO55           RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD43	PO54
RAD46         PO55           RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD44	PO55
RAD47         PO55           RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD45	PO55
RAD48         PO55           RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD46	PO55
RAD49         PO55           RAD50         PO55           RAD51         PO55	RAD47	PO55
RAD50 PO55 RAD51 PO55	RAD48	PO55
RAD51 PO55	RAD49	P055
	RAD50	P055
RAD52 PO55	RAD51	P055
	RAD52	P055
RAD53 PO59	RAD53	PO59

Requirements for accepted development (RAD)	Corresponding PO
RAD54	PO59
RAD55	PO59
RAD56	PO59
RAD57	PO59
RAD58	PO59
RAD59	PO59
RAD60	PO61
RAD61	PO62
RAD62	PO63
RAD63	PO63
RAD64	PO63
RAD65	PO63
RAD66	PO65
RAD67	P073
RAD68	P077
RAD69	P077
RAD70	PO80
RAD71	PO81
RAD72	PO83
RAD73	PO84
RAD74	P073
RAD75	PO85
RAD76	PO86-PO97
RAD77	PO86-PO97
RAD78	PO98
RAD79	PO99
RAD80	PO99
RAD81	PO100
RAD82	PO100
RAD83	PO103
RAD84	PO103
RAD85	PO103
RAD86	PO104
RAD87	PO104

Requirements for accepted development (RAD)	Corresponding PO
RAD88	PO107
RAD89	PO105
RAD90	PO105
RAD91	PO105
RAD92	PO104
RAD93	PO106
RAD94	PO106
RAD95	PO108, PO109
RAD96	PO112
RAD97	PO111-PO113, PO115-PO117
RAD98	PO111-PO113
RAD99	PO114
RAD100	PO118
RAD101	PO119
RAD102	PO120

### Part G-Requirements for accepted development - Urban neighbourhood precinct

### Table 6.2.6.4.1 Requirements for accepted development - Urban neighbourhood precinct

Requirements for accepted development			
	General requirements		
Building	height (Residential uses)		
RAD1	<ul> <li>Building height:</li> <li>a. is within the minimum and maximum mapped on Overlay map – Building heights; or</li> <li>b. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>		
Building	height (Non-residential uses)		
RAD2	Building height does not exceed the maximum height identified on Overlay map - Building heights.		
Setbacks	Setbacks (Residential uses)		
RAD3	Setbacks (excluding eaves, sun shading devices, built to boundary walls) comply with Table 6.2.6.4.3 'Setbacks' - Setback (Residential uses). Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).		
RAD4	Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are:a. only established on lots having a primary frontage of 18m or less and where permitted in Table 6.2.6.4.4;		

Requirer	nents for accepted develop	ment			
	b. of a length and height not exceeding that specified in Table 6.2.6.4.4 'Built to boundary walls (Residential uses)';				
	c. setback from the side boundary:				
	i. if a plan of deve not more than 2		s for only one	built to boundary wa	all on the one boundary,
	ii. if a built to boundary wall may be built on each side of the same boundary, not more than 20mm;				
	d. on the low side of a s	oping lot.			
	Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls a 'easement for maintenance purposes' is recommended.				nt lots a 'High Density
Site cove	er (Residential uses)				
RAD5	Site cover (excluding pation percentages in the table be		other unenclos	sed structures) does	not exceed the specified
	Building height		Lot Size		
		800- 1000m <sup>2</sup>	1001- 2500m <sup>2</sup>	Greater than 2501m <sup>2</sup>	
	8.5m or less	60%	60%	60%	
	>8.5m to 12.0m	50%	50%	50%	
	>12.0m to 21m	50%	40%	40%	
	>21m to 27m	N/A	35%	35%	
	Greater than 27m	N/A	25%	25%	
	Note - Refer to Planning scheme policy - Residential design for details and examples.				
Lighting					
RAD6	Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting. Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.				
Clearing	of habitat trees where not I	ocated in the E	nvironmental	areas overlay map	
RAD7	Development does not result in the damaging, destroyed or clearing of a habitat tree. This does not apply to:				
	a. Clearing of a habitat tree located within an approved development footprint;				

Requirements for accepted development				
b.	Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;			
c.	Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;			
d.	Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;			
e.	Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;			
f.	Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;			
g.	Clearing of a habitat tree associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;			
h.	Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.			
a li	ditor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognised s a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridors. information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of rees on Development Sites - Appendix A.			
	Works requirements			

Utilities	
RAD8	Development is provided with an appropriate level of service and infrastructure in accordance with Planning scheme policy - Integrated design (Appendix A).

Access	
RAD9	The frontage road is fully constructed to Council's standards.
	Note - Roads are considered to be constructed in accordance with Council standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. Testing of the existing pavement may be required to confirm whether the existing works meet the standards in Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
	Note - Frontage roads include streets where no direct lot access is provided.
RAD10	Any new or changes to existing direct vehicle access for residential development does not occur from arterial or sub-arterial roads.
RAD11	Any new or changes to existing crossovers and driveways are designed, located and constructed in accordance with:
	a. where for a Council-controlled road and associated with a Dwelling house:

		i.	Planning scheme policy - Integrated design;
	b.	whe	ere for a Council-controlled road and not associated with a Dwelling house:
		i.	AS/NZS2890.1 Parking facilities Part 1: Off street car parking;
		ii.	AS/NZS 2890.2 - Parking facilities Part 2: Off-street commercial vehicle facilities;
		iii.	Planning scheme policy - Integrated design;
		iv.	Schedule 8 - Service vehicle requirements;
	C.	and	ere for a State-Controlled road, the Safe Intersection Sight Distance requirements in Austroads the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, tion 62 approval.
RAD12	acco	ordan	or changes to existing internal driveways and access ways are designed and constructed in ce with AS/NZS 2890.1 Parking Facilities Part 1: Off street car parking and the relevant s in Planning scheme policy - Integrated design.
RAD13	liste	d in S	riveways, manoeuvring areas and loading facilities are sealed and provide for service vehicles Schedule 8 - Service vehicle requirements for the relevant use. The on-site manoeuvring is to ordance with Schedule 8 - Service vehicle requirements.
1	1		


Stormwa	Stormwater		
RAD14	Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing actionable nuisance to any person, property or premises in accordance with Planning scheme policy – Integrated design.		
	Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.		
RAD15	Development incorporates a 'deemed to comply solution' to manage stormwater quality where the development: a. is for an urban purpose that involves a land area of 2500m <sup>2</sup> or greater; and b. will result in: i. 6 or more dwellings; or		
	<ul> <li>ii. an impervious area greater than 25% of the net developable area.</li> <li>Note - The deemed to comply solution is to be designed, constructed, established and maintained in accordance with the requirements of Water by Design 'Deemed to Comply Solutions - Stormwater Quality Management for South East Queensland'</li> </ul>		
RAD16	and Planning scheme policy - Integrated design.         Development ensures that surface flows entering the premises from adjacent properties are not blocked, diverted or concentrated.		

	Note - A report from a suitably qualified Registered Professional Engineer Queensland may be required certifying that development does not increase the potential for significant adverse impacts on an upstream, downstream or surroundi premises.					
RAD17	Development ensures that works (e.g. fences and walls) do not block, divert or concentrate the flow of stormwater to adjoining properties.					
		bly qualified Registered Professional Engineer Queensland may be required certifying that the ease the potential for significant adverse impacts on an upstream, downstream or surrounding				
RAD18	Stormwater drainage infrastructure (excluding detention and bio-retention systems) through or within private land is protected by easements in favour of Council (at no cost to Council). Minimum easement widths are as follows:					
	Pipe Diameter	Minimum Easement Width (excluding access requirements)				
	Stormwater Pipe up to 825mm diameter	3.0m				
	Stormwater Pipe up to 825mm diameter with Sewer pipe up to 225m diameter	4.0m				
	Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the pipe and clear of all pits.				
	Note - Additional easement width may be required in certain circumstances in order to facilitate maintenance access to the stormwater system.					
	Note - Refer to Planning scheme policy - Integrated design (A	ppendix C) for easement requirements over open channels.				

Site work	Site works and construction management		
RAD19	The site and any existing structures are to be maintained in a tidy and safe condition.		
RAD20	Development does not cause erosion or allow sediment to leave the site. Note - The International Erosion Control Association (Australasia) Best Practice Erosion and Sediment Control provides guidance on strategies and techniques for managing erosion and sedimentation.		
RAD21	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.		
RAD22	Existing street trees are protected and not damaged during works. Note - Where development occurs in the tree protection zone, measures and techniques as detailed in Australian Standard AS 4970 Protection of trees on developments sites are adopted and implemented.		

\_\_\_\_\_

RAD23	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
RAD24	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
RAD25	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
RAD26	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works
RAD27	Disposal of materials is managed in one or more of the following ways:
	a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
	b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.
	Note - No burning of cleared vegetation is permitted.
	Note - The chipped vegetation must be stored in an approved location.
RAD28	All development works are carried out within the following times:
	a. Monday to Saturday (other than public holidays) between 6:30am and 6:30pm on the same day;
	b. no work is to be carried out on Sundays or public holidays.

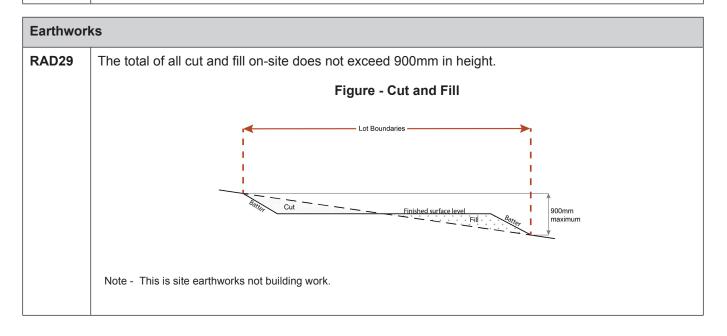

RAD30	Cut and fill batters, (other than batters to dams and water impoundments), have a finished slope no steeper than the following:
	a. any cut batter is no steeper than 1V in 4H;
	b. any fill batter, (other than a compacted fill batter), is no steeper than 1V in 4H;
	c. any compacted fill batter is no steeper than 1V in 4H.
RAD31	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.
RAD32	Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep slopes and batters.
	Note - Inspection and certification of steep slopes and batters may be required by a suitably qualified and experienced RPEQ.
RAD33	All fill and excavation is contained on-site and is free draining.
RAD34	Earthworks undertaken on the development site are shaped in a manner which does not:
	a. prevent stormwater surface flow which, prior to commencement of the earthworks, passed onto
	the development site, from entering the land; or
	b. redirect stormwater surface flow away from existing flow paths; or divert stormwater surface flow ante adjacent land (athor than a read) in a manner which:
	c. divert stormwater surface flow onto adjacent land (other than a road) in a manner which:
	i. concentrates the flow; or
	ii. increases the flow rates of stormwater over the affected section of the adjacent land above the situation which existed prior to the diversion; or
	iii. causes actionable nuisance to any person, property or premises.
RAD35	All fill placed on-site is:
	a. limited to that necessary for the approved use;
	b. clean and uncontaminated (i.e. no building waste, concrete, green waste, actual acid sulfate soils, potential acid sulfate soils or contaminated material etc.).
RAD36	The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures
RAD37	No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity.
	Note - Public sector entity is defined in Schedule 2 of the Act.
RAD38	Filling or excavation that would result in any of the following is not carried out on site:
	a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;

b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken: prevent reasonable access to Council or public sector entity maintained infrastructure or any C. drainage feature on, or adjacent to the site for monitoring, maintenance or replacement purposes. Note - Public sector entity is defined in Schedule 2 of the Act. Note - All building work covered by QDC MP1.4 is excluded from this provision.

#### **Fire services**

Note - The provisions under this heading only apply if:

a. the development is for, or incorporates:

- reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
- ii.
- iii.
- material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. iv.

#### AND

b. none of the following exceptions apply:

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
- ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.


RAD39		nal fire hydrant facilities are provided on site to the standard prescribed under the relevant parts stralian Standard AS 2419.1 (2005) – Fire Hydrant Installations.
	Note	- For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005):
	a.	in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks <sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
	b.	in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
	C.	in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
		i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;

	ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
	<ul> <li>iii for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities; and</li> </ul>
	d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.
RAD40	A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:
	a. an unobstructed width of no less than 3.5m;
	b. an unobstructed height of no less than 4.8m;
	c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
	d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.
RAD41	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>
RAD42	For development that contains on-site fire hydrants external to buildings:
	<ul><li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li><li>b. a sign identifying the following is provided at the vehicular entry point to the site:</li></ul>
	<ul> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> </ul>
	v. external hydrants and hydrant booster points;
	vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
	Note - The sign prescribed above, and the graphics used are to be:
	a. in a form;
	b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.
RAD43	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.


	Use specific requirements
Home bas	sed business <sup>(35)</sup>
RAD44	Home based business(s) <sup>(35)</sup> are fully enclosed within the existing dwelling or on-site structure.
RAD45	A maximum of 1 employee (not a resident) OR 2 customers OR customers from within 1 Small rigid vehicle (SRV) or smaller are permitted on the site at any one time.
RAD46	Service and delivery vehicles do not exceed one Small rigid vehicle (SRV) at any one time.
RAD47	Vehicle parking for the Home based business <sup>(35)</sup> on-site is limited to 1 car or Small rigid vehicle (SRV).
RAD48	Home based business(s) <sup>(35)</sup> occupy an area of the existing dwelling or on-site structure not greater than 40m <sup>2</sup> gross floor area.
RAD49	Home based business(s) <sup>(35)</sup> do not involve manufacturing.
	Note - Food businesses that are licensable by local government and only involve the manufacturing of non-potentially hazardous food are permitted. Definitions in the Food Act 2006 apply to this note.
RAD50	The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.
RAD51	The hours of operation do not exceed 8:00am to 6:00pm, Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday and Anzac Day.
	Note - Office or administrative activities that do not generate non-residents visiting the site, such as book-keeping and computer work, may operate outside the hours of operation.
RAD52	For a bed and breakfast, the use:
	a. is fully contained within the existing dwelling on-site;
	b. occupies a maximum of 2 bedrooms;
	c. includes the provision of a minimum of one (1) meal per day.
	Note - For a Bed and Breakfast SO29 - SO36 above do not apply.
Sales offi	ce <sup>(72)</sup>
RAD53	Car parking spaces are provided in accordance with Table 6.2.6.4.5 'Car parking spaces'.
RAD54	Car parking and manoeuvring areas are designed and constructed in accordance with the Australian Standards AS2890.1.
RAD55	Sales office <sup>(72)</sup> has direct vehicular access to a dedicated road constructed in accordance with Planning scheme policy - Integrated design.
RAD56	Fencing adjoining a street (other than a laneway) or public open space does not exceed 1.2 metres in height.
RAD57	30% of the front façade of the building (excluding the garage and front door) is made up of windows/glazing.

RAD58	The Sales office <sup>(72)</sup> has a clearly identifiable pedestrian entry that is visible and accessible from the primary frontage.
RAD59	The use of the premises for a Sales office <sup>(72)</sup> is for a maximum of 2 years after the commencement of the use.
Telecom	munications facility <sup>(81)</sup>
that will no	ote - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner ot cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
RAD60	A minimum area of 45m <sup>2</sup> is available to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
RAD61	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
RAD62	Equipment shelters and associated structures are located:
	<ul> <li>a. directly beside the existing equipment shelter and associated structures;</li> <li>b. behind the main building line;</li> <li>c. further away from the frontage than the existing equipment shelter and associated structures;</li> <li>d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.</li> </ul>
RAD63	Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.
RAD64	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
RAD65	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with Planning scheme policy - Integrated design.
RAD66	All equipment comprising the telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.
Retail, co	ommercial and community uses
RAD67	Where involving an extension (building work) in the front setback a minimum of 50% of the front facade of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied to a glazed facade located at ground floor is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.

	Figure - Glazing	
	2m m Minimum of 30% glazing Frontage modulated through the use of pillars or fine grain benotes at teast every 10m	
RAD68	Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction is required for the provision of cycle parking.	
RAD69	Where additional car parking spaces are provided they are not located between the frontage and the main building line.	
RAD70	Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.	
RAD71	Where involving an extension (building work) does not result in a reduction in the amount or standard of established landscaping on-site.	
RAD72	Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of <i>Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting</i> . Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	
RAD73	Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.	
RAD74	Development does not involve a drive-through facility.	
	Values and constraints requirements	
Note - The relevant values and constraints requirements do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.		
Acid sulf	ate soils - (refer Overlay map - Acid sulfate soils to determine if the following requirements apply)	
	ning scheme policy - Acid sulfate soils provides guidance for requirements for accepted development that has the potential to d sulfate soils i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.	
RAD75	Development does not involve:	



## b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m AHD.

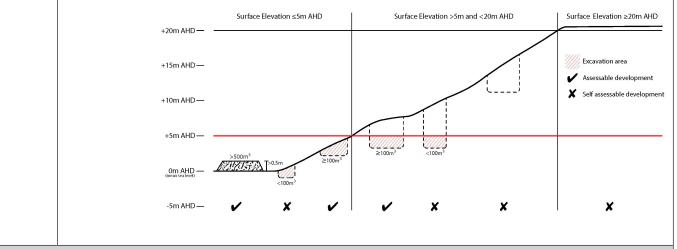

# Environmental areas (refer Overlay map - Environmental areas to determine if the following requirements apply)

Note - The following are excluded from the native clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this requirement primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.


Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.

RAD76	Where no suitable land cleared of native vegetation exists, clearing of native vegetation in a High Value Area or Value Area is for the purpose of a new dwelling house <sup>(22)</sup> or extension to an existing dwelling house <sup>(22)</sup> only on lots less than 750m <sup>2</sup> .
	Editor's note - See in heading above for other uses excluded from native vegetation clearing requirements.
	Editor's note - Where vegetation clearance is accepted development subject to requirements, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:
	<ul><li>i. co-locating all associated activities, infrastructure and access strips;</li><li>ii. be the least valued area of koala habitat on the site;</li></ul>
	iii. minimise the footprint of the development envelope area;
	<ul> <li>iv. minimise edge effects to areas external to the development envelope;</li> <li>v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design</li> </ul>
	Guideline and Planning scheme policy – Environmental areas;
	vi. sufficient area between the development and koala habitat trees to achieve their long-term viability.
	Editor's note - Where vegetation clearing is accepted development subject to requirements, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.
RAD77	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.
	This does not apply to the following:
	a. Clearing of native vegetation located within an approved development footprint;
	b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary
	for emergency access or immediately required in response to an accident or emergency;
	c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
	d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed
	2m in width either side of the fence;
	e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
	f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
	g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
	h. Grazing of native pasture by stock;
	i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.
	e resources transport routes (refer Overlay map - Extractive resources (transport route and buffer) nine if the following requirements apply)
RAD78	The following uses are not located within the 100m wide transport route buffer:
	a. Caretaker's accommodation <sup>(10)</sup> , except where located in the Extractive industry zone;
	<ul> <li>b. Community residence<sup>(16)</sup>;</li> </ul>
	c. Dual occupancy <sup>(21)</sup> ;
	d. Dwelling house; <sup>(22)</sup>
	e. Dwelling unit <sup>(23)</sup> ;
	f. Hospital <sup>(36)</sup> ;
	g. Rooming accommodation <sup>(69)</sup> ;
	h. Multiple dwelling <sup>(49)</sup> ;

	<ul> <li>i. Non-resident workforce accommodation<sup>(52)</sup>;</li> <li>j. Relocatable home park<sup>(62)</sup>;</li> <li>k. Residential care facility<sup>(65)</sup>;</li> <li>l. Resort complex<sup>(66)</sup>;</li> <li>m. Retirement facility<sup>(67)</sup>;</li> <li>n. Rural workers' accommodation<sup>(71)</sup>;</li> <li>o. Short-term accommodation<sup>(77)</sup>;</li> <li>p. Tourist park<sup>(84)</sup>.</li> </ul>
RAD79	Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive resources transport route.
RAD80	A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.
-	and landscape character (refer Overlay map - Heritage and landscape character to determine if <i>v</i> ing requirements apply)
landscape heritage sig	es, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural gnificance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning licy - Heritage and landscape character.
RAD81	Development is for the preservation, maintenance, repair and restoration of the site, object or building.
	This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.
	Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions
RAD82	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.
	This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.
RAD83	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.
RAD84	The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character:
	<ul> <li>a. construction of any building;</li> <li>b. laying of overhead or underground services;</li> <li>c. any sealing, paving, soil compaction;</li> <li>d. any alteration of more than 75mm to the ground surface prior to work commencing.</li> </ul>
RAD85	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.
Infrastruc apply)	ture buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements

RAD86	Development within a Water supply buffer does not include the incineration or burial of waste and all other waste is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.
RAD87	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.
RAD88	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):
	a. buildings or structures;
	b. gates and fences;
	c. storage of equipment or materials;
	d. landscaping or earthworks or stormwater or other infrastructure.
RAD89	On-site sewerage facilities in a Water supply buffer produce a minimum secondary treated effluent (90th percentile) and effluent application to ensure water quality is maintained and protected.
RAD90	On-site sewerage facilities in a Water supply buffer for a dwelling house <sup>(22)</sup> include:
	<ul> <li>a. emergency storage capacity of 1,000 litres and adequate buffering for shock loading/down time;</li> <li>b. a reserve land application area of 100% of the effluent irrigation design area;</li> <li>c. land application areas that are vegetated;</li> </ul>
	d. the base of the land application field is at least 2 metres above the seasonal high water table/bedrock (whichever is the closest to the base of the application area);
	e. wastewater collection and storage systems must have capacity to accommodate full load at peak times.
RAD91	On-site sewerage facilities in a Water supply buffer for development other than a dwelling house include emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies/overload with provision for de-sludging.
RAD92	Development involving Permanent plantation <sup>(59)</sup> within a Water supply buffer maintains a minimum of 30% ground cover at all times.
RAD93	Development does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer.
RAD94	Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.
RAD95	All habitable rooms located within an Electricity supply substation buffer are:
	<ul> <li>a. located a minimum of 10m from an electricity supply substation<sup>(80)</sup>; and</li> <li>b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.</li> </ul>
Overland	flow path (refer Overlay map - Overland flow path to determine if the following requirements apply)
RAD96	Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.
RAD97	Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development

	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow
RAD98	Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.
RAD99	Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area.
RAD100	Development for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.
-	and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the requirements apply)
Note - W1, wetland se	W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and tbacks.
RAD101	No development is to occur within:
	a. 50m from top of bank for W1 waterway and drainage line
	b. 30m from top of bank for W2 waterway and drainage line
	c. 20m from top of bank for W3 waterway and drainage line
	d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.
	Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.
	Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations.
	Note - The minimum setback distance applies to the each side of waterway.
	nenity - Regionally significant (Hills) and Locally important (Coast) - (refer Overlay map - Scenic o determine if the following requirements apply)
RAD102	Where located in the Locally important (Coast) scenic amenity overlay;
	<ul> <li>a. landscaping comprises indigenous coastal species;</li> <li>b. fences and walls facing the coast are no higher than 1m. Where fences and walls are higher than 1m, they have 50% transparency. This does not apply to a fence or wall at an angle of 90o to the coast;</li> </ul>
	<ul> <li>c. where over 12m in height, the building design includes the following architectural character elements:</li> <li>i. curving balcony edges and walls, strong vertical blades and wall planes;</li> </ul>

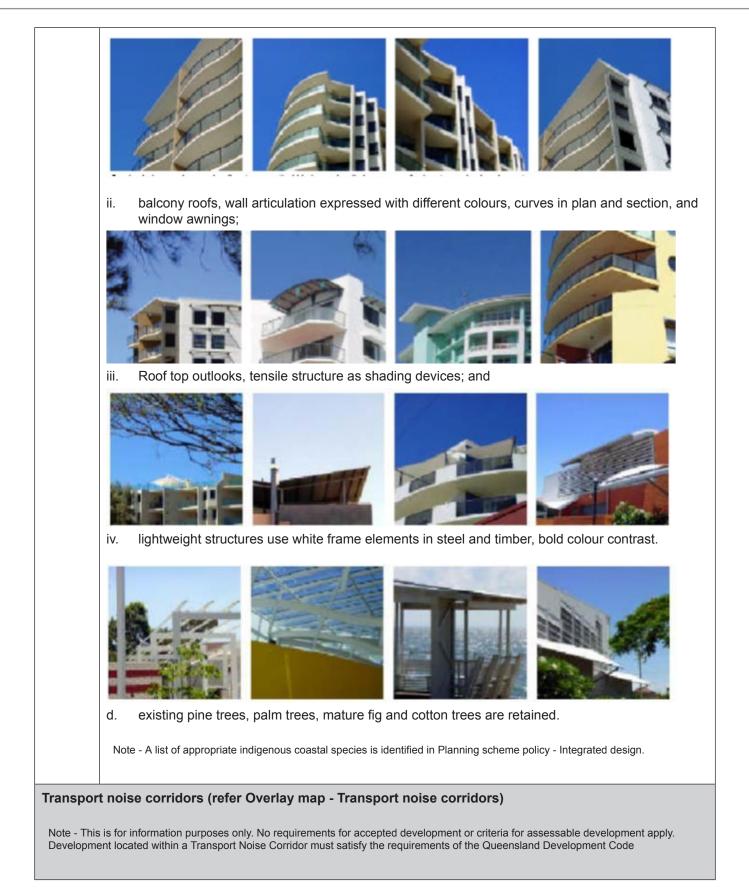

### Part H—Criteria for assessable development - Urban neighbourhood precinct

Where development is categorised as assessable development - code assessment in the Table of Assessment, and located in a precinct, the assessment benchmarks are the criteria set out in Part H, Table 6.2.6.4.2 as well as the purpose statement and overall outcomes of this code.

Where development is categorised as assessable development - impact assessable, the assessment benchmarks become the whole of the planning scheme.

Performance outcomes	Examples that achieve aspects of the Performance Outcomes		
General criteria			
Density			
PO1	E1		
The creation of dwellings in the Urban neighbourhood precinct results in a medium to high residential density	Residential uses, where creating dwellings, have a minimum site density of:		
of at least 45 dwellings per ha (site density).	a. 75 dwellings per ha for sites shown on:		
	i. 'Figure 6.2.6.4.1 - Kallangur' - Kallangur;		
	ii. 'Figure 6.2.6.4.2 - Mango Hill' - Mango Hill;		
	iii.     'Figure 6.2.6.4.3 - Mango Hill East' - Mango Hill East;		
	iv. 'Figure 6.2.6.4.4 - Murrumba Downs' - Murrumba Downs;		
	v. 'Figure 6.2.6.4.5 Kippa-Ring' - Kippa-Ring; or		
	vi. Overlay map - Building heights as having a building height maximum of 27m and a minimum of 8.5m;		
	b. 45 dwellings per hectare for all other areas.		
Efficient use of land			
PO2	No example provided		
Development maximises the efficient use of land through appropriate built form and land use intensity and does not constitute underdevelopment given the sites proximity to services and public transport or seaside amenity aspects.			
Residential uses			
PO3	No example provided.		
Dual Occupancies <sup>(21)</sup> and low density residential uses are not located in this precinct.			
Building height (Residential uses)			
PO4	E4		
Buildings and structures have a height that:	Building height:		

а.	is of a bulk and scale that is consistent with the medium to high rise character of the Urban neighbourhood precinct; Note - There are circumstances where the Urban neighbourhood precinct is intended to have a low rise character. These circumstances are identified as having a maximum building height less than 21m on Overlay map - Building heights. Alternatives are to be considered in relation to the intended low rise character for that specific area.	<ul> <li>a. is within the minimum and maximum mapped on Overlay map – Building heights; or</li> <li>b. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>
b.	responds to the topographic features of the site, including slope and orientation;	
C.	is not visually dominant or overbearing with respect to the streetscape, street conditions (e.g. street width) or adjoining properties;	
d.	positively contributes to the intended built form of the surrounding area;	
	Note - To demonstrate compliance with the above a visual impact assessment may be required in accordance with Planning scheme policy - Residential design. Visual impact assessments will require the consideration of all built form matters (e.g. height, setbacks, site cover, building bulk and mass, articulation, roof form and other design aspects) from a variety of perspectives to ascertain if the proposal will result in a positive contribution.	
e.	responds to the height of development on adjoining land where contained within another precinct or zone.	
	e - Refer to Planning scheme policy - Residential design for ills and examples.	
Buil	ding height (Non-residential uses)	
PO5		E5
affec posi	height of non-residential buildings does not adversely of amenity of the area or of adjoining properties and tively contributes to the intended built form of the bunding area.	Building height does not exceed the maximum height identified on Overlay map - Building heights except for architectural features associated with religious expression on Place of worship <sup>(60)</sup> and Educational establishment <sup>(24)</sup> buildings.
asse polic the cove desi	e - To demonstrate compliance with the above a visual impact essment may be required in accordance with Planning scheme cy - Residential design. Visual impact assessments will require consideration of all built form matters (e.g. height, setbacks, site er, building bulk and mass, articulation, roof form and other ign aspects) from a variety of perspectives to ascertain if the bosal will result in a positive contribution.	
Sett	oacks (Residential uses)	
PO6	i i i i i i i i i i i i i i i i i i i	E6.1
Resi	idential buildings and structures are setback to:	Setbacks (excluding built to boundary walls) comply with Table 6.2.6.4.3 'Setbacks' - Setback (Residential uses).

a.	be consistent with medium to high density Urban neighbourhood precinct character where buildings are positioned close to the footpath to create active frontages;	Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).
	result in development not being visually dominant or overbearing with respect to the streetscape and the adjoining sites; maintain private open space areas that are of a size and dimension to be usable and functional; maintain the privacy of adjoining properties; ensure parked vehicles do not restrict pedestrian and traffic movement and safety; limit the length, height and openings of boundary walls to maximise privacy and amenity on adjoining properties; ensure built to boundary walls do not create unusable or inaccessible spaces and do not negatively impact the streetscape character, amenity or functionality of adjoining properties; provide adequate separation to particular infrastructure and water bodies to minimise adverse impacts on people, property, water quality and infrastructure.	<ul> <li>E6.2</li> <li>Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are: <ul> <li>a. only established on lots having a primary frontage of 18m or less and where permitted in Table 6.2.6.4.4;</li> <li>b. of a length and height not exceeding that specified in Table 6.2.6.4.4 'Built to boundary walls (Residential uses)';</li> <li>c. setback from the side boundary: <ul> <li>i. if a plan of development provides for only one built to boundary wall on the one boundary, not more than 200mm; or</li> </ul> </li> <li>d. on the low side of a sloping lot.</li> </ul> Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls an ajacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls a 'easement for maintenance purposes' is recommended.</li></ul>
Soft	oacks (Non-residential uses)	
	· · · ·	/
	nt setbacks ensure non-residential buildings address actively interface with streets and public spaces.	<ul> <li>E7.1</li> <li>For the primary street frontage buildings are constructed:</li> <li>a. to the property boundary; or</li> <li>b. setback a maximum of 3m from the property boundary, where for the purpose of outdoor dining.</li> </ul>
		F7 0
		<b>E7.2</b> For the secondary frontage, setbacks are consistent with adjoining buildings.

Side and rear setbacks cater for driveway(s), services, utilities and buffers required to protect the amenity of adjoining sensitive land uses and the development will not be visually dominant or overbearing with respect to adjoining properties.							
Site cover (residential uses)							
PO9	E9						
Residential buildings and structures will ensure that site cover:	balconie	es and c	other un	enclose	n shading d structu jes in the	res) doe	
a. does not result in a site density that is inconsistent with the character of the area;	Building Lot Size						
b. does not result in an over development of the site;	height	300m²or less	301- 400m <sup>2</sup>	401- 500m <sup>2</sup>	501- 1000m <sup>2</sup>	1001- 2500m <sup>2</sup>	Greater than 2501m <sup>2</sup>
c. does not result in other elements of the site being compromised (e.g. Setbacks, open space etc);	8.5m or less	75%	70%	60%	60%	60%	60%
d. ensures that buildings and structures reflect the attached medium to high density urban character.	>8.5m to 12.0m	50%	50%	60%	50%	50%	50%
Note - Refer to Planning scheme policy - Residential design for details and examples.	>12.0m to 21m	N/A	N/A	50%	50%	40%	40%
	>21m to 27m	N/A	N/A	N/A	N/A	35%	35%
	Greater than 27m	N/A	N/A	N/A	N/A	25%	25%
		Refer to Pland examp	0	heme polio	cy - Reside	ential desi	gn for
Movement network	1						
PO10	E10.1						
Development is designed to connect to and form part of the surrounding neighbourhood by providing	Development provides and maintains the connections shown on the following movement figures:						
interconnected street, pedestrian and cyclist pathways to adjoining development, nearby centres, neighbourhood	a. Figure 6.2.6.4.6 - Dakabin						
hubs, community facilities, public transport nodes and open space.	b. Figure 6.2.6.4.7 - Kallangur						
Note - Refer to Planning scheme policy - Neighbourhood design for	c. Fig	gure 6.2	2.6.4.8 -	Mango	Hill		
guidance on achieving the above outcome.	d. Fig	gure 6.2	2.6.4.9 -	Mango	Hill East		
	e. Fig	gure 6.2	2.6.4.10	- Narang	gba - Ma	in Stree	t
	f. Fig	gure 6.2	2.6.4.11	- Petrie.			
	E10.2						

	For areas not shown on the above movement figures, no example provided. Note - Refer to Planning scheme policy - Neighbourhood design for guidance on achieving the performance outcome.
Water sensitive urban design	
PO11	No example provided.
Best practice Water Sensitive Urban Design (WSUD) is incorporated within development sites adjoining street frontages to mitigate impacts of stormwater run-off in accordance with Planning scheme policy - Integrated design.	
Setbacks to sensitive land uses	
P012	E12
Sensitive land uses within 250m of land in the Industry zone - General industry precinct must mitigate any potential exposure to industrial air, noise or odour emissions that impact on human health, amenity and wellbeing. Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy – Noise.	<ul> <li>Development is designed and operated to ensure that:</li> <li>a. it meets the criteria outlined in the Planning Scheme Policy - Noise; and</li> <li>b. the air quality objectives in the <i>Environmental</i> <i>Protection (Air) Policy 2008</i>, are met.</li> </ul>
Amenity	
PO13	No example provided.
The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.	
Noise	
PO14	No example provided.
Noise generating uses do not adversely affect existing or potential noise sensitive uses.	
Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line.	
Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.	
PO15	<b>E15.1</b> Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.

b. Note com prep Note	sitive land uses are provided with an appropriate ustic environment within designated external private oor living spaces and internal areas while: contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc); maintaining the amenity of the streetscape. e - A noise impact assessment may be required to demonstrate plance with this PO. Noise impact assessments are to be bared in accordance with Planning scheme policy - Noise. e - Refer to Planning Scheme Policy – Integrated design for alls and examples of noise attenuation structures.	<ul> <li>E15.2</li> <li>Noise attenuation structures (e.g. walls, barriers or fences): <ul> <li>a. are not visible from an adjoining road or public area unless:</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> </ul> </li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> </ul>
Clea	aring of habitat trees where not located within the	e Environmental areas overlay map
P01	6	No example provided.
	•	
a. b.	Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. Development does not result in the net loss of fauna	
	Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	
	Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. Development does not result in the net loss of fauna habitat. Where development does result in the loss of a habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required	
b. C.	Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. Development does not result in the net loss of fauna habitat. Where development does result in the loss of a habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed. Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in	

Utilities

P017	No example provided.
All services including water supply, sewage disposal, electricity, street lighting, telecommunications and gas (if available) are provided in accordance with Planning scheme policy - Integrated design (Appendix A).	

Access	
<b>PO18</b> Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.	No example provided.
PO19	E19.1
The layout of the development does not compromise: a. the development of the road network in the area; b. the function or safety of the road network; c. the capacity of the road network. Note - The road hierarchy is mapped on Overlay map - Road hierarchy.	<ul> <li>Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a motorway.</li> <li>Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway.</li> <li>Note - The road hierarchy is mapped on Overlay map - Road hierarchy.</li> <li>E19.2</li> <li>The development provides for the extension of the road network in the area in accordance with Council's road network planning.</li> <li>E19.3</li> <li>The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.</li> <li>E19.4</li> <li>The development layout allows forward vehicular access</li> </ul>
Dom	to and from the site.
PO20 Safe access is provided for all vehicles required to access the site.	<ul> <li>E20.1</li> <li>Site access and driveways are designed, located and constructed in accordance with:</li> <li>a. where for a Council-controlled road and associated with a Dwelling house: <ul> <li>i. Planning scheme policy - Integrated design;</li> </ul> </li> </ul>

	b. where for a Council-controlled road and not associated with a Dwelling house:
	i. AS/NZS2890.1 Parking facilities Part 1: Off street car parking;
	ii. AS 2890.2 - Parking facilities Part 2: Off-street commercial vehicle facilities;
	iii. Planning scheme policy - Integrated design;
	iv. Schedule 8 - Service vehicle requirements;
	c. where for a State-Controlled road, the Safe Intersection Sight Distance requirements in Austroads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
	E20.2
	Internal driveways, car parks and access ways are designed and constructed with a sealed pavement and in accordance with:
	a. AS/NZS 2890.1 Parking Facilities Part 1: Off street car parking;
	b. AS 2890.2 Parking Facilities Part 2: Off street commercial vehicle facilities;
	c. Planning scheme policy - Integrated design; and
	d. Schedule 8 - Service vehicle requirements.
	Note - This includes queue lengths (refer to Schedule 8 - Service vehicle requirements), pavement widths and construction.
	E20.3
	Access driveways, manoeuvring areas and loading facilities are sealed and provide for service vehicles listed in Schedule 8 - Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 - Service vehicle requirements.
	E20.4
	Landscaping (including shade trees) is provided within car parks in accordance with Planning scheme policy - Integrated design.
PO21	E21

Sealed and flood free road access during the minor storm event is available to the site from the nearest arterial or sub-arterial road.	Roads or streets giving access to the development from the nearest arterial or sub-arterial road are flood free during the minor storm event and are sealed.
Editor's note - Where associated with a State-controlled road, further requirements may apply, and approvals may be required from the Department of Transport and Main Roads.	Note - The road network is mapped on Overlay map - Road hierarchy.
PO22	E22.1
Roads which provide access to the site from an arterial or sub-arterial road remain trafficable during major storm events without flooding or impacting upon residential properties or other premises.	Access roads to the development have sufficient longitudinal and cross drainage to remain safely trafficable during major storm (1% AEP) events. Note - The road network is mapped on Overlay map - Road hierarchy. Note - Refer to QUDM for requirements regarding trafficability.
	E22.2 Culverts and causeways do not increase inundation levels or increase velocities, for all events up to the defined flood event, to upstream or downstream properties.

### Street design and layout **PO23** No example provided. Streets are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. The street design and construction accommodates the following functions: a. access to premises by providing convenient vehicular movement for residents between their homes and the major road network; b. safe and convenient pedestrian and cycle movement; adequate on street parking; C. d. stormwater drainage paths and treatment facilities; e. efficient public transport routes; f. utility services location; emergency access and waste collection; g. h. setting and approach (streetscape, landscaping and street furniture) for adjoining residences;

i.	expected traffic speeds and volumes; and	
j.	wildlife movement (where relevant).	
storm pede with t	<ul> <li>Preliminary road design (including all services, street lighting, nwater infrastructure, access locations, street trees and strian network) may be required to demonstrate compliance this PO.</li> <li>Refer to Planning scheme policy - Environmental areas and</li> </ul>	
	dors for examples of when and where wildlife movement structure is required.	
PO24	4	E24.1
is upo the d	existing road network (whether trunk or non-trunk) graded where necessary to cater for the impact from evelopment.	New intersections onto existing roads are designed to accommodate traffic volumes and traffic movements taken from a date 10 years from the date of completion of the last stage of the development. Detailed design is
Trans schei	- An applicant may be required to submit an Integrated sport Assessment (ITA), prepared in accordance with Planning me policy - Integrated transport assessment to demonstrate pliance with this PO, when any of the following occurs:	to be in accordance with Planning scheme policy - Integrated design. Note - All turns vehicular access to existing lots is to be retained at
•	Development is within 200m of a transport sensitive location such as a school, shopping centre, bus or train station or a large generator of pedestrian or vehicular traffic;	new road intersections wherever practicable. Note - Existing on-street parking is to be retained at new road
٠	Forecast traffic to/from the development exceeds 5% of the two way flow on the adjoining road or intersection in the morning or afternoon transport peak within 10 years of the	intersections and along road frontages wherever practicable.
	development completion;	E24.2
٠	Development access onto a sub arterial, or arterial road or within 100m of a signalised intersection;	Existing intersections external to the site are upgraded as necessary to accommodate increased traffic from the
٠	Residential development greater than 50 lots or dwellings;	development. Design is in accordance with Planning scheme policy - Operational works inspection,
•	Offices greater than 4,000m <sup>2</sup> Gross Floor Area (GFA);	maintenance and bonding procedures.
•	Retail activities including Hardware and trade supplies, Showroom, Shop or Shopping centre greater than 1,000m <sup>2</sup> GFA;	Note - All turns vehicular access to existing lots is to be retained at new road intersections wherever practicable.
•	Warehouses and Industry greater than 6,000m <sup>2</sup> GFA;	Note - Existing on-street parking is to be retained at upgraded road
•	On-site carpark greater than 100 spaces;	intersections and along road frontages wherever practicable.
•	Development has a trip generation rate of 100 vehicles or more within the peak hour;	E24.3
•	Development which dissects or significantly impacts on an environmental area or an environmental corridor.	The active transport network is extended in accordance with Planning scheme policy - Integrated design.
road deve deter works a futu part o ITA is neces	TA is to review the development's impact upon the external network for the period of 10 years from completion of the lopment. The ITA is to provide sufficient information for mining the impact and the type and extent of any ameliorative s required to cater for the additional traffic. The ITA must include ure structural road layout of adjoining properties that will form of this catchment and road connecting to these properties. The s to assess the ultimate developed catchment's impacts and ssary ameliorative works, and the works or contribution required e applicant as identified in the study.	

Note - The road network is mapped on Overlay map - Road hierarchy.	
Note - The primary and secondary active transport network is mapped on Overlay map - Active transport.	
PO25	E25
New intersections along all streets and roads are located and designed to provide safe and convenient movements	New intersection spacing (centreline – centreline) along a through road conforms with the following:
for all users. Note - Refer Planning scheme policy - Integrated design and	a. Where the through road provides an access or residential street function:
Planning scheme policy - Operational works inspection, maintenance and bonding procedures for design and construction standards.	i. intersecting road located on same side = 60 metres; or
Note - An Integrated Transport Assessment (ITA) including preliminary intersection designs, prepared in accordance with Planning scheme policy - Integrated transport assessment may be required to demonstrate compliance with this PO. Intersection	<ul><li>ii. intersecting road located on opposite side = 40 metres.</li></ul>
spacing will be determined based on the deceleration and queue storage distances required for the intersection after considering vehicle speed and present/forecast turning and through volumes.	b. Where the through road provides a local collector or district collector function:
	i. intersecting road located on same side = 100 metres; or
	ii. intersecting road located on opposite side = 60 metres.
	<ul> <li>Where the through road provides a sub-arterial function:</li> </ul>
	i. intersecting road located on same side = 250 metres; or
	<ul><li>ii. intersecting road located on opposite side = 100 metres.</li></ul>
	<ul> <li>Where the through road provides an arterial function:</li> </ul>
	i. intersecting road located on same side = 350 metres; or
	ii. intersecting road located on opposite side = 150 metres.
	e. Walkable block perimeter does not exceed:
	<ul> <li>600 metres in the Coastal communities precinct and Suburban neighbourhood precinct;</li> </ul>
	ii. 500 metres in the Next generation neighbourhood precinct;
	iii. 400 metres in the Urban neighbourhood precinct.

		mum intersection spacing identified e permitted (ie. left in/left out only) roads or arterial roads.
	Note - The road network is mapp hierarchy.	ed on Overlay map - Road
	Note - An Integrated Transport A preliminary intersection designs, Planning scheme policy - Integra required to demonstrate complian	prepared in accordance with ted transport assessment may be
PO26	E26	
All Council controlled frontage roads adjoining the development are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. All new works are extended to join any existing works within 20m.	Design and construct all Council controlled frontage roads in accordance with Planning scheme policy - Integrated design, Planning scheme policy - Operational works inspection, maintenance and bonding procedures and the following:	
	Situation	Minimum construction
<ul> <li>Note - Frontage roads include streets where no direct lot access is provided.</li> <li>Note - The road network is mapped on Overlay map - Road hierarchy.</li> <li>Note - The Primary and Secondary active transport network is mapped on Overlay map - Active transport.</li> <li>Note - Roads are considered to be constructed in accordance with Council's standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.</li> </ul>	Frontage road unconstructed or gravel road only; OR Frontage road sealed but not constructed* to Planning scheme policy - Integrated design standard; OR Frontage road partially constructed* to Planning scheme policy - Integrated design standard.	Construct the verge adjoining the development and the carriageway (including development side kerb and channel) to a minimum sealed width containing near side parking lane (if required), cycle lane (if required), 2 travel lanes plus 1.5m wide (full depth pavement) gravel shoulder and table drainage to the opposite side. The minimum total travel lane width is: 6m for minor roads; 7m for major roads.
	roads are roads that are not majo Note - Construction includes all a lighting and linemarking). Note - Alignment within road rese Note - *Roads are considered to l Council standards when there is s and depth to comply with the req	associated works (services, street erves is to be agreed with Council. be constructed in accordance with ufficient pavement width, geometry

	works inspection, maintenance and bonding procedures. Testing of the existing pavement may be required to confirm whether the existing works meet the standards in Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
Stormwater	
P027	E27.1
Minor stormwater drainage systems (internal and external) have the capacity to convey stormwater flows from frequent storm events for the fully developed upstream catchment whilst ensuring pedestrian and	The capacity of all minor drainage systems are designed in accordance with Planning scheme policy - Integrated design.
vehicular traffic movements are safe and convenient.	E27.2
	Stormwater pipe network capacity is to be calculated in accordance with the Hydraulic Grade Line method as detailed in Australian Rainfall and Runoff or QUDM.
	E27.3
	Development ensures that inter-allotment drainage infrastructure is provided in accordance with the relevant level as identified in QUDM.
	Note - Development provides inter-allotment – QUDM level III drainage, including bunds, to all lots that have a gradient less than 1 in 100 (for the whole of the allotment) to the road. The inter-allotment drainage system (including easements) is provided in accordance with Planning scheme policy - Integrated design (Appendix C).
PO28	E28.1
Major stormwater drainage system(s) have the capacity to safely convey stormwater flows for the 1% AEP event for the fully developed upstream catchment.	The internal drainage system safely and adequately conveys the stormwater flows for the 1% AEP event for the fully developed upstream catchment through the site.
	E28.2
	The external (downstream) drainage system safely conveys the stormwater flows for the 1% AEP event for the fully developed upstream catchment without allowing the flows to encroach upon private lots.
	E28.3
	Overland flow paths from roads and public open space areas do not pass through private lots. Drainage pathways are provided to accommodate overland flows from roads and public open space areas.
	E28.4

	The flow velocity in all unlined or soft faced open drains is kept within acceptable limits for the type of material or lining and condition of the channel. Note - Refer to QUDM for recommended average flow velocities.
PO29 Provide measures to properly manage surface flows for the 1% AEP event (for the fully developed catchment) draining to and through the land to ensure no actionable nuisance is created to any person or premises as a result of the development. The development must not result in ponding on adjacent land, redirection of surface flows to other premises or blockage of a surface flow relief path for flows exceeding the design flows for any underground system within the development.	E29 The stormwater drainage system is designed and constructed in accordance with Planning scheme policy - Integrated design.
PO30	No example provided.
Stormwater run-off from the site is conveyed to a point of lawful discharge without causing actionable nuisance to any person, property or premises.	
Note - Refer to Planning scheme policy - Integrated design for details.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.	
PO31	No example provided.
Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
PO32 Where development:	No example provided.

		C) for easement requirements ov	
		Note - Additional easement width circumstances in order to facilitat stormwater system. Note - Refer to Planning scheme p	
		Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the stormwater pipe (each side).
		Stormwater pipe up to 825mm diameter with sewer pipe up to 225m diameter	4.0m
		Stormwater pipe up to 825mm diameter	3.0m
easemer channels	order to achieve a lawful point of discharge, stormwater nts may also be required over temporary drainage s/infrastructure where stormwater discharges to a balance to entering Council's stormwater drainage system.	Pipe Diameter	Minimum easement width (excluding access requirements)
within pr are prote	ater drainage pipes and structures through or rivate land (including inter-allotment drainage) ected by easements in favour of Council with at area for practical access for maintenance ss.	E33 Stormwater drainage infrastructure (excluding detention and bio-retention systems) through or within private land (including inter-allotment drainage) is protected by easements in favour of Council. Minimum easement widths are as follows:	
suitably o Planning quality in	site based stormwater management plan prepared by a qualified professional will be required in accordance with scheme policy - Stormwater management. Stormwater infrastructure is to be designed in accordance with Planning policy - Integrated design (Appendix C).		
construc environn groundw the desig	ater quality management systems are designed, cted, established and maintained to minimise the mental impact of stormwater on surface, vater and receiving water environments and meet gn objectives outlined in Schedule 10 water management design objectives.		
ii.	an impervious area greater than 25% of the net developable area,		
o. will i.	Il result in: 6 or more dwellings; or		
	2500m <sup>2</sup> or greater; and		

Stormwater management facilities (excluding outlets) are located outside of riparian areas and prevent increased channel bed and bank erosion.		
PO35	E35	
Council is provided with accurate representations of the completed stormwater management works within residential developments.	"As Built" drawings and specifications of the stormwate management devices certified by an RPEQ is provide	
	Note - Documentation is to include:	
	<ul> <li>a. photographic evidence and inspection date of the installation of approved underdrainage;</li> </ul>	
	<ul> <li>copy of the bioretention filter media delivery dockets/quality certificates confirming the materials comply with specifications in the approved Stormwater Management Plan;</li> </ul>	
	c. date of the final inspection.	

Site works and construction management		
PO3	36	No example provided.
	site and any existing structures are maintained in a and safe condition.	
PO3	37	E37.1
	<ul> <li>works on-site are managed to:</li> <li>minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>minimise as far as possible, impacts on the natural environment;</li> <li>ensure stormwater discharge is managed in a manner that does not cause actionable nuisance to any person or premises;</li> <li>avoid adverse impacts on street trees and their critical root zone.</li> </ul>	<ul> <li>Works incorporate temporary stormwater runoff, erosion and sediment controls and trash removal devices designed in accordance with the Urban Stormwater Quality Planning Guidelines, State Planning Policy, Schedule 10 - Stormwater management design objectives, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour or erosion of any kind;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. minimum design storm for all temporary diversion drains and sedimentation basins in accordance with Schedule 10 - Stormwater management design objectives;</li> </ul>
		e. ponding or concentration of stormwater does not occur on adjoining properties.

	E37.2
	Stormwater runoff, erosion and sediment controls are constructed in accordance with Planning scheme policy - Integrated design (Appendix C) prior to commencement of any clearing or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.
	Note - The measures are adjusted on-site to maximise their effectiveness.
	E37.3
	The completed earthworks area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.
	E37.4
	Existing street trees are protected and not damaged during works.
	Note - Where development occurs in the tree protection zone, measures and techniques as detailed in Australian Standard AS 4970 Protection of trees on development sites are adopted and implemented.
PO38	E38
Dust suppression measures are implemented during soi disturbances and construction works to protect nearby premises from unreasonable dust impacts.	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
PO39	E39.1
All development works including the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
Note - A Traffic Management Plan may be required to demonstrate compliance with this PO. A Traffic Management Plan is to be prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD)	E39.2
Devices (MUTCD). Note - A haulage route must be identified and approved by Council where imported or exported material is transported to the site via a road of Local Collector standard or less, and:	All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads.
a. the aggregate volume of imported or exported material is greater than 1000m <sup>3</sup> ; or	
b. the aggregate volume of imported or exported material is	E39.3
<ul> <li>greater than 200m<sup>3</sup> per day; or</li> <li>c. the proposed haulage route involves a vulnerable land use or shopping centre.</li> </ul>	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.

Note - A dilapidation report (including photographs) may be required for the haulage route to demonstrate compliance with this PO. Editor's note - Where associated with a State-controlled road, further requirements may apply, and approval may be required from the Department of Transport and Main Roads.	<ul> <li>E39.4</li> <li>Construction traffic to and from the development site uses the highest classification streets or roads where a choice of access routes is available. Haul routes for the transport of imported or spoil material and gravel pavement material along Council roads below sub-arterial standard must be approved routes.</li> <li>Note - The road hierarchy is mapped on Overlay map - Road hierarchy.</li> <li>Note - A dilapidation report may be required to demonstrate compliance with this E.</li> <li>E39.5</li> <li>Where works are carried out in existing roads, the works must be undertaken so that the existing roads are maintained in a safe and usable condition. Practical access for residents, visitors and services (including postal deliveries and refuse collection) is retained to existing lots during the construction period and after completion of the works.</li> <li>Note - A traffic control plan prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) will be required for any works that will affect access, traffic movements or traffic safety in existing roads.</li> </ul>
	Access to the development site is obtained via an existing lawful access point.
PO40	E40
All disturbed areas are to be progressively stabilised during construction and the entire site rehabilitated and substantially stabilised at the completion of construction. Note - Refer to Planning scheme policy - Integrated design for details.	<ul> <li>At completion of construction all disturbed areas of the site are to be:</li> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques.</li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage.</li> </ul>
PO41	E41
Earthworks are undertaken to ensure that soil disturbances are staged into manageable areas.	Soil disturbances are staged into manageable areas of not greater than 3.5 ha.

Note - A site specific Erosion and Sediment Control Plan (ESCP) will be required to demonstrate compliance with this PO. An ESCP is to be prepared in accordance with Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design (Appendix C).	
PO42	E42.1
The clearing of vegetation on-site:	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development
a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and	works.
b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;	to bood in these dicus during development works.
c. is disposed of in a manner which minimises	E42.2
nuisance and annoyance to existing premises.	Disposal of materials is managed in one or more of the following ways:
Note - No burning of cleared vegetation is permitted.	a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
	b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.
	Note - The chipped vegetation must be stored in an approved location.
PO43	E43
All development works are carried out at times which minimise noise impacts to residents.	All development works are carried out within the following times:
	a. Monday to Saturday (other than public holidays) between 6:30am and 6:30pm on the same day;
	b. no work is to be carried out on Sundays or public holidays.
	Note - Work outside the above hours may be approved (in writing) where it can be demonstrated that the work will not cause significant inconvenience or disruption to the public, or the work is unlikely to cause annoyance or inconvenience to occupants of adjacent properties.
PO44	No example provided.
Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities,	

Ear	Earthworks		
PO4	15	E45.1	
and	site earthworks are designed to consider the visual amenity impact as they relate to:	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains	
a.	the natural topographical features of the site;	as necessary.	
b.	short and long-term slope stability;	E45.2	
C.	soft or compressible foundation soils;	Stabilisation measures are provided, as necessary, to	
d.	reactive soils;	ensure long-term stability and low maintenance of steep slopes and batters.	
e.	low density or potentially collapsing soils;		
f.	existing fill and soil contamination that may exist on-site;	E45.3	
g.	the stability and maintenance of steep slopes and batters;	Inspection and certification of steep slopes and batters is required by a suitably qualified and experienced RPEQ.	
h.	excavation (cut) and fill and impacts on the amenity	E45.4	
	of adjoining lots (e.g. residential).	All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.	
		E45.5	
		All filling or excavation is contained on-site and is free draining.	
		E45.6	
		All fill placed on-site is:	
		a. limited to that area necessary for the approved use;	
		b. clean and uncontaminated (i.e. no building waste, concrete, green waste, actual acid sulfate soils, potential acid sulfate soils or contaminated material etc.).	
		E45.7	
		The site is prepared and the fill placed on-site in accordance with AS3798.	
		Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.	

PO46	E46
Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area.	Any embankments more than 1.5 metres in height are stepped, terraced and landscaped. Figure - Embankment
PO47	E47.1
<ul> <li>Filling or excavation is undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> </ul>	No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity. Note - Public sector entity is defined in Schedule 2 of the Act.
<ul> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity is defined in Schedule 2 of the Act.</li> </ul>	<ul> <li>E47.2</li> <li>Filling or excavation that would result in any of the following is not carried out on-site:</li> <li>a. a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken;</li> </ul>
	<ul> <li>c. prevent reasonable access to Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the site for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity is defined in Schedule 2 of the Act.</li> <li>Note - All building work covered by QDC MP1.4 is excluded from this provision.</li> </ul>
PO48	No example provided.
Filling or excavation does not result in land instability. Note - Steep slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.	


PO49	No example provided.
<ul> <li>Filling or excavation does not result in:</li> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements.	
PO50 Filling or excavation on the development site is undertaken in a manner which does not create or accentuate problems associated with stormwater flows and drainage systems on land adjoining the site.	<ul> <li>E50</li> <li>Filling and excavation undertaken on the development site are shaped in a manner which does not: <ul> <li>a. prevent stormwater surface flow which, prior to commencement of the earthworks, passed onto the development site, from entering the land; or</li> <li>b. redirect stormwater surface flow away from existing flow paths; or</li> </ul> </li> <li>c. divert stormwater surface flow onto adjacent land, (other than a road), in a manner which: <ul> <li>i. concentrates the flow; or</li> <li>ii. increases the flow rates of stormwater over the affected section of the adjacent land above the situation which existed prior to the diversion; or</li> <li>iii. causes actionable nuisance to any person, property or premises.</li> </ul> </li> </ul>
<b>PO51</b> All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining recidents.	E51 Earth retaining structures:


a.

Note - Refer to Planning scheme policy - Residential design for<br/>guidance on how to achieve compliance with this performance<br/>outcome.b.where height is no greater than 900mm, are<br/>provided in accordance with Figure - Retaining on<br/>a boundary;

of adjoining residents.

are not constructed of boulder rocks or timber;

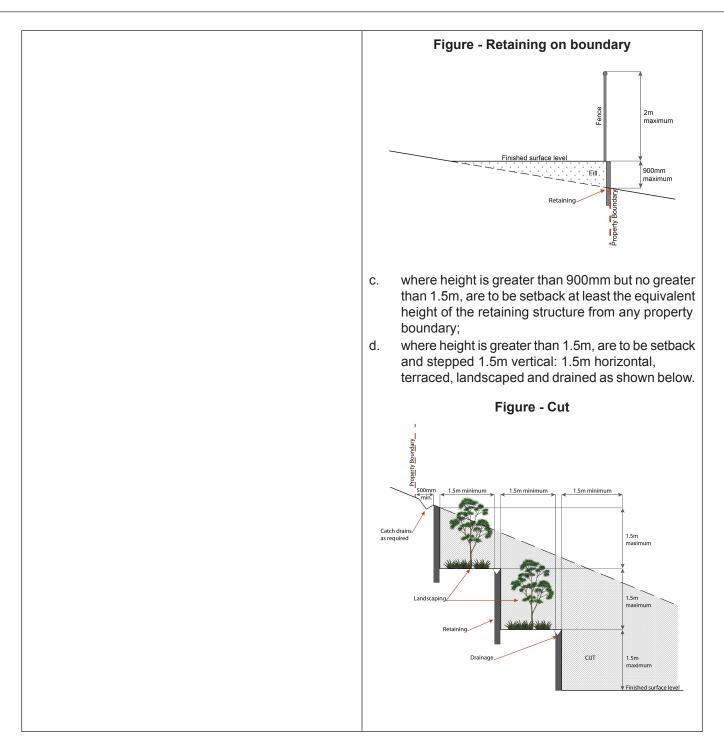

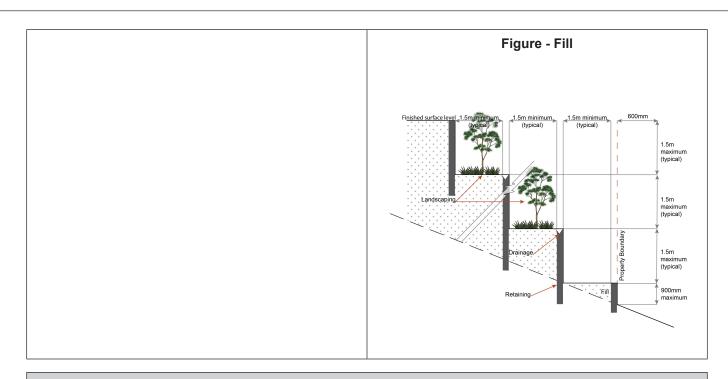

### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: а
  - i. reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.
  - iv

#### AND

- none of the following exceptions apply: b.
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

PO52		E52.1
	oment incorporates a fire fighting system that:	External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian</i>
	tisfies the reasonable needs of the fire fighting tity for the area;	Standard AS 2419.1 (2005) – Fire Hydrant Installations.
	appropriate for the size, shape and topography the development and its surrounds;	Note - For this requirement for accepted development the following are the relevant parts of AS 2419.1 (2005) that may be applicable:
	compatible with the operational equipment ailable to the fire fighting entity for the area;	<ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part</li> <li>3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or</li> </ul>
со	nsiders the fire hazard inherent in the materials mprising the development and their proximity to e another;	development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;

<ul> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> <li>Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.</li> </ul>	<ul> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: <ol> <li>i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> </ol> </li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul>
	<ul> <li>E52.2</li> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:</li> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.</li> </ul>
	<b>E52.3</b> On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>
PO53	E53
On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.	For development that contains on-site fire hydrants external to buildings:
	t a. those external hydrants can be seen from the vehicular entry point to the site; or
	b. a sign identifying the following is provided at the vehicular entry point to the site:
	i. the overall layout of the development (to scale);
	ii. internal road names (where used);
	iii. all communal facilities (where provided);
	iv. the reception area and on-site manager's

		V.	external hydrants and hydrant booster points;
		vi.	physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
		Note - The	sign prescribed above, and the graphics used are to be:
		a. in a	form;
		b. of a	size;
		c. illun	ninated to a level;
			vs the information on the sign to be readily understood, , by a person in a fire fighting appliance up to 4.5m from
		554	
PO5		E54	
sign at al	h on-site fire hydrant that is external to a building is posted in a way that enables it to be readily identified I times by the occupants of any firefighting appliance ersing the development site.	external to way of ma markers in <i>Fire hydra</i> Queensla	opment that contains on-site fire hydrants o buildings, those hydrants are identified by arker posts and raised reflective pavement in the manner prescribed in the technical note ant indication system produced by the ind Department of Transport and Main Roads.
			nnical note Fire hydrant indication system is available on e of the Queensland Department of Transport and Main
	Use speci	fic criteria	
Hon	ne based business <sup>(35)</sup>		
PO5	5	No exam	ble provided.
The	scale and intensity of the Home based business <sup>(35)</sup> :		
a.	is compatible with the physical characteristics of the site and the character of the local area;		
b.	is able to accommodate anticipated car parking demand without negatively impacting the streetscape or road safety;		
c.	does not adversely impact on the amenity of the adjoining and nearby premises;		
d.	remains ancillary to the residential use of the dwelling;		
e.	does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;		

f. ensures employees and visitors to the site do not negatively impact the expected amenity of adjoining properties;	
<ul> <li>ensures service and delivery vehicles do not negatively impact the amenity of the area.</li> </ul>	
Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and	Utility installation <sup>(86)</sup>
PO56	E56.1
<ul> <li>The development does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and</li> </ul>	<ul> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul>
<ul> <li>a. and through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>	<b>E56.2</b> A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.
PO57	E57
Infrastructure does not have an impact on pedestrian health and safety.	<ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>
PO58	E58
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility: a. generates no audible sound at the site boundaries	
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:	E58 All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the
<ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental</li> </ul>	E58 All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the
<ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>	E58 All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the

<ul> <li>a. provide functional and safe access, manoeuvring areas and car parking spaces for the number and type of vehicles anticipated to access the site;</li> <li>b. complement the streetscape character while</li> </ul>	
maintaining surveillance between buildings and public spaces;	
c. be temporary in nature.	
Note - Refer to Planning scheme policy - Residential design for access and crossover requirements.	
Telecommunications facility <sup>(81)</sup>	
Editor's note - In accordance with the Federal legislation Telecommur that will not cause human exposure to electromagnetic radiation beyo Radiation - Human Exposure) Standard 2003 and Radio Protection Sta to 300Ghz.	
PO60	E60.1
Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area.	New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.
	E60.2
	If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.
PO61	E61
A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.	A minimum area of 45m <sup>2</sup> is available to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
PO62	E62
Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
PO63	E63.1
<ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>	Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.

c. not visually dominant or intrusive;	E63.2
<ul><li>d. located behind the main building line;</li><li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and</li></ul>	In all other areas towers do not exceed 35m in height.
f. camouflaged through the use of colours and	E63.3
<ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li></ul>	Towers, equipment shelters and associated structures are of a design, colour and material to:
<ul><li>h. landscaped;</li><li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li></ul>	<ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>
	E63.4
	All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.
	Where there is no established building line the facility is located at the rear of the site.
	E63.5
	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
	E63.6
	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.
PO64	E64
Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.	An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.
PO65	E65
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.	All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.

Ret	ail, co	ommercial and community uses	
POe	66		No example provided.
Con	nmuni	ity activities:	
a.	are	located to:	
	i.	cluster with other non-residential activities to form a neighbourhood hub (this may include being located within or adjacent to an existing neighbourhood hub); or	
	ii.	if establishing a new neighbourhood hub (as described in the PO below); be on a main street;	
b.		located on allotments that have appropriate a and dimensions for the sitting of:	
	i.	buildings and structures;	
	ii.	vehicle servicing, deliveries, parking, manoeuvring and circulation;	
	iii.	landscaping and open space including buffering;	
C.		of a small scale, having regard to the ounding character;	
d.	are	serviced by public transport;	
e.		not negatively impact adjoining residents or the etscape.	
POe	67		No example provided.
		d commercial activities do not establish in this inless:	
a.	hub	ning part of an existing or new neighbourhood on a site identified on Overlay map - nmunity activities and neighbourhood hubs; or	
b.	cent	arated from other neighbourhood hubs and tres by 1600m, measured from the centre of h neighbourhood hub or centre; or	
C.	neig orde Sca	ning a new neighbourhood hub where the urban ghbourhood precinct does not adjoin a higher er or district centre (e.g. Clontarf, Woody Point, rborough) or where adjoining or opposite a train ion; or	
d.		ning part of a mixed-use building with residential s; or	
e.	for a	a corner store.	

POe	58	No example provided.
	orner store (shop) may establish as a standalone use part of a neighbourhood hub) where: having a maximum GFA of 250m <sup>2</sup> ; the use is located on the ground floor and the building adjoins the street frontage and has its main pedestrian entrance from the street frontage.	
POe	9	No example provided.
	ixed use building may establish as a standalone use part of a neighbourhood hub) where:	
Reta	ail and commercial uses:	
a.	have a total combined GFA of 1000m <sup>2</sup> or less; or, where for an Office have a total combined GFA of 1000m <sup>2</sup> or more;	
b.	are on a lot within 800m walking distance of a train station;	
C.	located on the ground floor and the building adjoins the street frontage and has its main pedestrian entrance from the street frontage.	
PO	70	No example provided.
	Office may establish as a standalone use (not part of eighbourhood hub or mixed use building) where:	
a. b.	a GFA of 2000m <sup>2</sup> or more; on a lot within 800m walking distance of a train station.	
PO	<b>'</b> 1	E71.1
Ser	vice stations are located, designed and orientated to:	Service stations are located:
a.	establish on heavily trafficked roads where the amenity of surrounding residential uses is already subject to impacts by road vehicle noise;	<ul><li>a. adjoining or within 400m of:</li><li>i. a neighbourhood hub identified on Overlay</li></ul>
b.	be in proximity of a neighbourhood hub or centre;	map - Community activities and neighbourhood hubs (not on a neighbourhood
C.	not negatively impact active streets, public spaces or hubs of activity where the pedestrian safety and comfort is of high importance (e.g. in neighbourhood	hub lot); or ii. a centre zone;
d.	hubs and centres); not result in the fragmentation of active streets (e.g. site where active uses are located on adjoining	b. on the corner lot of an arterial or sub-arterial road.
	lots);	E71.2
e.	ensure the amenity of adjoining properties is protected;	Service stations are designed and orientated on site to: a. include a landscaping strip having a minimum depth
		of 1m adjoining all road frontages;

<ul> <li>the site to the street;</li> <li>g. minimise impacts on adjoining residential uses, to a level suitable relative to expected residential amenity of the area. (e.g. high order road in urban or next generation neighbourhood, likely to be noisy and not like suburban);</li> <li>h. provide ancillary uses that meet the convenience needs of users.</li> <li>PO72</li> <li>Retail and commercial uses within a neighbourhood hub are of a scale that provide for the convenience needs of users of the immediate neighbourhood and do not constitute the scale or function of a Local centre.</li> <li>PT2</li> <li>Retail and commercial uses within a neighbourhood hub are of a scale that provide for the convenience needs or localised services of the immediate neighbourhood and do not constitute the scale or function of a Local centre.</li> <li>Retail format supermarket with a maximum Group of 1200m<sup>2</sup>;</li> <li>PO72</li> </ul>			
<ul> <li>Retail and commercial uses within a neighbourhood hub are of a scale that provide for the convenience needs or localised services of the immediate neighbourhood and do not constitute the scale or function of a Local centre do not constitute the scale of a Local centre refer to Table</li> <li>Note - For the function and scale of a Local centre refer to Table</li> <li>1 small format supermarket with a maximum Gi of 1200m<sup>2</sup>;</li> <li>10 small format retail or commercial tenancies w a maximum GFA of 100m<sup>2</sup> each.</li> </ul> PO73 Non-residential uses (excluding a Service station) address and activate streets and public spaces by: <ul> <li>a. ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement;</li> <li>b. new buildings adjoin or are within 3m of the primary street frontage(s), civic space or public open space;</li> <li>c. locating car parking areas and drive-through facilities behind or under buildings to not dominate the street environment;</li> <li>d. establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing, variation in colour, materials, finishes, articulation, recesses or projections); f. establishing and maintaining human scale.</li></ul>	g. h.	the streetscape while maintaining surveillance from the site to the street; minimise impacts on adjoining residential uses, to a level suitable relative to expected residential amenity of the area. (e.g. high order road in urban or next generation neighbourhood, likely to be noisy and not like suburban); provide ancillary uses that meet the convenience needs of users.	<ul> <li>canopies) are setback a minimum of 3m from the primary and secondary frontage and a minimum of 5m from side and rear boundaries;</li> <li>c. include a screen fence, of a height and standard in accordance with a noise impact assessment (Note - Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise), on side and rear boundaries where adjoining land is able to contain a residential use;</li> <li>d. not include more than 2 driveway crossovers.</li> </ul>
<ul> <li>Non-residential uses (excluding a Service station) address and activate streets and public spaces by:</li> <li>a. ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement;</li> <li>b. new buildings adjoin or are within 3m of the primary street frontage(s), civic space or public open space;</li> <li>c. locating car parking areas and drive-through facilities behind or under buildings to not dominate the street environment;</li> <li>d. establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing and avoiding blank walls with the use of sleeving);</li> <li>e. providing visual interest to the façade (e.g. Windows or glazing, variation in colour, materials, finishes, articulation, recesses or projections);</li> <li>f. establishing and maintaining human scale.</li> </ul>	Reta are o local do n	ail and commercial uses within a neighbourhood hub of a scale that provide for the convenience needs or lised services of the immediate neighbourhood and ot constitute the scale or function of a Local centre.	<ul> <li>Retail and commercial uses within a neighbourhood hub consist of no more than:</li> <li>a. 1 small format supermarket with a maximum GFA of 1200m<sup>2</sup>;</li> <li>b. 10 small format retail or commercial tenancies with</li> </ul>
<ul> <li>address and activate streets and public spaces by:</li> <li>a. ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement;</li> <li>b. new buildings adjoin or are within 3m of the primary street frontage(s), civic space or public open space;</li> <li>c. locating car parking areas and drive-through facilities behind or under buildings to not dominate the street environment;</li> <li>d. establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing and avoiding blank walls with the use of sleeving);</li> <li>e. providing visual interest to the façade (e.g. Windows or glazing, variation in colour, materials, finishes, articulation, recesses or projections);</li> <li>f. establishing and maintaining human scale.</li> </ul>	<b>PO7</b>	3	No example provided.
	addr a. b. c. d.	ess and activate streets and public spaces by: ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement; new buildings adjoin or are within 3m of the primary street frontage(s), civic space or public open space; locating car parking areas and drive-through facilities behind or under buildings to not dominate the street environment; establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing and avoiding blank walls with the use of sleeving); providing visual interest to the façade (e.g. Windows or glazing, variation in colour, materials, finishes,	
P074 No example provided.	f.	establishing and maintaining human scale.	
	PO7	4	No example provided.
All buildings exhibit a high standard of design and construction, which:	All b	uildings exhibit a high standard of design and	

add visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, cantilevered awning);	
enable differentiation between buildings;	
contribute to a safe environment;	
incorporate architectural features within the building facade at the street level to create human scale (e.g. cantilevered awning);	
include building entrances that are readily identifiable from the road frontage;	
locate and orientate to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites;	
incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;	
facilitate casual surveillance of all public spaces.	
5	No example provided.
prioritises the movement and safety of pedestrians between the street frontage and the entrance to the building;	
provides safety and security of people and property at all times;	
does not impede active frontage and active transport options;	
does not impact on the safe and efficient movement of traffic external to the site;	
is consolidated and shared with adjoining sites wherever possible.	
6	No example provided.
itised in the design of car parking areas through	
located along the most direct route between building entrances, car parks and adjoining uses;	
protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);	
are of a width to allow safe and efficient access for prams and wheelchairs.	
	in materials, patterns, textures and colours, cantilevered awning); enable differentiation between buildings; contribute to a safe environment; incorporate architectural features within the building facade at the street level to create human scale (e.g. cantilevered awning); include building entrances that are readily identifiable from the road frontage; locate and orientate to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites; incorporate appropriate acoustic treatments, having regard to any adjoining residential uses; facilitate casual surveillance of all public spaces. <b>5</b> elopment provides functional and integrated car ing and vehicle access, that: prioritises the movement and safety of pedestrians between the street frontage and the entrance to the building; provides safety and security of people and property at all times; does not impede active frontage and active transport options; does not impact on the safe and efficient movement of traffic external to the site; is consolidated and shared with adjoining sites wherever possible. <b>6</b> safety and efficiency of pedestrian movement is itised in the design of car parking areas through ding pedestrian paths in car parking areas through ding pedestrian paths in car parking areas thet are: located along the most direct route between building entrances, car parks and adjoining uses; protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc); are of a width to allow safe and efficient access for

PO	77		E77.1	
a. b. c. d. e.	avo effic avo parl pror pror parl	ber of car parking spaces is managed to: id significant impacts on the safety and ciency of the road network; id an oversupply of car parking spaces; id the visual impact of large areas of open car king from road frontages and public areas; mote active and public transport options; mote innovative solutions, including on-street king and shared parking areas.	a disability required by Disabili relevant disability discriminatio	e car parking spaces for people with ty Discrimination Act 1992 or the n legislation and standards. designed and constructed in in Standard AS2890.1 Parking
<b>PO</b> 7 a.	End occ	of trip facilities are provided for employees or upants, in the building or on-site within a sonable walking distance, and include:	E78.1 Minimum bicycle parking accordance with the table nearest whole number).	facilities are provided in below (rounded up to the
	i. ii. iii.	adequate bicycle parking and storage facilities; and adequate provision for securing belongings; and change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.	Use         Residential uses comprised of dwellings         All other residential uses         Non-residential uses	Minimum Bicycle ParkingMinimum 1 space per dwellingMinimum 1 space per 2 car parkingspaces identified in Schedule 7 – car parkingMinimum 1 space per 200m2 of GFA
b.	prov unre	withstanding a. there is no requirement to vide end of trip facilities if it would be easonable to provide these facilities having ard to: the projected population growth and forward planning for road upgrading and development of cycle paths; or whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute distances and nature of the terrain; or the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.	the Queensland Development instrument to prescribe facility identified in those acceptable s combination of the default level Queensland Development Cod by Council. <b>E78.2</b> Bicycle parking is: a. provided in accordan <i>Guide to Traffic Mar</i>	r end of trip facilities prescribed under Code permit a local planning levels higher than the default levels

Editor's note - The intent of b above is to ensure the requirements for bicycle parking and end of trip facilities are not applied in unreasonable circumstances. For example these requirements should not, and do not apply in the Rural zone or the Rural residential zone etc.

Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the examples under this heading meet the current performance requirement prescribed in the Queensland Development Code.

- c. located within the building or in a dedicated, secure structure for residents and staff;
- d. adjacent to building entrances or in public areas for customers and visitors.

Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.

Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.

Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### E78.3

For non-residential uses, storage lockers:

- a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);
- b. have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).

Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.

Editor's note - The examples for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This example is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

#### E78.4

For non-residential uses, changing rooms:

- a. are provided at a rate of 1 per 10 bicycle parking spaces;
- b. are fitted with a lockable door or otherwise screened from public view;
- are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:

sp	-,	Male/ Female	Change rooms required	Showers required	Sanitary compartments required	Washbasins required
----	----	-----------------	-----------------------------	------------------	--------------------------------------	------------------------

		1-5	Male	1 unisex	1	1 closet pan	1
			and female	change room			
		6-19	Female	1	1	1 closet pan	1
		20 or more	Male	1	1	1 closet pan	1
			Female	1	2, plus 1 for every 20 bicycle spaces provided thereafter	2 closet pans, plus 1 sanitary compartment for every 60 bicycle parking spaces provided thereafter	1, plus 1 for every 60 bicycle parking spaces provided thereafter
			Male	1	2, plus 1 for every 20 bicycle spaces provided thereafter	1 urinal and 1 closet pans, plus 1 sanitary compartment at the rate of 1 closet pan or 1 urinal for every 60 bicycle space provided thereafter	1, plus 1 for every 60 bicycle parking spaces provided thereafter
		and Star Note - Al	ndards (V I sanitary	VELS) rati	ng shower	tar Water Efficier head. onstructed in com	
		d. ar	e provid	led with	:		
		i. ii. iii.	a ho com	ok and l partme	pench sea ht;	ve each wash ating within ea ed adjacent to	ach shower
			basi				
		and non-	residenti	al activitie	s when with	cross multiple site in 100 metres of bicycle parking	the entrance
		the Que instrume identified amalgar	ensland I ent to pread d in those nation of and Deve	Developm scribe fac acceptat the defau	ent Code p ility levels h ble solutions It levels set	trip facilities pres ermit a local plar igher than the do s. This example for end of trip fa e additional facili	nning efault levels is an cilities in the
PO7	79	No exar	nple pr	ovided.			
Loa	ding and servicing areas:						
a.	are not visible from the street frontage;						
b.	are integrated into the design of the building;						
C.	include screening and buffers to reduce negative impacts on adjoining sensitive land uses;						
d.	where possible loading and servicing areas are consolidated and shared with adjoining sites.						

PO80	E80
Bins and bin storage area/s are designed, located and managed to prevent amenity impacts on the locality.	Development is designed to meet the criteria in the Planning scheme policy - Waste and is demonstrated in a waste management program.
PO81	No example provided.
On-site landscaping is provided, that:	
a. is incorporated into the design of the development;	
<li>b. reduces the dominance of car parking and servicing areas from the street frontage;</li>	
c. retains mature trees wherever possible;	
<ul> <li>does not create safety or security issues by creating potential concealment areas or interfering with sight lines;</li> </ul>	
e. maintains the achievement of active frontages and sight lines for casual surveillance.	
Note - All landscaping is to accord with Planning scheme policy - Integrated design.	
PO82	E82
Surveillance and overlooking are maintained between the road frontage and the main building line.	No fencing is provided forward of the building line.
PO83	No example provided.
Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety and minimise adverse impacts on residential and other sensitive land uses.	
PO84	E84
The hours of operation minimise adverse amenity impacts on adjoining sensitive land uses.	Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.
Values and con	straints criteria
Note - The relevant values and constraints criteria do not apply where Reconfiguring a lot or Material change of use or Operational work, wh development footprint plan (or similar in the case of Landslide hazard) planning scheme.	ere that approval has considered and addressed (e.g. through a

Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

PO85	E85
<ul> <li>Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:</li> <li>a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;</li> <li>b. protects the environmental and ecological values and health of receiving waters;</li> <li>c. protects buildings and infrastructure from the effects of acid sulfate soils.</li> </ul>	<ul> <li>Development does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.</li> </ul>

# Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note – The following are excluded from the native vegetation clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

Vegetation clearing, ecological value and connectivity	ty
PO86	No example provided.
Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:	
<ul> <li>a. the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded;</li> <li>b. on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*.</li> <li>* Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014.</li> </ul>	
PO87	No example provided.
<ul> <li>Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by:</li> <li>a. retaining habitat trees;</li> <li>b. providing contiguous patches of habitat;</li> <li>c. provide replacement and rehabilitation planting to improve connectivity;</li> <li>d. avoiding the creation of fragmented and isolated patches of habitat;</li> <li>e. providing wildlife movement infrastructure.</li> <li>Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy – Environmental areas.</li> </ul>	
Vegetation clearing and habitat protection	1
PO88	No example provided.
Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	

	39	No example provided.
deg Valu	elopment does not result in the net loss or radation of habitat value in a High Value Area or a le Offset Area. Where development does result in loss or degradation of habitat value, development	
a.	rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a viable and healthy habitat area;	
b.	provide replacement fauna nesting boxes in the event of habitat tree loss in accordance with Planning scheme policy - Environmental areas; undertake rehabilitation, revegetation and	
C.	restoration in accordance with the South East Queensland Ecological Restoration Framework.	
POS	90	No example provided.
	elopment ensures safe, unimpeded, convenient and oing wildlife movement and habitat connectivity by:	
a. b.	providing contiguous patches of habitat; avoiding the creation of fragmented and isolated patches of habitat;	
c. d.	providing wildlife movement infrastructure; providing replacement and rehabilitation planting to improve connectivity.	
Veg	etation clearing and soil resource stability	
POS	91	No example provided.
Dev	elopment does not:	
a. b.	result in soil erosion or land degradation; leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.	
Veg	etation clearing and water quality	
Veg PO		No example provided.
POS Dev grou		No example provided.
POS Dev grou	elopment maintains or improves the quality of undwater and surface water within, and downstream,	No example provided.
POS Dev grou of a	elopment maintains or improves the quality of indwater and surface water within, and downstream, site by: ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads; avoiding or minimising changes to landforms to	No example provided.
POS Dev grou of a a.	elopment maintains or improves the quality of indwater and surface water within, and downstream, site by: ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads;	No example provided.

	1
Development minimises adverse impacts of stormwater run-off on water quality by:	
<ul> <li>a. minimising flow velocity to reduce erosion;</li> <li>b. minimising hard surface areas;</li> <li>c. maximising the use of permeable surfaces;</li> <li>d. incorporating sediment retention devices;</li> <li>e. minimising channelled flow.</li> </ul>	
Vegetation clearing and access, edge effects and urb	ban heat island effects
PO94	No example provided.
Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment.	
PO95	No example provided.
Development minimises potential adverse 'edge effects' on ecological values by:	
<ul> <li>a. providing dense planting buffers of native vegetation between a development and environmental areas;</li> <li>b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas;</li> <li>c. restoring, rehabilitating and increasing the size of existing patches of native vegetation;</li> <li>d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors;</li> <li>e. landscaping with native plants of local origin.</li> <li>Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the groundwater and surface water flow.</li> </ul>	
PO96	No example provided.
Development avoids adverse microclimate change and does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by:	
<ul> <li>a. pervious surfaces;</li> <li>b. providing deeply planted vegetation buffers and green linkage opportunities;</li> <li>c. landscaping with local native plant species to achieve well-shaded urban places;</li> <li>d. increasing the service extent of the urban forest canopy.</li> </ul>	
Vegetation clearing and Matters of Local Environme	ntal Significance (MLES) environmental offsets
PO97	No example provided.

nativ wate buffe with Plan Edite prov requ	re development results in the unavoidable loss of re vegetation within a Value Offset Area MLES arway buffer or a Value Offset Area MLES wetland er, an environmental offset is required in accordance the environmental offset requirements identified in ning scheme policy - Environmental areas. or's note - For MSES Koala Offsets, the environmental offset isions in schedule 11 of the Regulation, in combination with the irements of the Environmental Offset Act 2014, apply.	ap - Extractive resources (transport route and buffer)		
to de	etermine if the following assessment criteria app	ly)		
PO9	8	E98		
	elopment:	The following uses are not located within the 100m wide transport route buffer:		
a.	does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route;	<ul> <li>a. Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;</li> <li>b. Community residence<sup>(16)</sup>;</li> </ul>		
b.	does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes;	<ul> <li>c. Dual occupancy<sup>(21)</sup>;</li> <li>d. Dwelling house<sup>(22)</sup>;</li> </ul>		
C.	adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive	<ul> <li>e. Dwelling unit<sup>(23)</sup>;</li> <li>f. Hospital<sup>(36)</sup>;</li> <li>g. Rooming accommodation<sup>(69)</sup>;</li> <li>h. Multiple dwelling<sup>(49)</sup>;</li> </ul>		
	land uses. Such measures include, but are not limited to:	<ul> <li>Non-resident workforce accommodation<sup>(52)</sup>;</li> <li>Relocatable home park<sup>(62)</sup>;</li> </ul>		
	<ul> <li>i. locating the furthest distance possible from the transportation route;</li> <li>iii behitable rooms being located the furtheat</li> </ul>	<ul> <li>k. Residential care facility<sup>(65)</sup>;</li> <li>l. Resort complex<sup>(66)</sup>;</li> <li>m. Retirement facility<sup>(67)</sup>;</li> </ul>		
	ii. habitable rooms being located the furthest from the transportation route;	<ul> <li>m. Retirement facility<sup>(07)</sup>;</li> <li>n. Rural workers' accommodation<sup>(71)</sup>;</li> </ul>		
	iii. shielding and screening private outdoor recreation space from the transportation	<ul> <li>o. Short-term accommodation<sup>(77)</sup>;</li> <li>p. Tourist park<sup>(84)</sup>.</li> </ul>		
	routes.			
PO9	9	E99.1		
Development:		Development does not create a new vehicle access point onto an Extractive resources transport route.		
a.	does not adversely impact upon the efficient and effective transportation of extractive material along a transportation route;	E99.2		
b.	ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility;	A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.		
C.	utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.			
Heri	tage and landscape character (refer Overlay map	- Heritage and landscape character to determine if		

the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

	1
PO100	E100
<ul> <li>Development will:</li> <li>a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;</li> <li>b. protect the fabric and setting of the heritage site, object or building;</li> <li>c. be consistent with the form, scale and style of the heritage site, object or building;</li> <li>d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;</li> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul>	Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value. Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.
PO101	No example provided.
Demolition and removal is only considered where:	
<ul> <li>a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or</li> <li>b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or</li> <li>c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic event which substantially destroys the building or object.</li> </ul>	
<b>PO102</b> Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.	No example provided.
PO103	E103

Development does not adversely impact upon the health and vitality of significant trees. Where development occurs in proximity to a significant tree, construction	Development does: a. not result in the removal of a significant tree;
measures and techniques as detailed in AS 4970-2009	b. not occur within 20m of a protected tree;
Protection of trees on development sites are adopted to ensure a significant tree's health, wellbeing and vitality.	<ul> <li>c. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 – Pruning of Amenity Trees.</li> </ul>
Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably qualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome.	

# Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

E104.1 Run-off and sediment from roadways and impervious surfaces within a Water supply buffer are intercepted and treated on-site to remove oil, grease, chemicals, silt, trace metals and nutrients such as nitrogen and phosphorous.
surfaces within a Water supply buffer are intercepted and treated on-site to remove oil, grease, chemicals, silt, trace
E104.2
Incineration or burial of waste within a Water supply buffer is not undertaken onsite.
E104.3
Solid waste within a Water supply buffer is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.
E104.4
Holding tanks within a Water supply buffer are used for all liquid waste and provide for the separation of oils/solvents and solids prior to pump-out and collection by a licenced contractor.
E104.5
Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.
E105
Secondary treated wastewater treatment systems within a Water supply buffer include:
Iris IE Socialia IE Haob IE Noisc IE S

Editor's Note - For guidance refer to the Seq water Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.	<ul> <li>a. emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies or overload with provision for de-sludging;</li> <li>b. back up pump installation and backup power;</li> <li>c. MEDLI modelling to determine irrigation rates and sizing of irrigation areas;</li> <li>d. vegetated land application areas are not located in overland flow paths or on areas that perform groundwater recharge or discharge functions; and</li> <li>e. wastewater collection and storage systems have a capacity to accommodate full load at peak times and includes temporary facilities.</li> </ul>
PO106	E106
<ul> <li>Development within a Bulk water supply infrastructure buffer is located, designed and constructed to:</li> <li>a. protect the integrity of the water supply pipeline;</li> <li>b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline;</li> </ul>	<ul> <li>Development:</li> <li>a. does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer;</li> <li>b. involving a major hazard facility or environmentally relevant activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.</li> </ul>
PO107	E107
Development is located and designed to maintain required access to Bulk water supply infrastructure.	<ul> <li>Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):</li> <li>a. buildings or structures;</li> <li>b. gates and fences;</li> <li>c. storage of equipment or materials;</li> <li>d. landscaping or earthworks or stormwater or other infrastructure.</li> </ul>
PO108	E108
Habitable rooms within an Electricity supply substation buffer are located a sufficient distance from substations <sup>(80)</sup> to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields. Note - Habitable room is defined in the Building Code of Australia (Volume 1)	<ul> <li>Habitable rooms:</li> <li>a. are not located within an Electricity supply substation buffer; and</li> <li>b. proposed on a site subject to an Electricity supply supply substation<sup>(80)</sup> are acoustically insulted to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.</li> <li>Note - Habitable room is defined in the Building Code of Australia (Volume 1)</li> </ul>
PO109	No example provided.

buffe subs Sche Prote heal Note a no pers is pr	itable rooms within an Electricity supply substation er are acoustically insulated from the noise of a station <sup>(80)</sup> to achieve the noise levels listed in edule 1 Acoustic Quality Objectives, Environmental ection (Noise) Policy 2008 and provides a safe, thy and disturbance free living environment. e - To demonstrate achievement of the performance outcome, ise impact assessment report is prepared by a suitably qualified on. Guidance to preparing an noise impact assessment report rovided in Planning scheme policy – Noise.	
P01	10	E110
	elopment within a Pumping station buffer is located, gned and constructed to:	Development does not involve the construction of any buildings or structures within a Pumping station buffer.
a.	ensure that odour or other air pollutant impacts on the amenity of the development met the air quality of objectives in the Environmental Protection (Air) Policy 2008;	
b.	ensure that noise impacts on the amenity of the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008.	
Ove appl		path to determine if the following assessment criteria
	e - The applicable river and creek flood planning levels associated ined by requesting a flood check property report from Council.	with defined flood event (DFE) within the inundation area can be
PO1	11	No example provided.
Deve	elopment:	
a. b.	minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.	
P01	12	No example provided.
Deve	elopment:	
a. b.	maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment; does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding	

property.

Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.					
PO113	No example provided.				
Development does not:					
<ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> </ul>					
PO114	E114				
Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.	Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.				
PO115	E115				
Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.	Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.				
PO116	E116.1				
Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an unstream.	Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM: a. Urban area – Level III; b. Rural area – N/A; c. Industrial area – Level V; d. Commercial area – Level V.				
an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	E116.2				

	Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.					
PO117	No example provided.					
Development protects the conveyance of overland flow such that an easement for drainage purposes is provide over:						
a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;						
b. an overland flow path where it crosses more than one premises;						
c. inter-allotment drainage infrastructure.						
Note - Refer to Planning scheme policy - Integrated design for details and examples.						
Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.						
Additional criteria for development for a Park <sup>(57)</sup>						
PO118	E118					
Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:	Development for a Park <sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.					
a. public benefit and enjoyment is maximised;						
<li>b. impacts on the asset life and integrity of park structures is minimised;</li>						
c. maintenance and replacement costs are minimised						
Riparian and wetland setbacks						
PO119	E119					
Development provides and maintains a suitable setbac from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following matters:						
<ul><li>a. impact on fauna habitats;</li><li>b. impact on wildlife corridors and connectivity;</li></ul>	b. 30m from top of bank for W2 waterway and drainage line					

C.	impact on stream integrity;	C.	20m from top of bank for W3 waterway and drainage line
d.	impact of opportunities for revegetation and rehabilitation planting;	d.	100m from the edge of a Ramsar wetland, 50m from all other wetlands.
e.	edge effects.		
		are	e - W1, W2 and W3 waterway and drainage lines, and wetlands mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian wetland setbacks.

Scenic amenity - Regionally significant (Hills) and Locally important (Coast) (refer Overlay map - Scenic amenity to determine if the following assessment criteria apply)

PO120			E120				
Land a. b. Fend a. b. c. Build	dscaping complements the coastal landscape character and amenity; has known resilience and robustness in the coastal environment; ces and walls: do not appear visually dominant or conspicuous within its setting; reduce visual appearance through the use of built form articulation, setbacks, and plant screening; use materials and colours that are complementary to the coastal environment.	Whe	re loc nity o land fenc exist cotto whe inclu	cated in the Locally Important (Coast) scenic verlay: scaping comprises indigenous coastal species; es and walls are no higher than 1m; and ting pine trees, palm trees, mature fig and on trees are retained. re over 12m in height, the building design ides the following architectural character nents: curving balcony edges and walls, strong vertical blades and wall planes; balcony roofs, wall articulation expressed with different colours, curves in plan and section, and window awnings; roof top outlooks, tensile structures as shading			
ame	plements the particular bayside character and nity by adopting and incorporating a range of itectural character elements.		iv.	devices; lightweight structures use white frame elements in steel and timber, bold colour			
-	etation that contributes to bayside character and tity are: retained; protected from development diminishing their significance.			contrast.			

# Transport noise corridors (refer Overlay map - Transport noise corridors to determine if the following assessment criteria apply)

Note - This is for information purposes only. No requirements for accepted development or criteria for assessable development apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code

## Table 6.2.6.4.3 Setbacks

	Residential uses											
Height of wall		Frontage Frontage primary secondary to street					-		Frontage secondary to lane	Side non-built to boundary wall	Rear To OMP and wall	Trafficable water body To OMP and wall
	To wall	То ОМР	To covered car parking space*	To wall	To OMP	To covered car parking space*	To OMP, wall and covered car parking space*	To OMP and wall				
Less than 4.5m	Min 1m	Min 1m	Min 5.4m	Min 1m	Min 1m	Min 5.4m	Min 0.5m	Min 1.5m	Min 1.5m	Min 4.5m		
4.5 to 8.5m	Min 1m	Min 1m	N/A	Min 1m	Min 1m	N/A	Min 0.5m	Min 2m	Min 2m	Min 4.5m		
Greater than 8.5m	Min 5m	Min 3m	N/A	Min 2m	Min 1m	N/A	Min 0.5m	Min 2m up to 8.5m in height; plus 0.5m for every 3m in height (or storey) or part thereof over 8.5m	Min 5m	Min 4.5m		

Note - \* Does not apply to basement car parking areas

## Table 6.2.6.4.4 Built to boundary walls (Residential uses)

Lot frontage width	Mandatory / Optional	Length and height of built to boundary wall	
		Urban neighbourhood precinct	
Less than 7.5m	Mandatory - both sides unless a corner lot	Max Length: 80% of the length of the boundary Max Height: 8.5m	
7.5m to 12.5m	Mandatory - one side	Max Length: 70% of the length of the boundary Max Height: 10.5m	
Greater than 12.5m to 18m	Optional: i. on 1 boundary only; ii. where the built to boundary wall adjoins a lot with a frontage less than 18m.	Max Length: the lesser of 15m or 60% of the length of the boundary Max Height: 10.5m	
Greater than 18m	Not permitted.		

## Table 6.2.6.4.5 Car parking spaces

	S	Site proximity	Land use	Maximum number of car spaces to be provided	Minimum number of car Spaces to be provided
--	---	----------------	----------	---	---

Within 800m walking	Non-residential	1 per 30m <sup>2</sup> GFA	1 per 50m <sup>2</sup> GFA
distance of a higher order centre	Residential – permanent/long term	N/A	1 per dwelling*
	Residential – serviced/short term	3 per 4 dwellings* + staff spaces	1 per 5 dwellings* + staff spaces
Other (Wider catchment)	Non-residential	1 per 20m <sup>2</sup> GFA	1 per 30m <sup>2</sup> GFA
catchinenty	Residential – permanent/long term	N/A	1 per dwelling*
	Residential – serviced/short term	1 per dwelling* + staff spaces	1 per 5 dwellings* + staff spaces

Note - Car parking rates are to be rounded up to the nearest whole number.

Note -\* Where Dwellings are not being established (e.g. beds and communal area) the car parking rate specified above is to be provided per Non-residential GFA.

Note - Allocation of car parking spaces to dwellings is at the discretion of the developer.

Note - Residential - Permanent/long term includes: Multiple dwelling<sup>(49)</sup>, Relocatable home park<sup>(62)</sup>, Residential care facility<sup>(65)</sup>, Retirement facility<sup>(67)</sup>.

Note - Residential - Serviced/short term includes: Rooming accommodation<sup>(69)</sup> or Short-term accommodation<sup>(77)</sup>.

## **Density Figures**

## Figure 6.2.6.4.1 - Kallangur

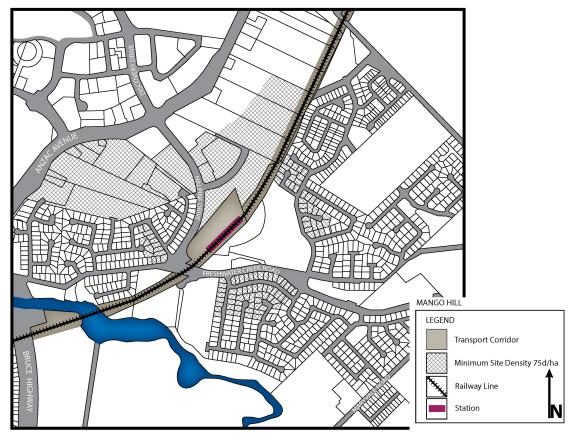


Figure 6.2.6.4.2 - Mango Hill

Figure 6.2.6.4.3 - Mango Hill East

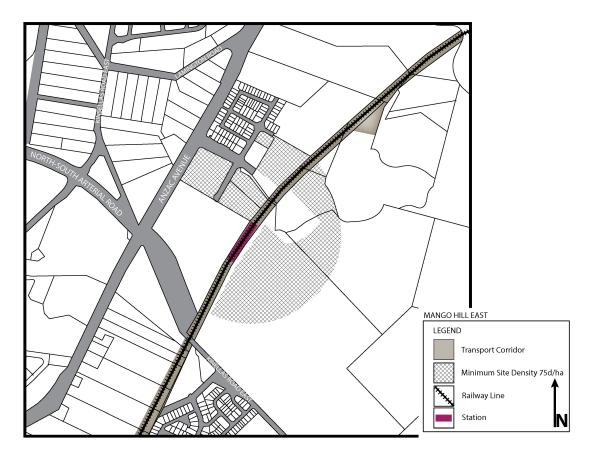




Figure 6.2.6.4.4 - Murrumba Downs



Figure 6.2.6.4.5 Kippa-Ring

### Movement network figures

Figure 6.2.6.4.6 - Dakabin



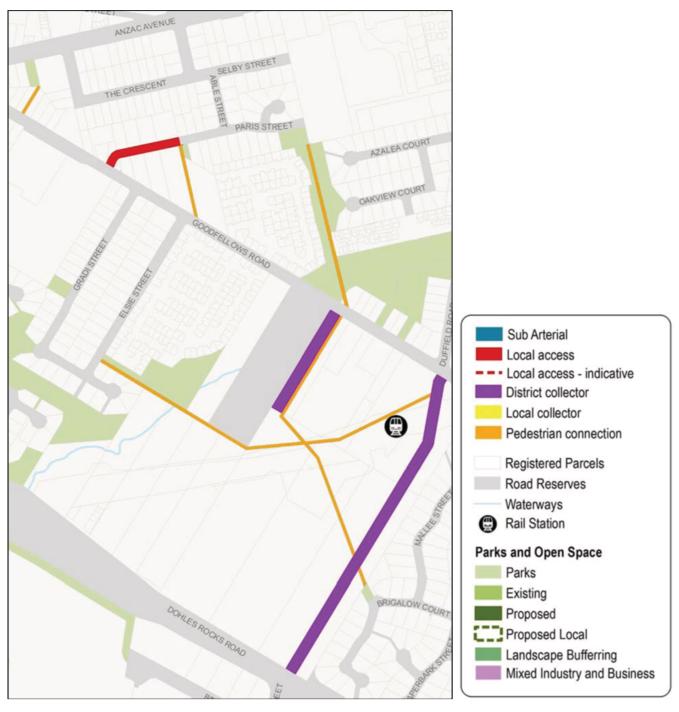
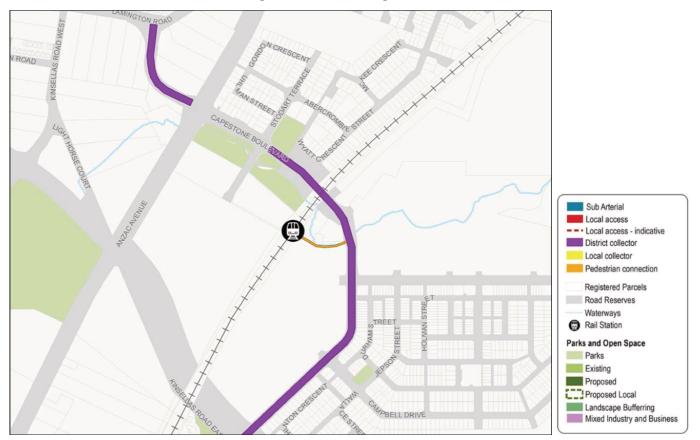


Figure 6.2.6.4.7 - Kallangur

### Figure 6.2.6.4.8 - Mango Hill



Figure 6.2.6.4.9 - Mango Hill East



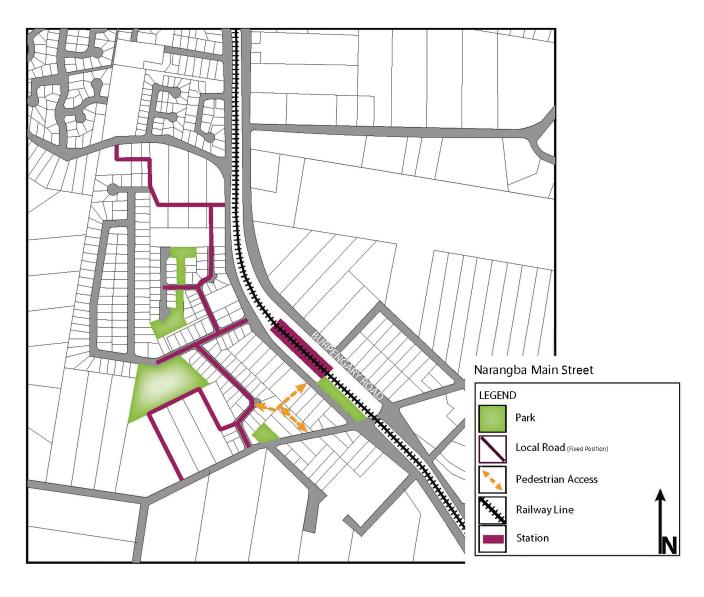


Figure 6.2.6.4.10 - Narangba - Main Street

Figure 6.2.6.4.11 - Petrie

