


NOTES:

1. Kerb ramps to be installed perpendicular (normal) to direction of travel.
2. Tactile ground surface indicators (TGSi) to comply with AS1428.4: Tactile Indicators
3. Minimum luminance contrast between the colour of the path and the colour of the TGSi shall be in accordance with AS1428.4.1 and the colour of TGSi's shall not be yellow.
4. All dimensions are in metres unless noted otherwise.

TGSi APPLICATION EXAMPLE PLANS – MID-BLOCK
 ALSO APPLICABLE AT INTERSECTIONS WITH LARGE RADIUS KERB RETURNS
 Scale A

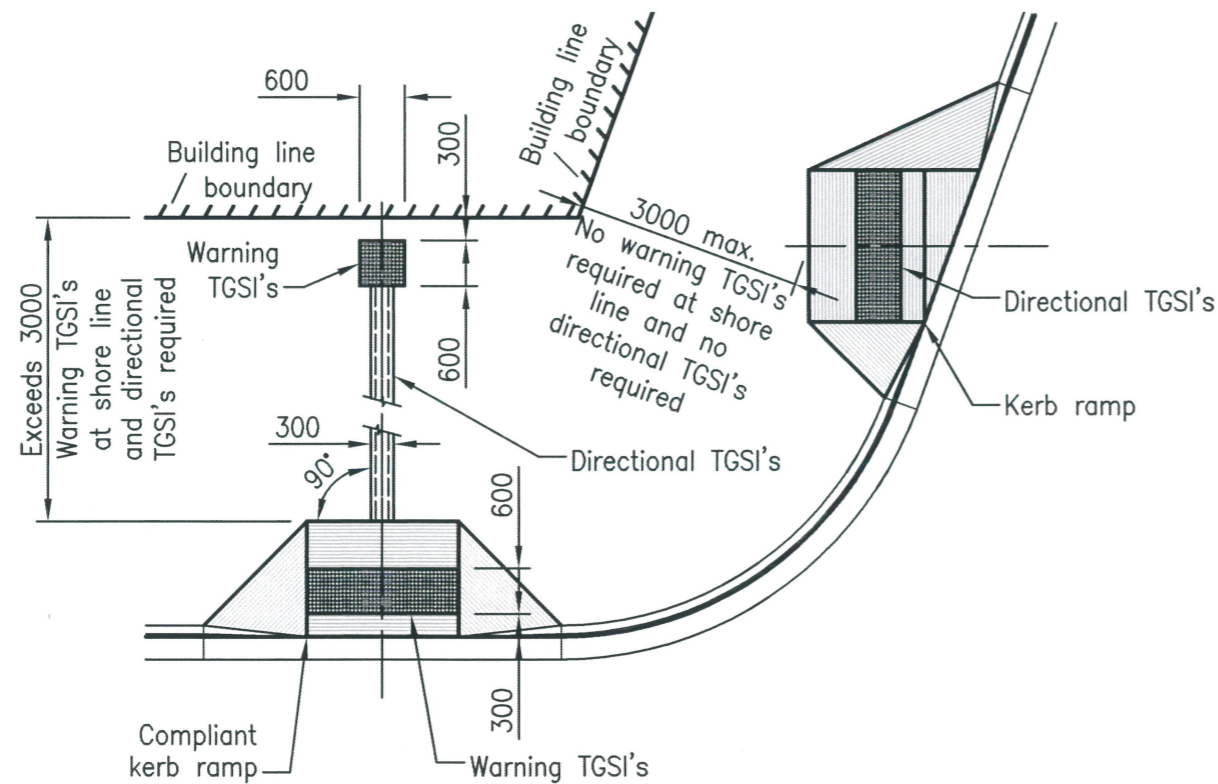

TGSi APPLICATION EXAMPLE PLAN – INTERSECTIONS
 ALSO APPLICABLE AT INTERSECTIONS WITH SMALL RADIUS KERB RETURNS
 Scale A

REVISIONS		INIT	DATE	SCALES		Drawn	BW	Date	07/16
E				A 0mm 500 1000 1500 2000 1:100		Coordinator	PP	Date	07/16
D						AUTHORISED			
C						 01/07/16 Manager Integrated Transport Planning & Design RPEQ 6872			
B									
A									
ORIGINAL ISSUE		BW	07/16						

**INSTALLATION OF TGSi
 ON RAMPED KERB CROSSINGS**



DRG No. **PC-2170**

ORIGINAL SIZE **A3** REVISION