




Stainless steel 'Stormwater' tag fixed to top of stake


LOCATOR STAKE PLAN

Scale B

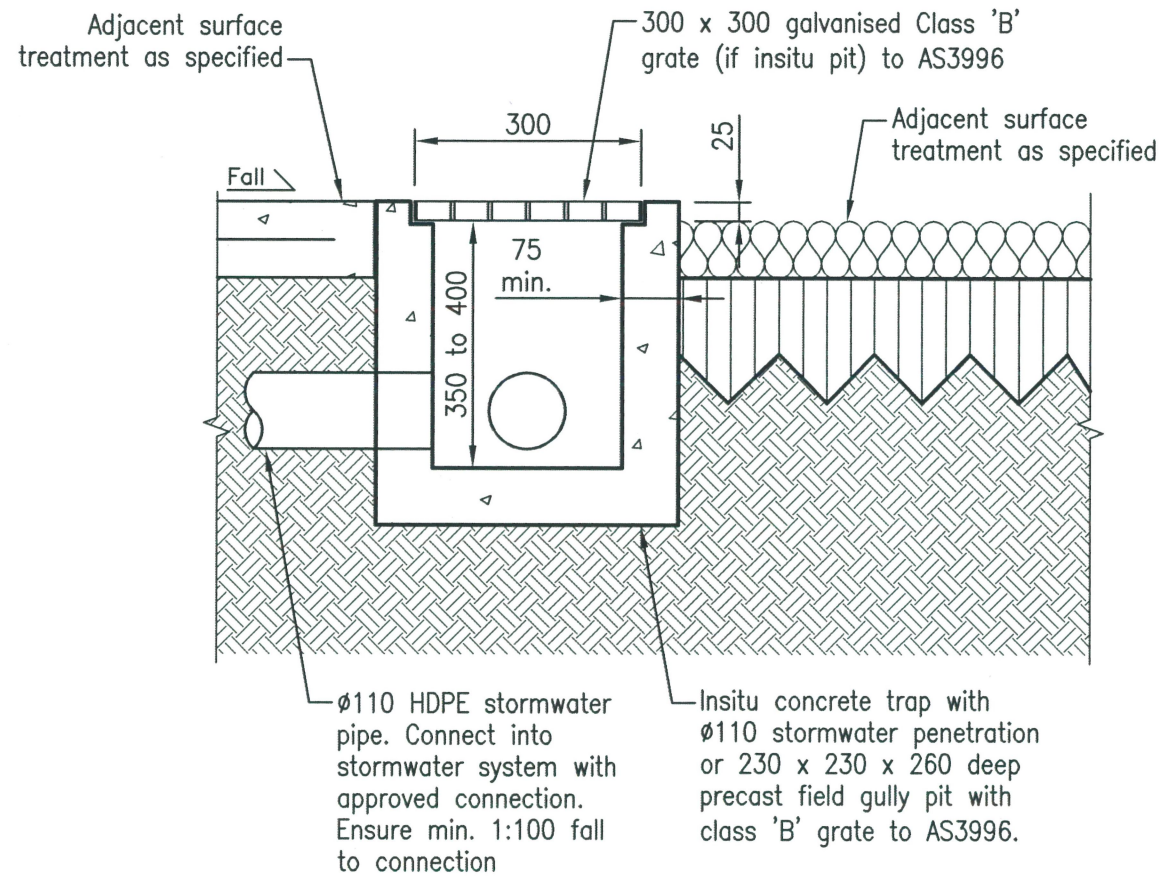

TYPE A SECTION

Scale A

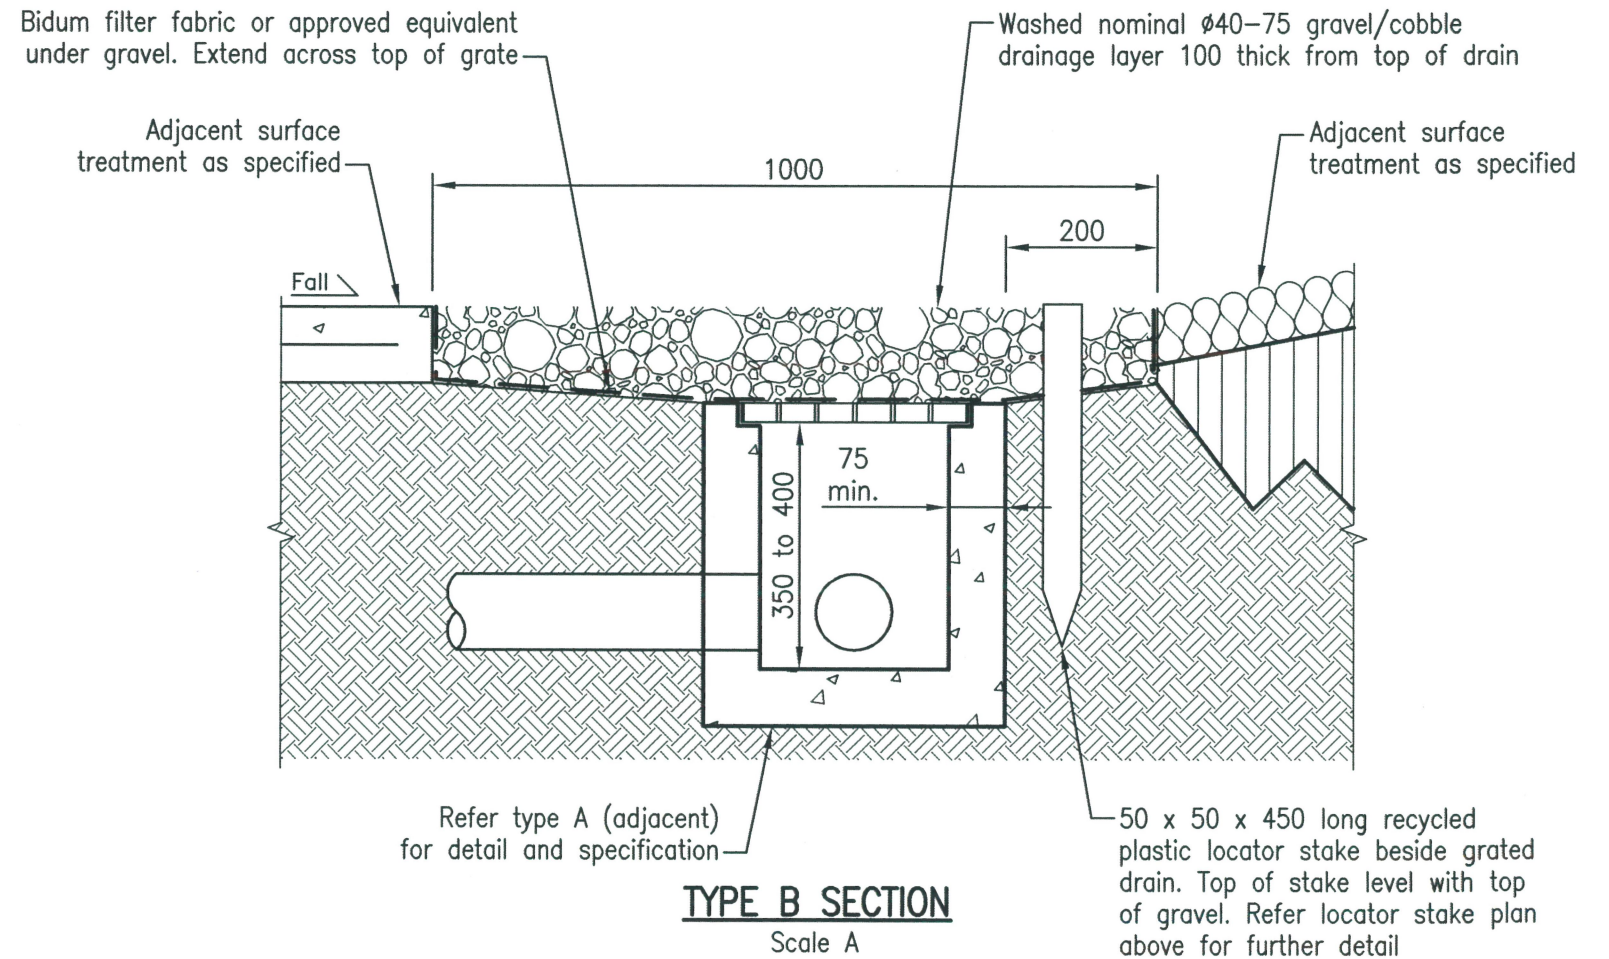


TYPE B SECTION


Scale A

NOTES:

1. Ensure mown height of grassed areas finishes flush with grate.
2. Ensure mulched garden areas finish 25mm below grate.
3. Mulch should not be used on steep slopes adjacent to grates or where ponding could cause the mulch to float and block the inlet grate.
4. Ensure pavement areas grade evenly towards grate at minimum 1:50.
5. Field inlet and connection to stormwater line to be to hydraulic engineers specification.
6. Inlet pits only to be used to drain low areas in landscaping and grassed areas. Not suitable for vehicular traffic or extensive pavement areas.
7. Current editions of Australian Standards shall be referenced, except where varied by specifications and/or drawings.
8. Dimensions are in millimetres unless noted otherwise.

REVISIONS	INIT	DATE	SCALES	Drawn	RH	Date	07/16
E			A 0mm 50 100 150 200 1:10 B 0mm 10 20 30 40 50 1:2.5	Coordinator	PP	Date	07/16
D				AUTHORISED  07/07/16 Manager Integrated Transport Planning & Design RPEQ 6872			
C							
B							
A							
X ORIGINAL ISSUE	RH	07/16					

DRAIN INLET PIT WITH GRATE


Moreton Bay Regional Council
 DRG No. **SW-5020**
 ORIGINAL SIZE **A3** REVISION