

#### **COPYRIGHT NOTICE**



This document, Hydrologic and Hydraulic Modelling - Redcliffe (RED), is licensed under the <u>Creative Commons</u>
<u>Attribution 4.0 Licence</u>, unless otherwise indicated.

### Please give attribution to: © Moreton Bay Regional Council 2016

We also request that you observe and retain any notices that may accompany this material as part of the attribution.

#### Notice Identifying Other Material and/or Rights in this Publication:

The author of this document has taken steps to both identify third-party material and secure permission for its reproduction and reuse. However, please note that where these materials are not licensed under a Creative Commons licence or similar terms of use, you should obtain permission from the rights holder to reuse their material beyond the ways you are permitted to use them under the <u>Copyright Act 1968</u>. Where third party material is used, this has been identified within the document. Please also see the Table of References.

#### **Further Information**

For further information about the copyright in this document, please contact: Moreton Bay Regional Council PO Box 159 CABOOLTURE QLD 4510

Email: mbrc@moretonbay.qld.gov.au

Phone: (07) 3205 0555

#### **DISCLAIMER**

The <u>Creative Commons Attribution 4.0 Licence</u> contains a Disclaimer of Warranties and Limitation of Liability. In addition: This flood study and its associated models and data were produced by BMT WBM Pty Ltd for Moreton Bay Regional Council only. The views expressed in the study are those of the author(s) alone, and do not necessarily represent the views of the Moreton Bay Regional Council. Reuse of this study or its associated data by anyone for any other purpose could result in error and/or loss. You should obtain professional advice before making decisions based upon the contents of this document.

# **APPENDIX A: INFRASTRUCTURE DATA ASSESSMENT REPORT**





Infrastructure Data Assessment
Report Hays Inlet and Redcliffe
Catchments Regional Floodplain
Database Stage 2 Backage 2



# Infrastructure Data Assessment Report Hays Inlet and Redcliffe Catchments Regional Floodplain Database Stage 2 Package 2

Prepared For:

Moreton Bay Regional Council

Prepared By:

BMT WBM Pty Ltd (Member of the BMT group of companies)

#### Offices

Brisbane
Denver
Mackay
Melbourne
Newcastle
Perth
Sydney
Vancouver



## **DOCUMENT CONTROL SHEET**

**BMT WBM Pty Ltd** 

BMT WBM Pty Ltd

Level 11, 490 Upper Edward Street

Brisbane 4000

Queensland Australia PO Box 203 Spring Hill 4004

FO BOX 203 Spring Fill 4

Tel: +61 7 3831 6744 Fax: +61 7 3832 3627

ABN 54 010 830 421

www.wbmpl.com.au

Document:

Project Manager:

R.B18104.001.01.P2\_HAY\_RED\_In

frastructure\_Data\_Report\_doublesid

ed.doc

Anne Kolega / Richard Sharpe

Client:

Moreton Bay Regional Council

Client Contact:

Steve Roso / Hester van Zijl

Client Reference

Regional

Floodplain Database

Stage 2

Title:

Infrastructure Data Assessment Report for the Hays Inlet and Redcliffe catchments as

part of Moreton Bay Regional Council's Regional Floodplain Database Stage 2

Author:

Anne Kolega / Richard Sharpe

Synopsis:

Infrastructure Data Assessment Report including the review and prioritisation of available and required infrastructure data for the detailed modelling of the Hays Inlet

and Redcliffe catchments for Moreton Bay Regional Councils RFD Stage 2

## **REVISION/CHECKING HISTORY**

REVISION NUMBER	DATE OF ISSUE	CHECKED BY		IS	SUED BY
0	19/10/2010	R Sharpe		A Kolega	
1	15/06/2012	M Hovey	Melhorey	R Sharpe	Ryshoop

## **DISTRIBUTION**

DESTINATION	REVISION				
	0	1	2	3	
MBRC	PDF	PDF			
BMT WBM File	PDF	PDF			
BMT WBM Library	PDF	PDF			

CONTENTS I

i

# **CONTENTS**

		Conter	its		
	1	lutno	DUCTION		1-1
	•	INTRO	DUCTION		1-1
		1.1	Background		1-1
		1.2	Scope		1-1
		1.3	Objective		1-1
	2	AVAIL	ABLE DATA FOR GAP ANALYSIS		2-1
	3	DATA	CAPTURE METHODOLOGY		3-1
		3.1	General Methodology		3-1
		3.2	Data Prioritisation (A and B)		3-1
		3.2	.1 Bridges and Culverts		3-1
		3.2	.2 Channels		3-2
		3.2	.3 Detention Basins		3-2
		3.2	.4 Bathymetry		3-2
	4	Conc	LUSION AND RECOMMENDATION		4-1
LIST	OF	Figuri	≣S		
	Fig	ure A-1	Infrastructure Data Summary Hays Inlet and Redcliffe Catchments	A-2	
	Fig	ure A- 2	Data Prioritisation Map Hays Inlet and Redcliffe Catchments	A-3	
	Fig	ure B-1	Hays Inlet Catchent Black Duck Lakes, Weir near Dohles Rocks Road	B-2	
	Fig	ure B-2	Hays Inlet catchment Black Duck Lake between Ogg Road and Blackall Road	B-2	
	Fig	ure B-3	Hays Inlet catchment, Dohles Rocks Road	B-3	
	Fig	ure B-4	Hays Inlet Catchment Brays Road	B-3	
	Fig	ure B-5	Hays Inlet Catchment, Bridge and Shop, School Road	B-4	
	Fig	ure B-6	Hays Inlet Catchment, Structure between Old Gympie road and School Road	B-4	
	Fig	ure B-7	Hays Inlet catchment, Bounty Boulevard, North Lakes	B-5	
	Fig	ure B-8	Redcliffe Catchment Ashmole Road	B-5	



Figure B-9	Redcliffe Catchment, Corner of Walsh and Yates Street,	
	Looking Upstream	B-6
Figure B-10	Redcliffe Catchment, Anzac Avenue (near Dorall Street)	B-6

# 1 Introduction

# 1.1 Background

Moreton Bay Regional Council (MBRC) is currently undertaking Stage 2 of developing a Regional Floodplain Database (RFD). The RFD includes the development of coupled hydrologic and hydraulic models for the entire local government area (LGA) that are capable of seamless interaction with a spatial database to deliver detailed information about flood behaviour across the region.

Stage 2 includes the detailed hydrologic and hydraulic modelling of 5 packages, which cover 11 catchments in MBRC LGA. This *Infrastructure Data Assessment report* forms part of the hydrologic and hydraulic modelling report of the Hays Inlet and Redcliffe catchments RFD Stage 2, Package 4.

# 1.2 Scope

The scope of this report can be summarised in the following key points:

- Review available information provided by Council and the Department of Transport and Main Roads (DTMR);
- Undertake a gap analysis based on the broadscale model results and other data provided by Council (i.e. cadastre, local roads, state controlled roads, topographic data);
- Identify infrastructure data that need to be collected for the detailed modelling;
- Prioritise the additional infrastructure data required; and
- Document methodology and required infrastructure data in an Infrastructure Data Assessment report.

# 1.3 Objective

The objective is to prioritise additional required data, based on the philosophy that detailed information is to be collected to develop a high quality model, with the 100 year ARI flood behaviour being of particular interest, more than smaller events.

Priority A data involves data that is critical for a high quality model; Priority B is to include all remaining data for which assumptions, such as field inspection and desktop measurements could be used *and* achieve a relatively high quality model.

This report has been provided to MBRC for review and further negotiation of required data considering the broader RFD objectives and potential budget constraints for all 5 packages.



# 2 AVAILABLE DATA FOR GAP ANALYSIS

The infrastructure data assessment was based on the following data being available at commencement of the study:

- Topographic data: The topography is based on LiDAR (Light Detection And Ranging) data collected in 2009 and provided by Department of Environment and Resource Management (DERM). The LiDAR data was used to create a 2.5m grid Digital Elevation Model (DEM);
- Hydrography Dataset provided by MBRC in September 2010;
- State controlled roads and minor roads GIS layers provided by MBRC in September 2010;
- As-constructed bridge plans for selected structures along state controlled roads provided by DTMR where available. The categorisation of high, medium and low priority for the DTMR structures was previously undertaken by Aurecon. Based on this desktop assessment, Council requested the as-constructed plans from DTMR to speed up the data consolidation process;
- As-constructed bridge plans for selected minor roads in MBRC LGA were provided by MBRC where available;
- Structure dataset provided by MBRC for the Hays Inlet catchment (derived from the former Pine Rivers Shire Council);
- The flood extents from the Stage 1 broadscale model sub-project were utilised to locate potential structures; and
- A site visit undertaken in the Hays Inlet and Redcliffe catchments on 1 October 2010.

# 3 DATA CAPTURE METHODOLOGY

# 3.1 General Methodology

This section describes the methodology for the gap analysis and data prioritisation. All available data outlined in Section 2 were converted into GIS layers and reviewed. The state controlled roads layers were overlaid with the broadscale flood extent in the probable maximum flood (PMF) event to locate waterway structures. Each crossing was marked, if none of the available data already existed in these locations (gap analysis).

The DTMR structures that have previously been categorised as *medium* and *low* priority were reviewed and prioritised.

The data prioritisation was undertaken based on the following considerations:

- The location of the structures within the catchment; e.g. structure data were considered lower priority at the upstream end of tributaries;
- The vicinity to denser populated areas; e.g. rural areas in the upper part of the catchment were considered lower priority;
- The height of a bridge structure, i.e. if the road and structure soffit is well above the water level (i.e. Houghton Highway Bridge), it is anticipated that a flow constriction can be applied to the model based on photos and the site visit. Selected photos taken during the site visit are presented in Appendix B (Figures B-1 to B-7); and
- The flood gradient and flood behaviour in the vicinity of the structures based on the broadscale
  model results; where a structure is located within a wide floodplain and not within the major
  flowpath, (downstream part of the catchment along Beachmere Road), details were considered
  of lower priority.

The outcomes of the gap analysis and prioritisation are presented in the section below.

# 3.2 Data Prioritisation (A and B)

## 3.2.1 Bridges and Culverts

The gap analysis in the Hays Inlet and Redcliffe catchments identified the following summary of available data and potential additional structure locations:

- MBRC bridge plans were provided for 1 structure in the Redcliffe catchment;
- DTMR bridges (high, medium and low category) were provided at approximately 9 locations in the Hays Inlet, and 3 locations in the Redcliffe catchment; and
- Structures with no available information have been located at 31 road and flood extent crossings.

Figure A-1 in the Appendix provides a summary of the available and the additional structures identified from the gap analysis. The data prioritisation undertaken in category A and B for the additional locations and the remaining DTMR structures are illustrated in Figure A-2.



The data prioritisation results in the following summary for bridges and culverts:

- 4 DTMR structures prioritised as category A (that were previously categorised "medium");
- 4 DTMR structures prioritised as category B (that were previously categorised "low");
- 19 additional crossings (bridges or culverts) prioritised as category A; and
- 12 additional crossings (bridges or culverts) prioritised as category B.

In consultation with MBRC, it is anticipated that Council will source and provide the DTMR asconstructed bridge plans (at east for priority A).

#### 3.2.2 Channels

From the site visit and aerial photography nine channels have been identified in the Redcliffe catchment. Detailed information for these channels is currently being sourced from Council.

## 3.2.3 Detention Basins

Two basins were identified in the Hays Inlet catchment in the vicinity of the Black Duck Lakes, to the North and the South of Dohles Rocks Road. Information on the basin embankment height is required for these locations; refer to Figure A-2.

# 3.2.4 Bathymetry

Based on the current DEM it is anticipated that no additional bathymetry data is required in the Hays Inlet and Redcliffe catchments.

# 4 CONCLUSION AND RECOMMENDATION

This Infrastructure Data Assessment report has summarised available structure data as well as locations where additional structure data is required. The additional structures have been prioritised in two categories.


Priority A data involves data that is critical for a high quality model; Priority B includes all remaining data for which assumptions, such as field inspection and desktop measurements could be used *and* achieve a relatively high quality model.


The development of the Regional Floodplain Database (RFD) will be used not only for the purposes of the RFD, but can also be used for other asset data management purposes by Moreton Bay Regional Council, and therefore this is a good opportunity for Council to collect additional data on waterway structures, especially in the former Caboolture Shire Council and Redcliffe City Council areas.



**APPENDIX A: Maps** 



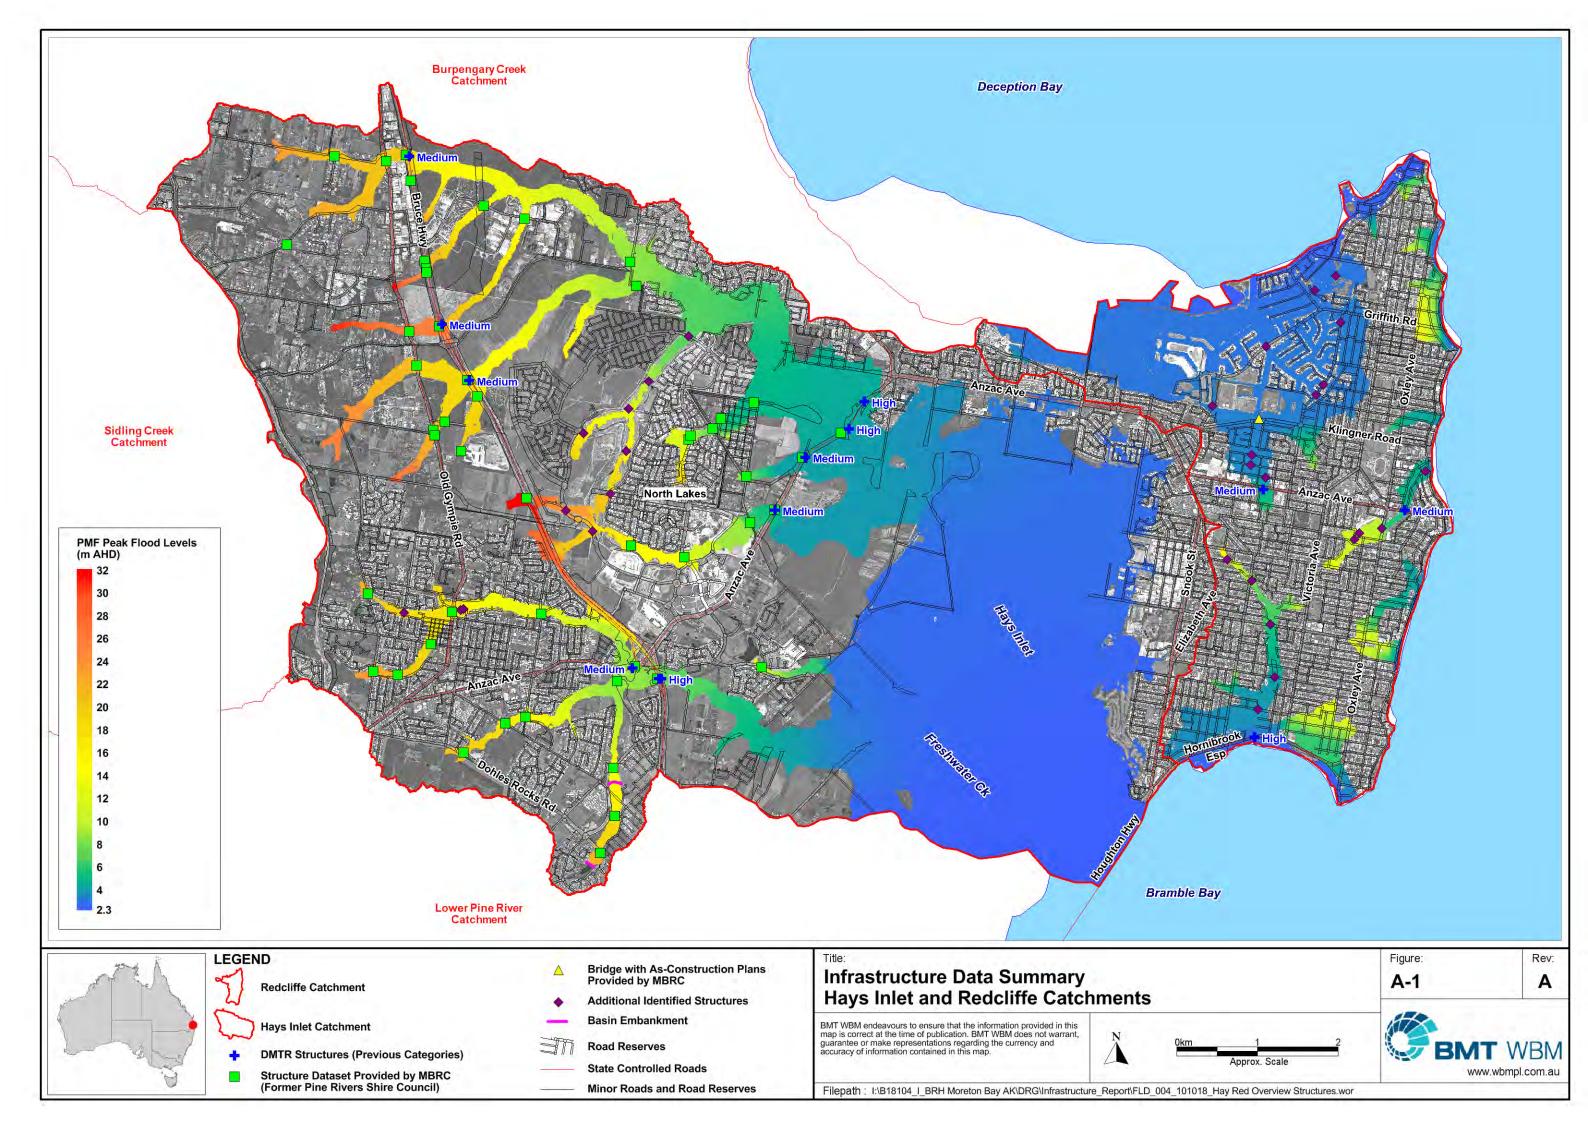

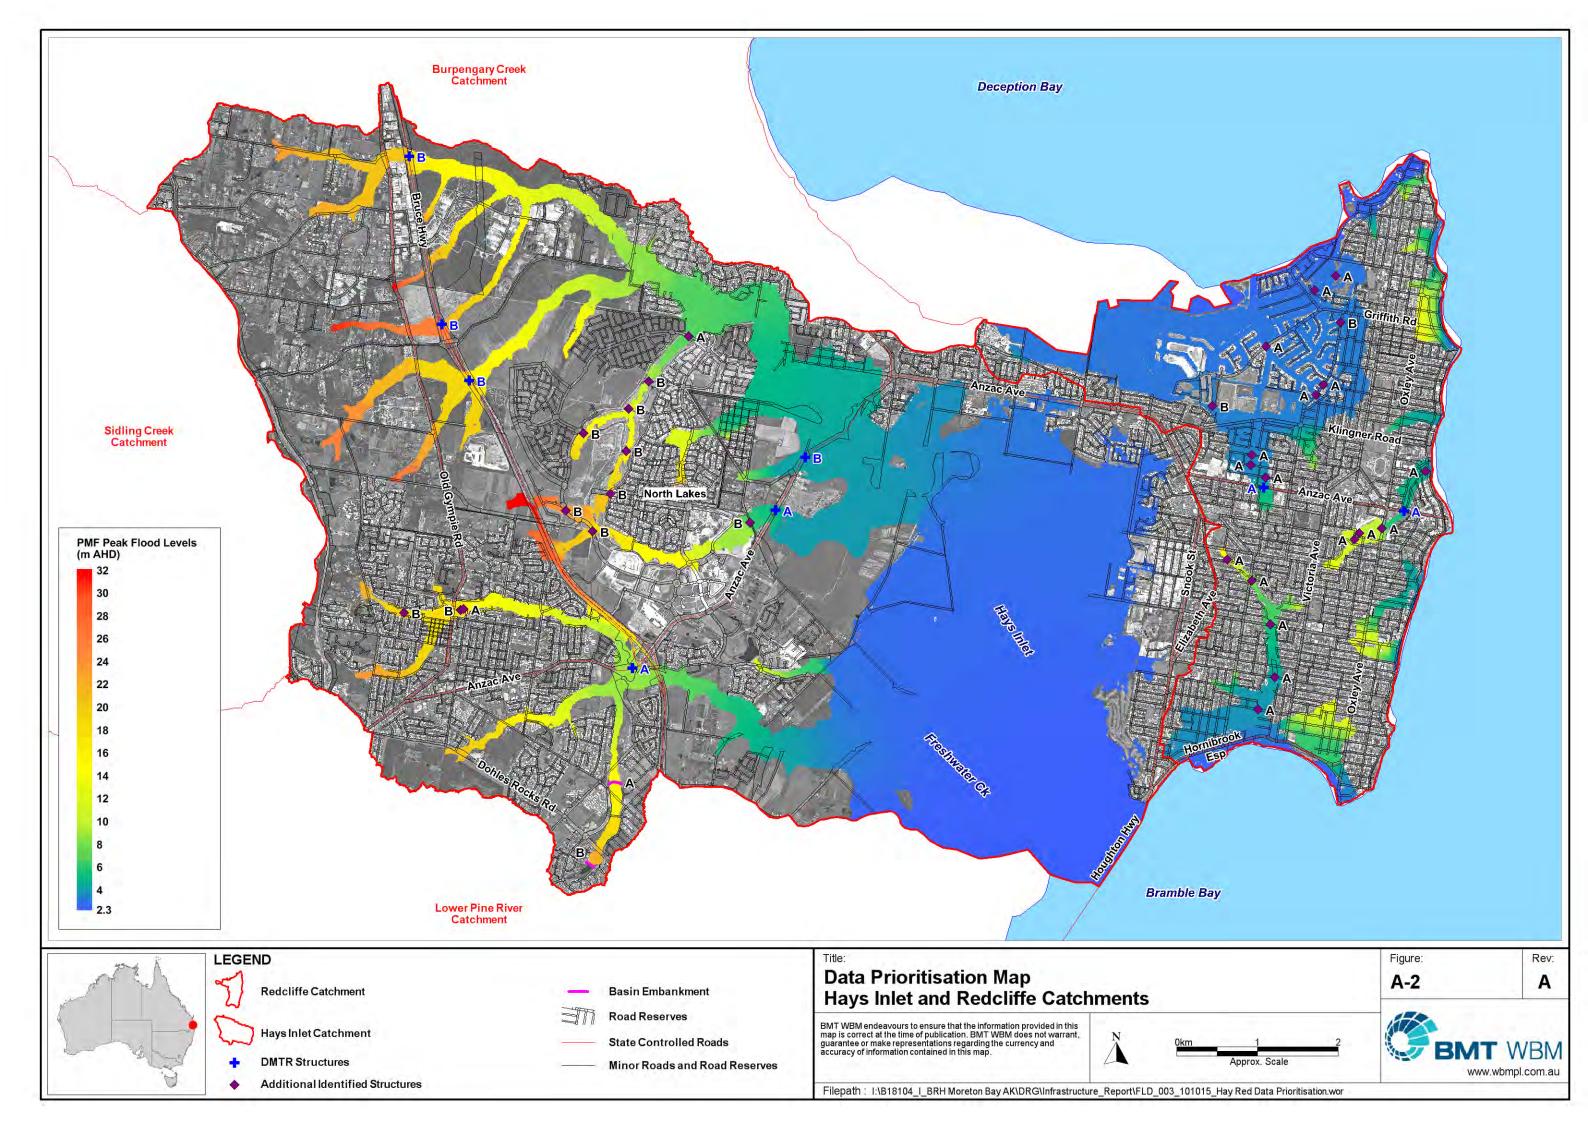

# **APPENDIX B: SITE VISIT PHOTOS**





Figure B-1 Hays Inlet Catchent Black Duck Lakes, Weir near Dohles Rocks Road



Figure B-2 Hays Inlet catchment Black Duck Lake between Ogg Road and Blackall Road



Figure B-3 Hays Inlet catchment, Dohles Rocks Road



Figure B-4 Hays Inlet Catchment Brays Road



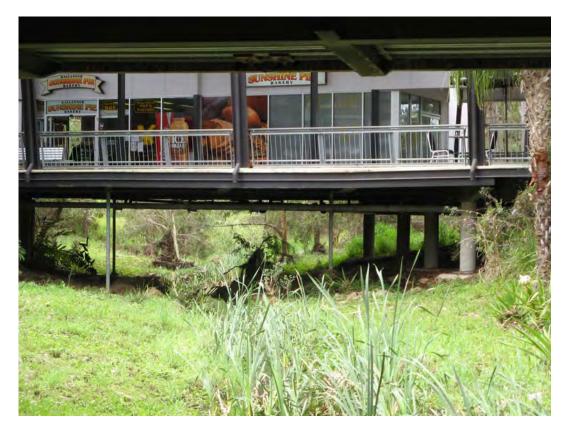


Figure B-5 Hays Inlet Catchment, Bridge and Shop, School Road



Figure B-6 Hays Inlet Catchment, Structure between Old Gympie road and School Road



Figure B-7 Hays Inlet catchment, Bounty Boulevard, North Lakes



Figure B-8 Redcliffe Catchment Ashmole Road





Figure B-9 Redcliffe Catchment, Corner of Walsh and Yates Street, Looking Upstream



Figure B-10 Redcliffe Catchment, Anzac Avenue (near Dorall Street)



BMT WBM Brisbane

Level 8, 200 Creek Street Brisbane 4000 PO Box 203 Spring Hill QLD 4004 Tel +61 7 3831 6744 Fax +61 7 3832 3627 Email wbm@wbmpl.com.au Web www.wbmpl.com.au

BMT WBM Denver

14 Inverness Drive East, #B132 Englewood Denver Colorado 80112 USA Tel +1 303 792 9814 Fax +1 303 792 9742 Email wbmdenver@wbmpl.com.au Web www.wbmpl.com.au

BMT WBM Melbourne

Level 5, 99 King Street Melbourne 3000 PO Box 604 Collins Street West VIC 8007 Tel +61 3 9614 6400 Fax +61 3 9614 6966 Email wbmmelbourne@wbmpl.com.au Web www.wbmpl.com.au

**BMT WBM Mackay** 

Suite 1, 138 Wood Street Mackay 4740 PO Box 4447 Mackay QLD 4740 Tel +61 7 4953 5144 Fax +61 7 4953 5132 Email wbmmackay@wbmpl.com.au Web www.wbmpl.com.au

BMT WBM Newcastle

126 Belford Street Broadmeadow 2292 PO Box 266 Broadmeadow NSW 2292 Tel +61 2 4940 8882 Fax +61 2 4940 8887 Email wbmnewcastle@wbmpl.com.au Web www.wbmpl.com.au

BMT WBM Perth


1 Brodie Hall Drive Technology Park Bentley 6102 Tel +61 8 9328 2029 Fax +61 8 9486 7588 Email wbmperth@wbmpl.com.au Web www.wbmpl.com.au

BMT WBM Sydney

Level 1, 256-258 Norton Street Leichhardt 2040 PO Box 194 Leichhardt NSW 2040 Tel +61 2 9713 4836 Fax +61 2 9713 4890 Email wbmsydney@wbmpl.com.au Web www.wbmpl.com.au

BMT WBM Vancouver

1190 Melville Street #700 Vancouver British Columbia V6E 3W1 Canada Tel +1 604 683 5777 Fax +1 604 608 3232 Email wbmvancouver@wbmpl.com.au Web www.wbmpl.com.au

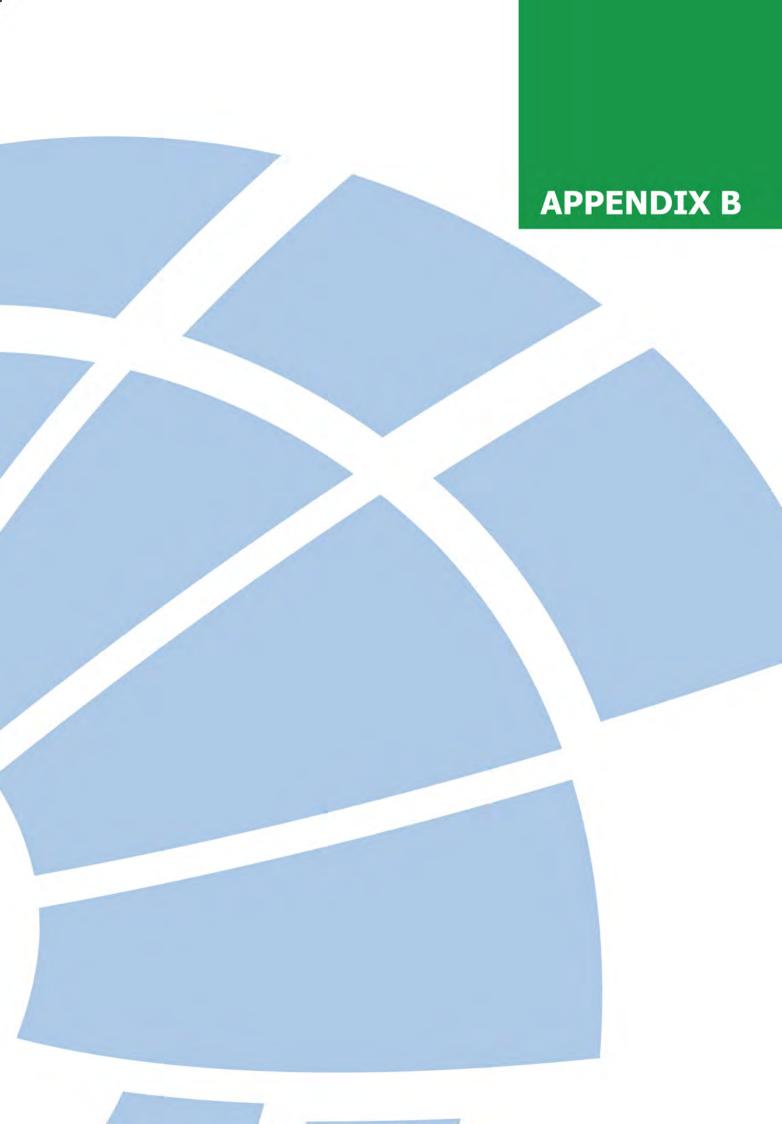

# **APPENDIX B: HYDROGRAPHY REVIEW REPORT**





BMT WBM Pty Ltd Level 11, 490 Upper Edward Street Brisbane 4000 Queensland Australia PO Box 203 Spring Hill 4004

Tel: +61 7 3831 6744 Fax: +61 7 3832 3627

ABN 54 010 830 421

www.wbmpl.com.au

Our Ref: AK: L.B18104.002.Hydrography Review.doc

10 December 2010

Hester van Zijl Waterways & Coastal Planning, Infrastructure Planning Moreton Bay Regional Council

Attention: Hester van Zijl

Dear Hester,

RE: Hydrography Review Report for the Hays Inlet, Redcliffe and Caboolture River Catchments Regional Floodplain Database Stage 2, Packages 2 and 4

## 1 Background

Moreton Bay Regional Council (MBRC) is currently developing a Regional Floodplain Database (RFD). The RFD includes the development and storage of hydrologic and hydraulic models for the entire Local Government Area (LGA). These model input and output data will be included in a spatial database to store detailed information about flood behaviour across the region.

Stage 2 of the RFD comprises the detailed modelling of 11 catchments (5 packages) covering the MBRC LGA.

This Hydrography Review Report forms part of the modelling of the following two packages, RFD, Stage 2:

- Hays Inlet and Redcliffe catchments (package 2); and
- Caboolture River catchment (package 4).

#### 2 Scope

The scope of this hydrography review can be summarised by the following key points:

- Review the subcatchment delineation as part of Stage 1 (broadscale modelling);
- Review previous flood studies within the Hays Inlet, Redcliffe and Caboolture River catchments (provided by MBRC);
- Identify areas that are to be refined; and
- Propose changes and provide a report and digital data to MBRC for review.

MBRC will review the proposed changes and confirm acceptance prior to the amendment of models. This staged approach ensures that detailed Quality Assurance checks are performed and that Council is heavily involved in the study, which will enhance future usage of the models and data within Council. Council's review is also important to consider catchment delineation for modelling of proposed development (that MBRC is aware of to date). It also ensures consistency with Council's naming and identifier (ID) conventions.

## 3 Objective

The main objective of this task is to create a solid level of detail for future modelling within the catchments, which is consistent with Council's hydrography dataset and the adopted identifiers.

This task focuses on the supply of a digital dataset, which can be utilised and amended by MBRC.

## 4 Hydrography Review Data

The following data was utilised for this assessment:

- Hydrography dataset (catchment delineation) provided by MBRC in September 2010;
- Flood extent (100 Year Embedded Design Storm) derived from RFD, Stage 1, broadscale modelling (BMT WBM, 2010);
- Flood extent (100 Year ARI) of the previous flood study for the Caboolture River catchment (Australian Water Engineering, 1994) provided by MBRC in November 2010;
- Flood extent from combined and transition flood study results (100 Year ARI) based on previous flood studies and storm surge studies in the Hays Inlet and Redcliffe catchments (various consultants). The Hays Inlet catchment was previous split into two subcatchments, formerly called Saltwater and Freshwater Creek catchments; and
- Digital Elevation Model for the three catchments provided by MBRC in September 2010 and based on LiDAR data collected in 2009 and derived from the Department of Environment and Resource Management (DERM).

#### 5 Methodology

The original subcatchment delineation was reviewed utilising the data outlined above. It was noted that in some localised areas the resolution of the original subcatchment delineation is too coarse to replicate the flood extent from the previous studies. These areas were identified by comparing the flood extent from the previous studies with the flood extent from the broadscale models, and checking for areas where the flood extent from the previous studies covered additional tributaries or extended further upstream. The difference in the flood extent is due to the subcatchment breakdown, the associated distribution of flow within each subcatchment and/or the location of the inflows to the hydraulic model.

# 6 Proposed Changes

Subcatchments that were considered too coarse were subdivided, thereby refining the hydrography and the associated future model output and flood information across the catchments. The proposed changes to the subcatchments are illustrated in Figures 1 and 2. Figures 1 and 2 also show the original subcatchment delineation and the flood extent from the broadscale models and the previous studies in the Hays Inlet and Redcliffe catchments and the Caboolture River catchment respectively.

Accompanying this report, two digital datasets have been provided to MBRC on 08 December 2010:

- DWCP\_Hydro\_Catchments\_Minor\_BMTWBMrevised.TAB, comprising all subcatchments including the proposed subcatchments; and
- Proposed\_catchment\_delineation.TAB including only the catchments that we propose to change within the three catchments of Redcliffe, Hays Inlet and Caboolture.

The following subcatchments are proposed to be subdivided:

Subcatchment Identifier	Catchment	Minor Basin
FWC_01_14222	Freshwater Creek	Hays Inlet
FWC_02_01351	Freshwater Creek	Hays Inlet
FWC_05_00000	Freshwater Creek	Hays Inlet
FWC_05_00808	Freshwater Creek	Hays Inlet
FWC_08_02696	Freshwater Creek	Hays Inlet
SWC_01_18277	Saltwater Creek	Hays Inlet
SWC_01_18995	Saltwater Creek	Hays Inlet
SWC_02_00000	Saltwater Creek	Hays Inlet
SWC_02_00970	Saltwater Creek	Hays Inlet
SWC_04_00264	Saltwater Creek	Hays Inlet
SWC_08_00418	Saltwater Creek	Hays Inlet
SWC_12_03272	Saltwater Creek	Hays Inlet
SWC_14_04906	Saltwater Creek	Hays Inlet
SWC_14_05488	Saltwater Creek	Hays Inlet
SWC_20_00619	Saltwater Creek	Hays Inlet
SWC_22_01072	Saltwater Creek	Hays Inlet
SWC_24_00639	Saltwater Creek	Hays Inlet
SWC_26_01113	Saltwater Creek	Hays Inlet
SWC_28_01496	Saltwater Creek	Hays Inlet
SWC_32_01672	Saltwater Creek	Hays Inlet
SWC_40_00247	Saltwater Creek	Hays Inlet
GYM_01_08692	Gympie Creek	Caboolture River
GYM_04_01218	Gympie Creek	Caboolture River
GYM_06_00322	Gympie Creek	Caboolture River
WAR_01_12320	Wararba Creek	Caboolture River
WAR_01_13474	Wararba Creek	Caboolture River
WAR_44_00000	Wararba Creek	Caboolture River
WAR_50_04019	Wararba Creek	Caboolture River
WAR_50_06071	Wararba Creek	Caboolture River
WAR_52_00000	Wararba Creek	Caboolture River

The subcatchment breakdown for the subcatchment with the ID "WAR\_50\_06071" is suggested for consistency of subcatchment sizes in this vicinity (not because of previous flood studies).

## 7 Recommendation

We recommend that Council reviews the proposed changes and provides feedback on the proposed changes. Based on this feedback we will adopt a final catchment breakdown and update the hydrologic model based on the agreed catchment breakdown as necessary.

#### 8 Reference

BMT WBM (2010), Hydraulic Modelling (Broadscale) Regional Floodplain Database, Stage 1, Sub-project 1D prepared for Moreton Bay Regional Council; and

Australian Water Engineering, 1994, Caboolture Flood Study comprising Caboolture River, King John and Lagoon Creek, prepared for Caboolture Shire Council.

Please contact myself or Richard Sharpe should you wish to discuss the report.

Yours faithfully BMT WBM Pty Ltd


d. holege


Anne Kolega

Enclosed:

Figure 1: Hydrography Review and Proposed Changes Hays Inlet and Redcliffe Catchments

Figure 2: Hydrography Review and Proposed Changes Caboolture River Catchment

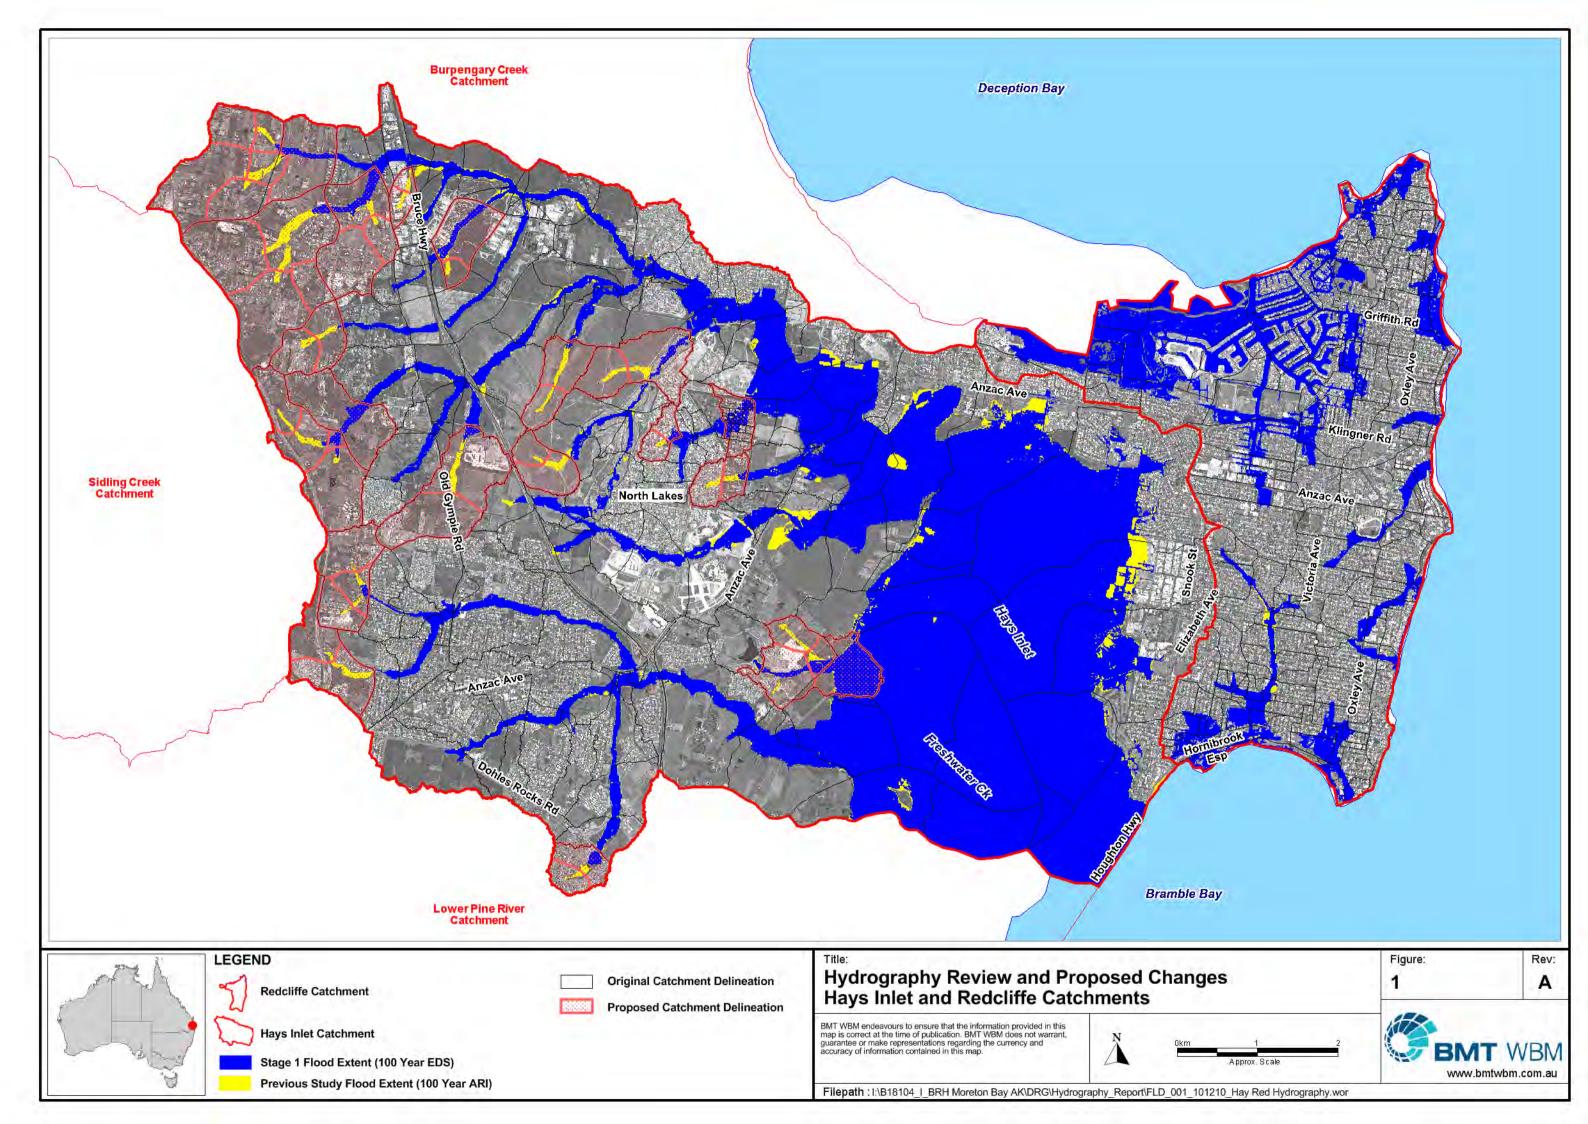

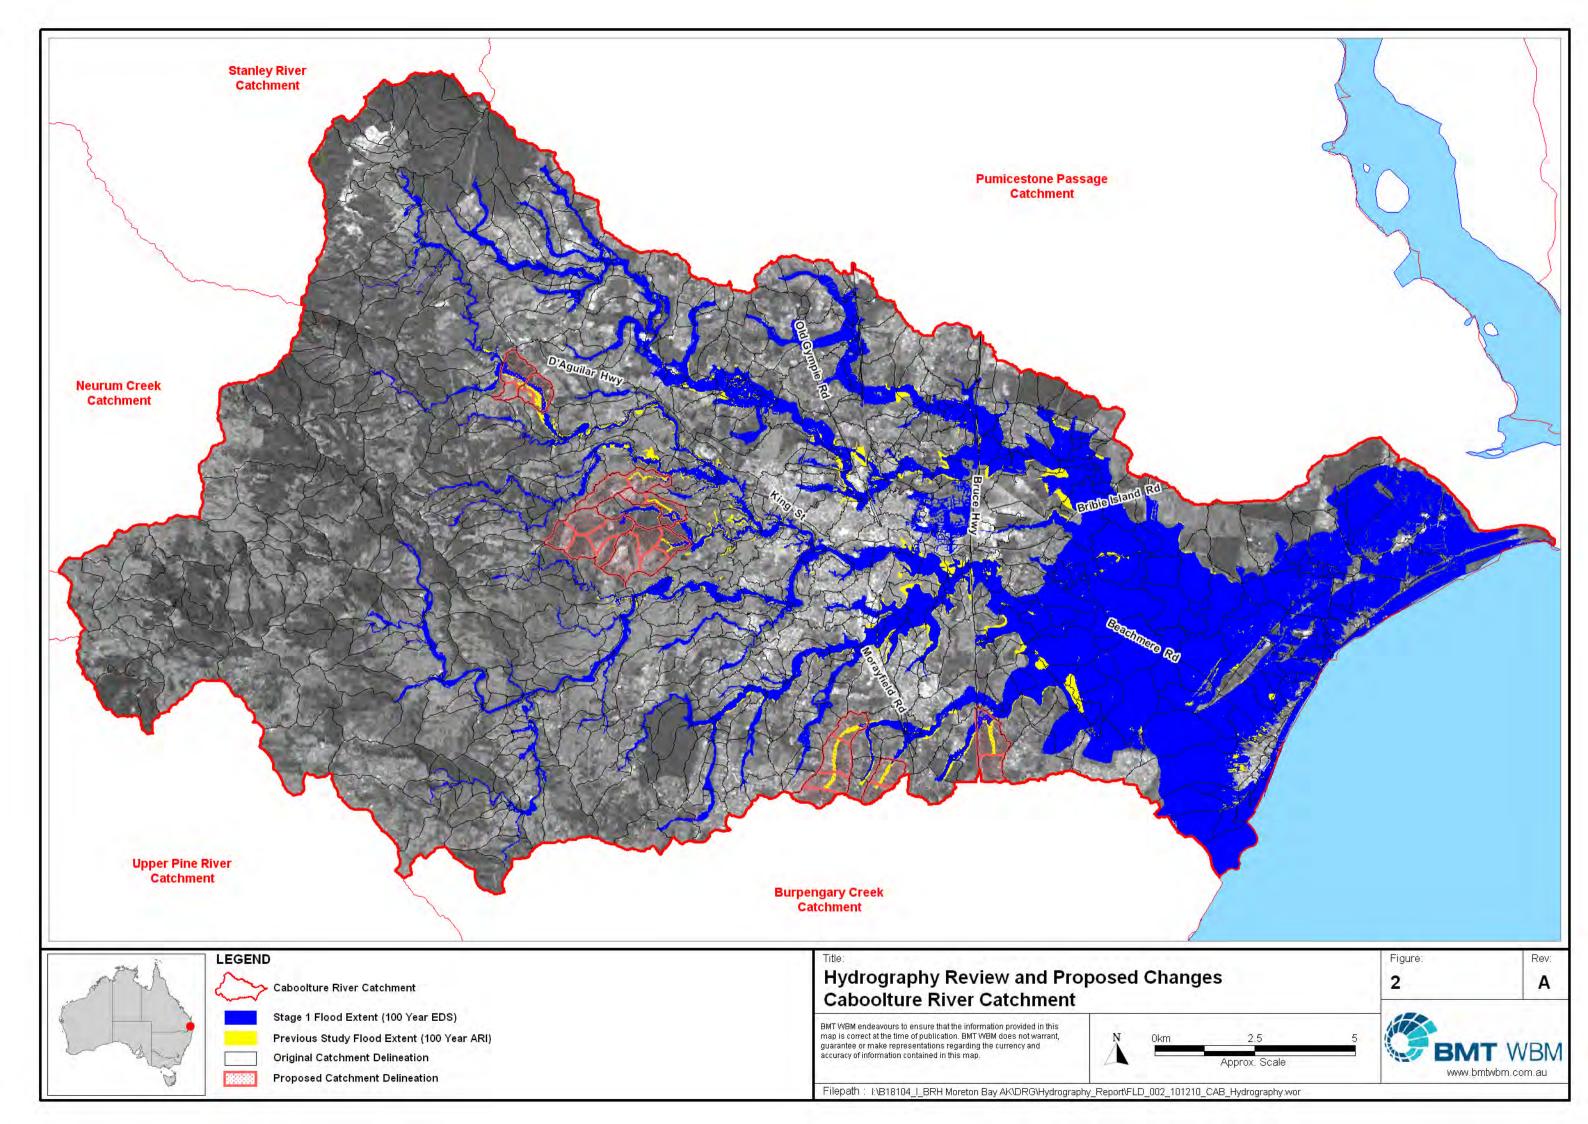




# **APPENDIX C: CALIBRATION AND VALIDATION REPORT**





Calibration Feasibility Report
Hays Inlet and Redcliffe Catchments
Regional Floodplain Database
Stage 2

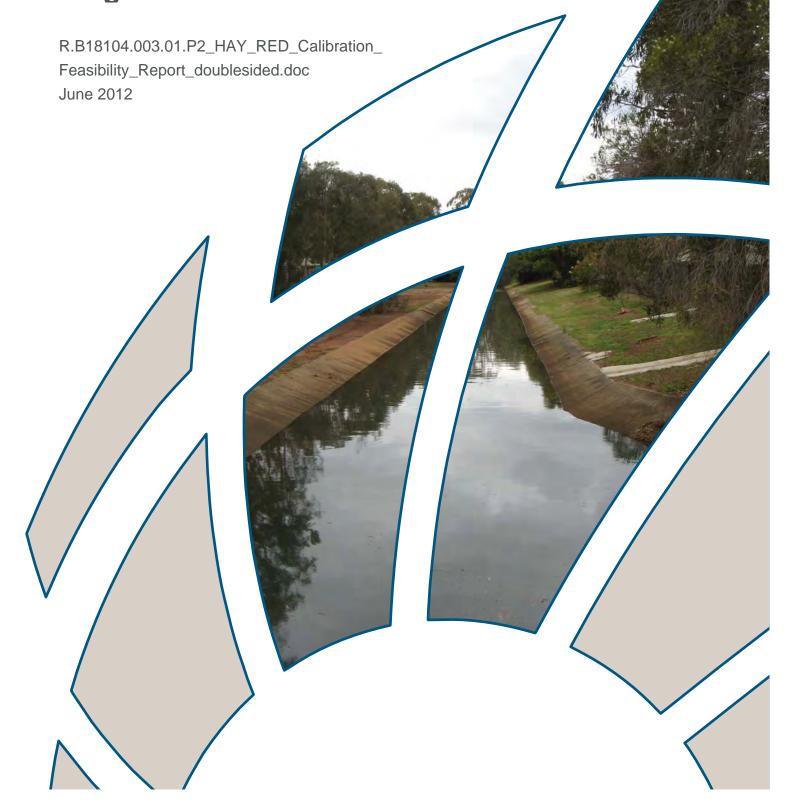

# Calibration Feasibility Report Hays Inlet and Redcliffe Catchments Regional Floodplain Database Stage 2

Prepared For:

Moreton Bay Regional Council

Prepared By:

BMT WBM Pty Ltd (Member of the BMT group of companies)

**Offices** 

Brisbane
Denver
Mackay
Melbourne
Newcastle
Perth
Sydney
Vancouver



### **DOCUMENT CONTROL SHEET**

**BMT WBM Pty Ltd** 

BMT WBM Pty Ltd

Level 11, 490 Upper Edward Street

Brisbane 4000 Queensland Australia

PO Box 203 Spring Hill 4004

Tel: +61 7 3831 6744 Fax: +61 7 3832 3627

ABN 54 010 830 421

www.wbmpl.com.au

Document:

R.B18104.003.01.P2\_HAY\_RED\_C

alibration\_Feasibility\_Report\_doubl

esided.doc

Project Manager:

Richard Sharpe

Client:

Moreton Bay Regional Council

Client Contact:

Steve Roso

Client Reference

Regional Floodplain Database

Title: Calibration Feasibility Report Hays Inlet and Redcliffe Catchments Regional Floodplain

Database Stage 2

Author: Richard Sharpe \ Anne Kolega

Synopsis: Calibration Feasibility Report including the review of available rainfall and river gauge

data for the calibration of the combined hydrologic and hydraulic models developed for the Hays Inlet and Redcliffe catchment for Moreton Bay Regional Councils RFD Stage

2

### **REVISION/CHECKING HISTORY**

REVISION NUMBER	DATE OF ISSUE	CHECKED BY		ISSUED BY	
0 1	24 January 15 June 2012	AK MH	Melhorey	RGS RGS	Ryshoop

### **DISTRIBUTION**

DESTINATION	REVISION			
	0	1	2	3
MBRC	PDF	PDF		
BMT WBM File	PDF	PDF		
BMT WBM Library	PDF	PDF		

CONTENTS

i i

# **CONTENTS**

		Conte	11.5		
		List of	Figures		i
	1	Intro	DUCTION		1-1
		1.1	Background		1-1
		1.2	Scope		1-1
	2	Ніѕто	RICAL FLOODING		2-1
	3	AVAIL	ABLE DATA		3-1
		3.1	Stream Gauge Data		3-1
		3.2	Rainfall Data		3-1
		3.3	Maximum Height Indicators		3-2
		3.4	Water Quality Event Monitoring		3-2
		3.5	Historic Flood Levels		3-3
		3.6	Resident Survey		3-3
	4	Conc	LUSIONS AND RECOMMENDATIONS		4-1
	5	REFER	RENCE		5-1
LIST	of l	FIGURI	ES		
	Fig	ure 3-1	Rainfall and River Stream Gauge Locations Hays Inlet and Redcliffe Catchments	3-4	
List	OF	TABLE	ES .		
	Tab	ole 3-1	Rainfall Data Summary	3-1	
		ole 3-2	Maximum Height Indicators Summary	3-2	
Table 3-3		ole 3-3	Water Quality Event Monitoring Summary		



## 1 Introduction

# 1.1 Background

Moreton Bay Regional Council (MBRC) is currently undertaking Stage 2 of developing a Regional Floodplain Database (RFD). The RFD includes the development of coupled hydrologic and hydraulic models for the entire local government area (LGA) that are capable of seamless interaction with a spatial database to deliver detailed information about flood behaviour across the region.

Stage 2 includes the detailed hydrologic and hydraulic modelling of 5 packages, which cover 11 catchments in MBRC LGA. This *Calibration Feasibility report* forms part of the hydrologic and hydraulic modelling report of the Hays Inlet and Redcliffe catchments RFD Stage 2, Package 2. Through Stage 2 of the RFD, hydraulic models of the Hays Inlet and Redcliffe catchments will be developed. The aim of this assessment is to investigate the feasibility of calibrating these hydraulic models by considering the quantity and quality of rainfall gauge, river gauge and other information on flooding in the catchments.

# 1.2 Scope

The scope of this calibration feasibility assessment and report can be summarised as follows:

- Review available information on historical flooding provided by MBRC sourced from MBRC and Queensland Department of Environment and Resource Management (DERM);
- Collect river stream gauge data available from the Bureau of Meteorology (BoM);
- Document available data for model calibration, such as rainfall and river levels; and
- Assess the feasibility of using recorded data from historical flood events to calibrate the Hays Inlet and Redcliffe hydraulic models.

### 2 HISTORICAL FLOODING

The Redcliffe peninsular has a number of canals and drains that are susceptible to the ingress of sea water or backup of rainfall runoff in the drains during high tides. King tides are known to cause some flooding in the streets of Redcliffe. Rainfall records in the catchment that have been reviewed as part of this assessment (first gauges installed in 1970) suggest that the most significant rainfall events were in 1974, 1980 and 1981.

The Hays Inlet estuary flows into Bramble Bay. As such the lower reaches of the Saltwater and Freshwater Creeks may be susceptible to flooding during high tides and ocean storm surges. The rainfall records reviewed as part of this assessment (first gauges installed in 1970) suggest that the Hays Inlet catchment's most significant rainfall event occurred in 1974. A number of rainfall events have occurred in the catchment, but none in the reviewed records stand out as being especially large and infrequent. This suggests that a large infrequent rainfall event has not occurred in the catchment since the rainfall gauges were installed in 1970.

It is noted that the Pine River and the Caboolture River catchments recorded major rainfall depth in January 2011, resulting in the highest river levels on record for the Caboolture River. However this event did not result in large amounts of rainfall (or flooding issues) in the Hays Inlet and Redcliffe catchments.



### 3 AVAILABLE DATA

# 3.1 Stream Gauge Data

Stream data received from MBRC were reviewed and none was identified to be located within the Hays Inlet or Redcliffe catchment areas. BoM's river data stations were also reviewed online (*Source: http://www.bom.gov.au/qld/flood/seast.shtml*) with no gauge stations found within the catchment areas.

### 3.2 Rainfall Data

Rainfall gauge data was provided by MBRC comprising the three categories:

- Rainfall Daily;
- · Rainfall Alert; and
- Pluviometer (6-minute interval records).

Review was undertaken to identify relevant rainfall data from stations that are located within the Hays Inlet and Redcliffe catchments. Table 3-1 summarises the rainfall data owned by BoM and provided by MBRC for the Hays Inlet and Redcliffe catchments, and Figure 3-1 highlights the gauge locations.

**Sensor Name BoM Station Start Date** End Date **Sensor Type** Lipscombe Road AL Rainfall Alert 540445 06/2008 09/2009 02/1998 Bramble Bay Bowling Club Rainfall Daily 40807 03/1990 Clontarf Rainfall Daily 40965 01/1987 ongoing Mango Hill Rainfall Daily 40986 11/1979 03/2009 40159 01/1970 10/1986 Narangba Railway Station Rainfall Daily Margate Collins St Rainfall Daily 40180 11/1886 ongoing Redcliffe Council Rainfall Daily 40697 02/1981 11/2004 Margate Collins St Pluviometer 40180 05/1989 03/1963 Redcliffe Pluviometer 40958 11/2004 ongoing Redcliffe Council Pluviometer 40697 05/1989 11/2004

Table 3-1 Rainfall Data Summary

7.9

18.6

# 3.3 Maximum Height Indicators

Maximum height indicators from MBRC were reviewed. The gauge stations identified within the Hays Inlet catchment are listed in Table 3-2 and shown in Figure 3-1. These height indicators are typically used for road safety purposes and are not appropriate for hydraulic model calibration.

CreekLocationLevel RLBlack duck CreekBrays Road9.2Freshwater CreekHalpine Dam Spillway18.5Freshwater Creek NorthDuffield Road12.1

**Brays Road** 

Table 3-2 Maximum Height Indicators Summary

# 3.4 Water Quality Event Monitoring

Freshwater Creek South

Saltwater creek -

Tributary C

MBRC has installed a number of Water Quality Event Monitoring data which were also reviewed for utilisation during model calibration. Gauge stations identified within Hays Inlet catchment are listed in Table 3-3.

North Lakes Golf Course

Creek	Location
Saltwater Creek - Tributary C	Kinsellas Road West - Mango Hill
Saltwater Creek - Tributary A	North Ridge Circuit - North Lakes
Freshwater Creek	Bruce Highway - Murrumba Downs
Freshwater Creek - Black Duck 1	Ogg Road - Murrumba Downs
Freshwater Creek - Black Duck 2	McClintock Drive - Murrumba Downs
Freshwater Creek - Halpine Dam	Freshwater Creek Road - Mango Hill
Freshwater Creek - Halpine Dam	Freshwater Creek Road - Mango Hill
Saltwater Creek - Tributary A	Goodwin Road - Narangba
Saltwater Creek - Tributary B	Bounty Boulevard -North Lakes

Table 3-3 Water Quality Event Monitoring Summary

These gauges record water levels, rainfall and turbidity and were installed in 2007 (except for the Saltwater Creek Tributary C gauge in the North Lakes Development which was installed in 1990). The gauge data may be used as additional information on flood levels for model calibration. The gauge locations are illustrated in Figure 3-1.




### 3.5 Historic Flood Levels

It is noted that the former Caboolture Shire Council has a database relating to historical flood events for the Caboolture River catchment. However, a similar database was unavailable from the former Pine Rivers Shire Council or the Redcliffe City Council for the Hays Inlet and Redcliffe catchments.

# 3.6 Resident Survey

MBRC have issued a questionnaire to residents to collate historical flood information, such as flood extents, levels (if available), flood marks and photos. This survey was first undertaken in 2010. Due to the flood event in the Pine River and the Caboolture River in January 2011, MBRC issued another media release to the community through the local newspaper that asks for provision of any available flood information to Council. This data is currently being collated by MBRC through the RFD project website. Information can be provided via E-mail (flood@moretonbay.qld.gov.au reformation can be provided via E-mail (flood@moretonbay.qld.gov.au reformation can be provided via E-mail (flood@moretonbay.qld.gov.au)

As mentioned in Section 2, the January 2011 event did not record major rainfall (and no major flooding issues) in the Hays Inlet and Redcliffe catchments. Therefore model calibration using data collected from the resident survey for this recent event will not be feasible.

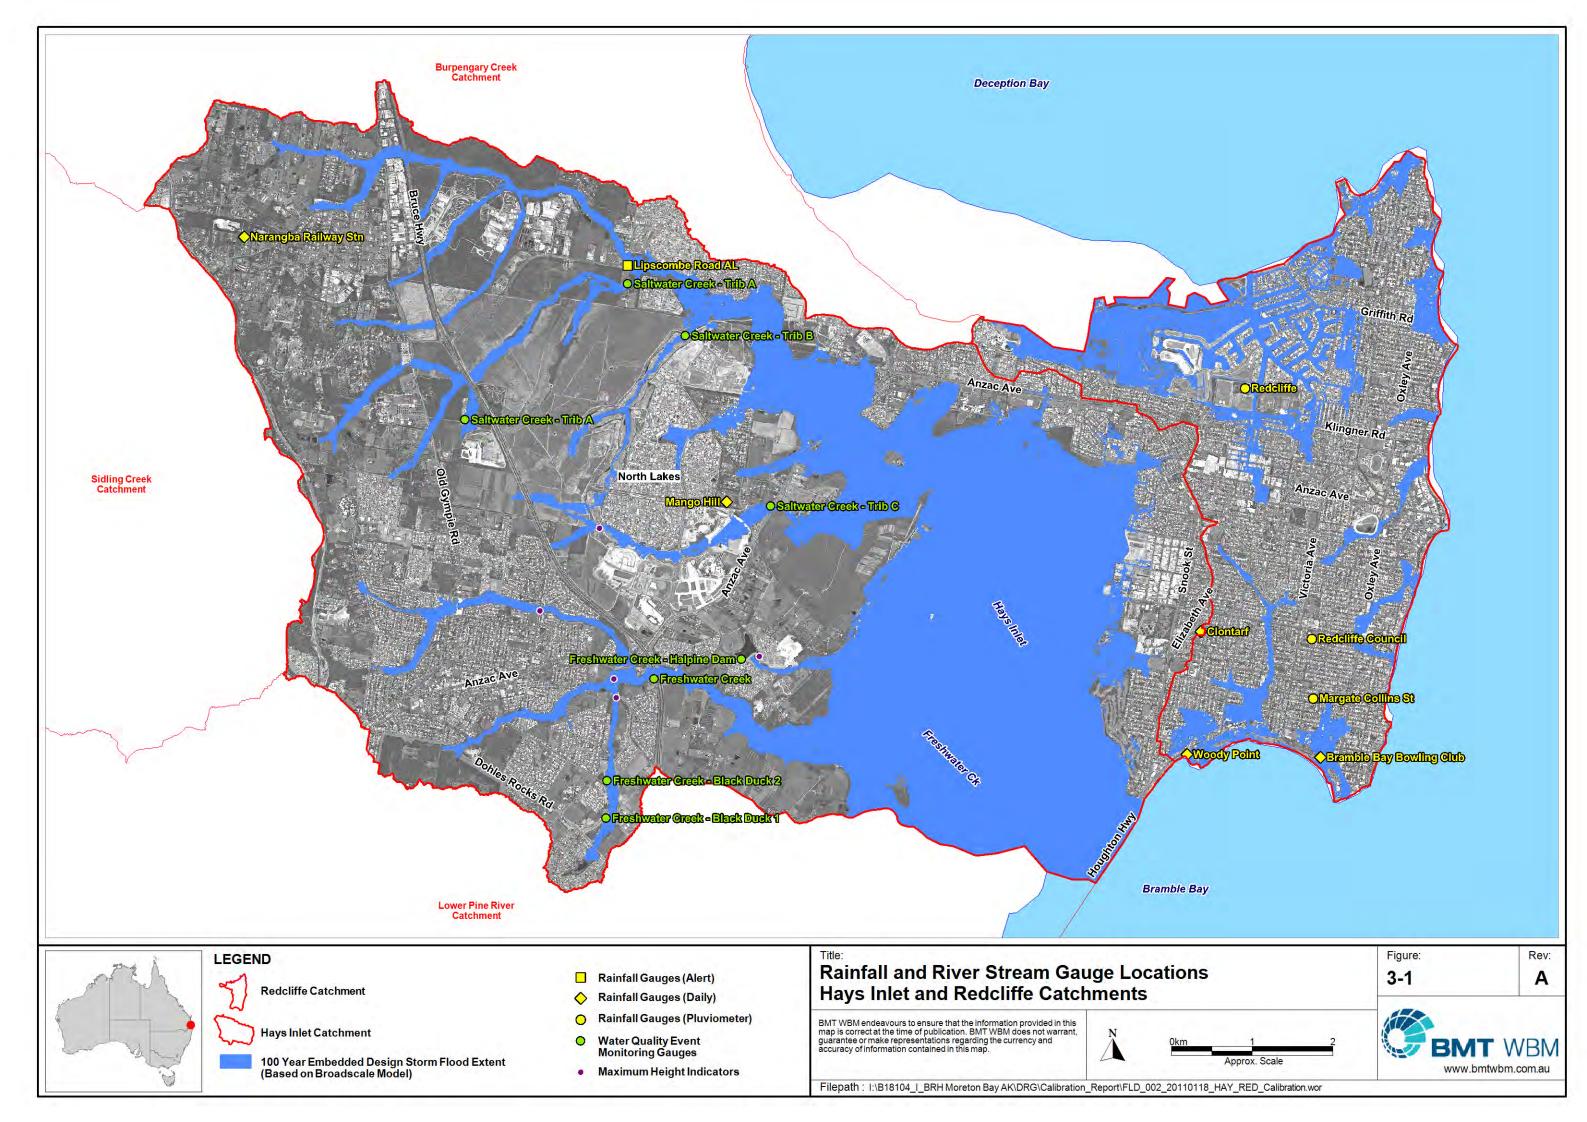

### 4 CONCLUSIONS AND RECOMMENDATIONS

River gauge data is crucial for a high quality model calibration due to the ability to not only calibrate to the peak flood level, but also to the flood volume and the timing. The number of available gauges across the catchment also has a great effect on the quality of model calibration; generally the more gauge data available the better, and a good spread of the gauges over various tributaries in the catchment is also advantageous.

The severity of the flood is also important. For this particular study a minor flood event (e.g. the 5 or 10 year ARI event) is less useful for calibration compared to larger flood events (e.g. 50 or 100 year ARI event). This is because the study includes modelling of large flood events, and calibrating to large flood events will test both in-bank and out-of-bank flow in the hydraulic model.

There are three pluviometers in the Redcliffe catchment that would enable catchment inflows into the hydraulic models to be determined for various historic events. However there is no river level data in Redcliffe. Therefore it will only be feasible to calibrate the Redcliffe hydraulic model if a reliable dataset of a large number of flood levels from historic flood events would be available. This is not the case and therefore calibration of the combined hydrologic and hydraulic models is not recommended

In the Hays Inlet catchment there are two daily rainfall gauges. The availability of rainfall data is therefore limited, which will inhibit the ability to development representative historical inflows into the hydraulic model. The availability of water level data in the catchment is also limited, but some does exist through water quality event monitoring gauges. There are nine such gauges in the Hays Inlet catchment. Most of these gauges were installed in 2007 with the exception of the Saltwater Creek Tributary C gauge in the North Lakes Development which was installed in 1990. It is acknowledged that for future flood events this data may be used to undertake a calibration (depending on the interval of the data recording). However no significant flood events have occurred since installation of the gauges in 2007. The quality of calibration data available from the water quality monitoring gauges will depend on the record frequency (daily, hourly, etc) and calibration may therefore not be worthwhile.

Based on the conclusions above it is recommended that calibration on the Hays Inlet and Redcliffe catchments is not feasible and should therefore not be carried out.

It is further recommended that:

- As the river height data recorded by these gauges may be used for both water quality and hydraulic model calibration, it is recommended that review of the water quality monitoring gauges is undertaken, in particular the recording frequency of the river levels.. Collection of a detailed time series of river height data is useful for model calibration so that the water volume and timing in the model can be checked as well as the peak flood levels; and
- A number of river height gauges be installed in the Hays Inlet and Redcliffe catchments.

# 5 REFERENCE

Bureau of Meteorology, 2011, *Water Resources Station Catalogue*, viewed 18 January 2011, <a href="http://www.bom.gov.au/hydro/wrsc">http://www.bom.gov.au/hydro/wrsc</a>>

Moreton Bay Regional Council, 2011, *Share your flood data*, viewed 18 January 2011, <a href="http://www.moretonbay.qld.gov.au/general.aspx?ekfrm=74810&libID=77442">http://www.moretonbay.qld.gov.au/general.aspx?ekfrm=74810&libID=77442</a>>





**BMT WBM Brisbane** 

Level 8, 200 Creek Street Brisbane 4000 PO Box 203 Spring Hill QLD 4004 Tel +61 7 3831 6744 Fax +61 7 3832 3627 Email bmtwbm@bmtwbm.com.au Web www.bmtwbm.com.au

BMT WBM Denver

8200 S. Akron Street, Unit 120 Centennial Denver Colorado 80112 USA Tel +1 303 792 9814 Fax +1 303 792 9742 Email denver@bmtwbm.com

www.bmtwbm.com.au

BMT WBM Mackay Suite 1, 138 Wood Street Mackay 4740

Suite 1, 136 wood Street Mackay 4740
PO Box 4447 Mackay QLD 4740
Tel +61 7 4953 5144 Fax +61 7 4953 5132
Email mackay@bmtwbm.com.au
Web www.bmtwbm.com.au

**BMT WBM Melbourne** Level 5, 99 King Street Melbourne 3000

PO Box 604 Collins Street West VIC 8007
Tel +61 3 8620 6100 Fax +61 3 8620 6105
Email melbourne@bmtwbm.com.au
Web www.bmtwbm.com.au

**BMT WBM Newcastle** 

126 Belford Street Broadmeadow 2292 PO Box 266 Broadmeadow NSW 2292 Tel +61 2 4940 8882 Fax +61 2 4940 8887 Email newcastle @bmtwbm.com.au Web www.bmtwbm.com.au

BMT WBM Perth

Unit 6, 29 Hood Street, Subiaco 6008 Tel +61 8 9322 1577 Fax +61 8 9226 0832 Email perth@bmtwbm.com.au Web www.bmtwbm.com.au

BMT WBM Sydney

Level 1, 256-258 Norton Street Leichhardt 2040 PO Box 194 Leichhardt NSW 2040 Tel +61 2 9713 4836 Fax +61 2 9713 4890 Email sydney@bmtwbm.com.au Web www.bmtwbm.com.au

BMT WBM Vancouver 401 611 Alexander Street Vancouver

British Columbia V6A 1E1 Canada Tel +1 604 683 5777 Fax +1 604 608 3232 Email vancouver@bmtwbm.com Web www.bmtwbm.com.au