6.2.3 Emerging community zone code

6.2.3.1 Application - Emerging community zone

This code applies to assessing development in the Emerging community zone, if:

- 1. self-assessable or assessable development where this code is an applicable code identified in the assessment criteria column of a table of assessment (Part 5);
- 2. impact assessable development (Part 5).

When using this code, reference should be made to section 5.3.2 and, where applicable, section 5.3.3 located in Part 5.

For self-assessable or assessable development for this Code Part 6.2.3;

- 1. Part A of the code applies to self-assessable development in the 6.2.3.1 'Interim precinct';
- 2. Part B of the code applies to assessable development in the 6.2.3.1 'Interim precinct';
- 3. Part C of the code applies to self-assessable interim development on a developable lot in the 6.2.3.2.1 'Developable lots';
- 4. Part D of the code applies to assessable, interim development on a developable lot in the 6.2.3.2.1 'Developable lots';
- 5. Part E of the code applies to self-assessable, on a developed lot in the 6.2.3.2.2 'Developed lots';
- 6. Part F of the code applies to assessable, on a developed lot in the 6.2.3.2.2 'Developed lots'.

6.2.3.2 Purpose - Emerging community zone

- 1. The purpose of the Emerging community zone code is to:
 - a. identify land that is suitable for urban purposes and conserve land that may be suitable for urban development in the future;
 - b. manage the timely conversion of non-urban land to urban purposes;
 - c. prevent or discourage development that is likely to compromise appropriate longer term land use.
- 2. The Emerging community zone has 2 precincts which have the following purpose;
 - a. The Interim precinct is to identify and conserve land that may be suitable for urban development in the future, allowing interim uses that will not compromise the best longer term use of the land pending further investigation.
 - b. The Transition precinct is to:
 - i. identify and conserve land that may be suitable for urban development in the future, allowing interim uses that will not compromise the best longer term use of the land;
 - ii. provide mechanisms to promote and implement an appropriate mix of dwelling types, consistent with a next generation neighbourhood across the transition precinct once this land is developed and serviced with all local government networks including water and sewer and is suitable for urban development.

Once serviced by all local government networks, including water and sewer the Transition precinct is to provide a mix of dwelling types to support densities that are moderately higher than traditional suburban areas. Housing forms include predominantly detached dwellings on a variety of lot sizes with a greater range of attached dwellings and low to medium rise apartment buildings. These areas will have convenient access to centres, community facilities and higher frequency public transport.

3. The Emerging community zone seeks to implement the policy direction set in Part 3, Strategic Framework.

6.2.3.1 Interim precinct

6.2.3.1.1 Purpose - Interim precinct

- 1. The purpose of the Emerging community zone Interim precinct will be achieved through the following overall outcomes:
 - a. Development is to maintain a semi-rural character until such time as infrastructure is delivered and relevant site specific constraints are resolved.
 - b. Development will consist of interim uses on large lots.
 - c. Interim uses are appropriate in this precinct where they:
 - i. would be compatible with the existing semi-rural character;
 - ii. would not prejudice or delay the development of the site and adjoining areas for urban purposes;
 - iii. are low intensity in nature and characterised by low investment in buildings and infrastructure relative to the value of the site.
 - d. Residential activities consist of detached dwelling houses⁽²²⁾ or caretaker's accommodation⁽¹⁰⁾, predominantly on large lots.
 - e. The character and scale of dwelling houses⁽²²⁾ are compatible with the intended character for the precinct.
 - f. Secondary dwellings associated with a principal dwelling, remain subordinate and ancillary to the principal dwelling to retain the low density, low intensity, residential form of a dwelling house⁽²²⁾.
 - g. Garages, car ports and domestic outbuildings remain subordinate and ancillary to the principal dwelling and are located and designed to reduce amenity impacts on the streetscape and adjoining properties.
 - h. Dwelling houses⁽²²⁾ are designed to add visual interest and contribute to an attractive streetscape and public realm.
 - i. Dwelling houses⁽²²⁾ are provided with infrastructure and services at a level suitable for the area as a interim precinct.
 - j. Dwelling houses⁽²²⁾ are responsive to the lot shape, dimensions and topographic features.
 - k. Non-residential uses do not result in adverse or nuisance impacts on adjoining properties or the wider environment. Any adverse or nuisance impacts are contained and internalised to the site through location, design, operation and on-site management practices.
 - I. General works associated with the development achieves the following:
 - a high standard of electricity, telecommunications, roads, sewerage, water supply and street lighting services is provided to new developments to meet the current and future needs of users of the site;
 the development manages stormwater to:
 - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
 - B. prevent stormwater contamination and the release of pollutants;
 - C. maintain or improve the structure and condition of drainage lines and riparian areas;
 - D. avoid off-site adverse impacts from stormwater.
 - iii. the development does not result in unacceptable impacts on the capacity on the capacity and safety of the external road network;
 - iv. the development ensures the safety, efficiency and useability of access ways and parking areas;
 - v. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.

- m. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- n. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- o. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- p. Development in a Water supply buffer is undertaken in a manner which contributes to the maintenance and enhancement where possible of water quality to protect the drinking water and aquatic ecosystem environmental values in those catchments.
- q. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
 - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
 - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
 - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
 - iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
 - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
 - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
 - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
 - v. protecting native species and protecting and enhancing species habitat;
 - vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
 - vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
 - viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
 - ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
 - x. ensuring effective and efficient disaster management response and recovery capabilities;
 - xi. where located in an overland flow path:
 - A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
 - B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
 - C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
 - D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- r. Development in the Interim precinct includes one or more of the following:

•	Animal husbandry ⁽⁴⁾	•	Dwelling House ⁽²²⁾	•	Rural Industry ⁽⁷⁰⁾ - if on a
•	Animal keeping ⁽⁵⁾ - where not for a cattery or kennel	•	Emerging services		lot greater than 1ha and having a GFA of 150m ² or less
	-	•	Environment facility ⁽²⁶⁾		
•	Caretaker's accommodation ⁽¹⁰⁾	•	Home based business ⁽³⁵⁾	•	Sales office ⁽⁷²⁾
•	Cropping ⁽¹⁹⁾ - if not forestry for wood production	•	Intensive horticulture ⁽⁴⁰⁾ - if on a lot greater than 1ha	•	Veterinary services ⁽⁸⁷⁾ Wholesale nursery ⁽⁸⁹⁾
		•	Roadside stall ⁽⁶⁸⁾		

s. Development in the Interim precinct does not include any of the following:

•	Adult store ⁽¹⁾	•	Health care services ⁽³³⁾	•	Port services ⁽⁶¹⁾
•	Agricultural supplies store ⁽²⁾	•	High impact industry ⁽³⁴⁾	•	Relocatable home park ⁽⁶²⁾
•	Air services ⁽³⁾	•	Hospital ⁽³⁶⁾	• (Renewable energy
•	Animal keeping ⁽⁵⁾ - if for a	•	Hotel ⁽³⁷⁾		facility ⁽⁶³⁾
	cattery or kennel	•	Indoor sport and		Research and technology industry ⁽⁶⁴⁾
•	Aquaculture ⁽⁶⁾		recreation ⁽³⁸⁾	•	Residential care facility ⁽⁶⁵⁾
•	Bar ⁽⁷⁾	•	Intensive animal industry ⁽³⁹⁾	•	Resort complex ⁽⁶⁶⁾
•	Brothel ⁽⁸⁾	•	Low impact industry ⁽⁴²⁾		Retirement facility ⁽⁶⁷⁾
•	Bulk landscape supplies ⁽⁹⁾	•	Major sport, recreation and		
•	Car wash ⁽¹¹⁾		entertainment facility ⁽⁴⁴⁾	•	Rooming accommodation ⁽⁶⁹⁾
•	Cemetery ⁽¹²⁾		Marine industry ⁽⁴⁵⁾	•	Rural workers'
	Community residence ⁽¹⁶⁾	\mathcal{O}	Market ⁽⁴⁶⁾		accommodation ⁽⁷¹⁾
	Crematorium ⁽¹⁸⁾	•	Medium impact industry ⁽⁴⁷⁾	•	Service industry ⁽⁷³⁾
	Cropping ⁽¹⁹⁾ - if forestry for	•	Motor sport facility ⁽⁴⁸⁾	•	Service station ⁽⁷⁴⁾
	wood production	•	Multiple dwelling ⁽⁴⁹⁾	•	Shop ⁽⁷⁵⁾
•	Detention facility ⁽²⁰⁾	•	Nature-based tourism ⁽⁵⁰⁾	•	Shopping centre ⁽⁷⁶⁾
	Dual occupancy ⁽²¹⁾	•	Nightclub entertainment facility ⁽⁵¹⁾	•	Short-term
	Dwelling unit ⁽²³⁾		-		accommodation ⁽⁷⁷⁾
	Extractive industry ⁽²⁷⁾	•	Non-resident workforce accommodation ⁽⁵²⁾	•	Showroom ⁽⁷⁸⁾
•	Food and drink outlet ⁽²⁸⁾	•	Office ⁽⁵³⁾	•	Special industry ⁽⁷⁹⁾
•	Function facility ⁽²⁹⁾	•	Outdoor sales ⁽⁵⁴⁾	•	Theatre ⁽⁸²⁾
•	Funeral parlour ⁽³⁰⁾	•		٠	Tourist attraction ⁽⁸³⁾
	- - P -		Outdoor sport and recreation ⁽⁵⁵⁾	•	Tourist park ⁽⁸⁴⁾

•	Garden centre ⁽³¹⁾	•	Parking station ⁽⁵⁸⁾	•	Transport depot ⁽⁸⁵⁾
•	Hardware trade and supplies ⁽³²⁾	•	Permanent plantation ⁽⁵⁹⁾	•	Warehouse ⁽⁸⁸⁾

t. Development not listed in the tables above may be considered on its merits and where it reflects and support the outcomes of the zone.

6.2.3.1.2 Criteria for assessment

To determine if development is self-assessable, development must comply with the self-assessable acceptable outcomes set out in Part A, Table 6.2.3.1.1. Where development does not meet a self-assessable acceptable outcome (SAO) of the relevant criteria Part A Table 6.2.3.1.1, assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a SAO is not met, and is therefore limited to the subject matter of the SAOs that are not complied with. To remove any doubt, for those SAOs that are complied with, there is no need for assessment against the corresponding PO.

Self-assessable outcomes (SAC	e acceptable D)	Corresponding performance outcomes (PO)
SAO1		PO4
SAO2		P06
SAO3		P05
SAO4		P07
SAO5		PO8
SAO6		P09
SAO7	X	P010-P013
SAO8		P010-P013
SAO9		P014
SAO10		P015
SAO11		PO18
SAO12		P019-P024
SAO13		P027
SAO14	6	P027
SAO15		PO29
SAO16		PO33
SAO17		PO35
SAO18		PO37
SAO19		PO38
SAO20		PO35
SAO21		PO39
SAO22		PO39-PO44

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO23	PO41
SAO24	PO45
SAO25	PO45
SAO26	PO45
SAO27	PO46
SAO28	PO47
SAO29	PO48
SAO30	PO48
SAO31	PO48
SAO32	PO49
SAO33	PO50
SAO34	PO50
SAO35	PO50
SAO36	P051
SAO37	PO50
SAO38	PO50
SAO39	PQ50
SAO40	P052
SAO41	P052
SAO42	P053
SAO43	P053
SA044	PO54
SAO45	PO58
SAO46	PO58
SAO47	PO58
SAO48	PO58
SAO49	PO58
SAO50	PO60
SA051	PO62
SAO52	PO63
SAO53	P064
SAO54	P064
SAO55	P064
SAO56	PO64

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO57	P066
SAO58	P070
SAO59	P070
SAO60	P071
SAO61	P072
SAO62	P073
SAO63	P074-P085
SAO64	P074-P085
SAO65	P086
SAO66	P087
SAO67	P087
SAO68	P088
SAO69	P088
SAO70	PO91
SA071	P091
SA072	P091
SAO73	PO93
SA074	P094
SA075	P095
SAO76	P096-P098, P0100-P0102
SA077	P096-P098, P0100-P0102
SA078	P096-P098
SAO79	PO99
SAO80	PO103
SAO81	PO104

Part A — Criteria for self-assessable development - Interim precinct

Table 6.2.3.1.1 Self-assessable development - Interim precinct

Self-assessable acceptable outcomes				
	General criteria			
Building h	leight			
SAO1	Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m.			
Setbacks				

SAO2	Buildings and structures associated with the following uses are setback from all lot boundaries as follows:
	a. Animal husbandry ⁽⁴⁾ (buildings only) - 10m;
	b. Cropping ⁽¹⁹⁾ (buildings only) - 10m;
	c. Animal keeping ⁽⁵⁾ , excluding catteries and kennels - 20m;
	d. Cropping ⁽¹⁹⁾ (buildings only) - 10m;
	e. Intensive horticulture ⁽⁴⁰⁾ - 10m;
	f. Rural Industry ⁽⁷⁰⁾ - 20m;
	g. Wholesale nursery ⁽⁸⁹⁾ - 10m;
	h. Veterinary services ⁽⁸⁷⁾ - 10m.
SAO3	Unless specified elsewhere in the zone code, all other buildings and structures are setback:
	a. Road frontage - 6m minimum;
	b. Side and Rear - 4.5m minimum.
	Note - For a Dwelling house ⁽²²⁾ where located in a bushfire hazard area (see Overlay map - Bushfire hazard) a greater setback may be required. See values and constraints criteria Bushfire hazard areas. Note - This provision does not apply where a development footprint exists for a lot.
Developm	ent footprint
SAO4	Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within that development footprint.
Building o	on sloping land
SAO5	Building and site design on slopes between 10% and 15%:
	a. use split-level, multiple-slab, pier or pole construction;
	b. avoid single-plane slabs and benching; and
	c. ensure the height of any cut or fill, whether retained or not, does not exceed 900mm.
	Note - this does not apply to outbuildings or building work.
Lighting	
SAO6	Artificial lighting is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of the Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.
	Note - "Curfewed hours" are taken to be those between 10pm and 7am the following day.

Hazardou	s Chemicals
SAO7	All development that involves the storage or handling of hazardous chemicals listed in Schedule 9, Table 9.0.1 Hazardous Chemicals Self-Assessable Thresholds complies with Schedule 9, Table 9.0 Hazardous Chemicals Self-Assessable Criteria.
SAO8	Development does not involve the storage or handling of hazardous chemicals listed in Schedule 9 Table 9.0.2 Hazardous Chemicals Assessable Thresholds.
Waste trea	atment
SAO9	All concentrated animal use areas (e.g. sheds, pens, holding yards, stables) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment area
Car parkir	ng
SAO10	On-site car parking is provided in accordance with Schedule 7 - Car parking.
Clearing o	of habitat trees where not located in the Environmental areas overlay map.
SA011	Development does not result in the damaging,destroyed or clearing of a habitat tree. This does not apply to: a. Clearing of a habitat tree located within an approved development footprint;
	b. Clearing of a habitat tree within 10m from a lawfully established building reasonably necessar for emergency access or immediately required in response to an accident or emergency;
	c. Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses serious personal injury or damage to infrastructure;
	d. Clearing of a habitat tree reasonably necessary to construct and maintain a property boundar fence and not exceed 4m in width either side of the fence where in the Rural, Rural residenti and Environmental management and conservation zones. In any other zone, clearing is not a exceed 2m in width either side of the fence;
	e. Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works with a registered easement for public infrastructure or drainage purposes;
	f. Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suita qualified person, submitted to and accepted by Council;
\land	g. Clearing of a habitat tree associated with removal of recognised weed species, maintaining exist open pastures and cropping land, windbreaks, lawns or created gardens;
	h. Native forest practice where exempt under Part 1, 1.7.7 Exempt development.
~	Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognise as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridor Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.
	Works criteria
Utilities	
SAO12	Where available, the development is connected to:
	a. an existing reticulated electricity supply;b. telecommunications and broadband;
	1

	c. reticulated sewerage;d. reticulated water;
	d. reticulated water;e. constructed and dedicated road.
Access	
SAO13	Any new or changes to existing site access and driveways are designed and located in accordance
UNU IU	with:
	 a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
SAO14	Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
Stormwate	er
SAO15	Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy – Integrated design.
	Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.
	s and construction management
SAO16	Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design.
SAO17	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
SAO18	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.
SAO19	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
SAO20	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
Earthwork	S
SAO21	The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures
SAO22	The total of all cut and fill on-site does not exceed 900mm in height.

	Figure - Cut and fill
	Lot Boundaries
	Note - This is site earthworks not building work.
SAO23	 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mr b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works be undertaken.
	Note - Public sector entity is defined in the Sustainable Planning Act 2009.
	ces provisions under this heading only apply if:
Note - The p a. the d i. ii. iii. iv.	ces provisions under this heading only apply if: evelopment is for, or incorporates: reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
Note - The p a. the d i. ii. iii. iv. AND b. none i. ii. ii.	ces provisions under this heading only apply if: evelopment is for, or incorporates: reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park ⁽⁸⁴⁾ with accommodation in the form of caravans or tents; or material change of use for outdoor sales ⁽⁵⁴⁾ , outdoor processing or outdoor storage where involving combustible materials
Note - The p a. the d i. ii. iii. iv. AND b. none i. ii. ii.	Ces provisions under this heading only apply if: evelopment is for, or incorporates: reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park (⁶⁴) with accommodation in the form of caravans or tents; or material change of use for outdoor sales (⁶⁴) of the following exceptions apply: the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulat water supply; or every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulat water supply network, measured around all obstructions, either on or adjacent to the site.

b.	in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
C.	in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
	i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
	ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
	 iii for outdoor sales⁽⁵⁴⁾, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales⁽⁵⁴⁾, outdoor processing and outdoor storage facilities; and
d.	in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.
	ntinuous path of travel having the following characteristics is provided between the vehicle access to the site and each external fire hydrant and hydrant booster point on the land:
a.	an unobstructed width of no less than 3.5m;
b.	an unobstructed height of no less than 4.8m;
C.	constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
d.	an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.
	ite fire hydrant facilities are maintained in effective operating order in a manner prescribed in ralian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.
_	
For d	levelopment that contains on-site fire hydrants external to buildings:
a.	levelopment that contains on-site fire hydrants external to buildings: those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site:
a.	those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site:i. the overall layout of the development (to scale);
a.	 those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used);
a.	those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site:i. the overall layout of the development (to scale);
a.	 those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster points;
a.	 those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided);
a.	 those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster points; vi. physical constraints within the internal roadway system which would restrict access by fire
a. b.	 those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster points; vi. physical constraints within the internal roadway system which would restrict access by fire
a. b.	 those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster points; vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
a. b.	 those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster points; vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points. - The sign prescribed above, and the graphics used are to be:
a. b. Note	 those external hydrants can be seen from the vehicular entry point to the site; or a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster points; vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points. The sign prescribed above, and the graphics used are to be: in a form;
	d. A corpoint a. b. c. d.

SAO28	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads. Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.		
	Use specific c	riteria	
Dwelling	house ⁽²²⁾ - Secondary dwelling		
SAO29	The siting and design of dwellings ensures that the	ne secondary dwelling is:	
	a. not located in front of the primary dwelling;		
b. annexed to (adjoining, below or above) or located within 50.0m of the primary dwelling (exc domestic outbuildings);			
	c. accessed from the existing driveway giving	access to the dwelling house ⁽²²⁾ .	
SAO30	No more than 1 secondary dwelling is located on	an allotment.	
SAO31	The GFA of the secondary dwelling does not exce	eed 100m ² GFA.	
Dwelling	house ⁽²²⁾ - Domestic outbuildings		
GAGGE	Domestic outbuildings:a. have a maximum GFA as outlined below:		
	Size of lot	Max. GFA 50m ²	
	600m ² - 1000m ²	70m ²	
	>1000m ² - 2000m ²	80m ²	
	Greater than 2000m ²	150m ²	
	Note - Building Work is excluded from the GFA calculations. b. have a maximum building height of 4m;		
	b. have a maximum building height of 4m;		
	b. have a maximum building height of 4m;c. are located behind the main building line an	d not within primary or secondary frontage setbacks.	
Home ba	b. have a maximum building height of 4m;		
Home bas SAO33	 b. have a maximum building height of 4m; c. are located behind the main building line an sed business ⁽³⁵⁾ 		
	 b. have a maximum building height of 4m; c. are located behind the main building line an sed business ⁽³⁵⁾ Home based business(s)⁽³⁵⁾ are fully contained with the based business (s) 	d not within primary or secondary frontage setbacks.	
SAO33	 b. have a maximum building height of 4m; c. are located behind the main building line an sed business ⁽³⁵⁾ Home based business(s)⁽³⁵⁾ are fully contained will based child care facility. The maximum total use area is 100m². 	d not within primary or secondary frontage setbacks. thin a dwelling or on-site structure, except for a home	

SAO36	Hours of operation to be restricted to 8:00am to 6:00pm Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday or Anzac Day, except for:		
	a. bed and breakfast or farmstay business which may operate on a 24 hour basis;		
	b. office or administrative activities that do not generate non-residents visiting the site, such as book keeping and computer work.		
SAO37	The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:		
	a. 1 heavy vehicle;		
	b. 1 trailer;		
	c. Up to 3 motor vehicles.		
	Note - The car parking provision associated with the dwelling house ⁽²²⁾ is in addition to this requirement.		
	Note - The number of motor vehicles stated is in addition to motor vehicles associated with a dwelling house ⁽²²⁾ .		
SAO38	Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.		
	Note - Planting for screening is to have a minimum depth of 3m.		
SA020	Llegur, uchiele starses huildings, parking areas and starding areas are esthack a minimum of 20m		
SAO39	Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.		
SAO40	The use does not involve vehicle servicing or major repairs, including spray painting or panel beating.		
•	Note - Vehicle servicing excludes general maintenance of a vehicle such as, but not limited to, changing engine fluids, filters and parts such as batteries and plugs.		
SAO41	The use is not an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection</i>		
	Regulation 2008.		
SAO42	Only goods grown, produced or manufactured on-site are sold from the site.		
SAO43	Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from boundary of the site.		
SAO44	For bed and breakfast and farmstays:		
	a. overnight accommodation is provided in the dwelling house ⁽²²⁾ of the accommodation operator.		
	b. maximum 4 bedrooms are provided for a maximum of 10 guests.		
	c. meals are served to paying guests only.		
	d. rooms do not contain food preparation facilities.		
	Note - SAO36 - SAO46 above do not apply to home based business ⁽³⁵⁾		

Roadside stalls ⁽⁶⁸⁾			
SAO45	No more than one roadside stall ⁽⁶⁸⁾ per property.		
SAO46	Goods offered for sale are only goods grown, produced or manufactured on the site.		
SAO47	The maximum area associated with a roadside stall ⁽⁶⁸⁾ , including any larger separate items displayed for sale, does not exceed 20m ² .		
SAO48	Car parking for 2 vehicles is provided off the road carriage and located on the property.		
SAO49	The roadside stall ⁽⁶⁸⁾ is located no closer than 100m from an intersection.		
Sales offic	ce ⁽⁷²⁾		
SAO50	A sales office ⁽⁷²⁾ is located on the site for no longer than 2 years.		
Telecomm	nunications facility ⁽⁸¹⁾		
that will not	e - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz		
SAO51	A minimum of 45m ² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.		
SAO52	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.		
SAO53	Equipment shelters and associated structures are located:		
•	 a. directly beside the existing equipment shelter and associated structures; b. behind the main building line; c. further away from the frontage than the existing equipment shelter and associated structures; d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m. 		
SAO54	Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.		
SAO55	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.		
SAO56	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.		
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.		
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with Planning scheme policy - Integrated design.		
SA057	All equipment comprising the telecommunications facility ⁽⁸¹⁾ which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.		
	Values and constraints criteria		

consistent	e relevant values and constraints criteria do not apply where the development, the subject of the application, is associated and with, and subsequent to a current Development permit for Reconfiguring a lot or Material change of use, where that approval, r a superseded planning scheme, has considered and addressed (e.g. through a development footprint plan or similar, or conditions of approval) the identified value or constraint under this planning scheme.			
apply) Note - For t	hazard areas (refer Overlay map - Bushfire hazard to determine if the following assessment criteria the purposes of section 12 of the Building Regulation 2006, land identified as very high potential bushfire intensity, high potential			
	ensity, medium potential bushfire intensity or potential impact buffer on the Bushfire hazard areas overlay map is the 'designated zard area'. AS 3959-2009 Construction of buildings in bushfire hazard areas applies within these areas.			
SAO58	 a. Building and structures are: i. not located on a ridgeline ii. not located on land with a slope greater than 15% (see Overlay map – Landslide hazard (for land having a slope greater than 15%)) 			
	b. Dwellings are located on east to south facing slopes.			
	House Sites Numbered in Order of Degree of Fire Safety May be subject to Avoid these hill fire storms (4). S.E.			
	Relatively safe on south facing slope.			
X	(1 being the safest , 6 being the most hazardous.) From Bushfire Prone Areas: Siting and Design of Residential Buildings (1997), Queensland Department of Local Government and Planning, and Queensland Fire & Rescue Service.			
SAO59	Buildings and structures have contained within the site: a. a separation from classified vegetation of 20m or the distance required to achieve a bushfire			
 attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater; a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater; 				
	 c. a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures; d. an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and e. an access path suitable for use by a standard fire fighting appliance having a formed width of at 			
	least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%:			

	 i. to, and around, each building and other roofed structure; and ii. to each fire fighting water supply extraction point. 		
	Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS 3959.		
SAO60	The length of driveway:		
	 a. to a public road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road; b. has a maximum gradient no greater than 12.5%; c. have a minimum width of 3.5m; d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline. 		
SAO61	SAO61 a. A reticulated water supply is provided by a distributer retailer for the area or, where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m or buildings and structures.		
	b. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.		
	c. Where a tank is the nominated on-site fire fighting water storage source, it includes:		
	i. a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;		
	ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.		
SAO62	Development does not involve the manufacture or storage of hazardous chemicals.		
criteria ap	ental areas (refer Overlay map - Environmental areas to determine if the following assessment ply)		
a. Clear	ing of native vegetation located within an approved development footprint;		
	b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;		
	Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;		
either	d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;		
	ing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public tructure or drainage purposes;		
	earing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to d accepted by Council;		
	ing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping windbreaks, lawns or created gardens;		

h. Graz	zing of native pasture by stock;			
i. Nati	ve forest practice where exempt under Part 1, 1.7.7 Exempt development.			
Note - Nativ environmer	Note - Definition for native vegetation is located in Schedule 1 Definitions. Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the			
Editors' No	cheme policy - Environmental areas. te - The accuracy of overlay mapping can be challenged through the development application process (code assessable nt) or by way of a planning scheme amendment. See Council's website for details.			
	te - When clearing native vegetation within a MSES area, you may still require approval from the State government.			
SAO63	Where no suitable land cleared of native vegetation exists, clearing of native vegetation in High Value Area or Value Offset Area is for the purpose of a new dwelling house ⁽²²⁾ and all associated facilities [*] or an extension to an existing dwelling house ⁽²²⁾ only, and comprises an area no greater than 1500m ² .			
	Note - *All associated facilities includes: on-site wastewater treatment, all areas of disturbance, on-site parking, access and manoeuvring areas. Editor's note - See in heading above for other uses exempt from native vegetation clearing requirements.			
	Editor's note - Where self-assessable vegetation clearance is being undertaken, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measure to minimise impacts include:			
•	 i. co-locating all associated activities, infrastructure and access strips; ii. be the least valued area of koala habitat on the site; iii. minimise the footprint of the development envelope area; iv. minimise edge effects to areas external to the development envelope; v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy – Environmental areas; vi. sufficient area between the development and koala habitat trees to achieve their long-term viability. 			
	Editor's note - Where self-assessable vegetation clearing is being undertaken, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.			
SAO64	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.			
	This does not apply to the following:			
	 a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to access a consider to infractive type. 			
	 to serious personal injury or damage to infrastructure; d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence; 			

Extractive	 e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes; f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council; g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens; h. Grazing of native pasture by stock; i. Native forest practice where exempt under Part 1, 1.7.7 Exempt development. 	
	ine if the following assessment criteria apply)	
SAO65	The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house; ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; n. Rural workers' accommodation ⁽⁷¹⁾ ; o. Short-term accommodation ⁽⁷⁷⁾ ; p. Tourist park ⁽⁸⁴⁾ .	
SAO66	Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive resources transport route.	
SAO67	A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.	
Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply) Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.		
SAO68	Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant	
	historical and cultural value of Planning scheme policy - Heritage and landscape character. Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions	
SAO69	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.	

	This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significat historical and cultural value of Planning scheme policy - Heritage and landscape character.	
SA070 Development does not result in the removal of or damage to any significant tree identified map – Heritage and landscape character and listed in Appendix 2 of Planning scheme polition and landscape character.		
SAO71	 The following development does not occur within 20m of the base of any significant tree, identified Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme po – Heritage and landscape character: a. construction of any building; b. laying of overhead or underground services; c. any sealing, paving, soil compaction; d. any alteration of more than 75mm to the ground level prior to work commencing. 	
SA072	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Prunin of Amenity Trees.	
	e - land having a slope greater 15% (refer Overlay map - Landslide hazard - land having a slop 5% to determine if the following assessment criteria apply)	
SAO73	 Development does not: a. involve earthworks exceeding 50m³; b. involve cut and fill having a height greater than 600mm; c. involve any retaining wall having a height greater than 600mm; d. redirect or alter the existing flow of surface or groundwater. 	
SA074	Buildings, excluding domestic outbuildings:a. are split-level, multiple-slab, pier or pole construction;b. are not single plane slab on ground.	
SA075	Development does not involve the manufacture, handling or storage of hazardous chemicals.	
Overland apply)	flow path (refer Overlay map - Overland flow path to determine if the following assessment crite	
SA076		
SA077	Development for a material change of use or operational work does not impede the flow of flood wat through the premises or worsen flood flows to other premises. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overlan flow	
SAO78	Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.	

SAO80	Development for a material change of use or building work for a Park ⁽⁵⁷⁾ ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.	
-	nd wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the assessment criteria apply)	
Note - W1, \ wetland sett	N2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and backs.	
SAO81	No development is to occur within:	
	a. 50m from top of bank for W1 waterway and drainage line	
	b. 30m from top of bank for W2 waterway and drainage line	
	c. 20m from top of bank for W3 waterway and drainage line	
	d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.	
	Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.	
	Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations.	
	Note - The minimum setback distance applies to the each side of waterway.	

Part B — Criteria for assessable development - Interim precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part B, Table 6.2.3.1.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

Table 6.2.3.1.2 Assessable development - Interim precinct

Performance outcomes	Acceptable outcomes	
General criteria		
Interim uses		
P01	No acceptable outcome provided.	
Interim uses:		
a. do not fragment or alienate the land or result in the loss of land for future urban purposes;		
b. result in minimal investment;		
c. do not prejudice or delay the use of the land for urban purposes.		

PO2	1	No acceptable outcome provided.	
Inter	im uses:		
a.	are adequately serviced with necessary infrastructure to meet on-site needs and requirements;		
b.	are of a size and scale that maintains the low density, low intensity and open area landscape character anticipated in the interim precinct;		
C.	are designed, located and operated in a manner that avoids nuisance impacts on adjoining properties;		
d.	requires minimal filling or excavation. Where this occurs, visual impacts are reduced through screening;		
e.	are not visually dominant from the streetscape or adjoining properties;		
f.	utilise materials, finishes and colours that are consistent with existing semi-rural environment.		
Site	density		
PO3		No acceptable outcome provided	
Development does not result in residential density exceeding more than one dwelling house ⁽²²⁾ per lot.			
Buil	ding height		
PO4 The a.	height of buildings and structures: is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct;	AO4.1 Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m.	
b.	does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises.		
Sett	Setbacks		
PO5		AO5	
Build	dings and structures are setback to: be consistent with the semi-rural character of	Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows:	
a.	the area;	a. Front boundary – 6m;	

b.	result in development not being visually dominant or overbearing with respect on adjoining properties;	b. Side boundary – 4.5m;c. Rear boundary – 4.5m.
C.	maintain the privacy of adjoining.	Note - This provision does not apply where a development footprint exists for a lot.
PO6		AO6
Non	-residential uses are setback to ensures:	The following uses and associated buildings are setback from all property boundaries as follows:
a.	chemical spray, fumes, odour, dust are contained on-site;	a. Animal husbandry ⁽⁴⁾ (buildings only) - 10m;
b.	unreasonable nuisance or annoyance resulting	b. Cropping ⁽¹⁹⁾ (buildings only) - 10m;
	from, but not limited to; noise, storage of materials and rubbish does not adversely impact upon land users adjacent to, or within the general vicinity; and	c. Animal keeping ⁽⁵⁾ , excluding catteries and kennels - 20m;
		d. Cropping ⁽¹⁹⁾ (buildings only) - 10m;
C.	buildings and other structures are consistent with the open area, low density, low built form	e. Intensive horticulture ⁽⁴⁰⁾ - 10m;
	character and amenity associated with the interim precinct.	f. Rural Industry ⁽⁷⁰⁾ - 20m;
		g. Wholesale nursery ⁽⁸⁹⁾ - 10m;
		h. Veterinary services ⁽⁸⁷⁾ - 10m.
	elopment footprint	
P07		No acceptable outcome provided.
as p a lot	ere a development footprint has been identified art of a development approval for reconfiguring , all development occurs within that development print.	
Buil	ding on sloping land	
PO8		No acceptable outcome provided.
Building and site design on slopes between 10% and 15% must:		
a.	use split-level, multiple-slab, pier or pole construction;	
b.	avoid single-plane slabs and benching;	
C.	ensure the height of any cut or fill, whether retained or not, does not exceed 900mm;	
d.	minimise any visual impact on the landscape character; and	
e.	protect the amenity of adjoining properties.	

Amenity	
PO9	No acceptable outcome provided.
The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, light, chemicals and other environmental nuisances	
	performance outcomes, a Hazard Assessment Report may be required to ordance with 'State Planning Policy Guideline - Guidance on development
Note - Terms used in this section are defined in 'State Planning P	Policy Guideline - Guidance on development involving hazardous chemicals'.
PO10	AO10.1
Off sites risks from foreseeable hazard scenarios involving hazardous chemicals are commensurate with the sensitivity of the surrounding land use zones.	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land uses as described below:
	Dangerous Dose
	a. For any hazard scenario involving the release of gases or vapours:
	 i. AEGL2 (60minutes) or if not available ERPG2; ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	b. For any hazard scenario involving fire or explosion:
	i. 7kPa overpressure;
	ii. 4.7kW/m2 heat radiation.
	If criteria AO1.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 0.5 x 10-6/year.
	AO10.2
	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below:
	Dangerous Dose
	a. For any hazard scenario involving the release of gases or vapours:

	 i. AEGL2 (60minutes) or if not available ERPG2; ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	normal atmospheric pressure. b. For any hazard scenario involving fire or explosion:
	i. 7kPa overpressure;ii. 4.7kW/m2 heat radiation.
	If criteria AO1.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.
	AO10.3 Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below:
	Dangerous Dosea. For any hazard scenario involving the release of gases or vapours:
	 i. AEGL2 (60minutes) or if not available ERPG2; ii. An oxygen content in air <19.5% or >23.5% at
×O`	normal atmospheric pressure. b. For any hazard scenario involving fire or explosion:
	i. 14kPa overpressure;ii. 12.6kW/m2 heat radiation.
	If criteria AO1.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.
P011	AO11
Buildings and package stores containing fire-risk hazardous chemicals are designed to detect the early stages of a fire situation and notify a designated person.	Buildings and package stores containing fire-risk hazardous chemicals are provided with 24 hour monitored fire detection system for early detection of a fire event.
P012	A012
	Storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) capable of containing a minimum of the total

	aggregate capacity of all packages plus the maximum operating capacity of any fire protection system for the storage area(s) over a minimum of 60 minutes.
PO13	A013.1
greater than 2,500L or kg within a Local Government "flood hazard area" are located and designed in a manner to minimise the likelihood of inundation of flood waters from creeks, rivers, lakes or estuaries.	 The base of any tank with a WC >2,500L or kg is higher that any relevant flood height level identified in an area's flood hazard area. Alternatively: a. bulk tanks are anchored so they cannot float if submerged or inundated by water; and b. tank openings not provided with a liquid tight seal, i.e an atmospheric vent, are extended above the relevant flood height level.
	The lowest point of any storage area for packages
	>2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively, package stores are provided with impervious bund walls o racking systems higher than the relevant flood height leve
P014	A014
Stormwater generated on-site is treated and disposed of in an acceptable manner to mitigate any impacts on soil, surface water or ground water quality.	All concentrated animal use areas (e.g. Sheds, pens, holdin yards, stables, kennels and other animal enclosures) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment areas
Car parking	
P015	AO15
	On-site car parking is provided in accordance with Schedu 7 - Car parking.
b. provides safe and convenient on-site parking	

c. is appropriate to the road classification and carrying capacity of the local network and able to meet the additional demands generated by the development; and	
d. does not result adverse impacts on the efficient and safe functioning of the road network.	
Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.	
Noise	
PO16	No acceptable outcome provided.
Noise generating uses do not adversely affect existing or potential noise sensitive uses.	
Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line.	
Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.	
P017	A017.1
Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:	Development is designed to meet the criteria outlined in Planning Scheme Policy – Noise.
a. contributing to safe and usable public spaces,	A017.2
through maintaining high levels of surveillance of parks, streets and roads that serve active	Noise attenuation structures (e.g. walls, barriers or fenc
	a. are not visible from an adjoining road or public are
transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);maintaining the amenity of the streetscape.	unless:
pedestrian paths or cycle lanes etc);maintaining the amenity of the streetscape.	unless: i. adjoining a motorway or rail line; or
pedestrian paths or cycle lanes etc);	 adjoining a motorway or rail line; or adjoining part of an arterial road that does no serve an existing or future active transport purp (e.g. pedestrian paths or cycle lanes) or when
 pedestrian paths or cycle lanes etc); b. maintaining the amenity of the streetscape. Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise. 	 i. adjoining a motorway or rail line; or ii. adjoining part of an arterial road that does no serve an existing or future active transport purp (e.g. pedestrian paths or cycle lanes) or when attenuation through building location and mater is not possible. b. do not remove existing or prevent future active transport prevent
 pedestrian paths or cycle lanes etc); b. maintaining the amenity of the streetscape. Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise. Note - Refer to Planning Scheme Policy – Integrated design 	 adjoining a motorway or rail line; or adjoining part of an arterial road that does no serve an existing or future active transport purp (e.g. pedestrian paths or cycle lanes) or when attenuation through building location and mater is not possible.

	Note - Refer to Overlay map – Active transport for future active transport routes.
Clearing of habitat trees where not located within	n the Environmental areas overlay map.
PO18	No acceptable outcome provided
a. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	
b. Development does not result in the net loss of fauna habitat. Where development does result in the loss of habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.	
c. Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner	
Note: Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas	
Wa	orks criteria
Utilities	
PO19	AO19
The development is connected to an existing reticulated electricity supply system approved by the relevant energy regulating authority.	Development is connected to underground electricity.
PO20	No acceptable outcome provided
The development has access to telecommunications and broadband services in accordance with current standards.	
PO21	No acceptable outcome provided
Where available the development is to safely connect to reticulated gas.	
PO22	A022.1
The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk to public health.	Where in a sewered area, the development is connected to a reticulated sewerage network.

	,
	AO22.2
	Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.
	Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater Code.
	A022.3
	Trade waste is pre-treated on-site prior to discharging into the sewerage network.
PO23	A023.1
The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.	Where in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is connected to the reticulated water supply system in accordance with the South East Queensland Water Supply and Sewerage Design and Construction Code and the relevant Water Service Association of Australia (WSAA) codes and standards.
	A023.2
	Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development.
P024	No acceptable outcome provided
The development is provided with constructed and dedicated road access.	
Access	
PO25 Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.	No acceptable outcome provided
PO26	AO26.1
The layout of the development does not compromise:a. the development of the road network in the area;	The development provides for the extension of the road network in the area in accordance with Council's road network planning.
b. the function or safety of the road network;c. the capacity of the road network.	AO26.2

Note - The road hierarchy is mapped on Overlay map - Road hierarchy.	The development does not compromise future road wider of frontage roads in accordance with the relevant standa and Council's road planning.
	A026.3
	The lot layout allows forward access to and from the site
PO27	A027.1
Safe access is provided for all vehicles required to access the site.	 Site access and driveways are designed and located in accordance with: a. Where for a Council-controlled road, AS/NZS2890. section 3; or b. Where for a State-Controlled road, the Safe Intersec Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy a Transport Infrastructure Act 1994, section 62 appropriate
	A027.2
	Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standa in Planning scheme policy - Integrated design. Note - This includes queue lengths (refer to Schedule 8 Service vehic requirements), pavement widths and construction.
	A027.3
	Access driveways, manoeuvring areas and loading facility provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements.
PO28 Upgrade works (whether trunk or non-trunk) are provided where necessary to:	No acceptable outcome provided
a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;	
b. ensure the orderly and efficient continuation of the active transport network;	
 c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design. 	
Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome refer to Planning scheme policy - Integrated transport assessment for guidance on when an ITA is required. An ITA	

should be prepared in accordance with Planning scheme policy - Integrated transport assessment.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - The primary and secondary active transport network is mapped on Overlay map - Active transport.

Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:

- Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or
- ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.

Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.

Stormwater

PO29

Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.

Note - Refer to Planning scheme policy - Integrated design for details.

Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.

Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.

PO30	No acceptable outcome provided
Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may	

No acceptable outcome provided


be required to demonstrate achievement of this performance outcome.	
PO31 Stormwater quality management systems are designed and constructed to minimise the environmental impact of stormwater discharge on surface and underground receiving water quality and meet the design objectives in Tables A and B in Appendix 3 of the SPP. Note - A stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management. Site works and construction managment PO32 The site and any existing structures are maintained	No acceptable outcome provided
in a tidy and safe condition.	
 All works on-site are managed to: a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light; b. minimise as far as possible, impacts on the natural environment; c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises; d. avoid adverse impacts on street trees and their critical root zone. 	 Works incorporate temporary stormwater runoff, erosion a sediment controls and trash traps designed in accordanc with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including burnot limited to the following: a. stormwater is not discharged to adjacent properties a manner that differs significantly from pre-existing conditions; b. stormwater discharged to adjoining and downstrear properties does not cause scour and erosion; c. stormwater discharge rates do not exceed pre-existing conditions; d. the 10% AEP storm event is the minimum design stor for all temporary diversion drains; and e. the 50% AEP storm event is the minimum design stor for all silt barriers and sediment controls are constructed prior to commencement of any clearing or earthworks and are maintained and adjusted as necessar at all times to ensure their ongoing effectiveness.

P034	The completed earthworks area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property. AO33.4 Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a qualified arborist which demonstrates and ensures that no permanent damage is caused to the tree. AO34
Dust suppression measures are implemented during soil disturbances and construction works to protect nearby premises from unreasonable dust impacts.	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
PO35	AO35.1
All works on-site and the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape. Note - Where the amount of imported or exported material is greater than 50m ³ , a haulage route must be identified and	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
approved by Council.	AO35.2 All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads. Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).
	AO35.3
	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
P036	AO36
All disturbed areas are rehabilitated at the completion of construction.	At completion of construction all disturbed areas of the site are to be:
Note - Refer to Planning scheme policy - Integrated design for details.	a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;b. grassed.
	Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.
PO37	AO37.1

The clearing of vegetation on-site:	7
 a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. Note - No burning of cleared vegetation is permitted. 	 All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works. AO37.2 Disposal of materials is managed in one or more of the following ways: a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site. Note - The chipped vegetation must be stored in an approved location, preferably a park or public land.
PO38 Any alteration or relocation in connection with or	No acceptable outcome provided
arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.	
Earthworks	
P039	AO39.1
On-site earthworks are designed to consider the visual and amenity impact as they relate to:a. the natural topographical features of the site;b. short and long-term slope stability;	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.
c. soft or compressible foundation soils;d. reactive soils;	AO39.2
e. low density or potentially collapsing soils;	Stabilisation measures are provided, as necessary, to ensure
f. existing fill and soil contamination that may exist on-site;g. the stability and maintenance of steep rock	long-term stability and low maintenance of steep rock slopes and batters.
 f. existing fill and soil contamination that may exist on-site; g. the stability and maintenance of steep rock slopes and batters; h. excavation (cut) and fill and impacts on the 	
 f. existing fill and soil contamination that may exist on-site; g. the stability and maintenance of steep rock slopes and batters; 	and batters.

	All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.
	AO39.5 All filling or excavation is contained on-site.
	AO39.6
	 All fill placed on-site is: a. limited to that required for the necessary approved use; b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).
	AO39.7 The site is prepared and the fill placed on-site in accordance with AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
PO40 Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the	AO40 Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.
surrounding area.	Figure - Embankment
PO41	AO41.1
 Filling or excavation is undertaken in a manner that: a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land; b. does not preclude reasonable access to a Council or public sector entity maintained 	No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity. Note - Public sector entity as defined in the Sustainable Planning Act 2009.
infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.	AO41.2 Filling or excavation that would result in any of the following is not carried out on-site:
Note - Public sector entity as defined in the Sustainable Planning Act 2009.	 a. a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity

	infrastructure above that which existed prior to the earthworks being undertaken.
	Note - Public sector entity as defined in the Sustainable Planning Act 2009.
PO42	No acceptable outcome provided
Filling or excavation does not result in land instability. Note - Steep rock slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.	
 PO43 Development does not result in a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway; b. increased flood inundation outside the site; c. any reduction in the flood storage capacity in the floodway; d. and any clearing of native vegetation. Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements. 	No acceptable outcome provided.
PO44 All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents.	A044 Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provide in accordance with Figure - Retaining on a boundary Figure - Retaining on boundary Finshed surface level

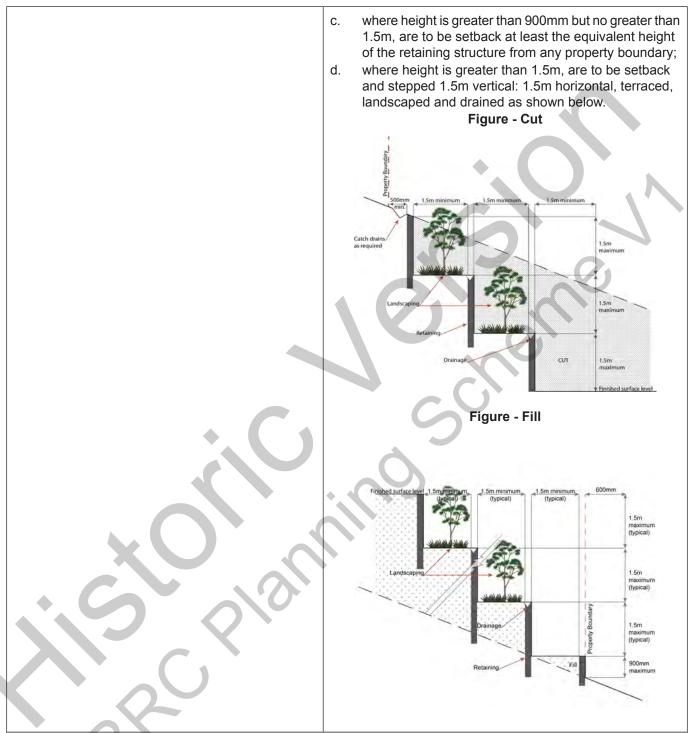

Fire Services

Note - The provisions under this heading only apply if:

- a. the development is for, or incorporates:
 - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
 - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park⁽⁸⁴⁾ with accommodation in the form of caravans or tents; or material change of use for outdoor sales⁽⁵⁴⁾, outdoor processing or outdoor storage where involving combustible materials. ii.
 - iii.
 - iv.

AND

b.

none of the following exceptions apply:

the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated ii. water supply network, measured around all obstructions, either on or adjacent to the site. Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection. **PO45** AO45.1 Development incorporates a fire fighting system that: External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian a. satisfies the reasonable needs of the fire Standard AS 2419.1 (2005) - Fire Hydrant Installations. fighting entity for the area; is appropriate for the size, shape and b. Note - For this acceptable outcome, the following are the relevant parts topography of the development and its of AS 2419.1 (2005) that may be applicable: surrounds: in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks $^{(84)}$ or development a. is compatible with the operational equipment C. available to the fire fighting entity for the area; comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted considers the fire hazard inherent in the d. in-ground hydrants would be an acceptable alternative; materials comprising the development and their b. in regard to the general locational requirements for fire hydrants proximity to one another; - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS considers the fire hazard inherent in the e. 2419.1 (2005): surrounds to the development site; in regard to the proximity of hydrants to buildings and other facilities C. - Part 3.2.2.2 (b), (c) and (d), with the exception that: f. is maintained in effective operating order. for dwellings and their associated outbuildings, hydrant i. Note - The Queensland Fire and Emergency Services is the coverage need only extend to the roof and external walls entity currently providing the fire fighting function for the urban of those buildings; areas of the Moreton Bay Region. for caravans and tents, hydrant coverage need only extend ii. to the roof of those tents and caravans; for outdoor sales⁽⁵⁴⁾, processing or storage facilities, iii hydrant coverage is required across the entire area of the outdoor sales⁽⁵⁴⁾, outdoor processing and outdoor storage facilities: in regard to fire hydrant accessibility and clearance requirements d. - Part 3.5 and, where applicable, Part 3.6. AO45.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land: an unobstructed width of no less than 3.5m; a. b. an unobstructed height of no less than 4.8m; constructed to be readily traversed by a 17 tonne HRV C. fire brigade pumping appliance; d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point. AO45.3

	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>
PO46	AO46
PO46 On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.	AO46 For development that contains on-site fire hydrants external to buildings: a. those external hydrants can be seen from the vehicular entry point to the site; or b. a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster points; vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points. Note - The sign prescribed above, and the graphics used are to be: a. in a form; b. of a size; c. illuminated to a level; which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign. For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.
Use sp	ecific criteria

Dwelling house ⁽²²⁾ - Secondary dwelling	
PO48	No acceptable outcome provided.
Secondary dwellings:	
a. are subordinate and ancillary to the primary dwelling in size and function;	
b. are not larger than 100m ² GFA;	
c. have the appearance, bulk and scale of a single dwelling from the street;	
d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the dwelling house ⁽²²⁾ on-site.	
Dwelling house ⁽²²⁾ - Domestic outbuildings	
PO49	No acceptable outcome provided.
Domestic outbuildings and car ports are:	
a. of a height that does not negatively impact the visual amenity of adjoining properties;	5
b. located on-site to not dominate the streetscape.	
Home based business ⁽³⁵⁾	
PO50	AO50.1
The Home based business(s) ⁽³⁵⁾ :	The home based business(s) ⁽³⁵⁾ , including any storage, are fully enclosed within a dwelling or on-site structure.
 a. is subordinate in size and function to the primary use on the site being a permanent residence; 	AO50.2
b. are of a scale and intensity that does not result	Up to 2 additional non-resident , either employees or
in adverse visual or nuisance impacts on the	customers, are permitted on the site at any one time, except where involving the use of heavy vehicles, where no
residents in adjoining or nearby dwellings;	employees are permitted
c. store no more heavy vehicles, trailer and motor vehicles on-site than follows:	employees are permitted. Note - This provision does not apply to Bed and Breakfast or farmstay
c. store no more heavy vehicles, trailer and motor	
 c. store no more heavy vehicles, trailer and motor vehicles on-site than follows: i. 1 heavy vehicle; 	Note - This provision does not apply to Bed and Breakfast or farmstay
c. store no more heavy vehicles, trailer and motor vehicles on-site than follows:	Note - This provision does not apply to Bed and Breakfast or farmstay business.
 c. store no more heavy vehicles, trailer and motor vehicles on-site than follows: i. 1 heavy vehicle; i. 1 trailer; ii. Up to 3 motor vehicles. 	Note - This provision does not apply to Bed and Breakfast or farmstay business. AO50.3 The maximum number of heavy vehicles, trailer and motor
 c. store no more heavy vehicles, trailer and motor vehicles on-site than follows: i. 1 heavy vehicle; i. 1 trailer; 	Note - This provision does not apply to Bed and Breakfast or farmstay business. AO50.3 The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:

e. are suitably screened to ensure adverse visual impacts on the residents in adjoining or nearby dwellings are minimised;	Note - The car parking provision associated with the dwelling house ⁽²²⁾ is in addition to this requirement.
f. sufficiently separated from adjoining properties so development does not result in adverse visual, noise, or nuisance impacts on adjoining	Note - The number of motor vehicles stated is in addition to motor vehicles associated with a dwelling house ⁽²²⁾ .
residents.	AO50.4
	Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.
	Note - Planting for screening is to have a minimum depth of 3m.
	AO50.5
	Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.
P051	A051
The hours of operation for home based business(s) ^{(35)} are managed so that the activity does not adversely impact on the low intensity character and amenity anticipated in the Interim precinct.	Hours of operation to be restricted to 8:00am to 6:00pm Monday to Saturdy and are not open to the public on Sunday's, Christmas Day, Good Friday or Anzac Day, except for:
	a. bed and breakfast or farm stay business which may operate on a 24 hour basis;
	 office or administrative activities that do not generate non-residents visiting the site such as book keeping and computer work;
	c. starting and warming up of heavy vehicles, which can commence at 7.00am.
P052	AO52.1
The Home based business(s) ⁽³⁵⁾ does not result in:	The use does not involve heavy vehicle servicing or major repairs, including spray painting or panel.
a. an adverse visual, odour, particle drift or noise nuisance impact on the residents in adjoining or nearby dwellings;	AO52.2
b. an adverse impact upon the low intensity and open area character and amenity anticipated in the locality;	Home based business(s) ⁽³⁵⁾ do not comprise an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection Regulation 2008.</i>
c. the establishment of vehicle servicing or major repairs, spray painting, panel beating or any	AO52.3
environmentally relevant activity (ERA).	Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.

		Note - Nuisance is defined in the Environmental Protection Act 1994.
PO	53	AO53.1
activ	site display and sales of goods is limited to the vities being undertaken from the site and does result in:	Only goods grown, produced or manufactured on-site are sold from the site.
a.	the display and sale of goods being viewed from outside of the site;	AO53.2 Display of goods grown, produced or manufactured on-sit
b.	overall development on the site having a predominantly commercial appearance.	are contained within a dwelling or on-site structure and th display of goods is not visible from the boundary of the sit
PO	54	A054
	I and breakfast and farmstays are of a size and le that:	For bed and breakfast and farmstays-
a.	are consistent with the low intensity, open area	a. short-term accommodation ⁽⁷⁷⁾ is provided in the dwelli house ⁽²²⁾ of the accommodation operator;
	character and amenity of the rural residential area;	 b. maximum 4 bedrooms are provided for a maximum 10 guests;
b.	ensures acceptable levels of privacy and amenity for the residents in adjoining or nearby dwellings.	c. meals are served to paying guests only;
	uwenings.	d. rooms do not contain food preparation facilities.
Мај	or electricity infrastructure ⁽⁴³⁾ , Substation ⁽⁸⁰⁾	and Utility installation ⁽⁸⁶⁾
PO	55	AQ55.1
The on t	e development does not have an adverse impact the visual amenity of a locality and is:	AO55.1 Development is designed to minimise surrounding land us
The on t a. b. c.	e development does not have an adverse impact the visual amenity of a locality and is: high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive;	 AO55.1 Development is designed to minimise surrounding land us conflicts by ensuring infrastructure, buildings, structures at other equipment: a. are enclosed within buildings or structures; b. are located behind the main building line;
The on t a. b.	e development does not have an adverse impact the visual amenity of a locality and is: high quality design and construction; visually integrated with the surrounding area;	 AO55.1 Development is designed to minimise surrounding land us conflicts by ensuring infrastructure, buildings, structures at other equipment: a. are enclosed within buildings or structures; b. are located behind the main building line; c. have a similar height, bulk and scale to the surrounding fabric;
The on t a. b. c. d.	e development does not have an adverse impact the visual amenity of a locality and is: high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive; located behind the main building line; below the level of the predominant tree canopy or the level of the surrounding buildings and structures; camouflaged through the use of colours and materials which blend into the landscape;	 AO55.1 Development is designed to minimise surrounding land us conflicts by ensuring infrastructure, buildings, structures at other equipment: a. are enclosed within buildings or structures; b. are located behind the main building line; c. have a similar height, bulk and scale to the surroundin fabric; d. have horizontal and vertical articulation applied to all
The on t a. b. c. d. e.	e development does not have an adverse impact the visual amenity of a locality and is: high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive; located behind the main building line; below the level of the predominant tree canopy or the level of the surrounding buildings and structures; camouflaged through the use of colours and	 AO55.1 Development is designed to minimise surrounding land us conflicts by ensuring infrastructure, buildings, structures at other equipment: a. are enclosed within buildings or structures; b. are located behind the main building line; c. have a similar height, bulk and scale to the surroundin fabric; d. have horizontal and vertical articulation applied to al exterior walls. AO55.2 A minimum 3m wide strip of dense planting is provided around the surrounding is pro
The on t a. b. c. d. e. f. g. h.	e development does not have an adverse impact the visual amenity of a locality and is: high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive; located behind the main building line; below the level of the predominant tree canopy or the level of the surrounding buildings and structures; camouflaged through the use of colours and materials which blend into the landscape; treated to eliminate glare and reflectivity; landscaped; otherwise consistent with the amenity and character of the zone and surrounding area.	 AO55.1 Development is designed to minimise surrounding land us conflicts by ensuring infrastructure, buildings, structures at other equipment: a. are enclosed within buildings or structures; b. are located behind the main building line; c. have a similar height, bulk and scale to the surroundin fabric; d. have horizontal and vertical articulation applied to al exterior walls.
The on t a. b. c. d. e. f. g. h. i. POS	e development does not have an adverse impact the visual amenity of a locality and is: high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive; located behind the main building line; below the level of the predominant tree canopy or the level of the surrounding buildings and structures; camouflaged through the use of colours and materials which blend into the landscape; treated to eliminate glare and reflectivity; landscaped; otherwise consistent with the amenity and character of the zone and surrounding area.	 AO55.1 Development is designed to minimise surrounding land us conflicts by ensuring infrastructure, buildings, structures at other equipment: a. are enclosed within buildings or structures; b. are located behind the main building line; c. have a similar height, bulk and scale to the surroundin fabric; d. have horizontal and vertical articulation applied to al exterior walls. AO55.2 A minimum 3m wide strip of dense planting is provided aroun the outside of the fenced area, between the development and street frontage, side and rear boundaries.

	c. provide safe vehicular access to the site;d. do not utilise barbed wire or razor wire.
PO57	AO57
 All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility: a. generates no audible sound at the site boundaries where in a residential setting; or b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008. 	All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.
Roadside stall ⁽⁶⁸⁾	
PO58	AO58.1
A roadside stall ⁽⁶⁸⁾ :	For a roadside stall ⁽⁶⁸⁾ .
a. comprises only one roadside stall ⁽⁶⁸⁾ per property;	a. no more than one roadside stall ⁽⁶⁸⁾ per property;
 b. only offers goods grown, produced or manufactured on the site; 	b. goods offered for sale are only goods grown, produced or manufactured on the site;
 c. is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and surrounding properties; 	 c. the maximum area associated with a roadside stall⁽⁶⁸⁾, including any larger separate items displayed for sale, does not exceed 20m².
d. is designed and located to ensure safe and accessible access, egress and on-site parking and not negatively impact the road network.	 AO58.2 Roadside stall⁽⁶⁸⁾: a. provide car parking for 2 vehicles off the road carriage and located on the property;
	b. is located no closer than 100m from an intersection.
	Note - Refer to Overlay map - Road hierarchy for road classification.
Rural industry ⁽⁷⁰⁾	
PO59 Rural industry ⁽⁷⁰⁾ :	No acceptable outcome provided
a. adopt construction materials and use of colour for buildings and structures are visually compatible with the rural residential character and amenity;	
b. is of a size, scale and design that is not visually dominant, overbearing and inconsistent with the low intensity built form and open area character and amenity of the rural residential environment.	
Sales office ⁽⁷²⁾	


PO60	AO60
Sales office ⁽⁷²⁾ remain temporary in duration and retain a physical connection to land or building being displayed or sold.	Development is carried out for no longer than 2 years.
(24)	
that will not cause human exposure to electromagnetic radiation	nmunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner beyond the limits outlined in the Radiocommunications (Electromagnetic on Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
PO61	AO61.1
Telecommunications facilities ⁽⁸¹⁾ are co-located with existing telecommunications facilities ⁽⁸¹⁾ , Utility installation ⁽⁸⁶⁾ , Major electricity infrastructure ⁽⁴³⁾ or Substation ⁽⁸⁰⁾ if there is already a facility in the same coverage area.	New telecommunication facilities ⁽⁸¹⁾ are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.
coverage area.	AO61.2
	If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.
PO62	AO62
A new Telecommunications facility ⁽⁸¹⁾ is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.	A minimum of 45m ² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
PO63	AO63
Telecommunications facilities ⁽⁸¹⁾ do not conflict with lawful existing land uses both on and adjoining the site.	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
PO64	AO64.1
The Telecommunications facility ⁽⁸¹⁾ does not have an adverse impact on the visual amenity of a locality and is: a. high quality design and construction;	Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.
b. visually integrated with the surrounding area;	AO64.2
 c. not visually dominant or intrusive; d. located behind the main building line; e. below the level of the predominant tree canopy or the level of the surrounding buildings and 	In all other areas towers do not exceed 35m in height.
or the level of the surrounding buildings and structures;	AO64.3
f. camouflaged through the use of colours and materials which blend into the landscape;g. treated to eliminate glare and reflectivity;	Towers, equipment shelters and associated structures are of a design, colour and material to:

h. landscaped;i. otherwise consistent with the amenity and	a. reduce recognition in the landscape;b. reduce glare and reflectivity.
character of the zone and surrounding area.	
	AO64.4
	All structures and buildings are setback behind the main
	building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive
	industry zones, the minimum side and rear setback is 3m
	Where there is no established building line the facility is
	located at the rear of the site.
	AO64.5
	The facility is enclosed by security fencing or by other mea to ensure public access is prohibited.
	AO64.6
	A minimum 3m wide strip of dense planting is provided arou the perimeter of the fenced area, between the facility and street frontage and adjoining uses.
•_ ()	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.
PO65	AO65
Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.	An Access and Landscape Plan demonstrates how 24 ho vehicular access will be obtained and maintained to the facil in a manner that is appropriate to the site's context.
P066	AO66
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.	All equipment comprising the Telecommunications facility ⁽ which produces audible or non-audible sound is housed with a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipme
	can be heard, or felt at the site boundary.
Wholesale nursery ⁽⁸⁹⁾	
PO67	No acceptable outcome provided.
Buildings and activities associated with a wholesale nursery ⁽⁸⁹⁾ .	
a. ensures the propagation of plants, whether or not in the open, occur without loss of amenity to adjacent properties;	

	b. do not result in any form of environmental degradation, including, but not limited to, soil degradation, pollution of natural water courses and introduction of exotic plant species into the natural on-site or adjoining flora;	
	 are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas; 	
	d. have vehicle access from a road classified as a arterial or sub-arterial.	
	Note - Refer to Overlay map - Road hierarchy for road classification.	
	Veterinary services ⁽⁸⁷⁾	
	PO68	No acceptable outcome provided.
	Buildings and activities associated with veterinary services ⁽⁸⁷⁾ :	
	a. are for veterinary care, surgery and treatment of animals only;	5
	 b. are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas; 	
	c. have vehicle access from a road classified as a arterial or sub-arterial.	
	Note - Refer to Overlay map - Road hierarchy for road classification.	
Ì	Winery ⁽⁹⁰⁾	
		N
	PO69 Buildings and activities associated with winery ⁽⁹⁰⁾ :	No acceptable outcome provided.
	 are for a winery⁽⁹⁰⁾ and ancillary activities only. Uses not affiliated with winery⁽⁹⁰⁾ activities, or the sale of products produced or manufactured on-site, are avoided; 	
	 b. are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas; and 	
	c. have vehicle access from a road classified as a arterial or sub-arterial.	

Note - Refer to Overlay map - Road hierarchy for road classification.	
Values and	constraints criteria
consistent with, and subsequent to a current Development per under this or a superseded planning scheme, has considered and	where the development, the subject of the application, is associated and mit for Reconfiguring a lot or Material change of use, where that approval, addressed (e.g. through a development footprint plan or similar, or conditions or constraint under this planning scheme.
Bushfire hazard areas (refer Overlay map - Bushfi apply)	re hazard to determine if the following assessment criteria
Note - To demonstrate achievement of the performance outcome Guidance for the preparation of a bushfire management plan is p	es, a bushfire management plan is prepared by a suitably qualified person. provided in Planning scheme policy – Bushfire hazard areas.
Note - Unacceptable risk is defined as a situation where people serious injury, loss of life, failure of community infrastructure, or	or property are exposed to a predictable hazard event that may result in property damage.
PO70	A070.1
 Development: a. minimises the number of buildings and people working and living on a site exposed to bushfire risk; b. ensures the protection of life during the passage of a fire front; c. is located and designed to increase the chance of survival of buildings and structures during a bushfire; d. minimises bushfire risk from build up of fuels around buildings and structures; e. ensure safe and effective access for emergency services during a bushfire. 	 Buildings and structures are: a. not located on a ridgeline; b. not located on land with a slope greater than 15% (see Overlay map - Landslide hazard (for land having a slope greater than 15%)); c. dwellings are located on east to south facing slopes. AO70.2 Buildings and structures have contained within the site: a. a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater; b. a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater; c. a separation of no less than 10m between a fire fighting water supply of no more than 29, whichever is the greater; c. a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures; d. an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and e. an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 25%:
	 i. to, and around, each building and other roofed structure; and ii. to each fire fighting water supply extraction point.

	Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack le are as described in Australian Standard AS 3959
P071	A071
 Development and associated driveways and access ways: a. avoid potential for entrapment during a bushfire; b. ensure safe and effective access for emergency services during a bushfire; c. enable safe evacuation for occupants of a site during a bushfire. 	 A length of driveway: a. to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road; b. has a maximum gradient no greater than 12.5%; c. have a minimum width of 3.5m; d. accommodate turning areas for fire fighting appliant in accordance with Qld Fire and Emergency Service Fire Hydrant and Vehicle Access Guideline.
PO72 Development provides an adequate water supply for fire-fighting purposes.	 A072 a. a reticulated water supply is provided by a distribut retailer for the area or; b. where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittin swimming pools) is located within 10m of buildings structures. c. Where a swimming pool is the nominated on-site fir fighting water storage source, vehicle access is provit to within 3m of that water storage source. d. Where a tank is the nominated on-site fire fighting water storage source. i. a hardstand area allowing medium rigid vehic (15 tonne fire appliance) access within 6m of tank; ii. fire brigade tank fittings, comprising 50mm basis
	valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.
P073	A073
 Development: a. does not present unacceptable risk to people or environment due to the impact of bushfire on dangerous goods or combustible liquids; b. does not present danger or difficulty to emergency services for emergency response or evacuation. Editor's note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage. 	Development does not involve the manufacture or storage of hazardous chemicals.

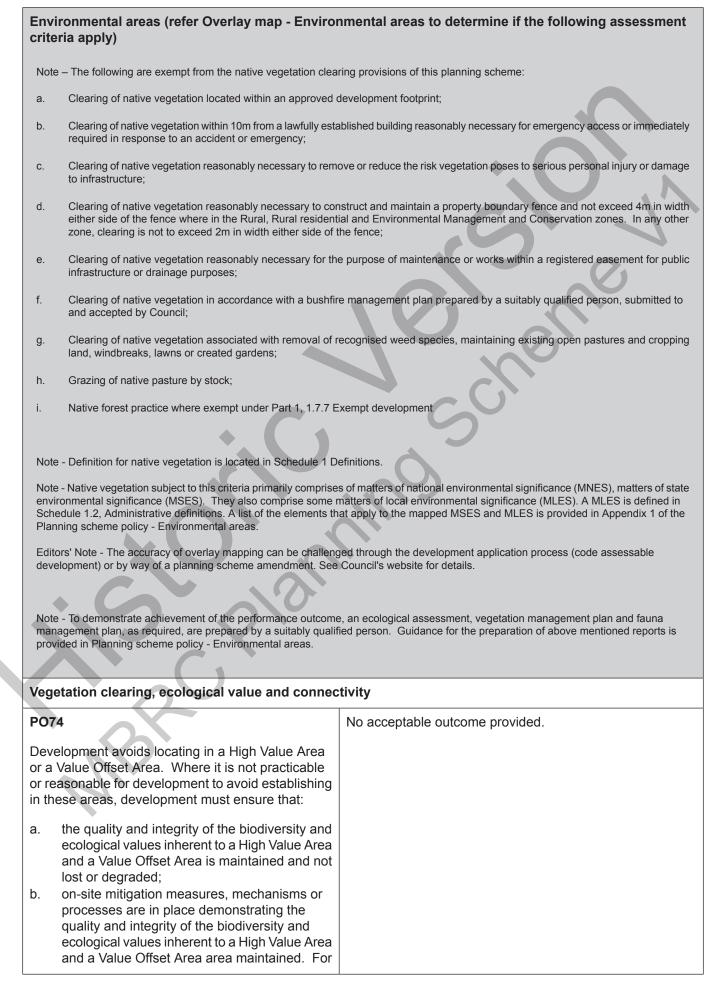

example, this can be achieved through	
replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*.	
offset under the Environmental Offsets Act 2014.	
PO75	No acceptable outcome provided.
Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by: a. retaining habitat trees;	
 b. providing contiguous patches of habitat; c. provide replacement and rehabilitation planting to improve connectivity; 	
 avoiding the creation of fragmented and isolated patches of habitat; 	
e. providing wildlife movement infrastructure.	CO.
Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with	
ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy – Environmental areas.	
bridges. Further information is provided in Planning scheme policy – Environmental areas.	
bridges. Further information is provided in Planning scheme policy – Environmental areas. Vegetation clearing and habitat protection	No accontable automa provided
bridges. Further information is provided in Planning scheme policy – Environmental areas.	No acceptable outcome provided.
bridges. Further information is provided in Planning scheme policy – Environmental areas. Vegetation clearing and habitat protection PO76 Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted	No acceptable outcome provided.
bridges. Further information is provided in Planning scheme policy – Environmental areas. Vegetation clearing and habitat protection PO76 Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	
 bridges. Further information is provided in Planning scheme policy – Environmental areas. Vegetation clearing and habitat protection PO76 Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. PO77 Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development will: a. rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a 	
 bridges. Further information is provided in Planning scheme policy – Environmental areas. Vegetation clearing and habitat protection PO76 Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. PO77 Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development will: a. rehabilitate, revegetate, restore and enhance 	

P078	No acceptable outcome provided.
Development ensures safe, unimpeded, convenient and ongoing wildlife movement and habitat connectivity by:	
 a. providing contiguous patches of habitat; b. avoiding the creation of fragmented and isolated patches of habitat; c. providing wildlife movement infrastructure; d. providing replacement and rehabilitation planting to improve connectivity. 	
Vegetation clearing and soil resource stability	
P079	No acceptable outcome provided.
Development does not:	
 a. result in soil erosion or land degradation; b. leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely manner. 	
Vegetation clearing and water quality	
 PO80 Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by: a. ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads; b. avoiding or minimising changes to landforms to maintain hydrological water flows; c. adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry⁽⁴⁾ and animal keeping⁽⁵⁾ activities. 	No acceptable outcome provided.
P081	No acceptable outcome provided.
Development minimises adverse impacts of stormwater run-off on water quality by:	
 a. minimising flow velocity to reduce erosion; b. minimising hard surface areas; c. maximising the use of permeable surfaces; d. incorporating sediment retention devices; e. minimising channelled flow. 	
Vegetation clearing and access, edge effects and	l urban heat island effects
PO82	No acceptable outcomes provided.

Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment.	
PO83	No acceptable outcome provided.
 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors; e. landscaping with native plants of local origin. Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the 	
groundwater and surface water flow.	\mathcal{O}
 PO84 Development avoids adverse microclimate change and does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by: a. pervious surfaces; b. providing deeply planted vegetation buffers and green linkage opportunities; c. landscaping with local native plant species to achieve well-shaded urban places; d. increasing the service extent of the urban forest canopy. 	No acceptable outcome provided.
Vegetation clearing and Matters of Local Environ	mental Significance (MLES) environmental offsets
PO85 Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas. Editor's note - For MSES Koala Offsets, State Planning Regulatory Provision environmental offset provisions apply.	No acceptable outcome provided.

Extractive resources transport route (refer Overl to determine if the following assessment criteria	ay map - Extractive resources (transport route and buffer) a apply)
PO86	A086
 Development: a. does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route; b. does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes; c. adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to: i. locating the furthest distance possible from the transportation route; ii. habitable rooms being located the furthest from the transportation route; 	 a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house⁽²²⁾; e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾.
PO87 Development:	AO87.1 Development does not create a new vehicle access point onto an Extractive resources transport route.
 a. does not adversely impact upon the efficient and effective transportation of extractive material along a transportation route; b. ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility; c. utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard. 	
the following assessment criteria apply) Note - To assist in demonstrating achievement of heritage perfo by a suitably qualified person verifying the proposed development Note - To assist in demonstrating achievement of this performant	rmap - Heritage and landscape character to determine if rmance outcomes, a Cultural heritage impact assessment report is prepared ent is in accordance with The Australia ICOMOS Burra Charter. Ince outcome, a Tree assessment report is prepared by a qualified arborist in cape character. The Tree assessment report will also detail the measures on development sites.
landscape character and listed in Schedule 1 of Planning scher	al cultural heritage significance, are identified on Overlay map - Heritage and me policy - Heritage and landscape character. Places also having cultural Queensland Heritage Register, are also identified in Schedule 1 of Planning

P088	A088
 Development will: a. not diminish or cause irreversible damage to the cultural heritage values present on the site and associated with a heritage site, object or building; b. protect the fabric and setting of the heritage site, object or building; c. be consistent with the form, scale and style of the heritage site, object or building; d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes; e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building; f. retain public access where this is currently provided. 	Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.
 Demolition and removal is only considered where: a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or c. limited demolition is performed in the course or repairs, maintenance or restoration; or d. demolition is performed following a catastrophic event which substantially destroys the building or object. 	
PO90 Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultura heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.	
Development does not adversely impact upon the health and vitality of significant trees. Where development occurs in proximity to a significant tree construction measures and techniques as detailed in AS 4970-2009 Protection of trees on developmen sites are adopted to ensure a significant tree's health wellbeing and vitality.	 Development does: a. not result in the removal of a significant tree; b. not occur within 20m of a protected tree; t c. involve pruning of a tree in accordance with Australian

Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably gualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome.

Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

PO92

AO92

Development within a Pumping station buffer is located, designed and constructed to:

- a. ensure that odour or other air pollutant impacts on the amenity of the development met the air guality of objectives in the Environmental Protection (Air) Policy 2008;
- ensure that noise impacts on the amenity of b. the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008.

Development does not involve the construction of any buildings or structures within a Pumping station buffer.

Landslide (refer Overlay map - Landslide hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a site-specific geotechnical assessment report is prepared by a qualified engineer. Guidance for the preparation of a geotechnical assessment report is provided in Planning scheme policy - Landslide hazard.

PO93

PO94

and structures by:

Development:

a.	maintains the safety of people and property on
	a site and neighbouring sites from landslides;

- b. ensures the long-term stability of the site considering the full nature and end use of the development;
- ensures site stability during all phases of C. construction and development;
- minimises disturbance of natural drainage d. patterns of the site and does not result in the redirection or alteration of the existing flow if surface or groundwater
- minimises adverse visual impacts on the e. amenity of adjoining residents and provides a positive interface with the streetscape.

AO93 Development does not:

AO94

- а. involve earthworks exceeding 50m³;
- b. involve cut and fill having a height greater than 600mm;
- C. involve any retaining wall having a height greater than 600mm: d. redirect or alter the existing flow of surface or groundwater.

Buildings, excluding domestic outbuildings: topography in the siting, design and form of buildings

- are split-level, multiple-slab, pier or pole construction; a. b. are not single plane slab on ground.
- minimising overuse of cut and fill to create а. single flat pads and benching;

Buildings are designed to respond to sloping

b.		
	avoiding expanses of retaining walls, loss of trees and vegetation and interference with natural drainage systems;	
C.	minimising any adverse visual impact on the landscape character ;	
d.	Protect the amenity of adjoining properties.	
PO9	5	AO95
and on h	elopment protects the safety of people, property the environment from the impacts of landslide azardous chemicals manufactured, handled or ed by incorporating design measures to ensure:	Development does not involve the manufacture, handling or storage of hazardous chemicals.
a.	the long-term stability of the development site considering the full nature and end use of the development;	
b.	site stability during all phases of construction and development;	
C.	the development is not adversely affected by landslide activity originating on sloping land above the site;	
d.	emergency access and access from the site for the public and emergency vehicles is available and is not at risk from landslide.	
Ove appl		flow path to determine if the following assessment criteria
obta	a The applicable river and creek flood planning levels associated by requesting a flood check property report from Counciliant of the second secon	ciated with defined flood event (DFE) within the inundation area can be cil.
PO9		No acceptable outcome provided.
	6	
Deve	6 elopment:	
Deve a.		
	elopment: minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other	
a.	elopment: minimises the risk to persons from overland flow; does not increase the potential for damage from	
a.	elopment: minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.	A097
a. b. PO9	elopment: minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.	
a. b. PO9 Deve a.	elopment: minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure. 7 elopment: maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;	AO97
a. b. PO9	elopment: minimises the risk to persons from overland flow; does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure. 7 elopment: maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP	AO97

	l
adverse impacts on an upstream, downstream or surrounding premises.	
Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.	
PO98	No acceptable outcome provided.
Development does not:	* () · ,
 a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level; b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure. Note - Open concrete drains greater than 1m in width are not 	
an acceptable outcome, nor are any other design options that may increase scouring.	
PO99	AO99
Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.	Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.
PO100	AO100
Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.	Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.
P0101	AO101.1
Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant	 Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM: a. Urban area – Level III; b. Rural area – N/A; c. Industrial area – Level V; d. Commercial area – Level V.
adverse impacts on an upstream, downstream or surrounding premises.	AO101.2
Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.

PO102	No acceptable outcome provided.
Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:	
a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;	
 an overland flow path where it crosses more than one premises; 	
c. inter-allotment drainage infrastructure.	
Note - Refer to Planning scheme policy - Integrated design for details and examples.	
Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.	
Additional criteria for development for a Park ⁽⁵⁷⁾	
PO103	AO103
Development for a Park ⁽⁵⁷⁾ ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:	Development for a Park ⁽⁵⁷⁾ ensures works are provided accordance with the requirements set out in Appendix B the Planning scheme policy - Integrated design.
a. public benefit and enjoyment is maximised;	
b. impacts on the asset life and integrity of park structures is minimised;	
c. maintenance and replacement costs are minimised.	
Riparian and wetland setbacks	
P0104	AO104
Development provides and maintains a suitable	Development does not occur within:
setback from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following	a. 50m from top of bank for W1 waterway and draina line
a. impact on fauna habitats;	b. 30m from top of bank for W2 waterway and draina line
b. impact on wildlife corridors and connectivity;	c. 20m from top of bank for W3 waterway and draina
	line
c. impact on stream integrity;	
c. impact on stream integrity;d. impact of opportunities for revegetation and rehabilitation planting;	d. 100m from the edge of a Ramsar wetland, 50m fro all other wetlands.

6.2.3.2 Transition precinct

Click on the required section from the menu beside.

6.2.3.2.1 Developable lots

6.2.3.2.1 Purpose - Transition precinct, developable lot

Editor's note -The outcomes in this section are generally the same as Interim precinct but for developable lots

- 1. For uses on developable lots the purpose of the Emerging Community Zone transition precinct will be achieved through the following overall outcomes:
 - a. For interim uses development only occurs on a developable lot that is not serviced by all local government networks including water and sewer.
 - b. Development is to maintain a semi-rural character until such time as availability and provision of infrastructure is delivered and relevant site specific constraints are resolved.
 - c. Interim uses are appropriate in this precinct where they:
 - i. would be compatible with the existing semi-rural character and urban uses;
 - ii. would not prejudice or delay the development of the site and adjoining areas;
 - iii. are low intensity in nature and characterised by low investment in buildings and infrastructure relative to the value of the site.
 - d. Residential activities consist of detached dwelling houses⁽²²⁾ or caretaker's accommodation⁽¹⁰⁾, predominantly on large lots.
 - e. The character and scale of dwelling houses⁽²²⁾ are compatible with the intended character for the precinct.
 - f. Secondary dwellings associated with a principal dwelling, remaining subordinate and ancillary to the principal dwelling to retain the low density, low intensity, residential form of a dwelling house⁽²²⁾.
 - g. Garages, car ports and domestic outbuildings remain subordinate and ancillary to the principal dwelling and are located and designed to reduce amenity impacts on the streetscape and adjoining properties.
 - h. Dwelling houses⁽²²⁾ are designed to add visual interest and contribute to an attractive streetscape and public realm.
 - i. Dwelling houses⁽²²⁾ are provided with infrastructure and services at a level suitable for the area as a transition precinct.
 - j. Dwelling houses⁽²²⁾ are responsive to the lot shape, dimensions and topographic features.
 - k. Non-residential uses do not result in adverse or nuisance impacts on adjoining properties or the wider environment. Any adverse or nuisance impacts are contained and internalised to the site through location, design, operation and on-site management practices.
 - I. General works associated with the development achieves the following:
 - i. a high standard of electricity, telecommunications, roads, sewerage, water supply and street lighting services is provided to new developments to meet the current and future needs of users of the site;
 - ii. the development manages stormwater to:
 - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
 - B. prevent stormwater contamination and the release of pollutants;

- C. maintain or improve the structure and condition of drainage lines and riparian areas;
- D. avoid off-site adverse impacts from stormwater.
- iii. the development does not result in unacceptable impacts on the capacity on the capacity and safety of the external road network;
- iv. the development ensures the safety, efficiency and useability of access ways and parking areas;
- v. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- m. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke
- n. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
 - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
 - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
 - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
 - iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
 - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
 - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
 - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
 - v. protecting native species and protecting and enhancing species habitat;
 - vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
 - vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
 - viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
 - ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
 - c. ensuring effective and efficient disaster management response and recovery capabilities;
 - xi. where located in an overland flow path:
 - A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
 - B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
 - C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
 - D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- o. Development in the Transition precinct, on a developable lot includes one or more of the following:

•	Animal husbandry ⁽⁴⁾	•	Dwelling House ⁽²²⁾	•	Rural Industry ⁽⁷⁰⁾ - if on a
•	Animal keeping ⁽⁵⁾ - if not for	•	Emergency services		lot greater than 1ha and having a GFA of 150m ² or
	a cattery or kennel	•	Environment facility ⁽²⁶⁾		less (72)
•	Caretaker's accommodation ⁽¹⁰⁾	•	Home based business ⁽³⁵⁾	•	Sales office ⁽⁷²⁾
•	Cropping ⁽¹⁹⁾ - if not forestry	•	Intensive horticulture ⁽⁴⁰⁾ - if	•	Veterinary services ⁽⁸⁷⁾
	for wood production		on a lot greater than 1ha	•	Wholesale nursery ⁽⁸⁹⁾
		•	Roadside stall ⁽⁶⁸⁾		

p. Development in the Transition precinct, on a developable lot does not include any of the following:

•	Adult store ⁽¹⁾	•	High impact industry ⁽³⁴⁾	•	Port services ⁽⁶¹⁾
•	Agricultural supplies store ⁽²⁾	•	Hospital ⁽³⁶⁾	•	Relocatable home park ⁽⁶²⁾
•	Air services ⁽³⁾	•	Hotel ⁽³⁷⁾	•	Renewable energy facility ⁽⁶³⁾
•	Animal keeping ⁽⁵⁾ - if for a cattery or kennel	•	Indoor sport and recreation ⁽³⁸⁾	•	Research and technology industry ⁽⁶⁴⁾
•	Aquaculture ⁽⁶⁾	•	Intensive animal industry ⁽³⁹⁾		Residential care facility ⁽⁶⁵⁾
•	Bar ⁽⁷⁾	•	Low impact industry ⁽⁴²⁾	•	Resort complex ⁽⁶⁶⁾
•	Brothel ⁽⁸⁾	•	Major sport, recreation and	•	
•	Bulk landscape supplies ⁽⁹⁾		entertainment facility ⁽⁴⁴⁾	•	Retirement facility ⁽⁶⁷⁾
•	Car wash ⁽¹¹⁾		Marine industry ⁽⁴⁵⁾	•	Rooming accommodation ⁽⁶⁹⁾
•	Cemetery ⁽¹²⁾		Market ⁽⁴⁶⁾	•	Rural workers' (71)
	Community residence ⁽¹⁶⁾	0	Medium impact industry ⁽⁴⁷⁾		accommodation ⁽⁷¹⁾
•	Crematorium ⁽¹⁸⁾	•	Motor sport facility ⁽⁴⁸⁾	•	Service industry ⁽⁷³⁾
	Cropping ⁽¹⁹⁾ - if forestry for	•	Multiple dwelling ⁽⁴⁹⁾	•	Service station ⁽⁷⁴⁾
	wood production	•	Nature-based tourism ⁽⁵⁰⁾	•	Shop ⁽⁷⁵⁾
•	Detention facility ⁽²⁰⁾	•	Nightclub entertainment facility ⁽⁵¹⁾	•	Shopping centre ⁽⁷⁶⁾
	Dual occupancy ⁽²¹⁾	•	Non-resident workforce	•	Short-term accommodation ⁽⁷⁷⁾
	Dwelling unit ⁽²³⁾		accommodation ⁽⁵²⁾	•	Showroom ⁽⁷⁸⁾
•	Extractive industry ⁽²⁷⁾	•	Office ⁽⁵³⁾	•	Special industry ⁽⁷⁹⁾
•	Food and drink outlet ⁽²⁸⁾	•	Outdoor sales ⁽⁵⁴⁾	•	Theatre ⁽⁸²⁾
•	Function facility ⁽²⁹⁾	•	Outdoor sport and recreation ⁽⁵⁵⁾	•	Tourist attraction ⁽⁸³⁾
•	Funeral parlour ⁽³⁰⁾			•	

•	Garden centre ⁽³¹⁾	•	Parking station ⁽⁵⁸⁾	•	Tourist park ⁽⁸⁴⁾
•	Hardware and trade supplies ⁽³²⁾	•	Permanent plantation ⁽⁵⁹⁾	•	Transport depot ⁽⁸⁵⁾
				•	Warehouse ⁽⁸⁸⁾
•	Health care services ⁽³³⁾				

q. Development not listed in the tables above may be considered on its merits and where it reflects and support the outcomes of the zone.

6.2.3.2.2.2 Criteria for assessment

To determine if development is self-assessable, development must comply with the self-assessable acceptable outcomes set out in Part C, Table 6.2.3.2.1.1. Where development does not meet a self-assessable acceptable outcome (SAO) of the relevant criteria Part C Table 6.2.3.2.1.1, assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a SAO is not met, and is therefore limited to the subject matter of the SAOs that are not complied with. To remove any doubt, for those SAOs that are complied with, there is no need for assessment against the corresponding PO.

s	Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)	
S	SAO1	PO1	
S	SAO2	PO5	(
S	SAO3	P07	
s	SAO4	PO6	
S	SAO5	PO8	
S	SAO6	PO9	
S	SAO7	P010-P011	
S	SAO8	P012-P015	
ş	SAO9	P012-P015	
S	SAO10	PO16	
S	5AO11	P017	
S	SAO12	PO20	
S	SA013	PO21-PO26	
S	SAO14	PO29	
S	SAO15	PO29	
S	SAO16	PO31	
S	SAO17	PO35	
S	SAO18	PO37	
S	SAO19	PO39	
S	SAO20	PO40	
S	SAO21	PO37	

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO22	PO41
SAO23	PO41-PO46
SAO24	PO43
SAO25	PO47
SAO26	PO47
SAO27	PO47
SAO28	PO48
SAO29	PO49
SAO30	PO50
SAO31	PO50
SAO32	PO50
SAO33	PO51
SAO34	PO52
SAO35	PO52
SAO36	PO52
SAO37	P053
SAO38	PO52
SAO39	PO52
SAO40	PO52
SAO41	P054
SAO42	P054
SAO43	P055
SAO44	P055
SAO45	P056
SAO46	PO60
SAO47	PO60
SAO48	PO60
SAO49	PO60
SAO50	PO60
SAO51	PO62
SAO52	PO64
SAO53	PO65
SAO54	PO66
SAO55	PO66

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)	
SAO56	PO66	
SAO57	PO66	
SAO58	PO68	
SAO59	P072	
SAO60	P073	
SAO61	P073	
SAO62	P074	
SAO63	P075	
SAO64	P076	
SAO65	P077-P088	
SAO66	P077-P088	
SAO67	PO89	
SAO68	PO90	
SAO69	PO90	
SAO70	PO91	
SAO71	PO91	
SAO72	PO94	
SAO73	PO94	
SAO74	PO94	
SAO75	PO95	
SAO76	PO96	
SAO77	P097	
SAO78	PO104	
SAO79	PO98	
SAO80	PO98	
SAO81	PO100	
SAO82	PO99	
SAO83	PO99	
SAO84	PO99	
SAO85	PO98	
SAO86	PO100	
SAO87	PO100	
SAO88	PO102-PO103	
SAO89	PO106-PO108, PO110-PO112	

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)	
SAO90	PO106-PO108, PO110-PO112	
SAO91	PO106-PO108	
SAO92	PO109	
SAO93	PO113	
SAO94	PO114	

Part C - Criteria for self-assessable development - Transition precinct, developable lot

*

Table 6.2.3.2.1.1 Self-assessable development - Transition precinct, developable lot

Self-asses	Self-assessable acceptable outcomes - For developable lots only			
	General criteria			
Servicing				
SAO1	The site is a developable lot that is not serviced with all local government networks including water and sewer.			
Building h	eight			
SAO2	Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m.			
Setbacks				
SAO3	 Buildings and structures associated with the following uses are setback from all lot boundaries as follows: a. Animal husbandry⁽⁴⁾ (buildings only) - 10m; b. Cropping⁽¹⁹⁾ (buildings only) - 10m; c. Animal keeping⁽⁵⁾, excluding catteries and kennels - 20m; d. Cropping⁽¹⁹⁾ (buildings only) - 10m; e. Intensive horticulture⁽⁴⁰⁾ - 10m; f. Rural Industry⁽⁷⁰⁾ - 20m; g. Wholesale nursery⁽⁸⁹⁾ - 10m; h. Veterinary services⁽⁸⁷⁾ - 10m. 			
SAO4	 Unless specified elsewhere in the zone code, all other buildings and structures are setback: a. Road frontage - 6m minimum; b. Side and Rear - 4.5m minimum. Note - For a Dwelling house⁽²²⁾ where located in a bushfire hazard area (see Overlay map - Bushfire hazard) a greater setback may be required. See values and constraints criteria Bushfire hazard areas. Note - This provision does not apply where a development footprint exists for a lot. 			

SAO5	Where a development footprint has been identified as part of a development approval for reconfiguring				
	a lot, all development occurs within that development footprint .				
Building	on sloping land				
SAO6	Building and site design on slopes between 10% and 15%:				
	a. use split-level, multiple-slab, pier or pole construction;b. avoid single-plane slabs and benching;				
	c. ensure the height of any cut or fill, whether retained or not, does not exceed 900mm.				
	Note - This does not apply to outbuildings or building work.				
Lighting					
SAO7	Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommend maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.				
	Note - "Curfewed hours" are taken to be those between 10pm and 7am the following day.				
Hazardo	s chemicals				
SAO8	All development that involves the storage or handling of hazardous chemicals listed in Schedule 9, Development involving hazardous chemicals, Table 9.0.1 Hazardous Chemicals Self-Assessable Thresholds complies with Table 9.0.3 Hazardous Chemicals Self-Assessable Criteria.				
SAO9	Development does not involve the storage or handling of hazardous chemicals listed in Schedule 9, Development involving hazardous chemicals, Table 9.0.2 Hazardous Chemicals Assessable Thresholds				
Waste tr	atment				
SAO10	All concentrated animal use areas (e.g. sheds, pens, holding yards, stables) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment areas				
Car park	ing				
SAO11	On-site car parking is provided in accordance with Schedule 7 - Car parking.				
Clearing	of habitat trees where not located in the Environmental areas overlay map.				
SAO12	SAO12 Development does not result in the damaging,destroyed or clearing of a habitat tree. This does apply to:				
	a. Clearing of a habitat tree located within an approved development footprint;				
	b. Clearing of a habitat tree within 10m from a lawfully established building reasonably necessar for emergency access or immediately required in response to an accident or emergency;				
	c. Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses				

fence and not exceed 4m in width either side of the fence where in the Rural , Rural re and Environmental management and conservation zones. In any other zone, clearing exceed 2m in width either side of the fence; e. Clearing of a habitat tree reasonably necessary for the purpose of maintenance or wor a registered easement for public infrastructure or drainage purposes; f. Clearing of a habitat tree in accordance with a bushfire management plan prepared by qualified person, submitted to and accepted by Council; g. Clearing of a habitat tree is associated with removal of recognised weed species, maintainin open pastures and cropping land, windbreaks, lawns or created gardens; h. Native forest practice where exempt under Part 1, 17.7 Exempt development. Editor's nole - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is ras a habitat tree'. For Interior floaring and information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Prote Trees on Development Sites - Appendix A. Vutilities Works criteria Utilities Interculated electricity supply; b. telecommunications and broadband; c. reticulated water; e. constructed and dedicated road. Access SAO14 Any new or changes to existing site access and driveways are designed and located in accc with. a. Where for a Council-controlled road, AS/NZS2890.1 section 3;						
a registered easement for public infrastructure or drainage purposes; f. Clearing of a habitat tree in accordance with a bushfire management plan prepared by qualified person, submitted to and accepted by Council; g. Clearing of a habitat tree associated with removal of recognised weed species, maintainin open pastures and cropping land, windbreaks, lawns or created gardens; h. Native forest practice where exempt under Part 1, 1.7.7 Exempt development. Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is r as a habitat tree'. For further information on habitat trees, refer lo Planning scheme policy – Environmental areas and Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Prote Trees on Development Sites - Appendix A. Works criteria Utilities SA013 Where available, the development is connected to: a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated severage; d. reticulated water; e. constructed and dedicated road. Access SA014 Any new or changes to existing site access and driveways are designed and located in accc with:	fence and not exceed 4m in width either side of the fence where in the Rural, Rural residentia and Environmental management and conservation zones. In any other zone, clearing is not to					
qualified person, submitted to and accepted by Council; g. Clearing of a habitat tree associated with removal of recognised weed species, maintainin open pastures and cropping land, windbreaks, lawns or created gardens; h. Native forest practice where exempt under Part 1, 1.7.7 Exempt development. Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is r as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy - Environmental areas and Information dealing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Prote Trees on Development Sites - Appendix A. Works criteria Utilities SA013 Where available, the development is connected to: a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated water; e. constructed and dedicated road. Access SA014 Any new or changes to existing site access and driveways are designed and located in acccowith: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SAQ15 </th <th></th> <th colspan="3"></th>						
open pastures and cropping land, windbreaks, lawns or created gardens; h. Native forest practice where exempt under Part 1, 1.7.7. Exempt development. Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is r as a habitat tree'. For further information on habitat trees, referice Planning scheme policy - Environmental areas and Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Prote Trees on Development Sites - Appendix A. Utilities Works criteria Utilities . SAO13 Where available, the development is connected to: a. an existing reticulated electricity supply; telecommunications and broadband; c. reticulated water; c. constructed and dedicated road. Access SAO14 Any new or changes to existing site access and driveways are designed and located in accc with:						
Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is r as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Prote Works criteria Utilities SA013 Where available, the development is connected to: a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated sewerage; d. reticulated water; e. constructed and dedicated road. Access SA014 Any new or changes to existing site access and driveways are designed and located in accommut. a. Where for a Council-controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 82 approval. SA015 Any new or changes to existing internal driveways and access ways are designed and const accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant sin Planning scheme policy - Integrated design.						
as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Prote Trees on Development Sites - Appendix A. Works criteria Utilities SAO13 Where available, the development is connected to: a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated sewerage; d. reticulated and dedicated road. Access SAO14 Any new or changes to existing site access and driveways are designed and located in accommute. a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SAO15 Any new or changes to existing internal driveways and access ways are designed and const accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant s in Planning scheme policy - Integrated design.	pt under Part 1, 1.7.7 Exempt development.	h. Native forest practice where				
Utilities SA013 Where available, the development is connected to: a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated sewerage; d. reticulated and dedicated road. Access SA014 Any new or changes to existing site access and driveways are designed and located in accommutivity. a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SA015 Any new or changes to existing internal driveways and access ways are designed and const accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant s in Planning scheme policy - Integrated design.	at trees, refer to Planning scheme policy – Environmental areas and corridors.	Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognis as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corrido Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.				
Utilities SA013 Where available, the development is connected to: a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated sewerage; d. reticulated water; e. constructed and dedicated road. Access SA014 Any new or changes to existing site access and driveways are designed and located in accommutation. a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SA015 Any new or changes to existing internal driveways and access ways are designed and const accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant s in Planning scheme policy - Integrated design.	orke oritoria					
SA013 Where available, the development is connected to: a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated sewerage; d. reticulated water; e. constructed and dedicated road. Access SA014 Any new or changes to existing site access and driveways are designed and located in accord with: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SA015 Any new or changes to existing internal driveways and access ways are designed and constaccordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant s in Planning scheme policy - Integrated design.						
 a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated sewerage; d. reticulated water; e. constructed and dedicated road. Access SAO14 Any new or changes to existing site access and driveways are designed and located in accord with: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SAO15 Any new or changes to existing internal driveways and access ways are designed and const accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant sin Planning scheme policy - Integrated design.						
b. telecommunications and broadband; c. reticulated sewerage; d. reticulated water; e. constructed and dedicated road. Access SA014 Any new or changes to existing site access and driveways are designed and located in accommunication with: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SA015 Any new or changes to existing internal driveways and access ways are designed and consist accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant stin Planning scheme policy - Integrated design.	SA013 Where available, the development is connected to:					
 SAO14 Any new or changes to existing site access and driveways are designed and located in account with: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SAO15 Any new or changes to existing internal driveways and access ways are designed and constance of the AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant sin Planning scheme policy - Integrated design. 	 b. telecommunications and broadband; c. reticulated sewerage; d. reticulated water; 					
 with: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in A and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure section 62 approval. SA015 Any new or changes to existing internal driveways and access ways are designed and construction accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant sin Planning scheme policy - Integrated design. 	ess					
SAO15 Any new or changes to existing internal driveways and access ways are designed and const accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant s in Planning scheme policy - Integrated design.	ld, AS/NZS2890.1 section 3; or the Safe Intersection Sight Distance requirements in AustRoads	 with: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustReand the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1 				
Stormwater	SAO15 Any new or changes to existing internal driveways and access ways are designed and constructed accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standa					
	Stormwater					
SAO16 Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful of without causing nuisance or annoyance to any person, property or premises in accordance with scheme policy – Integrated design.						
Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the dra discharge from the site does not increase the downstream flood levels during events up to and including the 1% A An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured stormwater is discharged into a catchment that includes State Transport Infrastructure.						

Itrash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning Scheme policy - Integrated design. SA018 Construction traffic including contractor car parking is controlled in accordance with a firaffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe. SA019 All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works. SA020 Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification. SA021 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associate with the site are to be cleaned at all times. SA022 The site is prepared and the fill placed on-site in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures. SA023 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill Figure - Cut and fill An eduction in cover over any Council or public sector entity infrastructure to less than 600mm; be associated or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; be an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which	Site works and construction management			
plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe. SA019 All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works. SA020 Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification. SA021 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associate with the site are to be cleaned at all times. Earthworks SA022 The site is prepared and the fill placed on-site in accordance with Planning scheme policy - Operational works inspection. maintenance and bonding procedures SA023 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill Figure - Cut and fill Up to the site is the earthworks not building work. SA024 SA024 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; backet or to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.	SAO17	Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design.		
development works. Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works. SA020 Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification. SA021 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associate with the site are to be cleaned at all times. Earthworks SA022 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798. Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures SA023 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill Figure - Cut and fill Vet - This is site earthworks not building work. SA024 SA024 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.	SAO18	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.		
SA020 Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification. SA021 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times. Earthworks SA022 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798. Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures SA023 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill Vote - This is site earthworks not building work. SA024 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase infinished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase infinished under each ever, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase infinished under each ever, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	SAO19			
plan sealing, or final building classification. SA021 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times. Earthworks SA022 The site is prepared and the fill placed on-site in accordance with Adustralian Standard AS3798. Note - The fill is to be inspected and tested inaccordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures SA023 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill Up of the This is site earthworks not building work. SA024 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.		Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.		
with the site are to be cleaned at all times. Earthworks SA022 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798. Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures SA023 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill Figure - Cut and fill Image: Cut and fill Note-This is site earthworks not building work. Figure - Cut and fill SA024 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.	SAO20	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.		
SA022 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798. Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures SA023 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill Image: Cut and fill Vote - This is site earthworks not building work. Image: Cut and fill on exceed 900mm SA024 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.	SAO21	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.		
Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures SA023 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill Figure - Cut and fill Under This is site earthworks not building work. Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.	Earthwork	s		
sao23 The total of all cut and fill on-site does not exceed 900mm in height. Figure - Cut and fill	SAO22	The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.		
Figure - Cut and fill Lot Boundaries Lot Boundaries Lot Boundaries Boom Boom Note - This is site earthworks not building work. SA024 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.				
Note - This is site earthworks not building work. SA024 Filling or excavation does not result in: a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.	SAO23	The total of all cut and fill on-site does not exceed 900mm in height.		
	SAO24	 Note - This is site earthworks not building work. Filling or excavation does not result in: a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure to less than 600mm; 		
Fire services		NOTE - Public Sector entity is defined in the Sustainable Planning Act 2009.		
	Fire services			


Note - The provisions under this heading only apply if:				
a.	the d	e development is for, or incorporates:		
	i. ii. iii. iv.	reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park ⁽⁸⁴⁾ with accommodation in the form of caravans or tents; or material change of use for outdoor sales ⁽⁵⁴⁾ , outdoor processing or outdoor storage where involving combustible materials.		
AND b.	none	of the following exceptions apply:		
υ.		the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated		
	i. II.	water supply; or every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.		
	m com	provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant plying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent		
SAO	25	External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .		
	Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):			
	 a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist development comprised solely of dwellings and their associated outbuildings, single outlet above-gro suitably signposted in-ground hydrants would be an acceptable alternative; b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as we be of AS 2419.1 (2005); 			
		c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:		
		i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;		
		ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;		
		iii for outdoor sales ⁽⁵⁴⁾ , processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales ⁽⁵⁴⁾ , outdoor processing and outdoor storage facilities; and		
		d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.		
		A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:		
		a. an unobstructed width of no less than 3.5m;		
		b. an unobstructed height of no less than 4.8m;		
		c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;		
		d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.		

	Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.		
SAO28	For development that contains on-site fire hydrants external to buildings:		
 a. those external hydrants can be seen from the vehicular entry point to the site; or b. a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); 			
	 v. external hydrants and hydrant booster points; vi. physical constraints within the internal roadway system which would restrict access by fi fighting appliances to external hydrants and hydrant booster points. 		
	Note - The sign prescribed above, and the graphics used are to be:		
	a. in a form;b. of a size;		
	c. illuminated to a level;		
which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting applian 4.5m from the sign.			
SAO29	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.		
	Use specific criteria		
Dwelling	Use specific criteria house ⁽²²⁾ - Secondary dwelling		
Dwelling SAO30			
-	house ⁽²²⁾ - Secondary dwelling The siting and design of dwellings ensures that the secondary dwelling is: a. not located in front of the primary dwelling;		
-	house ⁽²²⁾ - Secondary dwelling The siting and design of dwellings ensures that the secondary dwelling is: a. not located in front of the primary dwelling; b. annexed to (adjoining, below or above) or located within 50.0m of the primary dwelling (excludi		
SAO30	 house⁽²²⁾ - Secondary dwelling The siting and design of dwellings ensures that the secondary dwelling is: a. not located in front of the primary dwelling; b. annexed to (adjoining, below or above) or located within 50.0m of the primary dwelling (excludid domestic outbuildings). 		
SAO30 SAO31 SAO32	 house⁽²²⁾ - Secondary dwelling The siting and design of dwellings ensures that the secondary dwelling is: a. not located in front of the primary dwelling; b. annexed to (adjoining, below or above) or located within 50.0m of the primary dwelling (excluding domestic outbuildings). No more than 1 secondary dwelling is located on an allotment. 		
SAO30 SAO31 SAO32	house ⁽²²⁾ - Secondary dwelling The siting and design of dwellings ensures that the secondary dwelling is: a. not located in front of the primary dwelling; b. annexed to (adjoining, below or above) or located within 50.0m of the primary dwelling (excluding domestic outbuildings). No more than 1 secondary dwelling is located on an allotment. The GFA of the secondary dwelling does not exceed 100m ² GFA.		

	Size of lot	Max. GFA	
	Less than 600m ²	50m ²	
	600m ² - 1000m ²	70m ²	
	>1000m ² - 2000m ²	80m ²	
	Greater than 2000m ²	150m ²	
	Note - Building Work is excluded from the GFA calculations.		
	b. have a maximum building height of 4m;		
	c. are located behind the main building line and not within pl	rimary or secondary frontage setbacks.	
Home bas	ed business ⁽³⁵⁾		
SAO34	Home based business(s) ⁽³⁵⁾ are fully contained within a dwelling based child care facility.	g or on-site structure, except for a home	
SAO35	The maximum total use area is 100m ² .		
SAO36	Up to 2 additional non-resident , either employees or customers, are permitted on the site at any one time, except where involving the use of heavy vehicles, where no employees are permitted.		
	Note - This provision does not apply to Bed and Breakfast or farmstay business.		
SAO37	Hours of operation to be restricted to 8:00am to 6:00pm Monda public on Sunday's, Christmas Day, Good Friday or Anzac Day		
	a. bed and breakfast or farmstay business which may operative	te on a 24 hour basis;	
	b. office or administrative activities that do not generate non-residents visiting the site, such as book keeping and computer work.		
SAO38	The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:		
	a. 1 heavy vehicle;		
	b. 1 trailer;		
	c. Up to 3 motor vehicles.		
	Note - The car parking provision associated with the dwelling house ⁽²²⁾ is in addition to this requirement.		
	Note - The number of motor vehicles stated is in addition to motor vehicles associated with a dwelling house ⁽²²⁾ .		
SAO39	Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.		
	Note - Planting for screening is to have a minimum depth of 3m.		

SAO40	Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.		
SAO41	The use does not involve vehicle servicing or major repairs, including spray painting or panel beating.		
	Note - Vehicle servicing excludes general maintenance of a vehicle such as, but not limited to, changing engine fluids, filters and parts such as batteries and plugs.		
SAO42	The use is not an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection Regulation 2008.</i>		
SAO43	Only goods grown, produced or manufactured on-site are sold from the site.		
SAO44	Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from boundary of the site.		
SAO45	For bed and breakfast and farmstays:		
	a. overnight accommodation is provided in the dwelling house ⁽²²⁾ of the accommodation operator.		
	b. maximum 4 bedrooms are provided for a maximum of 10 guests.		
	c. meals are served to paying guests only.		
	d. rooms do not contain food preparation facilities.		
	Note - SAO34 - SAO44 above do not apply to home based business ⁽³⁵⁾ .		
Roadside	stalls ⁽⁶⁸⁾		
SAO46	46 No more than one roadside stall ⁽⁶⁸⁾ per property.		
SAO47	Goods offered for sale are only goods grown, produced or manufactured on the site.		
SAO48	The maximum area associated with a roadside stall ⁽⁶⁸⁾ , including any larger separate items displayed for sale, does not exceed 20m ² .		
SAO49	Car parking for 2 vehicles is provided off the road carriage and located on the property.		
SAO50	The roadside stall ⁽⁶⁸⁾ is located no closer than 100m from an intersection.		
Sales offi	ce ⁽⁷²⁾		
SAO51	A sales office ⁽⁷²⁾ is located on the site for no longer than 2 years.		
Editor's not that will not	e - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz		
SAO52	A minimum of 45m ² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.		
	structures for the pulpose of collocating on the proposed radiity.		

SAO54	Equipment shelters and associated structures are located:			
	a. directly beside the existing equipment shelter and associated structures;			
	b. behind the main building line;c. further away from the frontage than the existing equipment shelter and associated structures;			
	d. a minimum of 10m	-	daries, except where in the Ind	
SAO55	Equipment shelters and match the surrounding lo		res are either the same type of	colour or material to
SAO56	The facility is enclosed b	y security fencing or by	other means to ensure public a	ccess is prohibited.
SAO57	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.			
	Note - Landscaping is provide	ed in accordance with Planning	scheme policy - Integrated design.	Le la
	Note - Council may require a Planning scheme policy - Inte	detailed landscaping plan, pre grated design.	pared by a suitably qualified person to	ensure compliance with
SAO58	All equipment comprising	a the telecommunication	s facility ⁽⁸¹⁾ which produces aud	lible or non audible
34030	sound is housed within a	fully enclosed building i	ncorporating sound control mea rd, or felt at the site boundary.	
	٠	Values and constra	ints criteria	
			f-assessable development that has the thresholds of 100m ³ and 500m ³ respe	
SAO59	Development does not involve:			
	a. excavation or otherwise removing of more than 100m ³ of soil or sediment where below 5m Australian Height Datum AHD, or			
\nearrow	b. filling of land of mo below the 5m AHD		l with an average depth of 0.5n	n or greater where
	+20m AHD-	Surface Elevation ≤Sm AHD	Surface Elevation >5m and <20m AHD	Surface Elevation ≥20m AHD
	+15m AHD			Excavation area
1	+10m AHD	· · · · ·		X Self assessable development
	+5m AHD-		≥100m ¹ <100m ¹	
	Orn AHD	>500m ⁴ 2100m ⁴ 100m ⁴		
	-5m AHD —	~ × ~	~ × ×	×
	nazard areas (refer Overla	y map - Bushfire hazar	d to determine if the following	assessment criteria
apply)				

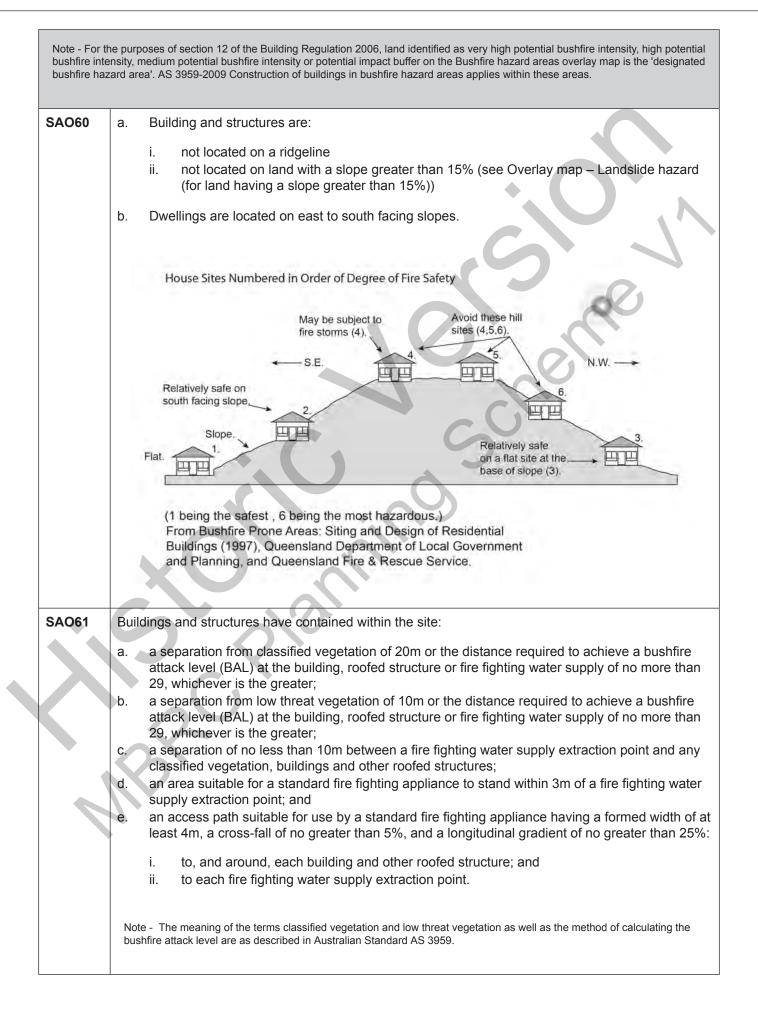


SAO62	The length of driveway:		
	 a. to a public road does not exceed 100m between the most distant part of a building used for a purpose other than storage and the nearest part of a public road; b. has a maximum gradient no greater than 12.5%; c. have a minimum width of 3.5m; 		
	d.	accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.	
SAO63	a. A reticulated water supply is provided by a distributer retailer for the area or, where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m buildings and structures.		
	b.	Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.	
	C.	Where a tank is the nominated on-site fire fighting water storage source, it includes:	
		i. a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;	
		ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.	
SAO64	Deve	elopment does not involve the manufacture or storage of hazardous chemicals.	
Environm	ental a	areas (refer Overlay map - Environmental areas to determine if the following assessment	
criteria ap			
Note - The f	following	g are exempt from the native clearing provisions of this planning scheme:	
a. Clear	ring of n	ative vegetation located within an approved development footprint;	
		ative vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately esponse to an accident or emergency;	
	c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;		
eithe	d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;		
	Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;		
	Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;		
	Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;		
h. Graz	ing of n	ative pasture by stock;	
i. Nativ	e forest	practice where exempt under Part 1, 1.7.7 Exempt development.	
Note - Defin	nition for	native vegetation is located in Schedule 1 Definitions.	

	e vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state tal significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in 2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the been policy - Environmental areas	
Planning scheme policy - Environmental areas.		
	e - The accuracy of overlay mapping can be challenged through the development application process (code assessable at) or by way of a planning scheme amendment. See Council's website for details.	
Editors' Note	e - When clearing native vegetation within a MSES area, you may still require approval from the State government.	
SAO65	Where no suitable land cleared of native vegetation exists, clearing of native vegetation in High Value Area or Value Offset Area is for the purpose of a new dwelling house ⁽²²⁾ and all associated facilities [*] or an extension to an existing dwelling house ⁽²²⁾ only, and comprises an area no greater than 1500m ² .	
	Note - *All associated facilities includes: on-site wastewater treatment, all areas of disturbance, on-site parking, access and manoeuvring areas.	
	Editor's note - See in heading above for other uses exempt from native vegetation clearing requirements.	
	Editor's note - Where self-assessable vegetation clearance is being undertaken, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:	
	i. co-locating all associated activities, infrastructure and access strips;	
	ii. be the least valued area of koala habitat on the site;	
	 iii. minimise the footprint of the development envelope area; iv. minimise edge effects to areas external to the development envelope; 	
	v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design	
	 Guideline and Planning scheme policy – Environmental areas; vi. sufficient area between the development and koala habitat trees to achieve their long-term viability. 	
	Editor's note - Where self-assessable vegetation clearing is being undertaken, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.	
SAO66	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.	
SAO66	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or	
SAO66	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.	
SAO66	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary	
SAO66	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;	
SAO66	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary	
SAO66	 No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure; d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary 	
SAO66	 No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure; d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential 	
SAO66	 No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure; d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to 	
SAO66	 No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure; d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence; e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works 	
SAO66	 No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure; d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence; e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes; f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a 	
SAO66	 No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure; d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence; e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes; f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council; g. Clearing of native vegetation associated with removal of recognised weed species, maintaining 	
SAO66	 No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer. This does not apply to the following: a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure; d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence; e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes; f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council; 	

Extractive resources transport routes (refer Overlay map - Extractive resources (transport route and buffer) to determine if the following assessment criteria apply)			
SAO67	The following uses are not located within the 100m wide transport route buffer:		
	 a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; 		
	 n. Rural workers' accommodation⁽⁷¹⁾; o. Short-term accommodation⁽⁷⁷⁾; p. Tourist park⁽⁸⁴⁾. 		
SAO68	Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive resources transport route.		
SAO69	A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.		
landscape o heritage sig	es, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and haracter and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural nificance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning icy - Heritage and landscape character.		
SAO70	Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.		
	Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions		
SA071	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan. This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.		
SAO72	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.		

SAO73	The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character:
	 a. construction of any building; b. laying of overhead or underground services; c. any sealing, paving, soil compaction; d. any alteration of more than 75mm to the ground level prior to work commencing.
SAO74	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.
	- land having a slope greater 15% (refer Overlay map - Landslide hazard - land having a slope % to determine if the following assessment criteria apply)
SAO75	Development does not:
	 a. involve earthworks exceeding 50m³; b. involve cut and fill having a height greater than 600mm; c. involve any retaining wall having a height greater than 600mm;
	c. involve any retaining wall having a height greater than 600mm;d. redirect or alter the existing flow of surface or groundwater.
SAO76	Buildings, excluding domestic outbuildings:
	a. are split-level, multiple-slab, pier or pole construction;b. are not single plane slab on ground.
SA077	Development does not involve the manufacture, handling or storage of hazardous chemicals.
Infrastruc criteria ap	ture buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment ply)
SAO78	Development does not involve the construction of any buildings or structures containing habitable rooms or sensitive land uses within a High voltage electricity line buffer.
SAO79	Development within a Water supply buffer does not include the incineration or burial of waste and all other waste is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.
SAO80	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.
SAO81	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):
	a. buildings or structures;
	b. gates and fences;
	c. storage of equipment or materials;
	d. landscaping or earthworks or stormwater or other infrastructure.
SAO82	On-site sewerage facilities in a Water supply buffer produce a minimum secondary treated effluent (90th percentile) and effluent application to ensure water quality is maintained and protected.
SAO83	On-site sewerage facilities in a Water supply buffer for a dwelling house ⁽²²⁾ include:
	a. emergency storage capacity of 1,000 litres and adequate buffering for shock loading/down time;

	 b. a reserve land application area of 100% of the effluent irrigation design area; c. land application areas that are vegetated;
	 the base of the land application field is at least 2 metres above the seasonal high water table/bedrock (whichever is the closest to the base of the application area);
	e. wastewater collection and storage systems must have capacity to accommodate full load at peak times.
SAO84	On-site sewerage facilities in a Water supply buffer for development other than a dwelling house include emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies/overload with provision for de-sludging.
SAO85	Development involving Permanent plantation ⁽⁵⁹⁾ within a Water supply buffer maintains a minimum of 30% ground cover at all times.
SAO86	Development does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer.
SAO87	Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.
SAO88	All habitable rooms located within an Electricity supply substation buffer are:
	 a. located a minimum of 10m from an electricity supply substation⁽⁸⁰⁾; and b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.
Overland f apply)	flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria
SAO89	Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.
SAO90	Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.
X	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow
SAO91	Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.
SAO92	Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area.
SAO93	Development for a material change of use or building work for a Park ⁽⁵⁷⁾ ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.
-	nd wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the assessment criteria apply)
Note - W1, \ wetland sett	N2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and backs.
SAO94	No development is to occur within:

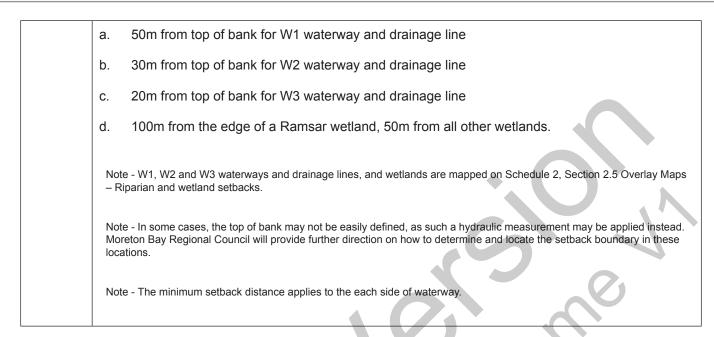

Part D - Criteria for assessable development - Transition precinct, developable lot

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part F, Table 6.2.3.2.2.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

Table 6.2.3.2.1.2 Assessable development - Transition precinct, developable lot

Performance outcomes	Acceptable outcomes
General	criteria
Servicing	
P01	No acceptable outcome provided.
The site is a developable lot that is not serviced with all local government networks including water and sewer.	
Interim uses	
P02	No acceptable outcome provided.
Interim uses:	
a. do not fragment or alienate the land or result in the loss of land for future urban purposes;	
b. result in minimal investment;	
c. do not prejudice or delay the use of the land for urban purposes.	
PO3	No acceptable outcome provided.
Interim uses:	

 a. are adequately serviced with necessary infrastructure to meet on-site needs and requirements; b. are of a size and scale that maintains the low density, tow intensity and open areal anaccape character anticipated in the interim precinct; c. are designed, located and open areal anaccape character anticipated in the interim precinct; e. are not visually dominant from the streetscape or adjoining properties; f. utilise materials, finishes and colours that are consistent with existing semi-rural environment. Site density PO4 Development does not result in residential density exceeding more than one dwelling house¹²² per tot. Building height PO5 A for sumption the existing low rise, open area and low density, character and amenity of the interim precinct; b. does not unduly impact on access to daylight, sanghing premises. Buildings and structures: a. is consistent with the existing low rise, open area and low density consarcter and amenity of the interim precinct; b. does not unduly impact on access to daylight, sanghing premises. Setbacks PO6 Buildings and structures are setback to: a. be consistent with the semi-rural character of the area; b. consistent with the semi-rural character of the area; b. consistent with the semi-rural character of the area; b. root sistent with the semi-rural character of the area; b. consistent with the semi-rural character of the area; c. maintain the privacy of adjoining. Note - This provision does not apply where a development foophint exists for a lot. Note - This provision does not apply where a development foophint e				
density, low intensity and open area landscape character anticipated in the interim precinci; are designed, located and operated in a manner that avoids nuisance impacts on adjoining properties; requires minimal filling or excavation. Where this occurs, visual impacts are reduced through screening; are not visually dominant from the streetscape or adjoining properties; utilise materials, finishes and colours that are consistent with existing semi-rural environment. No acceptable outdome provided Building height PO4 Development does not result in residential density exceeding more than one dwelling house ¹⁶²¹ per lot. No acceptable outdome provided Building height	a.	infrastructure to meet on-site needs and		
attat avoids nuisance impacts on adjoining properties; Irequires minimal filling or excavation. Where this occurs, visual impacts are reduced through screening; Impacts are reduced through screening; e. are not visually dominant from the streetscape or adjoining properties; Impacts and colours that are consistent with existing semi-rural environment. Site density PO4 PO4 No acceptable outcome provided Development does not result in residential density exceeding more than one dwelling house ⁽²⁾ per lot. No acceptable outcome provided Building height PO5 The height of buildings and structures: AO5 .a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. Setbacks PO6 Buildings and structures are setback to: AO6 .a. be consistent with the semi-rural character of the area; Co1 .b. does not unduly impact.on access to daylight, sumitight, overshadowing or privacy experienced by adjoining premises. Co1 Development not being visually dominant or overbearing with respect on adjoining properties; Co1 . ront boundary – 6m; Site boundary – 4.5m; . maintain the privacy of adjoining. Note- This provision dees not appy where a dev	b.	density, low intensity and open area landscape		
cccurs, visual impacts are reduced through screening; e. are not visually dominant from the streetscape or adjoining properties; f. utilise materials, finishes and colours that are consistent with existing semi-rural environment. No acceptable outcome provided PO4 Development does not result in residential density exceeding more than one dwelling house ^[20] per lot. No acceptable outcome provided Building height AO5 The height of buildings and structures: a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct. Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. 0. does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises. Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. be consistent with the semi-rural character of the area: b. Side boundary – 6m; b. result in development not being visually dominant or overbearing with respect on adjoining properties; c. Rear boundary – 4.5m; c. maintain the privacy of adjoining. b. Side boundary – 4.5m;	C.	that avoids nuisance impacts on adjoining		
adjoining properties; f. utilise materials, finishes and colours that are consistent with existing semi-rural environment. Site density PO4 PO4 No acceptable outcome provided Development does not result in residential density exceeding more than one dwelling house ⁽⁶²⁷⁾ per lot. No acceptable outcome provided Building height PO5 AO5 The height of buildings and structures: a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. b. does not unduly impacton access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises. MO6 Buildings and structures are setback to: a. FO6 Buildings and structures are setback to: a. Forth boundary is as follows: a. be consistent with the semi-rural character of the area; Forth boundary – 4.5m; b. result in development not being visually dominant or overbearing with respect on adjoining properties; C. c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint	d.	occurs, visual impacts are reduced through		
consistent with existing semi-rural environment. Site density PO4 No acceptable outcome provided Development does not result in residential density exceeding more than one dwelling house ⁽²²⁾ per lot. No acceptable outcome provided Building height AO5 PO5 AO5 The height of buildings and structures: Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. b. does not unduly impact on access to daylight, sulfid, overshadowing or privacy experienced by adjoining premises. Low Poils PO6 AO6 Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. Front boundary – 6m; b. Side boundary – 4.5m; c. Rear boundary – 4.5m; c. Rear boundary – 4.5m; c. Rear boundary – 4.5m; c. Note - This provision does not apply where a development fot oppinit	e.			
PO4 No acceptable outcome provided Development does not result in residential density exceeding more than one dwelling house ^[22] per lot. Aos Building height AO5 PO5 Ao5 The height of buildings and structures: a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. b. does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises. AO6 Buildings and structures are setback to: Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. be consistent with the semi-rural character of the area; a. Front boundary – 6m; b. result in development not being visually dominant or overbearing with respect on adjoining properties; Side boundary – 4.5m; c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint	f.			
Development does not result in residential density exceeding more than one dwelling house ⁽²²⁾ per lot. Aos Building height Aos POS Aos The height of buildings and structures: a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. b. does not unduly impact on access to daylight, sufjoining premises. Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. be consistent with the semi-rural character of the area; Ao6 Duildings and structures are setback to: a. Front boundary – 6m; b. result in development not being visually dominant or overbearing with respect on adjoining properties; b. Side boundary – 4.5m; c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint	Site	density		
exceeding more than one dwelling house ⁽²²⁾ per lot. Building height PO5 The height of buildings and structures: a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; b. does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises. Setbacks PO6 Buildings and structures are setback to: a. be consistent with the semi-rural character of the area; b. result in development not being visually dominant or overbearing with respect on adjoining properties; c. maintain the privacy of adjoining. AO6 Note - This provision does not apply where a development footprint	PO4		No acceptable outcome provided	
PO5 AO5 The height of buildings and structures: a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. b. does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises. AO5 Setbacks Voltess specified list the second structures are setback to: AO6 Buildings and structures are setback to: Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. be consistent with the semi-rural character of the area; AO6 b. result in development not being visually dominant or overbearing with respect on adjoining properties; b. Side boundary – 4.5m; c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint	Deve exce	elopment does not result in residential density eeding more than one dwelling house ⁽²²⁾ per lot.		
The height of buildings and structures: Inless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; Inless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. b. does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises. Inless otherwise specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. be consistent with the semi-rural character of the area; Inless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: b. result in development not being visually dominant or overbearing with respect on adjoining properties; b. Side boundary – 4.5m; c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint	Buil	ding height		
 a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; b. does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises. betbacks PO6 Buildings and structures are setback to: a. be consistent with the semi-rural character of the area; b. result in development not being visually dominant or overbearing with respect on adjoining properties; c. maintain the privacy of adjoining. buildings and structures are advelopment footprint 	PO5		AO5	
 a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct; b. does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises. Setbacks PO6 Buildings and structures are setback to: a. be consistent with the semi-rural character of the area; b. result in development not being visually dominant or overbearing with respect on adjoining properties; c. maintain the privacy of adjoining. AO6 Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. Front boundary – 6m; b. Side boundary – 4.5m; c. Rear boundary – 4.5m. Note - This provision does not apply where a development footprint 	The	height of buildings and structures:		
sunlight, overshadowing or privacy experienced by adjoining premises. Aug Setbacks PO6 Buildings and structures are setback to: AO6 unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. be consistent with the semi-rural character of the area; Juless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: b. result in development not being visually dominant or overbearing with respect on adjoining properties; b. Side boundary – 4.5m; c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint	а.	and low density character and amenity of the Interim	buildings and structures does not exceed 5m.	
PO6 AO6 Buildings and structures are setback to: Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. be consistent with the semi-rural character of the area; AO6 b. result in development not being visually dominant or overbearing with respect on adjoining properties; A. c. maintain the privacy of adjoining. b. Side boundary – 4.5m; c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint	b.	sunlight, overshadowing or privacy experienced by		
 Buildings and structures are setback to: a. be consistent with the semi-rural character of the area; b. result in development not being visually dominant or overbearing with respect on adjoining properties; c. maintain the privacy of adjoining. Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows: a. Front boundary – 6m; b. Side boundary – 4.5m; c. Rear boundary – 4.5m. 	Setbacks			
 a. be consistent with the semi-rural character of the area; b. result in development not being visually dominant or overbearing with respect on adjoining properties; c. maintain the privacy of adjoining. minimum setback from a boundary is as follows: a. Front boundary – 6m; b. Side boundary – 4.5m; c. Rear boundary – 4.5m. Note - This provision does not apply where a development footprint 	PO6		AO6	
 a. be consistent with the semi-rural character of the area; b. result in development not being visually dominant or overbearing with respect on adjoining properties; c. maintain the privacy of adjoining. b. Side boundary – 4.5m; c. Rear boundary – 4.5m. Note - This provision does not apply where a development footprint 	Build	dings and structures are setback to:	Unless specified elsewhere in the zone code, the	
 b. result in development not being visually dominant or overbearing with respect on adjoining properties; c. maintain the privacy of adjoining. b. Side boundary – 4.5m; c. Rear boundary – 4.5m. Note - This provision does not apply where a development footprint 	a.			
or overbearing with respect on adjoining properties; c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint	þ.		-	
c. maintain the privacy of adjoining. Note - This provision does not apply where a development footprint				
	C.	maintain the privacy of adjoining.	· · · · · · · · · · · · · · · · · · ·	

P07	A07	
 Non-residential uses are setback to ensure: a. chemical spray, fumes, odour, dust are contained on-site; b. unreasonable nuisance or annoyance resulting from, but not limited to; noise, storage of materials and rubbish does not adversely impact upon land users adjacent to, or within the general vicinity; and c. buildings and other structures are consistent with the open area, low density, low built form character and amenity associated with the interim precinct. 	 The following uses and associated buildings are setback from all property boundaries as follows: a. Animal husbandry⁽⁴⁾ (buildings only) - 10m; b. Cropping⁽¹⁹⁾ (buildings only) - 10m; c. Animal keeping⁽⁵⁾, excluding catteries and kennels - 20m; d. Cropping⁽¹⁹⁾ (buildings only) - 10m; e. Intensive horticulture⁽⁴⁰⁾ - 10m; f. Rural Industry⁽⁷⁰⁾ - 20m; g. Wholesale nursery⁽⁸⁹⁾ - 10m; h. Veterinary services⁽⁸⁷⁾ - 10m. 	
	n. vetennary services - Tom.	
Development footprint		
Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within that development footprint		
Building on sloping land		
 PO9 Building and site design on slopes between 10% and 15% must: a. use split-level, multiple-slab, pier or pole construction; b. avoid single-plane slabs and benching; c. ensure the height of any cut or fill, whether retained or not, does not exceed 900mm; d. minimise any visual impact on the landscape character; and e. protecting the amenity of adjoining. 	No acceptable outcome provided.	
Amenity		
PO10 The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.	No acceptable outcome provided.	

PO11	AO11
Development is located, designed and operated to avoid nuisance impacts caused by glare and lighting on another property. Nuisance effects generated as a result of development are to be contained to the development site.	Illumination does not exceed the recommended maximum values of light technical parameters for the control of obtrusive light in Table 2.1 of the Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.
Hazardous chemicals	
Note - To assist in demonstrating compliance with the following perfor be prepared and submitted by a suitably qualified person in accordan <i>involving hazardous chemicals</i> '.	
PO12	A012.1
Off sites risks from foreseeable hazard scenarios involving hazardous chemicals are commensurate with the sensitivity of the surrounding land use zones.	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land uses as described below:
	Dangerous Dose
	a. For any hazard scenario involving the release of gases or vapours:
	 i. AEGL2 (60minutes) or if not available ERPG2; ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	 b. For any hazard scenario involving fire or explosion: i. ZkPa everyrocours:
	i. 7kPa overpressure;ii. 4.7kW/m2 heat radiation.
	If criteria AO12.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 0.5 x 10-6/year.
	AO12.2
	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below:
	Dangerous Dose
	a. For any hazard scenario involving the release of gases or vapours:

	i. AEGL2 (60minutes) or if not available ERPG2;
	 An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	b. For any hazard scenario involving fire or explosion:
	i. 7kPa overpressure;
	ii. 4.7kW/m2 heat radiation.If criteria AO12.2 (a) or (b) cannot be achieved, then the
	risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.
	AO12.3
	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below: Dangerous Dose
	a. For any hazard scenario involving the release of gases or vapours:
	i. AEGL2 (60minutes) or if not available ERPG2;
	ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	b. For any hazard scenario involving fire or explosion:
	i. 14kPa overpressure;
	ii. 12.6kW/m2 heat radiation.
	If criteria AO12.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.
PO13	AO13
Buildings and package stores containing fire-risk	Buildings and package stores containing fire-risk
hazardous chemicals are designed to detect the early stages of a fire situation and notify a designated person.	hazardous chemicals are provided with 24 hour monitored fire detection system for early detection of a fire event.
PO14	AO14
Common storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) that are adequate to contain releases, including fire fighting media.	Storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) capable of containing a minimum

	of the total aggregate capacity of all packages plus the maximum operating capacity of any fire protection syst for the storage area(s) over a minimum of 60 minutes
PO15	A015.1
Storage and handling areas, including manufacturing areas, containing hazardous chemicals in quantities greater than 2,500L or kg within a Local Government "flood hazard area" are located and designed in a manner to minimise the likelihood of inundation of flood waters from creeks, rivers, lakes or estuaries.	The base of any tank with a WC >2,500L or kg is high than any relevant flood height level identified in an are flood hazard area. Alternatively: a) bulk tanks are anchored so they cannot float if submerged or inundated by water; and b) tank openings not provided with a liquid tight seal, an atmospheric vent, are extended above the relevant flood height level. AO15.2 The lowest point of any storage area for packages >2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively, package stores are provided with impervious bund walls or racking systems higher that the relevant flood height level.
Waste Treatment PO16	A016
Stormwater generated on-site is treated and disposed of in an acceptable manner to mitigate any impacts on soil, surface water or ground water quality. Development	All concentrated animal use areas (e.g. Sheds, pens holding yards, stables, kennels and other animal
resulting in the degradation of soil, surface water or ground water quality is avoided.	, , ,
resulting in the degradation of soil, surface water or	run-off is directed to suitable detention basins, filtration
resulting in the degradation of soil, surface water or ground water quality is avoided.	run-off is directed to suitable detention basins, filtration
resulting in the degradation of soil, surface water or ground water quality is avoided. Car parking PO17 Traffic generation, vehicle movement and on-site car parking associated with an activity:	run-off is directed to suitable detention basins, filtration or other treatment areas.
resulting in the degradation of soil, surface water or ground water quality is avoided. Car parking PO17 Traffic generation, vehicle movement and on-site car	run-off is directed to suitable detention basins, filtration or other treatment areas. AO17 On-site car parking is provided in accordance with
resulting in the degradation of soil, surface water or ground water quality is avoided. Car parking PO17 Traffic generation, vehicle movement and on-site car parking associated with an activity: a. provides safe, convenient and accessible access	A017 On-site car parking is provided in accordance with
resulting in the degradation of soil, surface water or ground water quality is avoided. Car parking PO17 Traffic generation, vehicle movement and on-site car parking associated with an activity: a. provides safe, convenient and accessible access for vehicles and pedestrians; b. provides safe and convenient on-site parking and	run-off is directed to suitable detention basins, filtration or other treatment areas. A017 On-site car parking is provided in accordance with

Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.	
Noise	
PO18	No acceptable outcome provided.
Noise generating uses do not adversely affect existing or potential noise sensitive uses. Noise is to be mitigated in accordance with Planning scheme policy - Noise.	
Note - The use of walls, barriers or fences that are visible from a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line.	
Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.	
PO19	AO19.1
Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:	Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.
a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of	AO19.2
parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths	Noise attenuation structures (e.g. walls, barriers or fences):
or cycle lanes etc); b. maintaining the amenity of the streetscape.	a. are not visible from an adjoining road or public area unless:
Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise. Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.	 adjoining a motorway or rail line; or adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.
	 b. do not remove existing or prevent future active transport routes or connections to the street network;
	 are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.
	Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.
	Note - Refer to Overlay map – Active transport for future active transport routes.
Clearing of habitat trees where not located within the	Environmental areas overlay map.
PO20	No acceptable outcome provided

a. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	
 Development does not result in the net loss of fauna habitat. Where development does result in the loss of habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed. 	
c. Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner	
Note: Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas	
Works	criteria
Utilities	6
PO21	A021
The development is connected to an existing reticulated electricity supply system approved by the relevant energy regulating authority.	Development is connected to underground electricity.
P022	No acceptable outcome provided
The development has access to telecommunications and broadband services in accordance with current standards.	
P023	No acceptable outcome provided
Where available the development is to safely connect to reticulated gas.	
PO24	AO24.1
The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk to public health.	Where in a sewered area, the development is connected to a reticulated sewerage network.
	A024.2
	Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.
	Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater Code.
1	

	AO24.3
	Trade waste is pre-treated on-site prior to discharging into the sewerage network.
PO25	AO25.1
The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.	Where in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is connected to the reticulated water supply system in accordance with the South East Queensland Water Supply and Sewerage Design and Construction Code and the relevant Water Service Association of Australia (WSAA) codes and standards.
	AO25.2 Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development.
PO26	No acceptable outcome provided
The development is provided with constructed and dedicated road access.	
Access	
PO27 Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.	No acceptable outcome provided
PO28	AO28.1
The layout of the development does not compromise:a. the development of the road network in the area;b. the function or safety of the road network;	The development provides for the extension of the road network in the area in accordance with Council's road network planning.
c. the capacity of the road network.	AO28.2
Note - The road hierarchy is mapped on Overlay map - Road hierarchy.	The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.
	AO28.3
	The lot layout allows forward access to and from the site.

PO29	AO29.1
Safe access is provided for all vehicles required to access the site.	Site access and driveways are designed and located in accordance with:
	a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or
	 Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
	AO29.2
	Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
	Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.
	AO29.3
	Access driveways, manoeuvring areas and loading facilities provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The
	on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements.
PO30	No acceptable outcome provided
Upgrade works (whether trunk or non-trunk) are provided where necessary to:	
 ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network; 	
b. ensure the orderly and efficient continuation of the active transport network;	
c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with	
Planning scheme policy - Integrated design.	
Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome refer to Planning scheme policy - Integrated transport assessment for guidance on when an ITA is required. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.	
Note - The road network is mapped on Overlay map - Road hierarchy.	
Note - The primary and secondary active transport network is mapped on Overlay map - Active transport.	

 Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows: i. Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing road network and active transport network design standards. 	
Stormwater	
 PO31 Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises. Note - Refer to Planning scheme policy - Integrated design for details. Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome. Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure. 	No acceptable outcome provided
PO32 Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site. Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	No acceptable outcome provided
PO33 Stormwater quality management systems are designed and constructed to minimise the environmental impact of stormwater discharge on surface and underground receiving water quality and meet the design objectives in Tables A and B in Appendix 3 of the SPP.	No acceptable outcome provided


qualified professional will be required in accordance with Planning scheme policy - Stormwater management.	
Site works and construction management	
PO34	No acceptable outcome provided
The site and any existing structures are maintained in tidy and safe condition.	a
 PO35 All works on-site are managed to: a. minimise as far as practicable, impacts on adjoinir or adjacent premises and the streetscape in regar to erosion and sedimentation, dust, noise, safety and light; b. minimise as far as possible, impacts on the natur environment; c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyand to any person or premises; d. avoid adverse impacts on street trees and their critical root zone. 	 Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrat design, including but not limited to the following: a. stormwater is not discharged to adjacent proper in a manner that differs significantly from pre-existing conditions; b. stormwater discharged to adjoining and downstream properties does not cause scour erosion; c. stormwater discharge rates do not exceed pre-existing conditions; d. the 10% AEP storm event is the minimum des storm for all temporary diversion drains; and e. the 50% AEP storm event is the minimum des storm for all silt barriers and sediment controls a constructed prior to commencement of any clearing earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness. Note - The measures are adjusted on-site to maximise their effectiveness. AO35.3 The completed earthworks area is stabilised using t established grass seeding, mulch or sprayed stabilisat techniques to control erosion and sediment and dust for the setablished grass seeding.
	AO35.4

]
Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a qualified arborist which demonstrates and ensures that no permanent damage is caused to the tree.
AO36
No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
A037.1
Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
A037.2
All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads. Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).
AO37.3 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
AO38
 At completion of construction all disturbed areas of the site are to be: a. topsoiled with a minimum compacted thickness of fifty (50) millimetres; b. grassed.
Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.
AO39.1
All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.

 a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and b. includes the removal of declared weeds and other materials which are detrimental to the intended use 	Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.
of the land;	AO39.2
c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.	Disposal of materials is managed in one or more of the following ways:
Note - No burning of cleared vegetation is permitted.	a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
	b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.
	Note - The chipped vegetation must be stored in an approved location, preferably a park or public land.
PO40	No acceptable outcome provided
Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.	SCI
Earthworks	
P041	AO41.1
On-site earthworks are designed to consider the visual and amenity impact as they relate to:a. the natural topographical features of the site;b. short and long-term slope stability;	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.
c. soft or compressible foundation soils;	AO41.2
 d. reactive soils; e. low density or potentially collapsing soils; f. existing fill and soil contamination that may exist on-site; g. the stability and maintenance of steep rock slopes and between 	Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.
and batters;h. excavation (cut) and fill and impacts on the amenity	AO41.3
of adjoining lots (e.g. residential). Note - Filling or excavation works are to be completed within six months of the commencement date.	Inspection and certification of steep rock slopes and batters is required by a suitably qualified and experienced RPEQ.
	AO41.4
	All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.

	AO41.5
	All filling or excavation is contained on-site.
	AO41.6
	All fill placed on-site is:
	a. limited to that required for the necessary approved
	 use; b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).
	AO41.7 The site is prepared and the fill placed on-site in
	accordance with AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
PO42	A042
Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area.	Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.
	Figure - Embankment
PO43	AO43.1
Filling or excavation is undertaken in a manner that:	No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity.
 a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land; b. does not preclude reasonable access to a Council 	Note - Public sector entity as defined in the Sustainable Planning Act 2009.
or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for	AO43.2
Monitoring, maintenance or replacement purposes.	Filling or excavation that would result in any of the following is not carried out on-site:
Act 2009.	a. a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm;
	 an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken.

	Note - Public sector entity as defined in the Sustainable Planning Act 2009.
PO44 Filling or excavation does not result in land instability. Note - Steep rock slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.	No acceptable outcome provided
 PO45 Development does not result in a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway; b. increased flood inundation outside the site; c. any reduction in the flood storage capacity in the floodway; d. and any clearing of native vegetation. Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements. 	No acceptable outcome provided.
PO46 All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents.	AO46 Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary; Figure - Retaining on boundary

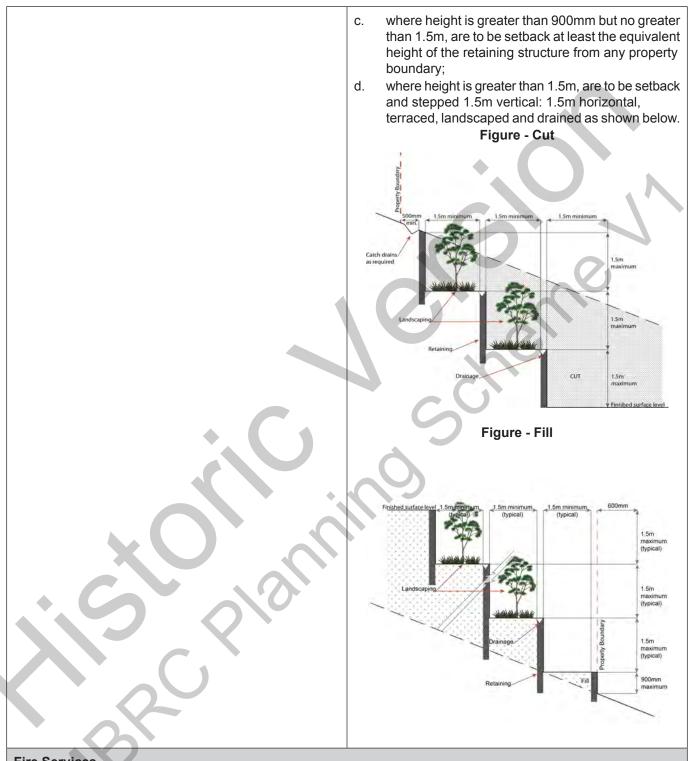

Fire Services

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
 - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
 - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park⁽⁸⁴⁾ with accommodation in the form of caravans or tents; or material change of use for outdoor sales⁽⁵⁴⁾, outdoor processing or outdoor storage where involving combustible materials. ii.
 - iii.
 - iv

AND

b. none of the following exceptions apply:

- i. the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

AO47.1

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

PO47

Development incorporates a fire fighting system that:

- a. satisfies the reasonable needs of the fire fighting entity for the area;
- b. is appropriate for the size, shape and topography of the development and its surrounds;
- c. is compatible with the operational equipment available to the fire fighting entity for the area;
- d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;
- e. considers the fire hazard inherent in the surrounds to the development site;
- f. is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of *Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations*.

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:

- a. in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks⁽⁸⁴⁾ or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
- in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
- c. in regard to the proximity of hydrants to buildings and other facilities Part 3.2.2.2 (b), (c) and (d), with the exception that:
 - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
 - ii. for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
 iii. for outdoor sales⁽⁵⁴⁾, processing or storage facilities,

for outdoor sales⁽⁵⁴⁾, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales⁽⁵⁴⁾, outdoor processing and outdoor storage facilities;

d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.

AO47.2

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- a. an unobstructed width of no less than 3.5m;
- b. an unobstructed height of no less than 4.8m;
- c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

AO47.3

	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>
PO48	AO48
On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.	 For development that contains on-site fire hydrants external to buildings: a. those external hydrants can be seen from the vehicular entry point to the site; or b. a sign identifying the following is provided at the vehicular entry point to the site: i. the overall layout of the development (to scale);
	ii. internal road names (where used);
	iii. all communal facilities (where provided);
	iv. the reception area and on-site manager's office (where provided);
	v. external hydrants and hydrant booster points;
	vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
	Note - The sign prescribed above, and the graphics used are to be: a. in a form;
	b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.
PO49	AO49
Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.

	Use specific criteria		
Dwelling house ⁽²²⁾ - Secondary dwelling			
PO50		No acceptable outcome provided.	
Sec	ondary dwellings:		
a.	are subordinate and ancillary to the primary dwelling in size and function;		
b.	are not larger than 100m ² GFA;		
C.	have the appearance, bulk and scale of a single dwelling from the street;		
d.	maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the dwelling house ⁽²²⁾ on-site.		
Dwe	elling house ⁽²²⁾ - Domestic outbuildings		
PO	51	No acceptable outcome provided.	
Don	nestic outbuildings and car ports are:		
a.	of a height that does not negatively impact the visual amenity of adjoining properties;	5	
b.	located on-site to not dominate the streetscape.	\mathcal{O}	
Home based business ⁽³⁵⁾			
PO	52	AO52.1	
Hon a.	ne based business(s) ⁽³⁵⁾ : Are subordinate in size and function to the primary use on the site being a permanent residence;	Home based business(s) ⁽³⁵⁾ having a maximum total use area is 100m ² , are fully contained within a dwelling or on-site structure, except for a home based child care facility.	
b.	Are of a scale and intensity that does not result in adverse visual or nuisance impacts on the residents	A052.2	
	in adjoining or nearby dwellings;	Up to 2 additional non-resident, either an employee or	
C.	Store no more heavy vehicles, trailer and motor vehicle on-site, as follows:	customer, are permitted on the site at any one time.	
	i. 1 heavy vehicle;	Note - This provision does not apply to Bed and Breakfast or farmstay business.	
	ii. 1 trailer;		
	iii. Up to 3 motor vehicles.	AO52.3	
d.	Results in a vehicular and pedestrian traffic	The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:	
	generation consistent with that reasonably expected in the surrounding low density, low built form and	a. 1 heavy vehicle;	
	open area character and amenity anticipated in the precinct;	b. 1 trailer;	
		c. Up to 3 motor vehicles.	

e. Are suitably screened to ensure adverse visual impacts on the residents in adjoining or nearby dwellings are minimised;	Note - The car parking provision associated with the dwelling house ⁽²²⁾ is in addition to this requirement.
f. Sufficiently separated from adjoining properties so development does not result in adverse visual, noise or nuisance impacts on adjoining residents	Note - The number of motor vehicles stated is in addition to motor vehicles associated with a dwelling house (22).
. , , ,	A052.4
	Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.
	Note - Planting for screening is to have a minimum depth of 3m.
	AO52.5
	Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.
A053	A053
The hours of operation for home based business(s) ⁽³⁵⁾ are managed so that the activity does not adversely impact on the low intensity character and amenity anticipated in the precinct.	Hours of operation to be restricted to 8:00am to 6:00pm Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday or Anzac Day, except for:
	a. bed and breakfast or farm stay business which may operate on a 24 hour basis;
	 office or administrative activities that do not generate non-residents visiting the site such as book keeping and computer work;
	c. starting and warming up of heavy vehicles, which can commence at 7.00am.
P054	AO54.1
The Home based business(s) ⁽³⁵⁾ does not result in: a. an adverse visual, odour, particle drift or noise	The use does not involve heavy vehicle servicing or major repairs, including spray painting or panel.
nuisance impact on the residents in adjoining or nearby dwellings;	AO54.2
b. an adverse impact upon the low intensity and open area character and amenity anticipated in the locality;	Home based business(s) ⁽³⁵⁾ do not comprise an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection Regulation 2008.</i>
 the establishment of vehicle servicing or major repairs, spray painting, panel beating or any 	AO54.3
environmentally relevant activity (ERA).	Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.

	Note - Nuisance is defined in the Environmental Protection Act 1994.
PO55	AO55.1
On-site display and sales of goods is limited to the activities being undertaken from the site and does not result in:	Only goods grown, produced or manufactured on-site are sold from the site.
a. the display and sale of goods being viewed from outside of the site;b. overall development on the site having a predominantly commercial appearance.	AO55.2 Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from the boundary of the site.
PO56	A056
Bed and breakfast and farmstays are of a size and scale	
that:a. are consistent with the low intensity, open area character and amenity of the rural residential area;b. ensures acceptable levels of privacy and amenity	 a. short-term accommodation⁽⁷⁷⁾ is provided in the dwelling house⁽²²⁾ of the accommodation operator; b. maximum 4 bedrooms are provided for a maximum of 10 guests;
for the residents in adjoining or nearby dwellings.	c. meals are served to paying guests only;d. rooms do not contain food preparation facilities.
Major electricity infrastructure ⁽⁴³⁾ , Substation ⁽⁸⁰⁾ and	Ultility installation ⁽⁸⁶⁾
PO57	A057.1
 The development does not have an adverse impact on the visual amenity of a locality and is: a. high quality design and construction; b. visually integrated with the surrounding area; c. not visually dominant or intrusive; d. located behind the main building line; e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures; f. camouflaged through the use of colours and materials which blend into the landscape; g. treated to eliminate glare and reflectivity; h. landscaped; i. otherwise consistent with the amenity and character of the zone and surrounding area. 	 Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment: a. are enclosed within buildings or structures; b. are located behind the main building line; c. have a similar height, bulk and scale to the surrounding fabric; d. have horizontal and vertical articulation applied to all exterior walls.
	AO57.2 A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.
PO58	AO58
Infrastructure does not have an impact on pedestrian health and safety.	 Access control arrangements: a. do not create dead-ends or dark alleyways adjacent to the infrastructure:

to the infrastructure;

		 b. minimise the number and width of crossovers and entry points; c. provide safe vehicular access to the site; d. do not utilise barbed wire or razor wire.
PO59		AO59
All a an e	ctivities associated with the development occur within nvironment incorporating sufficient controls to ensure facility: generates no audible sound at the site boundaries where in a residential setting; or meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.	All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.
Roa	dside stall ⁽⁶⁸⁾	
PO6	50	AO60.1
A ro	adside stall ⁽⁶⁸⁾ :	For a roadside stall ⁽⁶⁸⁾ :
a.	comprises only one roadside stall ⁽⁶⁸⁾ per property;	a. no more than one roadside stall ⁽⁶⁸⁾ per property;
b.	only offers goods grown, produced or manufactured on the site;	b. goods offered for sale are only goods grown, produced or manufactured on the site;
C.	is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and surrounding properties;	c. the maximum area associated with a roadside stall ⁽⁶⁸⁾ , including any larger separate items displayed for sale, does not exceed 20m ² .
d.	is designed and located to ensure safe and	AO60.2
	accessible access, egress and on-site parking and not negatively impact the road network.	Roadside stall ⁽⁶⁸⁾ :
		 provide car parking for 2 vehicles off the road carriage and located on the property;
		b. is located no closer than 100m from an intersection.
		Note - Refer to Overlay map - Road hierarchy for road classification.
Rur	al industry ⁽⁷⁰⁾	
P061		No acceptable outcome provided
Rura	al industry ⁽⁷⁰⁾ :	
a.	adopt construction materials and use of colour for buildings and structures are visually compatible with the rural residential character and amenity;	
b.	is of a size, scale and design that is not visually dominant, overbearing and inconsistent with the low intensity built form and open area character and amenity of the rural residential environment.	

Sales office ⁽⁷²⁾	
PO62	AO62
Sales office ⁽⁷²⁾ remain temporary in duration and retain a physical connection to land or building being displayed or sold.	Development is carried out for no longer than 2 years.
Telecommunications facility ⁽⁸¹⁾ Editor's note - In accordance with the Federal legislation Telecommuni that will not cause human exposure to electromagnetic radiation beyor Radiation - Human Exposure) Standard 2003 and Radio Protection Sta to 300Ghz.	nd the limits outlined in the Radiocommunications (Electromagnetic
PO63	AO63.1
Telecommunications facilities ⁽⁸¹⁾ are co-located with existing telecommunications facilities ⁽⁸¹⁾ , Utility installation ⁽⁸⁶⁾ , Major electricity infrastructure ⁽⁴³⁾ or Substation ⁽⁸⁰⁾ if there is already a facility in the same coverage area.	New telecommunication facilities ⁽⁸¹⁾ are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.
	AO63.2 If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.
PO64 A new Telecommunications facility ⁽⁸¹⁾ is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.	AO64 A minimum of 45m ² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
P065	AO65
Telecommunications facilities ⁽⁸¹⁾ do not conflict with lawful existing land uses both on and adjoining the site.	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
P066	AO66.1
 The Telecommunications facility⁽⁸¹⁾ does not have an adverse impact on the visual amenity of a locality and is: a. high quality design and construction; b. visually integrated with the surrounding area; 	Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.
c. not visually dominant or intrusive;d. located behind the main building line;	AO66.2
 below the level of the predominant tree canopy or the level of the surrounding buildings and structures; 	In all other areas towers do not exceed 35m in height.
	1

 f. camouflaged through the use of colours and materials which blend into the landscape; g. treated to eliminate glare and reflectivity; h. landscaped; i. otherwise consistent with the amenity and character of the zone and surrounding area. 	Towers, equipment shelters and associated structures are of a design, colour and material to: a. reduce recognition in the landscape; b. reduce glare and reflectivity. AO66.4 All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m. Where there is no established building line the facility is located at the rear of the site. AO66.5 The facility is enclosed by security fencing or by other means to ensure public access is prohibited. AO66.6 A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses. Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
PO67 Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.	AO67 An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.
PO68 All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.	AO68 All equipment comprising the Telecommunications facility ⁽⁸¹⁾ which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.
Wholesale nursery ⁽⁸⁹⁾	
PO69	No acceptable outcome provided.
Buildings and activities associated with a wholesale nursery ⁽⁸⁹⁾ :	

a.	ensures the propagation of plants, whether or not in the open, occur without loss of amenity to adjacent properties;	
b.	do not result in any form of environmental degradation, including, but not limited to, soil degradation, pollution of natural water courses and introduction of exotic plant species into the natural on-site or adjoining flora;	
C.	are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;	
d.	have vehicle access from a road classified as a a arterial or sub-arterial.	
Note	e - Refer to Overlay map - Road hierarchy for road classification.	
Vete	erinary services ⁽⁸⁷⁾	
PO7	70	No acceptable outcome provided.
Build serv	dings and activities associated with veterinary rices ⁽⁸⁷⁾ :	50
a.	are for veterinary care, surgery and treatment of animals only;	
b.	are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;	
C.	have vehicle access from a road classified as a arterial or sub-arterial.	
Not	e - Refer to Overlay map - Road hierarchy for road classification.	
Min	ery ⁽⁹⁰⁾	
PO7		No acceptable outcome provided.
Build	dings and activities associated with winery ⁽⁹⁰⁾ :	
a.	are for a winery ⁽⁹⁰⁾ and ancillary activities only. Uses not affiliated with winery ⁽⁹⁰⁾ activities, or the sale of products produced or manufactured on-site, are avoided;	
b.	are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas; and	
c.	have vehicle access from a road classified as a a arterial or sub-arterial.	

Values and constraints criteria Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply) Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils. **PO72** AO72 Development avoids disturbing acid sulfate soils. Where Development does not involve: development disturbs acid sulfate soils, development: а. excavation or otherwise removing of more than is managed to avoid or minimise the release of 100m³ of soil or sediment where below than 5m surface or groundwater flows containing acid and Australian Height datum AHD; or filling of land of more than 500m³ of material with metal contaminants into the environment; h protects the environmental and ecological values an average depth of 0.5m or greater where below the 5m Australian Height datum AHD. and health of receiving waters; protects buildings and infrastructure from the effects of acid sulfate soils.

Note - Refer to Overlay map - Road hierarchy for road classification.

a.

b.

C.

Bushfire hazard areas (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a bushfire management plan is prepared by a suitably qualified person. Guidance for the preparation of a bushfire management plan is provided in Planning scheme policy – Bushfire hazard areas.

Note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.

P073	A073.1
Development:	Buildings and structures are:
 a. minimises the number of buildings and people working and living on a site exposed to bushfire risk; b. ensures the protection of life during the passage of a fire front; c. is located and designed to increase the chance of 	 a. not located on a ridgeline; b. not located on land with a slope greater than 15% (see Overlay map - Landslide hazard (for land having a slope greater than 15%)); c. dwellings are located on east to south facing slopes.
survival of buildings and structures during a bushfire;	A073.2
d. minimises bushfire risk from build up of fuels around	Buildings and structures have contained within the site:
 buildings and structures; e. ensure safe and effective access for emergency services during a bushfire. 	a. a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
	 a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;

	 c. a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures; d. an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and e. an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%: i. to, and around, each building and other roofed structure; and ii. to each fire fighting water supply extraction point. Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS 3959
 PO74 Development and associated driveways and access ways: a. avoid potential for entrapment during a bushfire; b. ensure safe and effective access for emergency services during a bushfire; c. enable safe evacuation for occupants of a site during a bushfire. 	 AO74 A length of driveway: a. to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road; b. has a maximum gradient no greater than 12.5%; c. have a minimum width of 3.5m; d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.
P075	A075
Development provides an adequate water supply for fire-fighting purposes.	 a. a reticulated water supply is provided by a distributer retailer for the area or; b. where not connected to a reticulated water supply, on-site fire fighting water storage containing not loss them 10 200 litera (table with fire briesde table).
	less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is located within 10m of buildings and structures.
	 c. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access is provided to within 3m of that water storage source.
	d. Where a tank is the nominated on-site fire fighting water storage source, it includes:
	 a hardstand area allowing medium rigid vehicles (15 tonne fire appliance) access within 6m of the tank; fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.

PO76

Development:

- a. does not present unacceptable risk to people or environment due to the impact of bushfire on dangerous goods or combustible liquids;
- b. does not present danger or difficulty to emergency services for emergency response or evacuation.

Editor's note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.

Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note - The following are exempt from the native vegetation clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where exempt under Part 1, 1.7.7 Exempt development

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

Vegetation clearing, ecological value and connectivity

AO76

Development does not involve the manufacture or storage of hazardous chemicals.

PO77

PO80

Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that: the quality and integrity of the biodiversity and a. ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded; on-site mitigation measures, mechanisms or b. processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area area maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*. * Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014. **PO78** No acceptable outcome provided. Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by: retaining habitat trees; a. b. providing contiguous patches of habitat; provide replacement and rehabilitation planting to C. improve connectivity; avoiding the creation of fragmented and isolated d. patches of habitat; providing wildlife movement infrastructure. e Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy - Environmental areas. Vegetation clearing and habitat protection **PO79** No acceptable outcome provided. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.

No acceptable outcome provided.

No acceptable outcome provided.

	velopment does not result in the net loss or radation of habitat value in a High Value Area or a ue Offset Area. Where development does result in loss or degradation of habitat value, development	
a. b. c.	rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a viable and healthy habitat area; provide replacement fauna nesting boxes in the event of habitat tree loss in accordance with Planning scheme policy - Environmental areas; undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework.	
PO	81	No acceptable outcome provided.
	velopment ensures safe, unimpeded, convenient and yoing wildlife movement and habitat connectivity by: providing contiguous patches of habitat; avoiding the creation of fragmented and isolated patches of habitat; providing wildlife movement infrastructure; providing replacement and rehabilitation planting to improve connectivity.	Schen
Veg	etation clearing and soil resource stability	0
PO	82	
		No acceptable outcome provided.
Dev a. b.	velopment does not: result in soil erosion or land degradation; leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely manner.	No acceptable outcome provided.
a. b.	velopment does not: result in soil erosion or land degradation; leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely	No acceptable outcome provided.
a. b. Veg	velopment does not: result in soil erosion or land degradation; leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely manner. Jetation clearing and water quality	No acceptable outcome provided.
a. b. Veg PO: Dev grou	velopment does not: result in soil erosion or land degradation; leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely manner. getation clearing and water quality	
a. b. Veg PO: Dev grou	velopment does not: result in soil erosion or land degradation; leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely manner. petation clearing and water quality 83 velopment maintains or improves the quality of undwater and surface water within, and downstream, site by: ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve	
a. b. Veg PO: Dev grou	velopment does not: result in soil erosion or land degradation; leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely manner. letation clearing and water quality 83 velopment maintains or improves the quality of undwater and surface water within, and downstream, site by: ensuring an effective vegetated buffers and	
a. b. Veg POI Dev grou of a a.	velopment does not: result in soil erosion or land degradation; leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely manner. Jetation clearing and water quality B3 velopment maintains or improves the quality of undwater and surface water within, and downstream, site by: ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads; avoiding or minimising changes to landforms to	

 a. minimising flow velocity to reduce erosion; b. minimising hard surface areas; c. maximising the use of permeable surfaces; d. incorporating sediment retention devices; e. minimising channelled flow. Vegetation clearing and access, edge effects and urbation clearing and access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment. P086 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	an heat island effects No acceptable outcomes provided. No acceptable outcome provided.
 c. maximising the use of permeable surfaces; d. incorporating sediment retention devices; e. minimising channelled flow. Vegetation clearing and access, edge effects and urbation and environment. PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcomes provided.
 d. incorporating sediment retention devices; e. minimising channelled flow. Vegetation clearing and access, edge effects and urbation clearing and access, edge effects and urbation clearing and access, edge effects and urbation of biodiverse edge effects or the loss or degradation of biodiversity values within the environment. PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcomes provided.
 e. minimising channelled flow. Vegetation clearing and access, edge effects and urber PO85 Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment. PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcomes provided.
 Vegetation clearing and access, edge effects and urbative possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcomes provided.
 PO85 Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment. PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas ; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcomes provided.
 Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment. PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas ; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	Se
 in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment. PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas ; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcome provided.
 effects or the loss or degradation of biodiversity values within the environment. PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcome provided.
 within the environment. PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas ; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcome provided.
 PO86 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcome provided.
 Development minimises potential adverse 'edge effects' on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	No acceptable outcome provided.
 on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	
 on ecological values by: a. providing dense planting buffers of native vegetation between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	
 between a development and environmental areas; b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; 	
possible size where located between a development and environmental areas ;c. restoring, rehabilitating and increasing the size of existing patches of native vegetation;	
c. restoring, rehabilitating and increasing the size of existing patches of native vegetation;	5
existing patches of native vegetation;	
d analyzing that buildings and assass (nublic and	
d. ensuring that buildings and access (public and vehicle) are setback as far as possible from	
environmental areas and corridors;	
e. landscaping with native plants of local origin.	
Editor's note - Edge effects are factors of development that go to	
detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed	
invasion, pets, public and vehicle access, nutrient loads, noise and	
light pollution, increased fire frequency and changes in the groundwater and surface water flow.	
P087	No acceptable outcome provided.
Development avoids adverse microclimate change and	
does not result in increased urban heat island effects.	
Adverse urban heat island effects are minimised by:	
a. pervious surfaces;	
a. pervious surfaces;b. providing deeply planted vegetation buffers and	
green linkage opportunities;	
c. landscaping with local native plant species to	
achieve well-shaded urban places;	
d. increasing the service extent of the urban forest	
canopy.	
Vegetation clearing and Matters of Local Environmen	

buffer, with th Planni Editor' Provis	way buffer or a Value Offset Area MLES wetland , an environmental offset is required in accordance ne environmental offset requirements identified in ing scheme policy - Environmental areas. 's note - For MSES Koala Offsets, State Planning Regulatory sion environmental offset provisions apply.	
	ctive resources transport route (refer Overlay m termine if the following assessment criteria app	ap - Extractive resources (transport route and buff ly)
PO89		A089
a. c s t b. c a r c. a s a li li i i i i i	opment: does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route; does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes; adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to: i. locating the furthest distance possible from the transportation route; ii. habitable rooms being located the furthest from the transportation route; iii. shielding and screening private outdoor recreation space from the transportation routes.	 The following uses are not located within the 100m witransport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house⁽²²⁾; e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; n. Rural workers' accommodation⁽⁷¹⁾; o. Short-term accommodation⁽⁷⁷⁾; p. Tourist park⁽⁸⁴⁾.
	opment: does not adversely impact upon the efficient and	AO90.1 Development does not create a new vehicle access po onto an Extractive resources transport route.
b. e t a	effective transportation of extractive material along a transportation route; ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility; utilises existing vehicle access points and where	AO90.2 A vehicle access point is located, designed and constructed in accordance with Planning scheme pol - Integrated design.
e	existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.	

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

PO9	1	AO91
Dev	elopment will:	Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural
a.	not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;	heritage value.
b.	protect the fabric and setting of the heritage site, object or building;	Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The
C.	be consistent with the form, scale and style of the heritage site, object or building;	plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.
d.	utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;	5
e.	incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;	\mathcal{O}
f.	retain public access where this is currently provided.	
PO9	2	No acceptable outcome provided.
Dem	olition and removal is only considered where:	
a.	a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or	
b.	demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or	
C.	limited demolition is performed in the course of repairs, maintenance or restoration; or	
d.	demolition is performed following a catastrophic event which substantially destroys the building or object.	
PO9	3	No acceptable outcome provided.
of cu sym valu bein	are development is occurring on land adjoining a site altural heritage value, the development is to be pathetic to and consistent with the cultural heritage es present on the site and not result in their values g eroded, degraded or unreasonably obscured from ic view.	

AO94

PO94

Development does not adversely impact upon the health

measures and techniques as detailed in AS 4970-2009

Protection of trees on development sites are adopted to

ensure a significant tree's health, wellbeing and vitality.

Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably qualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome.

and vitality of significant trees. Where development

occurs in proximity to a significant tree, construction

Development does:

- a. not result in the removal of a significant tree;
- b. not occur within 20m of a protected tree;
- c. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 – Pruning of Amenity Trees.

Landslide (refer Overlay map - Landslide hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a site-specific geotechnical assessment report is prepared by a qualified engineer. Guidance for the preparation of a geotechnical assessment report is provided in Planning scheme policy – Landslide hazard.

PO95	A095
Development:	Development does not:
 a. maintains the safety of people and property on a site and neighbouring sites from landslides; b. ensures the long-term stability of the site considering the full nature and end use of the development; c. ensures site stability during all phases of construction and development; d. minimises disturbance of natural drainage patterns of the site and does not result in the redirection or alteration of the existing flow if surface or groundwater e. minimises adverse visual impacts on the amenity of adjoining residents and provides a positive interface with the streetscape. 	 a. involve earthworks exceeding 50m³; b. involve cut and fill having a height greater than 600mm; c. involve any retaining wall having a height greater than 600mm; d. redirect or alter the existing flow of surface or groundwater.
PO96	AO96
 Buildings are designed to respond to sloping topography in the siting, design and form of buildings and structures by: a. minimising overuse of cut and fill to create single flat pads and benching; b. avoiding expanses of retaining walls, loss of trees and vegetation and interference with natural drainage systems; c. minimising any adverse visual impact on the landscape character ; d. Protect the amenity of adjoining properties. 	 Buildings, excluding domestic outbuildings: a. are split-level, multiple-slab, pier or pole construction; b. are not single plane slab on ground.
PO97	AO97

Development protects the safety of people, property and Development does not involve the manufacture, handling the environment from the impacts of landslide on or storage of hazardous chemicals. hazardous chemicals manufactured, handled or stored by incorporating design measures to ensure: the long-term stability of the development site a. considering the full nature and end use of the development; site stability during all phases of construction and b. development; the development is not adversely affected by C. landslide activity originating on sloping land above the site; d. emergency access and access from the site for the public and emergency vehicles is available and is not at risk from landslide. Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply) AO98.1 **PO98** Run-off and sediment from roadways and impervious Development within a Water supply buffer captures solid or liquid waste from all land use, development and surfaces within a Water supply buffer are intercepted and activities is designed, constructed and managed to treated on-site to remove oil, grease, chemicals, silt, trace prevent the release of contaminants to surface water or metals and nutrients such as nitrogen and phosphorous. aroundwater bodies. AO98.2 Incineration or burial of waste within a Water supply buffer is not undertaken onsite. AO98.3 Solid waste within a Water supply buffer is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor. AO98.4 Holding tanks within a Water supply buffer are used for all liquid waste and provide for the separation of oils/solvents and solids prior to pump-out and collection by a licenced contractor. AO98.5 Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures. **PO99** AO99 Secondary treated wastewater treatment systems within a Water supply buffer include:

On-site sewerage systems within a Water supply buffer are designed and operated to ensure there is no worsening or adverse impacts to health risks, environmental risks and water quality.	 emergency storage capable of holding 3-6 holding peak flow of treated effluent in the event of emergencies or overload with provision for de-sludging;
Editor's Note - For guidance refer to the Seq water Development	b. back up pump installation and backup power;
Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.	c. MEDLI modelling to determine irrigation rates sizing of irrigation areas;
	d. vegetated land application areas are not locate overland flow paths or on areas that perform groundwater recharge or discharge functions;
	e. wastewater collection and storage systems have capacity to accommodate full load at peak time and includes temporary facilities.
PO100	AO100
Development within a Bulk water supply infrastructure	Development:
 buffer is located, designed and constructed to: a. protect the integrity of the water supply pipeline; b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline; 	 a. does not involve the construction of any buildin or structures within a Bulk water supply infrastructure buffer; b. involving a major hazard facility or environmen relevant activity (ERA) is setback 30m from a B water supply infrastructure buffer.
PO101	A0101
Development is located and designed to maintain required access to Bulk water supply infrastructure.	Development does not restrict access to Bulk water supply infrastructure of any type or size, having rega to (among other things):
S Plan	 a. buildings or structures; b. gates and fences; c. storage of equipment or materials; d. landscaping or earthworks or stormwater or ot infrastructure.
P0102	AO102
Habitable rooms within an Electricity supply substation	Habitable rooms:
buffer are located a sufficient distance from substations ⁽⁸⁰⁾ to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields. Note - Habitable room is defined in the Building Code of Australia (Volume 1)	 a. are not located within an Electricity supply substation buffer; and b. proposed on a site subject to an Electricity sup supply substation⁽⁸⁰⁾are acoustically insulted to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.
	Note - Habitable room is defined in the Building Code of Austra (Volume 1)

_				
	Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation ⁽⁸⁰⁾ to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment. Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy – Noise. Note - Habitable room is defined in the Building Code of Australia (Volume 1)			
ľ	PO104	AO104		
	Development within a High voltage electricity line buffer provides adequate buffers to high voltage electricity lines to protect amenity and health by ensuring development:	Development does not involve the construction of any buildings or structures within a High voltage electricity line buffer.		
	 a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields in accordance with the principle of prudent avoidance; 			
	b. is located and designed in a manner that maintains a high level of security of supply;			
	c. is located and design so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.			
ſ	PO105	AO105		
	 Development within a Pumping station buffer is located, designed and constructed to: a. ensure that odour or other air pollutant impacts on the amenity of the development met the air quality of objectives in the Environmental Protection (Air) Policy 2008; b. ensure that noise impacts on the amenity of the 	Development does not involve the construction of any buildings or structures within a Pumping station buffer.		
	b. ensure that noise impacts on the amenity of the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008.			
	apply)	path to determine if the following assessment criteria		
	Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council.	I with defined flood event (DFE) within the inundation area can be		
	PO106	AO106		
	Development:	No acceptable outcome provided.		
L		· /		

 a. minimises the risk to persons from overland flow; b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure. 	
PO107	A0107
Development:	No acceptable outcome provided.
 a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment; b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property. 	
Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.	
PO108	No acceptable outcome provided.
Development does not:	
 a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level; b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure. Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring. 	
PO109	AO109
Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.	Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.
PO110	AO110
Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.	Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.

Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow PO112 Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:	 a. Urban area – Level III; b. Rural area – N/A; c. Industrial area – Level V; d. Commercial area – Level V. A0111.2 Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment. No acceptable outcome provided.
 a. a stormwater pipe if the nominal pipe diameter exceeds 300mm; b. an overland flow path where it crosses more than one premises; c. inter-allotment drainage infrastructure. Note - Refer to Planning scheme policy - Integrated design for details and examples. Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM. 	
Additional criteria for development for a Park ⁽⁵⁷⁾	
 PO113 Development for a Park⁽⁵⁷⁾ ensures that the design and ayout responds to the nature of the overland flow affecting the premises such that: a. public benefit and enjoyment is maximised; b. impacts on the asset life and integrity of park structures is minimised; c. maintenance and replacement costs are minimised. 	in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.
Riparian and wetland setbacks	
PO114	A0114

Development provides and maintains a suitable setback Development does not occur within: from waterways and wetlands that protects natural and 50m from top of bank for W1 waterway and environmental values. This is achieved by recognising а. drainage line and responding to the following matters: b. 30m from top of bank for W2 waterway and impact on fauna habitats; a. drainage line b. impact on wildlife corridors and connectivity; c. 20m from top of bank for W3 waterway and C. impact on stream integrity; drainage line d. impact of opportunities for revegetation and d. 100m from the edge of a Ramsar wetland, 50m rehabilitation planting; from all other wetlands.

e. edge effects.

Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.

6.2.3.2.2 Developed lots

i.

6.2.3.2.2.1 Purpose - Transition precinct, Developed lot

Editor's note -The outcomes in this section are generally the same as General residential zone - Next generation neighbourhood precinct or the urban neighbourhood precinct (where identified in the Morayfield South urban area on 'Figure 6.2.3.2.2.1 Morayfield South urban area') but for developed lots.

- For uses on developed lots that are serviced with all local government networks including water and sewer, the purpose of the Emerging community zone - transition precinct will be achieved through the following overall outcomes:
 - a. Development only occurs on a developed lot that is serviced by all local government networks including water and sewer.
 - b. The Transition precinct will mainly comprise a series of residential neighbourhoods that will each achieve:
 - i. a minimum site density of 45 dwellings per hectare if on land within the Morayfield South urban area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area'; or
 - ii. between 15 and 75 dwellings per hectare for all other areas.
 - c. Neighbourhoods will have a mix of residential uses, tenure and densities on a variety of lot sizes providing housing choice and affordability for different lifestyle choices and life stages to meet diverse community needs. Land within the Morayfield South urban area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area' will be of a scale and density to facilitate an efficient use of land that supports compact, walkable and sustainable communities that are well connected to adjoining centres, community and social infrastructure.
 - d. Neighbourhoods are designed to provide well-connected, safe and convenient movement and open space networks through interconnected streets and active transport linkages that provide high levels of accessibility between residences, open space areas and places of activity.
 - e. Medium to high density residential uses (e.g. Multiple dwelling⁽⁴⁹⁾, Relocatable home park⁽⁶²⁾, Residential care facilities⁽⁶⁵⁾, Retirement facility⁽⁶⁷⁾, Rooming accommodation⁽⁶⁹⁾, Short-term accommodation⁽⁷⁷⁾) are located in proximity to a range of services and public transport stop(s) or station(s).
 - f. The design, siting and construction of residential uses are to:
 - contribute to an attractive streetscape with priority given to pedestrians;
 - ii. encourage passive surveillance of public spaces;
 - iii. results in privacy and residential amenity consistent with the low to medium density residential character intended for the area;
 - iv. provide a diverse and attractive built form;
 - v. orientate to integrate with the street and surrounding neighbourhood;
 - vi. incorporate sub-tropical urban design principles that respond to local climatic conditions;
 - vii. incorporate sustainable practices including maximising energy efficiency and water conservation;
 - viii. incorporate natural features and respond to site topography;
 - ix. cater for appropriate car parking and manoeuvring areas on-site;
 - x. be of a scale and density consistent with the low to medium density residential character intended for the area;

- xi. provide urban services such as reticulated water, sewerage, sealed roads, parks and other identified infrastructure;
- xii. ensure domestic outbuildings are subordinate in appearance and function to the dwelling.
- g. Non-residential uses in the Transition precinct on a developed lot take the form of community activities, corner stores, neighbourhood hubs and local centres.
- h. Community activities:
 - i. establish in a location that may be serviced by public transport;
 - ii. do not negatively impact adjoining residents or the streetscape;
 - iii. do not undermine the viability of existing or future centres.
- i. Corner stores may establish as a standalone use (not part of a neighbourhood hub) where:
 - i. the store is of a scale that remains subordinate to all centres and neighbourhood hubs within the region;
 - ii. clear separation from existing neighbourhood hub's and centres within the network are maintained to reduce catchment overlap. The corner store should not be within 1600m of another corner store, neighbourhood hub or centre measured from the centre of the corner store, neighbourhood hub or centre;
 - iii. they are appropriately designed and located to include active frontages.
- j. Retail and commercial activities (forming part of a neighbourhood hub):
 - i. cluster with other non-residential uses (excluding corner stores) forming a neighbourhood hub;
 - ii. are centred around a main street central core fostering opportunities for social and economic exchange;
 - iii. are of a small scale, appropriate for a neighbourhood hub;

Note - Retail and commercial uses that will result in a new or existing neighbourhood hub expanding to a scale and function consistent with a Local centre are to be assessed as if establishing a new Local centre. Refer to the Centre zone code for relevant assessment criteria.

- iv. do not negatively impact adjoining residents or the streetscape;
- v. are subordinate in function and scale to all centres within the region.
- k. The design, siting and construction of non-residential uses:

i.,

- maintains a human scale, through appropriate building heights and form;
- if. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces;
- iii. provides for active and passive surveillance of road frontages, movement corridors and public spaces;
- iv. promotes active transport options and ensures an oversupply of car parking is not provided;
- v. does not result in large internalised shopping centres⁽⁷⁶⁾ (e.g. large blank external walls with tenancies only accessible from within the building) surrounded by expansive areas of surface car parking.

V.

- I. New retail and commercial uses within the Morayfield South urban area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area' establish generally at the intersection of Blewers Road and Lindsay Road or as part of a mixed use building.
- m. Neighbourhood hub expansion (into adjoining lots) or the establishment of a new neighbourhood hub only occurs where:
 - i. it is of a scale that remains subordinate to all centres within the region;
 - ii. the expansion (into adjoining lots) will strengthen the existing neighbourhood hub as an important neighbourhood activity node;
 - iii. clear separation from existing neighbourhood hub's and centres within the network are maintained to reduce catchment overlap. New neighbourhood hubs are to service a currently unserviced catchment. The centre of a neighbourhood hub should not be located within 1600m of another neighbourhood hub or centre measured from the centre of each hub or centre;
 - iv. for a new neighbourhood hub, it is located on a sub-arterial or collector road;
 - v. they are appropriately designed and located to include active frontages around a main street core.
- n. General works associated with the development achieves the following:
 - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity (underground wherever possible), water and sewerage (where available);
 - ii. the development manages stormwater to:
 - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
 - B. prevent stormwater contamination and the release of pollutants;
 - C. maintain or improve the structure and condition of drainage lines and riparian areas;
 - D. avoid off-site adverse impacts from stormwater.
 - iii. the development does not result in unacceptable impacts on the capacity and safety of the external road network;
 - iv. the development ensures the safety, efficiency and useability of access ways and parking areas;
 - site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
 - . Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke
- p. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- q. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- r. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
 - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
 - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
 - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.

- iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
 - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
 - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
 - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
- v. protecting native species and protecting and enhancing species habitat;
- vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
- vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
- viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
- ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
- x. ensuring effective and efficient disaster management response and recovery capabilities;
- xi. where located in an overland flow path:
 - A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
 - B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
 - C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
 - D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- Sales office⁽⁷²⁾ Child care centre⁽¹³⁾ Relocatable home park⁽⁶²⁾ Club⁽¹⁴⁾ Shop⁽⁷⁵⁾ - if for a corner Residential care facility⁽⁶⁵⁾ • store Community care centre⁽¹⁵⁾ Retirement facility⁽⁶⁷⁾ Short-term • Community residence⁽¹⁶⁾ accommodation⁽⁷⁷⁾ - if Rooming accommodation⁽⁶⁹⁾ - if within 800m walking Community use⁽¹⁷⁾ within 800m walking distance of a higher order distance of a higher order or district centre or where Dual occupancy⁽²¹⁾ or district centre; or where within the Moravfield South within the Morayfield South urban area identified on Dwelling house⁽²²⁾ urban area identified on 'Figure 6.2.3.2.2.1 'Figure 6.2.3.2.2.1 Morayfield South urban Dwelling unit⁽²³⁾ Morayfield South urban area' area' Educational Where in a Neighbourhood • establishment⁽²⁴⁾ Hub or where within the Morayfield South urban Emergency services⁽²⁵⁾ area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area' and part of a mixed use building: - Food and drink outlet⁽²⁸⁾
- s. Development in the Transition precinct, on a developed lot includes one or more of the following:

•	Health care services ⁽³³⁾	- Hardware and trade supplies ⁽³²⁾
•	Home based business ⁽³⁵⁾	Supplies
•	Multiple dwelling ⁽⁴⁹⁾	- Health care services ⁽³³⁾ - Office ⁽⁵³⁾
•	Place of worship ⁽⁶⁰⁾	- Service Industry ⁽⁷³⁾
		- Shop ⁽⁷⁵⁾ - Veterinary services ⁽⁸⁷⁾

Note - Refer to Overlay map - Centre walking distances.

t. Development in the Transition precinct, on a developed lot does not include any of the following:

-						
	•	Adult store ⁽¹⁾	•	High impact industry ⁽³⁴⁾	•	Port services ⁽⁶¹⁾
	•	Agricultural supplies store ⁽²⁾	•	Hotel ⁽³⁷⁾	•	Renewable energy facility ⁽⁶³⁾
	•	Air services ⁽³⁾	•	Intensive animal industry ⁽³⁹⁾		
	•	Animal husbandry ⁽⁴⁾	•	Intensive horticulture ⁽⁴⁰⁾		Research and technology industry ⁽⁶⁴⁾
	•	Animal keeping ⁽⁵⁾	•	Low impact industry ⁽⁴²⁾		Rural industry ⁽⁷⁰⁾
	•	Aquaculture ⁽⁶⁾	• 1	Marine industry ⁽⁴⁵⁾	•	Rural workers' accommodation ⁽⁷¹⁾
	•	Bar ⁽⁷⁾	•	Medium impact industry ⁽⁴⁷⁾		
	•	Brothel ⁽⁸⁾	•	Motor sport facility ⁽⁴⁸⁾	•	Service Station ⁽⁷⁴⁾ - if standalone use
	•	Cemetery ⁽¹²⁾	•	Nature-based tourism ⁽⁵⁰⁾	•	Showroom ⁽⁷⁸⁾
	•	Crematorium ⁽¹⁸⁾		Nightclub entertainment facility ⁽⁵¹⁾	•	Special industry ⁽⁷⁹⁾
	•	Cropping ⁽¹⁹⁾			•	Theatre ⁽⁸²⁾
	•	Detention facility ⁽²⁰⁾	•	Non-resident workforce accommodation ⁽⁵²⁾	•	Tourist attraction ⁽⁸³⁾
	•	Extractive industry ⁽²⁷⁾	•	Outdoor sales ⁽⁵⁴⁾	•	Transport depot ⁽⁸⁵⁾
		Hardware and trade supplies ⁽³²⁾ - if more than	•	Permanent plantation ⁽⁵⁹⁾	•	Warehouse ⁽⁸⁸⁾
		250m ² GFA			•	Wholesale nursery ⁽⁸⁹⁾
	$\langle \cdot \rangle$	<i>b</i> `			•	Winery ⁽⁹⁰⁾
_	_					

u.

Development not listed in the tables above may be considered on its merits and where it reflects and supports the outcomes of the zone.

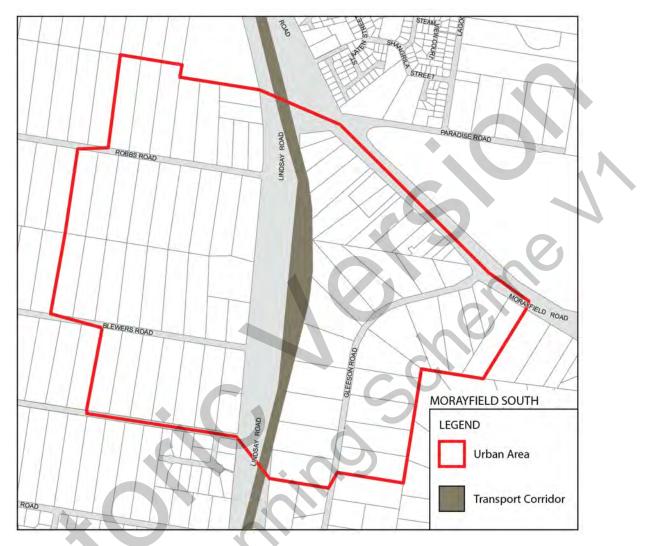


Figure 6.2.3.2.2.1 Morayfield South urban area

6.2.3.2.2.2 Criteria for assessment

To determine if development is self-assessable, development must comply with the self-assessable acceptable outcomes set out in Part E, Table 6.2.3.2.2.1. Where development does not meet a self-assessable acceptable outcome (SAO) of the relevant criteria Part E Table 6.2.3.2.2.1, assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a SAO is not met, and is therefore limited to the subject matter of the SAOs that are not complied with. To remove any doubt, for those SAOs that are complied with, there is no need for assessment against the corresponding PO.

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO1	PO1
SAO2	PO4
SAO3	PO5
SAO4	PO6
SAO5	PO6
SAO6	PO9
SAO7	PO14
SAO8	PO17

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO9	P019-P024
SAO10	PO18
SAO11	PO26
SAO12	P027
SAO13	P027
SAO14	PO29
SAO15	PO31
SAO16	PO33
SAO17	PO34
SAO18	PO36
SAO19	PO38
SAO20	PO39
SAO21	PO36
SAO22	PO40
SAO23	PO40-PO45
SAO24	PO42
SAO25	PO46
SAO26	PO46
SA027	PO46
SAO28	PO47
SAO29	PO48
SAO30	PO49
SAO31	P051
SAO32	P051
SAO33	P051
SAO34	PO51
SAO35	PO51
SAO36	PO51
SAO37	PO51
SAO38	P051
SAO39	PO51
SAO40	PO55
SAO41	PO55
SAO42	PO55

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO43	P055
SAO44	P055
SAO45	P055
SAO46	P055
SAO47	P057
SAO48	PO58
SAO49	PO59
SAO50	PO59
SAO51	PO59
SAO52	PO59
SAO53	PO61
SAO54	PO66
SAO55	P070
SAO56	P070
SAO57	P072
SAO58	P073
SAO59	P075
SAO60	P076
SAO61	P077
SAO62	P078
SAO63	P078
SAO64	P079
SAO65	PO80
SAO66	P081
SAO67	PO82-PO93
SAO68	P082-P093
SAO69	PO94
SAO70	PO95
SAO71	PO95
SAO72	PO96
SAO73	PO96
SAO74	PO99
SAO75	PO99
SAO76	PO99

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SA077	PO100
SAO78	PO101
SAO79	PO102
SAO80	PO111
SAO81	PO105
SAO82	PO105
SAO83	PO107
SAO84	PO106
SAO85	PO106
SAO86	PO106
SAO87	PO105
SAO88	PO106
SAO89	PO106
SAO90	PO109-PO110
SAO91	PO113-PO115, PO117-PO119
SAO92	PO113-PO115, PO117-PO119
SAO93	PO113-PO115
SAO94	PO116
SAO95	PO117
SAO96	PO118

Part E - Criteria for self-assessable development - Transition precinct, developed lot

Table 6.2.3.2.2.1 Self-assessable development - Transition precinct, developed lot

Self-asse	ssable acceptable outcomes - For developed lots only
	General criteria
Servicing	
SAO1	The site is a developed lot.
Building I	height (Residential uses)
SAO2	Building height does not exceed:
	 a. that shown on Overlay map - Building heights; or b. for lots identified in the Morayfield South urban area as shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' building height is within a minimum of 8.5m and a maximum of 21m; c. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.
Building I	height (Non-residential uses)

SAO3	Where involving an shown on Overlay			building heigh	nts for the exte	nsion do not to	o exceed that
Setbacks	(Residential uses)						
SAO4	- Table 6.2.3. (Residential b. all other area	yfield South u 2.2.4 'Setback uses) - Morayt	rban area shi ks (Residentia field South ur 3.2.2.3 'Setba	own on 'Figur al uses) - Mora ban area; or	e following: e 6.2.3.2.2.1 N ayfield South u tial uses) - All o	ırban area' - S	etbacks
	Note - Greater setbac for details).	ks may be require	ed if the lot adjoin	ns an environmen	tal corridor or are	a (Refer to values	and constraints
SAO5	Buildings (excludir	ng class 10 bu	ildings and st	tructures) ensi	ure that built to	boundary wa	lls are:
	a. of a length ar	nd height:			(2	
	area' - 7	able 6.2.3.2.2	.6 'Built to bo	undary walls ('Figure 6.2.3.2 Residential us Morayfield So	es) - Morayfiel	d South urbar
				Built to bounda al uses) - All of	ry walls (Resid ther areas	ential uses) - A	All other areas
	b. setback from	the side bour	idary:	3			
				ly one built to	boundary wall	on the bound	ary, not more
*	c. on the low sid	de of a sloping	j lot.				
Site cove	Editor's note - Lots cor of any wall within 600 Development Easeme recommended.	mm of a boundar	y. For boundarie	es with built to bou	undary walls on ad	djacent lots a 'Higl	h Density
SAO6	Site cover (excludi does not exceed th	-	-	•		other unenclos	ed structures
	Building height			Lot	t Size		
		300m ² or less	301- 400 m ²	401- 500m ²	501- 1000m ²	1001- 2500m ²	Greater than 2501m ²
	Less than 8.5m	75%	70%	60%	60%	60%	60%
	8.5m - 12.0m	50%	50%	60%	50%	50%	50%

Lighting	
SAO7	Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommend maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 or Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.
	Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.
Clearing	of habitat trees where not located in the Environmental areas overlay map.
SAO8	Development does not result in the damaging, destroyed or clearing of a habitat tree. This does no apply to:
	a. Clearing of a habitat tree located within an approved development footprint;
	b. Clearing of a habitat tree within 10m from a lawfully established building reasonably necessa for emergency access or immediately required in response to an accident or emergency;
	c. Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses serious personal injury or damage to infrastructure;
	d. Clearing of a habitat tree reasonably necessary to construct and maintain a property boundar fence and not exceed 4m in width either side of the fence where in the Rural, Rural residenti and Environmental management and conservation zones. In any other zone, clearing is not exceed 2m in width either side of the fence;
	e. Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works with a registered easement for public infrastructure or drainage purposes;
	f. Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suita qualified person, submitted to and accepted by Council;
	g. Clearing of a habitat tree associated with removal of recognised weed species, maintaining exist open pastures and cropping land, windbreaks, lawns or created gardens;
•	h. Native forest practice where exempt under Part 1, 1.7.7 Exempt development.
\wedge	Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognise as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridor Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.
	Works criteria
Utilities	
SAO9	Where available, the development is connected to:
	a. an existing reticulated electricity supply;
	b. telecommunications and broadband;c. reticulated sewerage;
	d. reticulated water;
	e. sealed and dedicated road.
SAO10	Where involving an extension (building work) in front of the main building line and where the lot adjo or is opposite to a park ⁽⁵⁷⁾ , foreshore or Humpybong Reserve, all existing overhead power lines are be undergrounded for the full frontage of the lot.

Access	
SAO11	Any new or changes to existing direct vehicle access for residential development does not occur from arterial or sub-arterial roads.
SAO12	 Any new or changes to existing site access and driveways are designed and located in accordance with: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
SAO13	Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
Stormwate	er
SAO14	Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy – Integrated design. Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.
SAO15	 Development incorporates a minimum of 2% of the site area constructed as a bioretention system in accordance with Planning scheme policy – Integrated design if the development: a. is for urban purposes only; b. involves a land area greater than 2500m²; c. will result in 6 or more dwellings; OR will result in an impervious area greater than 25% of the net developable area;
Site works	and construction management
SAO16	The site and any existing structures are to be maintained in a tidy and safe condition.
SA017	Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design.
SAO18	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
SAO19	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.
SAO20	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
SAO21	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.

Earthwork	(S
SAO22	The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures
SAO23	The total of all cut and fill on-site does not exceed 900mm in height.
	Figure - Cut and fill
	Lot Boundaries
	Note - This is site earthworks not building work.
SAO24	Filling or excavation does not result in:
	 a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken. Note - Public sector entity is defined in the Sustainable Planning Act 2009.
Fire servic	ces
Note - The p	provisions under this heading only apply if:
a. the d	evelopment is for, or incorporates:
i. ii. iii. iv. AND	reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park ⁽⁸⁴⁾ with accommodation in the form of caravans or tents; or material change of use for outdoor sales ⁽⁵⁴⁾ , outdoor processing or outdoor storage where involving combustible materials.
b. none	of the following exceptions apply:
i.	the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
ii.	every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.
	provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant plying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent


SAO25	External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .
	Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):
	 a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks⁽⁸⁴⁾ or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
	b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
	c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
	 for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
	ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
	 iii for outdoor sales⁽⁵⁴⁾, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales⁽⁵⁴⁾, outdoor processing and outdoor storage facilities; and
	d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.
SAO26	A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:
	a. an unobstructed width of no less than 3.5m;
	b. an unobstructed height of no less than 4.8m;
	c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
	d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.
SAO27	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in
	Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.
SAO28	For development that contains on-site fire hydrants external to buildings:
	a. those external hydrants can be seen from the vehicular entry point to the site; or
	b. a sign identifying the following is provided at the vehicular entry point to the site:
	 i. the overall layout of the development (to scale); ii. internal road names (where used);
	iii. all communal facilities (where provided);
	 iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster points;
	vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
	Note - The sign prescribed above, and the graphics used are to be:
	a. in a form;

	b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.
SAO29	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Use specific criteria
Dual occu	ipancies ⁽²¹⁾
SAO30	Dual Occupancies ⁽²¹⁾ are located on lots with a total road frontage of 25m or greater.
Home bas	ed business ⁽³⁵⁾
SAO31	Home based business(s) ⁽³⁵⁾ are fully enclosed within the existing dwelling or on-site structure.
SAO32	A maximum of 1 employee (not a resident) OR 2 customers OR customers from within 1 small rigid vehicle (SRV)or smaller are permitted on the site at any one time.
SAO33	Service and delivery vehicles do not exceed one Small Rigid Vehicle (SRV) at any one time.
SAO34	Vehicle parking for the Home based business ⁽³⁵⁾ on-site is limited to 1 car or Small Rigid Vehicle (SRV).
SAO35	Home based business(s) ⁽³⁵⁾ occupy an area of the existing dwelling or on-site structure not greater than 40m ² gross floor area.
SAO36	Home based business(s) ⁽³⁵⁾ do not involve manufacturing.
	Note - Manufacturing as defined in the <i>Food Act 2006</i> is permitted.
SAO37	The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.
SAO38	The hours of operation do not exceed 8:00am to 6:00pm, Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday and Anzac Day.
	Note - Office or administrative activities that do not generate non-residents visiting the site, such as book-keeping and computer work, may operate outside the hours of operation.
SAO39	For a bed and breakfast, the use:
	a. is fully contained within the existing dwelling on-site;
	b. occupies a maximum of 2 bedrooms;

	c. includes the provision of a minimum of 1 meal per day;
	d. accommodates a maximum of 6 people at any one time.
	Note - For a Bed and Breakfast SO31 - SO38 above do not apply.
Sales off	ice ⁽⁷²⁾
SAO40	Car parking spaces are provided in accordance with Table 6.2.3.2.2.7 'Car parking spaces'.
SAO41	Car parking and manoeuvring areas are designed and constructed in accordance with the Australi Standards AS2890.1.
SAO42	Sales office ⁽⁷²⁾ has direct vehicular access to a dedicated road constructed in accordance with Plann scheme policy - Integrated design.
SAO43	Fencing adjoining a street (other than a laneway) or public open space does not exceed 1.2 metres height.
SAO44	30% of the front façade of the building (excluding the garage and front door) is made up of windows/glazing.
SAO45	The Sales office ⁽⁷²⁾ has a clearly identifiable pedestrian entry that is visible and accessible from the primary frontage.
SAO46	The use of the premises for a Sales office ⁽⁷²⁾ is for a maximum of 2 years after the commencemen
	the use.
Telecom	the use. nunications facility ⁽⁸¹⁾
Editor's no that will no	nunications facility ⁽⁸¹⁾ te - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3K
Editor's no that will no Radiation ·	nunications facility ⁽⁸¹⁾ te - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3K
Editor's no that will no Radiation to 300Ghz	nunications facility ⁽⁸¹⁾ te - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manne t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3K
Editor's no that will no Radiation - to 300Ghz SAO47	nunications facility ⁽⁸¹⁾ te - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3K A minimum of 45m ² is available at ground level to allow for additional equipment shelters and associa structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or un-
Editor's no that will no Radiation to 300Ghz SAO47 SAO48	 nunications facility⁽⁸¹⁾ te - In accordance with the Federal legislation Telecommunications facilities⁽⁸¹⁾ must be constructed and operated in a manne t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3K A minimum of 45m² is available at ground level to allow for additional equipment shelters and associa structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping private or communal open space or car parking spaces required under the planning scheme or un an existing development approval. Equipment shelters and associated structures are located: a. directly beside the existing equipment shelter and associated structures; b. behind the main building line; c. further away from the frontage than the existing equipment shelter and associated structures d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear seback is 3m.
Editor's no that will no Radiation- to 300Ghz SAO47 SAO48 SAO49	 nunications facility⁽⁸¹⁾ te - In accordance with the Federal legislation Telecommunications facilities⁽⁸¹⁾ must be constructed and operated in a manne trause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3K A minimum of 45m² is available at ground level to allow for additional equipment shelters and associas structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or un an existing development approval. Equipment shelters and associated structures are located: a. directly beside the existing equipment shelter and associated structures; b. behind the main building line; c. further away from the frontage than the existing equipment shelter and associated structures d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractiv industry zones, the minimum side and rear setback is 3m.

SAO53 All equipment	Landscaping is provided in accordance with Planning scheme policy - Integrated design. Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with ing scheme policy - Integrated design. (81)		
SAO53 All equipoles of the sound	ing scheme policy - Integrated design.		
sound	(81)		
sound	uinment comprising the telecommunications facility ⁰¹ / which produces audible or non audible		
	uipment comprising the telecommunications facility ⁽⁸¹⁾ which produces audible or non-audible I is housed within a fully enclosed building incorporating sound control measures sufficient to e no noise from this equipment can be heard, or felt at the site boundary.		
Retail, commerci	al and community activities		
of the windo to a gl	e involving an extension (building work) in the front setback a minimum of 50% of the front facade building is made up of windows or glazing between a height of 1m and 2m. The minimum w/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied lazed facade located at ground level is to maintain visibility of the internal activity from the street of obscure surveillance of the street.		
	Figure - Glazing		
	2m m Minimum of 50% glazing Frontage modulated through the use of plans of fine grain tenancies at least every 10m		
	opment does not result in a reduction in the number or standard of car parking spaces provided site except where a reduction is required for the provision of cycle parking.		
	e additional car parking spaces are provided they are not located between the frontage and the building line.		
	e involving an extension (building work), bins and bin storage areas are provided, designed and ged in accordance with Planning scheme policy – Waste.		
	e involving an extension (building work) it does not result in a reduction in the amount or standard ablished landscaping on-site.		
maxin	ial lighting on-site is directed and shielded in such a manner as not to exceed the recommended num values of light technical parameters for the control of obtrusive light given in Table 2.1 of alian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.		
Note -	"Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.		
SAO60 Hours	of operation do not exceed 6:00am to 9:00pm Monday to Sunday.		
Values and constraints criteria			

Acid sulf	ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment o	cri
apply)		
	nning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to distur Is i.e. development involving filling or excavation works below the thresholds of 100m ³ and 500m ³ respectively.	rb a
SAO61	Development does not involve:	
	a. excavation or otherwise removing of more than 100m ³ of soil or sediment where below 5r Australian Height Datum AHD, or	m
	b. filling of land of more than 500m ³ of material with an average depth of 0.5m or greater who below the 5m AHD.	ıer
	Surface Elevation <5m AHD Surface Elevation >5m and <20m AHD Surface Elevation >5m and <20m AHD Surface Elevation	1≥20
	+15m AHD — Excavation are	
	+10m AHD-	
	+5m AHD	
	S500m ² → S00m ²	
	-5m AHD	
Bushfire apply)	hazard areas (refer Overlay map - Bushfire hazard to determine if the following assessment of	crit
bushfire in	the purposes of section 12 of the Building Regulation 2006, land identified as very high potential bushfire intensity, high putensity, medium potential bushfire intensity or potential impact buffer on the Bushfire hazard areas overlay map is the 'desi	
bushfire ha	azard area'. AS 3959-2009 Construction of buildings in bushfire hazard areas applies within these areas.	
SAO62	a. Building and structures are:	
	 not located on a ridgeline not located on land with a slope greater than 15% (see Overlay map – Landslide ha (for land having a slope greater than 15%)) 	azε

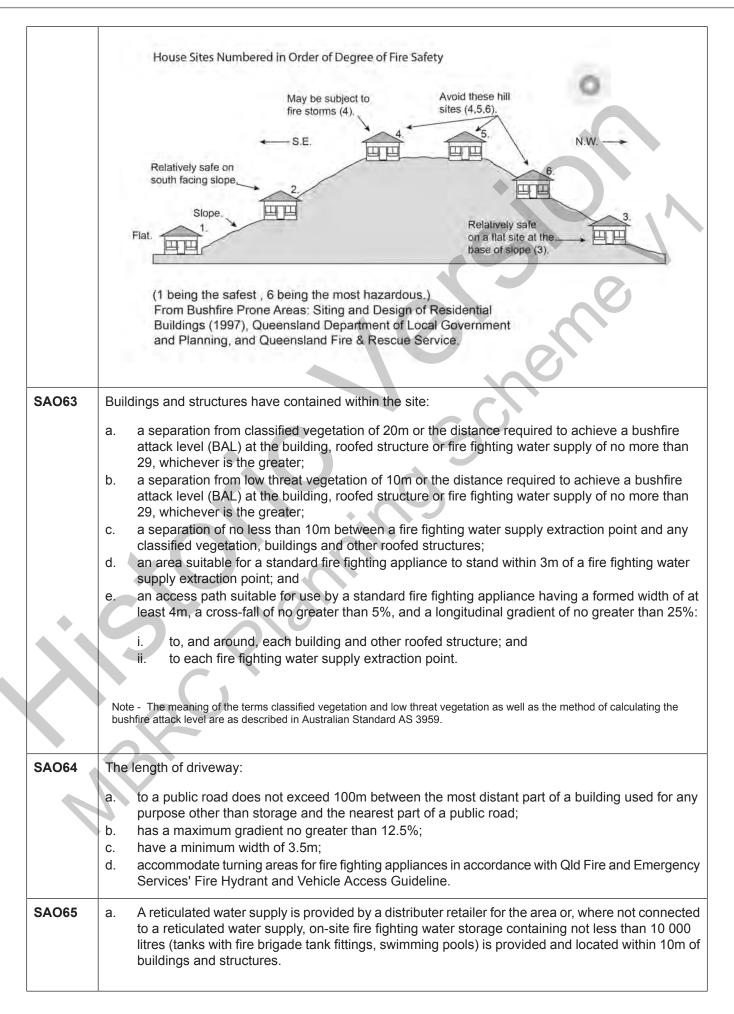

	1		
	b.	Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.	
	c.	Where a tank is the nominated on-site fire fighting water storage source, it includes:	
		i. a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;	
		ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.	
SAO66	Deve	elopment does not involve the manufacture or storage of hazardous chemicals.	
Environmo criteria ap		areas (refer Overlay map - Environmental areas to determine if the following assessment	
Note - The f	ollowing	g are exempt from the native clearing provisions of this planning scheme:	
a. Clear	ring of r	native vegetation located within an approved development footprint;	
b. Clear requir	b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;		
	ring of n rastruct	ative vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage ure;	
either	r side o	ative vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width f the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other ig is not to exceed 2m in width either side of the fence;	
		native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public e or drainage purposes;	
		native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to d by Council;	
		ative vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping eaks, lawns or created gardens;	
	 h. Grazing of native pasture by stock; i. Native forest practice where exempt under Part 1, 1.7.7 Exempt development. 		
Note - Defin	Note - Definition for native vegetation is located in Schedule 1 Definitions.		
Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.			
Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.			
Editors' Note	Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.		
SAO67	Area	are no suitable land cleared of native vegetation exists, clearing of native vegetation in High Value a or Value Offset Area is for the purpose of a new dwelling house ⁽²²⁾ and all associated facilities* an extension to an existing dwelling house ⁽²²⁾ only, and comprises an area no greater than 1500m ² .	

	Note - *All associated facilities includes: on-site wastewater treatment, all areas of disturbance, on-site parking, access and manoeuvring areas.
	Editor's note - See in heading above for other uses exempt from native vegetation clearing requirements.
	Editor's note - Where self-assessable vegetation clearance is being undertaken, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:
	 i. co-locating all associated activities, infrastructure and access strips; ii. be the least valued area of koala habitat on the site; iii. minimise the footprint of the development envelope area; iv. minimise edge effects to areas external to the development envelope; v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy – Environmental areas; vi. sufficient area between the development and koala habitat trees to achieve their long-term viability.
	Editor's note - Where self-assessable vegetation clearing is being undertaken, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.
SAO68	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.
	This does not apply to the following:
	a. Clearing of native vegetation located within an approved development footprint;
	 b. Clearing of native vegetation ocated within an approved development lootprint, b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary
	for emergency access or immediately required in response to an accident or emergency;
	 Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
	d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to
•	exceed 2m in width either side of the fence; e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works
	within a registered easement for public infrastructure or drainage purposes; f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a
	suitably qualified person, submitted to and accepted by Council;
	g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
	 h. Grazing of native pasture by stock; i. Native forest practice where exempt under Part 1, 1.7.7 Exempt development.
	e resources transport routes (refer Overlay map - Extractive resources (transport route and buffer) ine if the following assessment criteria apply)
SAO69	The following uses are not located within the 100m wide transport route buffer:
	a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone;
	b. Community residence ⁽¹⁶⁾ ;
	c. Dual occupancy ⁽²¹⁾ ;
	d. Dwelling house; ⁽²²⁾
	e. Dwelling unit ⁽²³⁾ ;
	 f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾;
	 g. Rooming accommodation⁽³⁹⁾; h. Multiple dwelling⁽⁴⁹⁾;

	 i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; n. Rural workers' accommodation⁽⁷¹⁾; o. Short-term accommodation⁽⁷⁷⁾; p. Tourist park⁽⁸⁴⁾.
SAO70	Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive resources transport route.
SA071	A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.
Note - Place landscape of heritage sig	and landscape character (refer Overlay map - Heritage and landscape character to determine if ing assessment criteria apply) es, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural nificance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning icy - Heritage and landscape character.
SAO72	Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character. Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions
SA073	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan. This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.
SA074	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.
SAO75	 The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character: a. construction of any building; b. laying of overhead or underground services; c. any sealing, paving, soil compaction; d. any alteration of more than 75mm to the ground level prior to work commencing.
SAO76	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.
	- land having a slope greater 15% (refer Overlay map - Landslide hazard - land having a slope % to determine if the following assessment criteria apply)

SAO77	Development does not:
	a. involve earthworks exceeding 50m ³ ;
	b. involve cut and fill having a height greater than 600mm;
	c. involve any retaining wall having a height greater than 600mm;
	d. redirect or alter the existing flow of surface or groundwater.
SAO78	Buildings, excluding domestic outbuildings:
	a. are split-level, multiple-slab, pier or pole construction;b. are not single plane slab on ground.
SAO79	Development does not involve the manufacture, handling or storage of hazardous chemicals.
Infrastruct criteria ap	ure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment ply)
SAO80	Development does not involve the construction of any buildings or structures containing habitable rooms or sensitive land uses within a High voltage electricity line buffer.
SAO81	Development within a Water supply buffer does not include the incineration or burial of waste and all other waste is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.
SAO82	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.
SAO83	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):
	a. buildings or structures;
	b. gates and fences;
	c. storage of equipment or materials;
	d. landscaping or earthworks or stormwater or other infrastructure.
SAO84	On-site sewerage facilities in a Water supply buffer produce a minimum secondary treated effluent (90th percentile) and effluent application to ensure water quality is maintained and protected.
SAO85	On-site sewerage facilities in a Water supply buffer for a dwelling house ⁽²²⁾ include:
	 a. emergency storage capacity of 1,000 litres and adequate buffering for shock loading/down time; b. a reserve land application area of 100% of the effluent irrigation design area; c. land application areas that are vegetated;
	d. the base of the land application field is at least 2 metres above the seasonal high water
	table/bedrock (whichever is the closest to the base of the application area);
	e. wastewater collection and storage systems must have capacity to accommodate full load at peak times.
SAO86	On-site sewerage facilities in a Water supply buffer for development other than a dwelling house include emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies/overload with provision for de-sludging.
SAO87	Development involving Permanent plantation ⁽⁵⁹⁾ within a Water supply buffer maintains a minimum of 30% ground cover at all times.

SAO88	Development does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer.
SAO89	Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.
SAO90	All habitable rooms located within an Electricity supply substation buffer are: a. located a minimum of 10m from an electricity supply substation ⁽⁸⁰⁾ ; and
	 acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.
Overland apply)	flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria
SAO91	Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.
SAO92	Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.
	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow
SAO93	Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.
SAO94	Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area.
SAO95	Development for a material change of use or building work for a Park ⁽⁵⁷⁾ ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.
	and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the assessment criteria apply)
Note - W1, wetland set	W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and packs.
SAO96	No development is to occur within:
	a. 50m from top of bank for W1 waterway and drainage line
	b. 30m from top of bank for W2 waterway and drainage line
	c. 20m from top of bank for W3 waterway and drainage line
	d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.
	Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.

Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations.

Note - The minimum setback distance applies to the each side of waterway.

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part F, Table 6.2.3.2.2.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

Part F - Criteria for assessable development - Transition precinct, developed lot

Table 6.2.3.2.2.2 Assessable development - Transition precinct, developed lot

Performance outcomes	Acceptable outcomes	
General criteria		
Servicing		
P01	No acceptable outcome provided.	
The site is a developed lot that is serviced with all local government networks including water and sewer.	S	
Neighbourhood hubs		
PO2	A02.1	
The expansion (into adjoining lots) of existing neighbourhood hubs or the establishment of a new neighbourhood hub must:	No acceptable outcome provided.	
 adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m²; 		
b. be located on the corner of an arterial, sub-arterial or collector road;		
c. form a 'Main street' having a maximum length of 200m;		
d. be centrally located within an 800m radial catchment;		
e. be separated from other neighbourhood hubs and centres by 1600m, measured from the centre of each neighbourhood hub or centre.		
Density	·	
PO3	No acceptable outcome provided.	
The Transition precinct achieves the following site densities:		

a.	if in the Morayfield South urban area shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' a minimum of 45 dwellings per hectare; or			
b.	for all other areas between 15 and 75 dwellings per ha.			
Bui	lding height (Residential uses)			
PO4	ļ.	A04		
Buil	dings and structures have a height that:	Building height does not exceed:		
a.	is consistent with the low to medium rise character of the Transition precinct;	 a. that shown on Overlay map - Building heights, or b. for lots identified in the Morayfield South urban area as shown on 'Figure 6.2.3.2.2.1 Morayfield South 		
b.	responds to the topographic features of the site, including slope and orientation;	urban area' building height is within a minimum of 8.5m and a maximum of 21m;		
c.	is not visually dominant or overbearing with respect to the streetscape;	c. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m		
d.	responds to the height of development on adjoining land where contained within another precinct or zone.	CCI		
	e - Refer to Planning scheme policy - Residential design for ails and examples.			
Bui	Building height (Non-residential uses)			
PO		A05		
The height of non-residential buildings does not adversely affect amenity of the area or of adjoining properties.		Building heights do not exceed that mapped on Overlay map - Building heights except for architectural features associated with religious expression on Place of worship ⁽⁶⁰⁾ and Educational establishment ⁽²⁴⁾ buildings.		
Set	oacks (Residential uses)			
POe		AO6.1		
	idential buildings and structures are setback to:	Setbacks (excluding built to boundary walls) comply with the following:		
a.	be consistent with the low to medium density Transition character intended for the area, where buildings are positioned closer to the footpath to create more active frontages and maximise private open space at the rear;	 a. if in the Morayfield South urban area shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' - Table 6.2.3.2.2.3 'Setbacks (Residential uses) - All other areas' - Setbacks (Residential uses) - Morayfield South urban area; or 		
b.	result in development not being visually dominant or overbearing with respect to the streetscape and the adjoining sites;	 b. for all other areas - Table 6.2.3.2.2.3 'Setbacks (Residential uses) - All other areas' - Setback (Residential uses) - All other areas. 		
C.	maintain private open space areas that are of a size and dimension to be usable and functional;			
L				

d. maintain the privacy of adjoining properties;	Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for	
e. ensure parked vehicles do not restrict pedestrian and traffic movement and safety;	details).	
f. limit the length, height and openings of boundary walls to maximise privacy and amenity on adjoining properties;	AO6.2 Buildings (excluding class 10 buildings and structures)	
 g. provide adequate separation to particular infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure; 	 a. of a length and height: i. if in the Morayfield South urban area shown on 'Figure 6.2.3.2.2.1 Morayfield South urban 	
 ensure built to boundary walls do not create unusable or inaccessible spaces and do not negatively impact the streetscape character, amenity or functionality of adjoining properties. 	area' - Table 6.2.3.2.2.6 'Built to boundary walls (Residential uses) - Morayfield South urban area' - Built to boundary walls (Residential uses) - Morayfield South urban area; or	
Note - Refer to Planning scheme policy - Residential design for details and examples.	 for all other areas - Table 6.2.3.2.2.5 'Built to boundary walls (Residential uses) - All other areas' - Built to boundary walls (Residential uses) - All other areas; 	
	b. setback from the side boundary:i. not more than 20mm; or	
	ii. If a plan of development shows only one built to boundary wall on the boundary, not more than 150mm;	
	c. on the low side of a sloping lot.	
	Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls and 'easement for maintenance purposes' is recommended.	
Setbacks (Non-residential uses)		
P07	A07.1	
Front setbacks ensure non-residential buildings address and actively interface with streets and public spaces.	For the primary frontage buildings are constructed:	
	a. to the property boundary; orb. setback a maximum of 3m from the property boundary, where for the purpose of outdoor dining.	
	AO7.2 For the secondary frontage, setbacks are consistent with adjoining buildings.	

PO8	No acceptable outcome provided.
Side and rear setbacks cater for driveway(s), services, utilities and buffers required to protect the amenity of adjoining sensitive land uses.	
Site cover (Residential uses)	
PO9	A09
 Residential buildings and structures will ensure that site cover: a. does not result in a site density that is inconsistent with the character of the area; b. does not result in an over development of the site; c. does not result in other elements of the site being compromised (e.g. Setbacks, open space etc); d. reflects the low to medium density character intended for the area. Note - Refer to Planning scheme policy - Residential design for details and examples. 	Site cover (excluding eaves, sun shading devices, pation balconies and other unenclosed structures) does not exceed the specified percentages in the table below. Building height Lot Size 300m ² 301- 401- 501- 1000n ² 2500m ² than 2501m 8.5m or less 75% 70% 60% 60% 60% 60% > 8.5m or 12.0m 50% 50% 50% 50% 50% 50% 50% Greater than 12.0m N/A N/A N/A 50% 40% 40% Note - Refer to Planning scheme policy - Residential design for method of calculation.
 PO10 Development is designed to connect to and form part of the surrounding neighbourhood by providing interconnected street, pedestrian and cyclist pathways to adjoining development, nearby centres, neighbourhood hub's, community facilities, public transport nodes and open space. PO11 Development provides and maintains the connections shown on: 	No acceptable outcome provided.
a. 'Figure 6.2.3.2.2.2 - Morayfield South' - Morayfield South;	
South; b. 'Figure 6.2.3.2.2.3 - Narangba East' - Narangba	

Best practice Water Sensitive Urban Design (SWD) is incorporated within development sites adjoining street frontages to mitigate impacts of stormwater run-off in accordance with Planning scheme policy - Integrated design.	
Sensitive land use separation	
PO13 Sensitive land uses within 250m of land in the Industry zone - General industry precinct must mitigate any potential exposure to industrial air, noise or odour emissions that impact on human health, amenity and wellbeing. Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy – Noise.	 AO13 Development is designed and operated to ensure that: a. it meets the criteria outlined in the Planning Scheme Policy – Noise; and b. the air quality objectives in the <i>Environmental Protection (Air) Policy 2008</i>, are met.
PO14	No acceptable outcome provided.
The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.	
P015	No acceptable outcome provided.
 Noise generating uses do not adversely affect existing or potential noise sensitive uses. Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line. Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise. 	
PO16	AO16.1
Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:	Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.
a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport	AO16.2 Noise attenuation structures (e.g. walls, barriers or fences):

 purposes (e.g. existing or future pedestrian paths or cycle lanes etc); b. maintaining the amenity of the streetscape. Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise. Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures. 	 a. are not visible from an adjoining road or public area unless: adjoining a motorway or rail line; or adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible. b. do not remove existing or prevent future active transport routes or connections to the street network; c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design. Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.
Clearing of habitat trees where not located within th PO17 a. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	Note - Refer to Overlay map – Active transport for future active transport routes. e Environmental areas overlay map. No acceptable outcome provided
 b. Development does not result in the net loss of fauna habitat. Where development does result in the loss of habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed. c. Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner Note: Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas 	
Works	s criteria
Utilities	
PO18	No acceptable outcome provided

Where the site adjoins or is opposite to a Park ⁽⁵⁷⁾ , foreshore or Humpybong Reserve all existing overhead power lines are to be undergrounded for the full frontage of the site.	
PO19	AO19
The development is connected to an existing reticulated electricity supply system approved by the relevant energy regulating authority.	Development is connected to underground electricity.
PO20 The development has access to telecommunications and broadband services in accordance with current standards.	No acceptable outcome provided
PO21	No acceptable outcome provided
Where available the development is to safely connect to reticulated gas.	
PO22	AO22.1
The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk to public health.	Where in a sewered area, the development is connect to a reticulated sewerage network. AO22.2 Trade waste is pre-treated on-site prior to discharging into the sewerage network.
PO23	AO23
The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.	Where in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is connected to t reticulated water supply system in accordance with th South East Queensland Water Supply and Sewerage Design and Construction Code and the relevant Wate Service Association of Australia (WSAA) codes and standards.
PO24 The development is provided with constructed and dedicated road access.	No acceptable outcome provided
Access	
PO25	No acceptable outcome provided

Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.	
PO26	AO26.1
 The layout of the development does not compromise: a. the development of the road network in the area; b. the function or safety of the road network; c. the capacity of the road network. Note - The road hierarchy is mapped on Overlay map - Road hierarchy. 	Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a motorway. Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway. Note - The road hierarchy is mapped on Overlay map - Road
	hierarchy.
	The development provides for the extension of the road network in the area in accordance with Council's road network planning.
	AO26.3 The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.
	AO26.4 The lot layout allows forward access to and from the site.
P027	AO27.1
Safe access is provided for all vehicles required to access the site.	Site access and driveways are designed and located in accordance with:
	 a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
	A027.2
	Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.

Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.	
Note - Refer to Planning scheme policy - Integrated design for details.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.	
PO30	No acceptable outcome provided
Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site. Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required	Sch
to demonstrate achievement of this performance outcome.	Ô
PO31	No acceptable outcome provided
Stormwater quality management systems are designed and constructed to minimise the environmental impact of stormwater discharge on surface and underground receiving water quality and meet the design objectives in Tables A and B in Appendix 3 of the SPP. Note - A stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.	
PO32	No acceptable outcome provided
Easements for drainage purposes are provided over:	
a. stormwater pipes located in freehold land if the pipe diameter exceeds 300mm;b. overland flow paths where they cross more than one property boundary.	
Note - Refer to Planning scheme policy - Integrated design for details.	
Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.	
Site works and construction management	


P033	No acceptable outcome provided
The site and any existing structures are maintained in a tidy and safe condition.	
PO34	AO34.1
 All works on-site are managed to: a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light; b. minimise as far as possible, impacts on the natural environment; c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises; d. avoid adverse impacts on street trees and their critical root zone. 	 Works incorporate temporary stormwater runoff, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following: a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions; b. stormwater discharge to adjoining and downstream properties does not cause scour and erosion; c. stormwater discharge rates do not exceed pre-existing conditions; d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and e. the 50% AEP storm event is the minimum design storm for all silt barriers and sediment controls are constructed prior to commencement of any clearing or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness. Note - The measures are adjusted on-site to maximise their effectiveness. AO34.3 The completed earthworks area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.
	Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a qualified arborist which demonstrates and ensures that no permanent damage is caused to the tree.
PO35	AO35
	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.

Dust suppression measures are implemented during soil disturbances and construction works to protect nearby premises from unreasonable dust impacts.	
PO36	AO36.1
All works on-site and the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape. Note - Where the amount of imported or exported material is greater than 50m ³ , a haulage route must be identified and approved by Council.	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe. AO36.2 All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads. Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD). AO36.3 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
	site ale to be cleaned at an times.
PO37	AO37
All disturbed areas are rehabilitated at the completion of construction.	At completion of construction all disturbed areas of the site are to be:
Note - Refer to Planning scheme policy - Integrated design for details.	a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;b. grassed.
	Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.
PO38	AO38.1
The clearing of vegetation on-site:a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
 includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; 	Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.
 c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. 	AO38.2
Note - No burning of cleared vegetation is permitted.	Disposal of materials is managed in one or more of the following ways:

_		
		 a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.
		Note - The chipped vegetation must be stored in an approved location, preferably a park or public land.
	PO39	No acceptable outcome provided
	Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.	Cine
	Earthworks	
	PO40	AO40.1
	 On-site earthworks are designed to consider the visual and amenity impact as they relate to: a. the natural topographical features of the site; b. short and long-term slope stability; 	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.
	c. soft or compressible foundation soils;d. reactive soils;	AO40.2
	 e. low density or potentially collapsing soils; f. existing fill and soil contamination that may exist on-site; g. the stability and maintenance of steep rock slopes 	Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.
	and batters; h. excavation (cut) and fill and impacts on the amenity	AO40.3
	of adjoining lots (e.g. residential). Note - Filling or excavation works are to be completed within six months of the commencement date.	Inspection and certification of steep rock slopes and batters is required by a suitably qualified and experienced RPEQ.
		AO40.4
		All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.
		AO40.5
		All filling or excavation is contained on-site.
		AO40.6
		All fill placed on-site is:

	 a. limited to that required for the necessary approvuse; b. clean and uncontaminated (i.e. no building was concrete, green waste or contaminated materia etc. is used as fill). AO40.7 The site is prepared and the fill placed on-site in accordance with AS3798. Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.
PO41 Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area.	AO41 Any embankments more than 1.5 metres in height ar stepped, terraced and landscaped. Figure - Embankment
P042	A042.1
 Filling or excavation is undertaken in a manner that: a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land; b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or 	No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity. Note - Public sector entity as defined in the Sustainable Planning Act 2009.
Note - Public sector entity as defined in the Sustainable Planning Act 2009.	 AO42.2 Filling or excavation that would result in any of the following is not carried out on-site: a. a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm; b. an increase in finished surface grade over, or with 1.5m on each side of, the Council or public sect entity infrastructure above that which existed pr to the earthworks being undertaken. Note - Public sector entity as defined in the Sustainable Planning Act 2009.
PO43	No acceptable outcome provided

Note - Steep rock slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.	
PO44	No acceptable outcome required.
F044	No acceptable outcome required.
Development does not result in	
a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;	
b. increased flood inundation outside the site;	
c. any reduction in the flood storage capacity in the floodway;	
d. and any clearing of native vegetation.	
Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements.	
Retaining walls and structures	6
D0//5	
PO45 All earth retaining structures provide a positive interface	AO45 Earth retaining structures:
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	Earth retaining structures:a. are not constructed of boulder rocks or timber;b. where height is no greater than 900mm, are
All earth retaining structures provide a positive interface	 Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining of the structure of the structure of the structure of the structure of the structures.
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	 Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining or a boundary;
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	 Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining or a boundary;
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	 Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary; Figure - Retaining on boundary
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining of a boundary; Figure - Retaining on boundary 2m maximum
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	 Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary; Figure - Retaining on boundary
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining of a boundary; Figure - Retaining on boundary <u>Finished surface level</u> Fill 900mm
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining of a boundary; Figure - Retaining on boundary Finshed surface level Fil. Some structures: Some structu
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining of a boundary; Figure - Retaining on boundary Finshed surface level Fil. Some structures: Some structu
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining or a boundary; Figure - Retaining on boundary Figure - Retaining on boundary
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	 Earth retaining structures: are not constructed of boulder rocks or timber; where height is no greater than 900mm, are provided in accordance with Figure - Retaining a boundary; Figure - Retaining on boundary Figure - Retaining on boundary finished surface level gravinum data and the surface level gravinum data
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity	Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining a boundary; Figure - Retaining on boundary Figure - Retaining on boundary

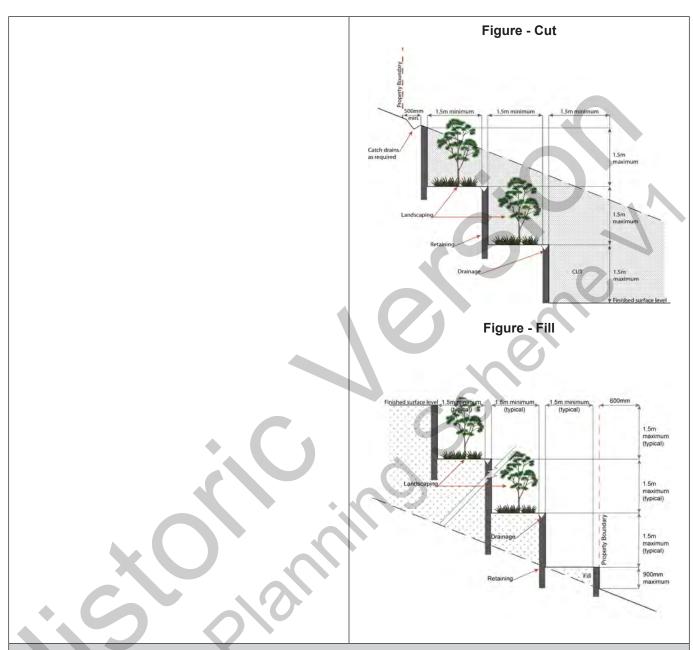

Fire services

Note - The provisions under this heading only apply if:

the development is for, or incorporates:

- reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
- material change of use for 2 or more sole on use of the sole of the same lot, or within the same community titles scheme; or material change of use for a Tourist park⁽⁸⁴⁾ with accommodation in the form of caravans or tents; or material change of use for outdoor sales⁽⁵⁴⁾, outdoor processing or outdoor storage where involving combustible materials. ii. iii.
- iv.

AND

none of the following exceptions apply: b.

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
- ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

PO46

Development incorporates a fire fighting system that:

- a. satisfies the reasonable needs of the fire fighting entity for the area;
- b. is appropriate for the size, shape and topography of the development and its surrounds;
- c. is compatible with the operational equipment available to the fire fighting entity for the area;
- d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;
- e. considers the fire hazard inherent in the surrounds to the development site;
- f. is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

AO46.1

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of *Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.*

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):

- a. in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks⁽⁸⁴⁾ or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
 - in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
 - in regard to the proximity of hydrants to buildings and other facilities Part 3.2.2.2 (b), (c) and (d), with the exception that:
 - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
 - for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
 - iii. for outdoor sales⁽⁵⁴⁾, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales⁽⁵⁴⁾, outdoor processing and outdoor storage facilities; and
- d. in regard to fire hydrant accessibility and clearance requirements Part 3.5 and where applicable, Part 3.6.

AO46.2

ii


A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- a. an unobstructed width of no less than 3.5m;
- b. an unobstructed height of no less than 4.8m;
- c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

	On-site fire hydrant facilities are maintained in effect operating order in a manner prescribed in Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.
PO47	A047
On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.	 For development that contains on-site fire hydrants external to buildings: a. those external hydrants can be seen from the vehicular entry point to the site; or b. a sign identifying the following is provided at th vehicular entry point to the site: i. the overall layout of the development (to scale); ii. internal road names (where used); iii. all communal facilities (where provided); iv. the reception area and on-site manager's office (where provided); v. external hydrants and hydrant booster point vi. physical constraints within the internal roadway system which would restrict accord by fire fighting appliances to external hydrant and hydrant booster points. Note - The sign prescribed above, and the graphics used are to the a. in a form; b. of a size; c. illuminated to a level; which allows the information on the sign to be readily understoor at all times, by a person in a fire fighting appliance up to 4.5m from the sign. AO48 For development that contains on-site fire hydrants external to buildings, those hydrants are identified by
at all times by the occupants of any firefighting appliance traversing the development site.	way of marker posts and raised reflective pavement markers in the manner prescribed in the technical no <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roa
	Note - Technical note Fire hydrant indication system is available the website of the Queensland Department of Transport and Ma Roads.
Use specif	

		AO49
a. are b. coi for	ccupancies ⁽²¹⁾ : re dispersed within the streetscape; ontribute to the diversity of dwelling types and rms; re not the predominant built form.	 Dual occupancies⁽²¹⁾ are dispersed within the streets in accordance with one or more of the following: a. no more than 20% of sites within a block cont an existing, approved or properly made application for a dual occupancy⁽²¹⁾; or b. a dual occupancy⁽²¹⁾ is separated by a minimum 6 lots (running along the street frontage) from
	Refer to Planning scheme policy - Residential design for al methods and calculation.	 another lot containing an existing, approved or properly made application for a dual occupancy or c. a dual occupancy⁽²¹⁾ is not located within 100r all directions) of an existing, approved or proprade application for a dual occupancy⁽²¹⁾. Note - Laneway lots may contain dual occupancies⁽²¹⁾ (lofts) or end two lots within a laneway. Note - Refer to Planning scheme policy - Residential design for dispersal methods and calculation.
Roomin	ng accommodation and Short-term accom	modation
PO50		No acceptable outcome provided.
accomm	ng accommodation ⁽⁶⁹⁾ and Short-term nodation ⁽⁷⁷⁾ are located within 800m walking e of a higher order, district or local centre.	
accomm distance	nodation ⁽⁽¹⁾ are located within 800m walking	
Accommediatance Home b PO51 The scal a. is of the b. is a den imp c. don adj	nodation ⁽¹¹⁾ are located within 800m walking e of a higher order, district or local centre.	of ely

 the visual amenity of a locality and is: high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive; located behind the main building line; below the level of the predominant tree canopy or the level of the surrounding buildings and structures; camouflaged through the use of colours and materials which blend into the landscape; otherwise consistent with the amenity and character of the zone and surrounding area. PO53 Infrastructure does not have an impact on pedestrian health and safety. do not create dead-ends or dark alleyways adjato the infrastructure; minimise the number and width of crossovers entry points; provide safe vehicular access to the site; do not utilise barbed wire or razor wire. PO54 All activities associated with the development occur within an environment incorporating sufficient controls to ensure 	f. ensure employees and visitor to the site do not negatively impact the expected amenity of adjoining properties;	
PO52 A052.1 The development does not have an adverse impact on the visual amenity of a locality and is: Development is designed to minimise surrounding use conflicts by ensuring infrastructure, buildings, structures and other equipment: a. high quality design and construction; Development ad other equipment: b. visually integrated with the surrounding area; Development ad other equipment: c. not visually dominant or intrusive; Development and other equipment: d. located behind the main building line; e. are enclosed within buildings or structures; d. located behind the main building ine; e. are enclosed within buildings or structures; d. have to rizontal and vertical articulation applie all exterior walls. f. camouflaged through the use of colours and materials which blen into the landscape; i. otherwise consistent with the amenity and character of the zone and surrounding area. PO53 No acceptate dead-ends or dark alleyways adja to the infrastructure; hall activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility: a. do not trained areaces to the site; a. generates no audible sound at the site boundaries with the atoresite as set out in the Environmental Protection (Noise) Policy		
The development does not have an adverse impact on the visual amenity of a locality and is: Development is designed to minimise surrounding intestructure, buildings, structures and other equipment: a. high quality design and construction; a. are enclosed within buildings or structures, buildings, istructures and other equipment: b. visually integrated with the surrounding area; are enclosed within buildings or structures; c. hoe to be buind the main building line; are enclosed within buildings or structures; c. camouflaged through the use of colours and materials which blend into the landscape; are located behind the main building line; f. camouflaged through the use of colours and materials which blend into the landscape; Abe2.2 g. treated to eliminate glare and reflectivity; h. h. landscaped; Abs3 i. otherwise consistent with the amenity and character of the zone and surrounding area. Ao53 P053 Ao53 Infrastructure does not have an impact on pedestrian health and safety. Ao54 All activities associated with the development occur within an environment incorporating sufficient controls to ensure. Ao54 All equipment which produces audible or non-audit is building a incorporating sound act the site boundaries. Ao54 All equipmen	Major electricity infrastructure ⁽⁴³⁾ , Substation ⁽⁸⁰⁾ and	Utility installation ⁽⁸⁶⁾
 the visual amenity of a locality and is: high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive; located behind the main building line; below the level of the predominant tree canopy or the level of the surrounding buildings and structures; camouflaged through the use of colours and materials which blend into the landscape; otherwise consistent with the amenity and character of the zone and surrounding area. Po53 Infrastructure does not have an impact on pedestrian health and safety. do not create dead-ends or dark alleyways adja to the infrastructure; most of the zones and surrounding sufficient controls to ensure where in a residential setting; or generates no audible sound at the site boundaries where in a residential setting; or meet the objectives as set out in the Environmental Protection (Noise) Policy 2008. Sales office ⁽⁷²⁾ Po55 No acceptable outcome provided. 	PO52	AO52.1
Infrastructure does not have an impact on pedestrian health and safety. Access control arrangements: a. do not create dead-ends or dark alleyways adjate to the infrastructure; b. minimise the number and width of crossovers entry points; c. provide safe vehicular access to the site; d. do not utilise barbed wire or razor wire. P054 All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility: a. generates no audible sound at the site boundaries where in a residential setting; or b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008. Sales office ⁽⁷²⁾ No acceptable outcome provided.	 the visual amenity of a locality and is: a. high quality design and construction; b. visually integrated with the surrounding area; c. not visually dominant or intrusive; d. located behind the main building line; e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures; f. camouflaged through the use of colours and materials which blend into the landscape; g. treated to eliminate glare and reflectivity; h. landscaped; i. otherwise consistent with the amenity and character 	 structures and other equipment: a. are enclosed within buildings or structures; b. are located behind the main building line; c. have a similar height, bulk and scale to the surrounding fabric; d. have horizontal and vertical articulation applied all exterior walls. A052.2 A minimum 3m wide strip of dense planting is provid around the outside of the fenced area, between the development and street frontage, side and rear
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility: All equipment which produces audible or non-audit sound is housed within a fully enclosed building incorporating sound control measures sufficient to environmental setting; or a. generates no audible sound at the site boundaries where in a residential setting; or b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008. Sales office ⁽⁷²⁾ PO55	Infrastructure does not have an impact on pedestrian	 Access control arrangements: a. do not create dead-ends or dark alleyways adjact to the infrastructure; b. minimise the number and width of crossovers a entry points; c. provide safe vehicular access to the site;
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:All equipment which produces audible or non-audit sound is housed within a fully enclosed building incorporating sound control measures sufficient to en- noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.Sales office (72)No acceptable outcome provided.	P054	AQ54
PO55 No acceptable outcome provided.	 All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility: a. generates no audible sound at the site boundaries where in a residential setting; or b. meet the objectives as set out in the Environmental 	All equipment which produces audible or non-audibl sound is housed within a fully enclosed building incorporating sound control measures sufficient to ens noise emissions meet the objectives as set out in the
	Sales office ⁽⁷²⁾	
		No acceptable outcome provided.

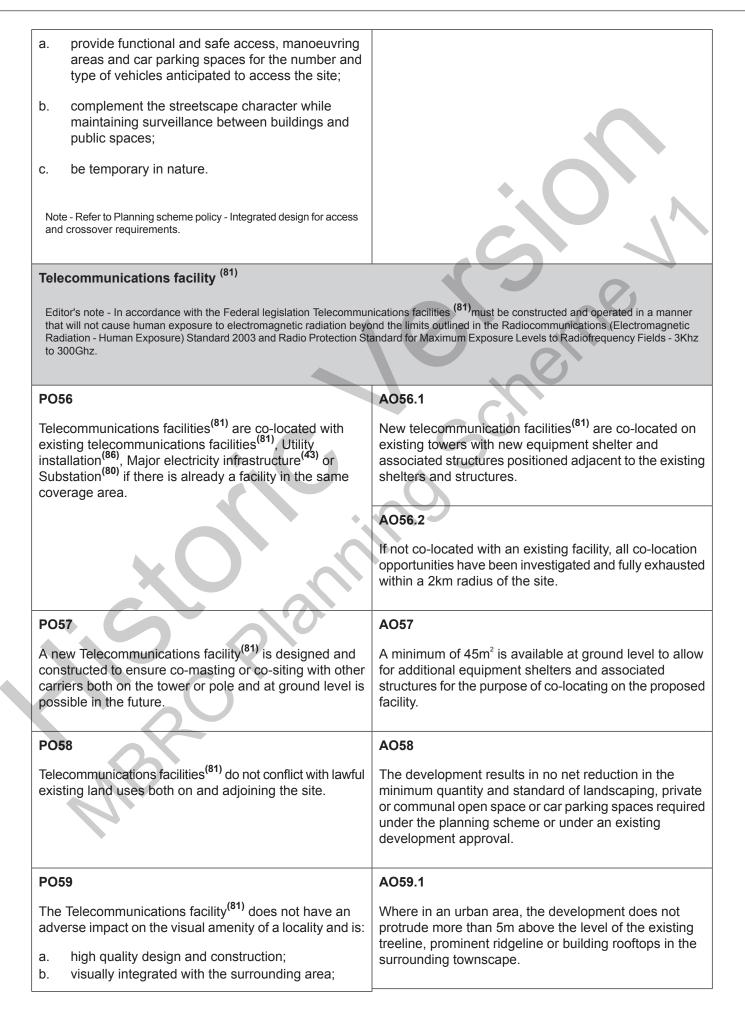

c. not visually dominant or intrusive;d. located behind the main building line;	AO59.2
e. below the level of the predominant tree canopy or the level of the surrounding buildings and	In all other areas towers do not exceed 35m in height.
structures; f. camouflaged through the use of colours and	AO59.3
materials which blend into the landscape;g. treated to eliminate glare and reflectivity;h. landscaped;	Towers, equipment shelters and associated structures are of a design, colour and material to:
 otherwise consistent with the amenity and character of the zone and surrounding area. 	a. reduce recognition in the landscape;b. reduce glare and reflectivity.
	AO59.4
	All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.
	Where there is no established building line the facility is located at the rear of the site.
	AO59.5
	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
	AO59.6
	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.
PO60	AO60
Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.	An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.
PO61	AO61
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.	All equipment comprising the Telecommunications facility ⁽⁸¹⁾ which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.

Reta	ail, co	ommercial and community activities	
POe	52		No acceptable outcome provided.
Con	าทนท	ity activities:	
a.	are	located to:	
	i.	cluster with other non-residential activities to form a neighbourhood hub (this may include being within or adjacent to an existing neighbourhood hub); or	
	ii.	if establishing a new neighbourhood hub (as described in the PO below); be on a main street;	
b.		located on allotments that have appropriate a and dimensions for the siting of:	
	i.	buildings and structures;	
	ii.	vehicle servicing, deliveries, parking, manoeuvring and circulation;	
	iii.	landscaping and open space including buffering.	5
C.		of a small scale, having regard to the ounding character;	\mathcal{O}
d.	are	serviced by public transport;	
e.		not negatively impact adjoining residents or the etscape.	
POE	3	5	AO63
are loca	of a s lised	d commercial uses within a neighbourhood hub cale that provide for the convenience needs or services of the immediate neighbourhood and nstitute the scale or function of a Local centre.	Retail and commercial uses within a neighbourhood hub consist of no more than: a. 1 small format supermarket with a maximum GFA of 1200m ² ;
		the function and scale of a Local centre refer to Table oreton Bay centres network.	 b. 10 small format retail or commercial tenancies with a maximum GFA of 100m² each.
neig	expa hbou	nsion (into adjoining lots) of existing rhood hubs or the establishment of a new rhood hub must:	No acceptable outcome provided.
a.	inclu	oin or address a park, public open space or ude privately owned civic or forecourt space ing a minimum area of 400m ² ;	
b.		ocated on the corner of an arterial, sub-arterial ollector road;	

C.	form a 'Main street' having a maximum length of 200m;	
d.	be centrally located within an 800m radial catchment;	
e.	be separated from other neighbourhood hubs and centres by 1600m, measured from the centre of each neighbourhood hub or centre.	
POe	65	No acceptable outcome provided.
Cori	ner stores may establish as standalone uses where:	
a.	having a maximum GFA of 250m ² ;	
b. c.	the building adjoins the street frontage and has its main pedestrian entrance from the street frontage; not within 1600m of another corner store,	
0.	neighbourhood hub or centre.	
POe	66	No acceptable outcome provided.
	-residential uses address and activate streets and lic spaces by:	5
a.	ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement;	Ó
b.	new buildings adjoin or are within 3m of the primary frontage(s), civic space or public open space;	
C.	locating car parking areas behind or below buildings to not dominate the street environment;	
d.	establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing and avoiding blank walls with the use of sleeving);	
e.	providing visual interest to the façade (e.g. Windows or glazing, variation in colour, materials, finishes, articulation, recesses or projections);	
f.	establishing and maintaining human scale.	
POe	37	No acceptable outcome provided.
	ouildings exhibit a high standard of design and struction, which:	
a.	add visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, cantilevered awning);	
b.	enable differentiation between buildings;	

C.	contribute to a safe environment;	
d.	incorporate architectural features within the building facade at the street level to create human scale (e.g. cantilevered awning);	
e.	include building entrances that are readily identifiable from the road frontage;	
f.	locate and orientate to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites;	
g.	incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;	
h.	facilitate casual surveillance of all public spaces.	
PO6	68	No acceptable outcome provided.
	elopment provides functional and integrated car sing and vehicle access, that:	
a.	prioritises the movement and safety of pedestrians between the street frontage and the entrance to the building;	SCI
b.	provides safety and security of people and property at all times;	0
C.	does not impede active transport options;	
d.	does not impact on the safe and efficient movement of traffic external to the site;	
e.	is consolidated and shared with adjoining sites wherever possible.	
PO	59	No acceptable outcome provided.
prio	safety and efficiency of pedestrian movement is ritised in the design of car parking areas through viding pedestrian paths in car parking areas that are:	
a.	located along the most direct route between building entrances, car parks and adjoining uses;	
b.	protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);	
C.	are of a width to allow safe and efficient access for prams and wheelchairs.	
PO7	70	AO70.1
The	number of car parking spaces is managed to:	Car parking is provided in accordance with Table 6.2.3.2.2.7 'Car parking spaces'.

a. avoid significant impacts on the safety and Note - The above rates exclude car parking spaces for people with efficiency of the road network; a disability required by Disability Discrimination Act 1992 or the relevant disability discrimination legislation and standards. b. avoid an oversupply of car parking spaces; avoid the visual impact of large areas of open car C. AO70.2 parking from road frontages and public areas; All car parking areas are designed and constructed in d. promote active and public transport options; accordance with Australian Standard AS2890.1. promote innovative solutions, including on-street e. parking and shared parking areas. Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome. **PO71** A071.1 End of trip facilities are provided for employees or Minimum bicycle parking facilities are provided in a. occupants, in the building or on-site within a accordance with the table below (rounded up to the reasonable walking distance, and include: nearest whole number). i. adequate bicycle parking and storage Use Minimum Bicycle Parking facilities: and Residential uses comprised Minimum 1 space per dwelling of dwellings ii. adequate provision for securing belongings; and All other residential uses Minimum 1 space per 2 car parking spaces identified in Schedule 7 iii. change rooms that include adequate showers, car parking sanitary compartments, wash basins and Non-residential uses Minimum 1 space per 200m2 of mirrors. GFA Notwithstanding a. there is no requirement to b. Editor's note - The acceptable solutions for end of trip facilities provide end of trip facilities if it would be prescribed under the Queensland Development Code permit a local unreasonable to provide these facilities having planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable regard to: outcome is a combination of the default levels set for end of trip facilities in the Queensland Development Code and the additional the projected population growth and forward facilities required by Council. planning for road upgrading and development of cycle paths; or AO71.2 whether it would be practical to commute to ii. and from the building on a bicycle, having Bicycle parking is: regard to the likely commute distances and nature of the terrain; or provided in accordance with Austroads (2008), a. Guide to Traffic Management - Part 11: Parking; the condition of the road and the nature and amount of traffic potentially affecting the safety b. protected from the weather by its location or a of commuters. dedicated roof structure; located within the building or in a dedicated, secure C. structure for residents and staff; Editor's note - The intent of b above is to ensure the requirements for bicycle parking and end of trip facilities are not applied in adjacent to building entrances or in public areas for d. unreasonable circumstances. For example these requirements customers and visitors. should not, and do not apply in the Rural zone or the Rural residential zone etc.

Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the acceptable outcomes under this heading meet the current performance requirement prescribed in the Queensland Development Code. Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.

Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

AO71.3

a.

b.

For non-residential uses, storage lockers:

- are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);
- have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).

Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

AO71.4

For non-residential uses, changing rooms:

- a. are provided at a rate of 1 per 10 bicycle parking spaces;
- b. are fitted with a lockable door or otherwise screened from public view;
- are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:

Bicycle spaces provided	Male/ Female	Change rooms required	Showers required	Sanitary compartments required	Washbasins required
1-5	Male and female	1 unisex change room	1	1 closet pan	1
6-19	Female	1	1	1 closet pan	1
20 or more	Male	1	1	1 closet pan	1
more	Female	1	2, plus 1 for every	2 closet pans, plus 1 sanitary	1, plus 1 for every 60

Image: Section of the provided in the section of the provided in the section of the section of the provided interesting in the section of the sectio
Image: Second
and Standards (WELS) rating shower head. Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1). d. are provided with: i. a mirror located above each wash basin; ii. a hook and bench seating within each shower compartment; iii. a socket-outlet located adjacent to each wash basin. Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code actions.
 a mirror located above each wash basin; a hook and bench seating within each shower compartment; a socket-outlet located adjacent to each wash basin. Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional
Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional
prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional
racinities required by Council.
P072 No acceptable outcome provided.
Bins and bin storage area/s are provided, designed and managed in accordance with Planning scheme policy – Waste.
PO73 No acceptable outcome provided.
On-site landscaping is provided, that:
a. is incorporated into the design of the development;
 reduces the dominance of car parking and servicing areas from the street frontage;
c. retains mature trees wherever possible;

d. does not create safety or security issues by creating potential concealment areas or interfering with sight lines;		
e. maintains the achievement of active frontages and sight lines for casual surveillance.		
Note - All landscaping is to accord with Planning scheme policy - Integrated design.		
P074	A074	
Surveillance and overlooking are maintained between the road frontage and the main building line.	No fencing is provided forward of the building line.	
P075	No acceptable outcome provided.	
Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety and minimise adverse impacts on residential and other sensitive uses.		
P076	A076	
The hours of operation minimise adverse amenity impacts on adjoining sensitive land uses.	Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.	
Values and con	straints criteria	
Note - The relevant values and constraints criteria do not apply where the development, the subject of the application, is associated and consistent with, and subsequent to a current Development permit for Reconfiguring a lot or Material change of use, where that approval, under this or a superseded planning scheme, has considered and addressed (e.g. through a development footprint plan or similar, or conditions of approval) the identified value or constraint under this planning scheme.		
Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)		
Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.		
P077	A077	
Development avoids disturbing acid sulfate soils. Where	Development does not involve:	
 development disturbs acid sulfate soils, development: a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment; b. protects the environmental and ecological values 	 a. excavation or otherwise removing of more than 100m³ of soil or sediment where below than 5m Australian Height datum AHD; or b. filling of land of more than 500m³ of material with an average depth of 0.5m or greater where below 	
and health of receiving waters;c. protects buildings and infrastructure from the effects of acid sulfate soils.	the 5m Australian Height datum AHD.	

Bushfire hazard areas (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)		
Note - To demonstrate achievement of the performance outcomes, a bushfire management plan is prepared by a suitably qualified person. Guidance for the preparation of a bushfire management plan is provided in Planning scheme policy – Bushfire hazard areas. Note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.		
P078	A078.1	
Development:	Buildings and structures are:	
 a. minimises the number of buildings and people working and living on a site exposed to bushfire risk; b. ensures the protection of life during the passage of a fire front; c. is located and designed to increase the chance of survival of buildings and structures during a bushfire; 	 a. not located on a ridgeline; b. not located on land with a slope greater than 15% (see Overlay map - Landslide hazard (for land having a slope greater than 15%)); c. dwellings are located on east to south facing slopes. 	
 d. minimises bushfire risk from build up of fuels around buildings and structures; e. ensure safe and effective access for emergency services during a bushfire. 	 Buildings and structures have contained within the site: a. a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater; b. a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater; c. a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures; d. an area suitable for a standard fire fighting water supply extraction point; and e. an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%: i. to, and around, each building and other roofed structure; and ii. to each fire fighting water supply extraction point. 	
P079	A079	
	A length of driveway:	

 Development and associated driveways and access ways: a. avoid potential for entrapment during a bushfire; b. ensure safe and effective access for emergency services during a bushfire; c. enable safe evacuation for occupants of a site during a bushfire. 	 a. to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road; b. has a maximum gradient no greater than 12.5%; c. have a minimum width of 3.5m; d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and
	Emergency Services' Fire Hydrant and Vehicle Access Guideline.
PO80	A080
Development provides an adequate water supply for fire-fighting purposes.	 a. a reticulated water supply is provided by a distributer retailer for the area or; b. where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is located within 10m of buildings and structures. c. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access is provided to within 3m of that water storage source. d. Where a tank is the nominated on-site fire fighting water storage source, it includes: i. a hardstand area allowing medium rigid vehicles (15 tonne fire appliance) access within 6m of the tank; ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.
 PO81 Development: a. does not present unacceptable risk to people or environment due to the impact of bushfire on dangerous goods or combustible liquids; b. does not present danger or difficulty to emergency services for emergency response or evacuation. Editor's note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage. 	AO81 Development does not involve the manufacture or storage of hazardous chemicals.

Note – The following are exempt from the native vegetation clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;

- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where exempt under Part 1, 1.7.7 Exempt development
- Note Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

Vegetation clearing, ecological value and connectivity

P082	No acceptable outcome provided.
Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:	
 a. the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded; b. on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area area maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*. 	

* Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014.	
PO83	No acceptable outcome provided.
 Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by: a. retaining habitat trees; b. providing contiguous patches of habitat; c. provide replacement and rehabilitation planting to improve connectivity; d. avoiding the creation of fragmented and isolated patches of habitat; e. providing wildlife movement infrastructure. Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy – Environmental areas. 	
Vegetation clearing and habitat protection	5
 PO84 Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. PO85 Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development will: a. rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a viable and healthy habitat area; b. provide replacement fauna nesting boxes in the event of habitat tree loss in accordance with Planning scheme policy - Environmental areas; 	No acceptable outcome provided. No acceptable outcome provided.
 c. undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework. PO86 Development ensures safe, unimpeded, convenient and ongoing wildlife movement and habitat connectivity by: 	No acceptable outcome provided.
 a. providing contiguous patches of habitat; b. avoiding the creation of fragmented and isolated patches of habitat; 	

c. d.	providing wildlife movement infrastructure; providing replacement and rehabilitation planting to improve connectivity.	
Veg	etation clearing and soil resource stability	
PO8	7	No acceptable outcome provided.
Dev	elopment does not:	
a. b.	result in soil erosion or land degradation; leave cleared land exposed for an unreasonable periods of time but is rehabilitated in a timely manner.	
Veg	etation clearing and water quality	
PO8	8	No acceptable outcome provided.
grou	elopment maintains or improves the quality of indwater and surface water within, and downstream, site by: ensuring an effective vegetated buffers and	
b. c.	setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads; avoiding or minimising changes to landforms to maintain hydrological water flows; adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry ⁽⁴⁾ and animal keeping ⁽⁵⁾ activities.	
PO8	9	No acceptable outcome provided.
	elopment minimises adverse impacts of stormwater off on water quality by: minimising flow velocity to reduce erosion; minimising hard surface areas; maximising the use of permeable surfaces; incorporating sediment retention devices; minimising channelled flow.	
Veg	etation clearing and access, edge effects and urb	oan heat island effects
in a effeo	elopment retains safe and convenient public access manner that does not result in the adverse edge cts or the loss or degradation of biodiversity values in the environment.	No acceptable outcomes provided.
PO9	1	No acceptable outcome provided.
	elopment minimises potential adverse 'edge effects' cological values by:	
a.	providing dense planting buffers of native vegetation between a development and environmental areas;	

 b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas; c. restoring, rehabilitating and increasing the size of existing patches of native vegetation; d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors; e. landscaping with native plants of local origin. Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the groundwater and surface water flow. 	
PO92	No acceptable outcome provided
 PO92 Development avoids adverse microclimate change and does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by: a. pervious surfaces; b. providing deeply planted vegetation buffers and green linkage opportunities; c. landscaping with local native plant species to 	No acceptable outcome provided.
 d. increasing the service extent of the urban forest canopy. 	Ś
Vegetation clearing and Matters of Local Environme	ntal Significance (MLES) environmental offsets
P093	No acceptable outcome provided.
Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas. Editor's note - For MSES Koala Offsets, State Planning Regulatory Provision environmental offset provisions apply.	
	hap - Extractive resources (transport route and buffer)
to determine if the following assessment criteria app	ıly)
PO94	AO94
Development:	The following uses are not located within the 100m wide transport route buffer:
a. does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the	 a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾;

b.	 does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes; adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to: i. locating the furthest distance possible from the transportation route; ii. habitable rooms being located the furthest from the transportation route; iii. shielding and screening private outdoor recreation space from the transportation route; 	 c. Dual occupancy⁽²¹⁾; d. Dwelling house⁽²²⁾; e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; n. Rural workers' accommodation⁽⁷¹⁾; o. Short-term accommodation⁽⁷⁷⁾; p. Tourist park⁽⁸⁴⁾. 			
	Toulos.				
POS	95	AO95.1			
Dev a.	elopment: does not adversely impact upon the efficient and effective transportation of extractive material along a transportation route;	Development does not create a new vehicle access point onto an Extractive resources transport route. AO95.2			
b. c.	ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility; utilises existing vehicle access points and where	A vehicle access point is located, designed and constructed in accordance with Planning scheme polic - Integrated design.			
_	existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.				
the Not by a Not	following assessment criteria apply) e - To assist in demonstrating achievement of heritage performance a suitably qualified person verifying the proposed development is i e - To assist in demonstrating achievement of this performance out	tcome, a Tree assessment report is prepared by a qualified arborist in			
	ordance with Planning scheme policy – Heritage and landscape c opted in accordance with AS 4970-2009 Protection of trees on dev	haracter. The Tree assessment report will also detail the measures elopment sites.			
lano heri	dscape character and listed in Schedule 1 of Planning scheme pol	ral heritage significance, are identified on Overlay map - Heritage and licy - Heritage and landscape character. Places also having cultural sland Heritage Register, are also identified in Schedule 1 of Planning			
POS	96	AO96			
Dev a. b.	elopment will: not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building; protect the fabric and setting of the heritage site, object or building;	Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value. Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with			

object or building;

or building of cultural heritage value is prepared in accordance with

6 Zones

C.	be consistent with the form, scale and style of the heritage site, object or building;	Planning scheme policy - Heritage and landscape character. Th plan is sent to, and approved by Council prior to the commencem
d.	utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;	of any preservation, maintenance, repair and restoration works
e.	incorporate complementary elements, detailing and ornamentation to those present on the heritage site,	
f.	object or building; retain public access where this is currently provided.	
PO	97	No acceptable outcome provided.
Der	nolition and removal is only considered where:	
a.	a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or	
b.	demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or	
c.	limited demolition is performed in the course of repairs, maintenance or restoration; or	
d.	demolition is performed following a catastrophic event which substantially destroys the building or object.	S
PO	98	No acceptable outcome provided.
of c sym valu beir	ere development is occurring on land adjoining a site sultural heritage value, the development is to be apathetic to and consistent with the cultural heritage ues present on the site and not result in their values and eroded, degraded or unreasonably obscured from lic view.	
PO	99	AO99
and	velopment does not adversely impact upon the health I vitality of significant trees. Where development	Development does: a. not result in the removal of a significant tree;
mea Pro ens	urs in proximity to a significant tree, construction asures and techniques as detailed in AS 4970-2009 tection of trees on development sites are adopted to ure a significant tree's health, wellbeing and vitality. nificant trees are only removed where they are in a	 b. not occur within 20m of a protected tree; c. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 – Pruning Amenity Trees.
poo safe	or state of health or where they pose a health and ety risk to persons or property. A Tree Assessment ort prepared by a suitably qualified arborist confirming ee's state of health is required to demonstrate	

Landslide (refer Overlay map - Landslide hazard to determine if the following assessment criteria apply)


Note - To demonstrate achievement of the performance outcomes, a site-specific geotechnical assessment report is prepared by a qualified engineer. Guidance for the preparation of a geotechnical assessment report is provided in Planning scheme policy – Landslide hazard.

PO100	AO100
Development:	Development does not:
 a. maintains the safety of people and property on a site and neighbouring sites from landslides; b. ensures the long-term stability of the site considering the full nature and end use of the development; c. ensures site stability during all phases of construction and development; d. minimises disturbance of natural drainage patterns of the site and does not result in the redirection or alteration of the existing flow if surface or groundwater e. minimises adverse visual impacts on the amenity of adjoining residents and provides a positive interface with the streetscape. 	 a. involve earthworks exceeding 50m³; b. involve cut and fill having a height greater than 600mm; c. involve any retaining wall having a height greater than 600mm; d. redirect or alter the existing flow of surface or groundwater.
PO101	AO101
 Buildings are designed to respond to sloping topography in the siting, design and form of buildings and structures by: a. minimising overuse of cut and fill to create single flat pads and benching; b. avoiding expanses of retaining walls, loss of trees and vegetation and interference with natural drainage systems; c. minimising any adverse visual impact on the landscape character ; d. Protect the amenity of adjoining properties. 	 Buildings, excluding domestic outbuildings: a. are split-level, multiple-slab, pier or pole construction; b. are not single plane slab on ground.
PO102	AO102
Development protects the safety of people, property and the environment from the impacts of landslide on hazardous chemicals manufactured, handled or stored by incorporating design measures to ensure:	Development does not involve the manufacture, handling or storage of hazardous chemicals.
 a. the long-term stability of the development site considering the full nature and end use of the development; b. site stability during all phases of construction and development; c. the development is not adversely affected by landslide activity originating on sloping land above the site; d. emergency access and access from the site for the public and emergency vehicles is available and is not at risk from landslide. 	
Infrastructure buffers (refer Overlay map - Infrastruct criteria apply)	ure buffers to determine if the following assessment
PO103	AO103.1

Development within a Water supply buffer captures solid or liquid waste from all land use, development and activities is designed, constructed and managed to prevent the release of contaminants to surface water or groundwater bodies.	Run-off and sediment from roadways and impervious surfaces within a Water supply buffer are intercepted and treated on-site to remove oil, grease, chemicals, silt, trace metals and nutrients such as nitrogen and phosphorous. AO103.2 Incineration or burial of waste within a Water supply buffer is not undertaken onsite. AO103.3 Solid waste within a Water supply buffer is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor. AO103.4 Holding tanks within a Water supply buffer are used for all liquid waste and provide for the separation of oils/solvents and solids prior to pump-out and collection by a licenced contractor. AO103.5 Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures. AO104 Secondary treated wastewater treatment systems within a Water supply buffer include: a. emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies or overload with provision for de-sludging;
Guidelines: Development Guidelines for Water Quality Management	emergencies or overload with provision for
	 d. vegetated land application areas are not located in overland flow paths or on areas that perform groundwater recharge or discharge functions; and e. wastewater collection and storage systems have a capacity to accommodate full load at peak times and includes temporary facilities.
PO105	AO105 Development:


Development within a Bulk water supply infrastructure buffer is located, designed and constructed to:a. protect the integrity of the water supply pipeline;b. maintain adequate access for any required	 a. does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer; b. involving a major hazard facility or environmentally relevant activity (ERA) is setback 30m from a Bulk
maintenance or upgrading work to the water supply pipeline;	water supply infrastructure buffer.
PO106	AO106
Development is located and designed to maintain required access to Bulk water supply infrastructure.	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):
	a. buildings or structures;b. gates and fences;
	c. storage of equipment or materials;
	d. landscaping or earthworks or stormwater or other infrastructure.
PO107	A0107
Habitable rooms within an Electricity supply substation	Habitable rooms:
buffer are located a sufficient distance from substations ⁽⁸⁰⁾ to avoid any potential adverse impacts	a. are not located within an Electricity supply
on personal health and wellbeing from electromagnetic	substation buffer; and
fields.	 proposed on a site subject to an Electricity supply supply substation⁽⁸⁰⁾are acoustically insulted to
Note - Habitable room is defined in the Building Code of Australia (Volume 1)	achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.
	Note - Habitable room is defined in the Building Code of Australia (Volume 1)
PO108	No acceptable outcome provided.
Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation ⁽⁸⁰⁾ to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental	
Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment.	
Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy – Noise.	
Note Habitable room is defined in the Duilding Order of Australia	
Note - Habitable room is defined in the Building Code of Australia (Volume 1)	
PO109	AO109
Development within a High voltage electricity line buffer provides adequate buffers to high voltage electricity lines to protect amenity and health by ensuring development:	Development does not involve the construction of any buildings or structures within a High voltage electricity line buffer.

6 Zones

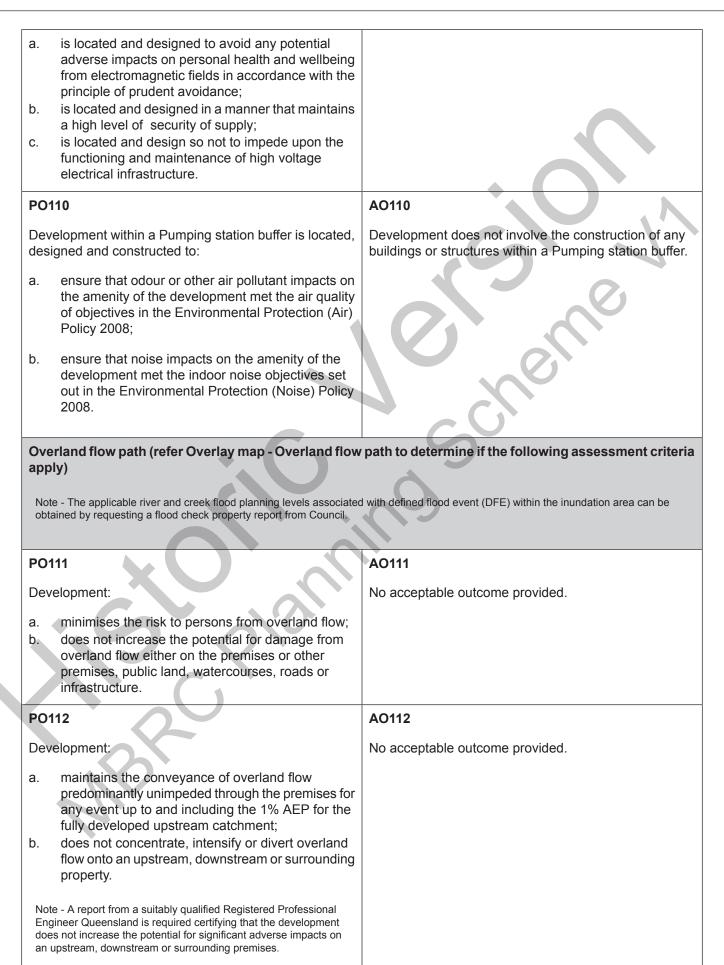

Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.	
PO113	No acceptable outcome provided.
Development does not:	
 a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level; b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure. 	
Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.	
PO114	A0114
Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.	Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.
P0115	A0115
Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.	Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.
PO116	AO116.1
Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on	Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM: a. Urban area – Level III; b. Rural area – N/A; c. Industrial area – Level V; d. Commercial area – Level V.
an upstream, downstream or surrounding premises.	AO116.2
Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.
PO117	No acceptable outcome provided.

6 Zones

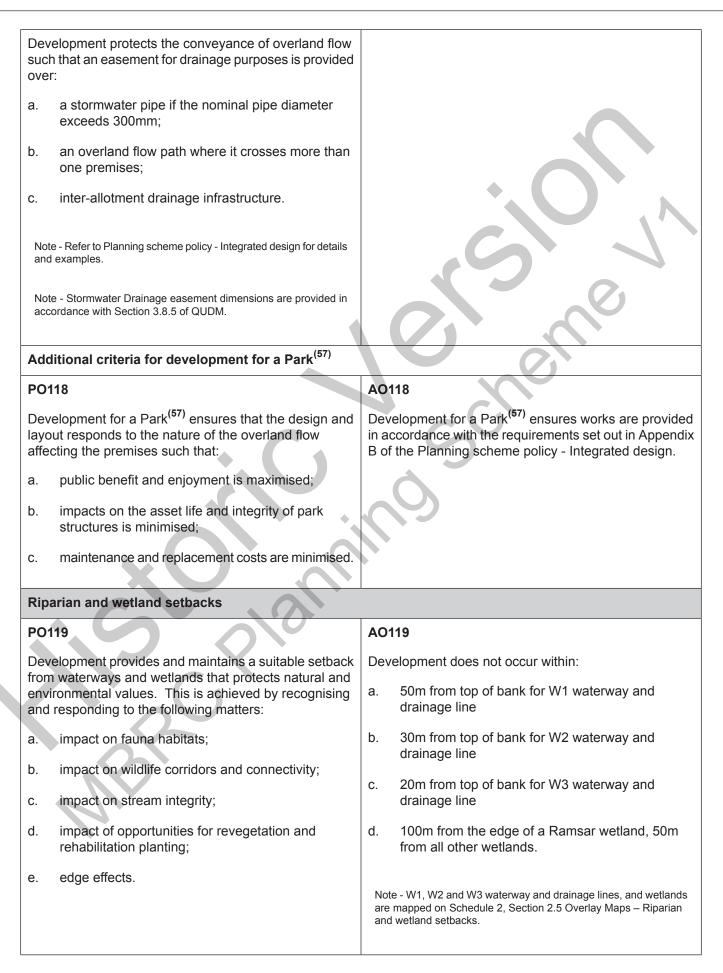

Height to wall	Frontage primary			Frontage secondary to street			Frontage secondary to lane	Side non-built to	Rear To OMP and wall	Canal To OMP and wall
	To wall	To OMP	To covered car parking space	To wall	To OMP	To covered car parking space	To OMP, wall and covered car parking space	boundary wall To OMP and wall		
Less than 4.5m	Min 3m	Min 2m	Min 5.4m*	Min 2m	Min 1m	Min 5.4m*	Min 0.5	Min 1.5m	Min 1.5m	Min 4.5m
4.5m to 8.5m	Min 3m	Min 2m	N/A	Min 2m	Min 1m	N/A	Min 0.5	Min 2m	Min 2m	Min 4.5m
Greater than 8.5m	Min 6m	Min 5m	N/A	Min 3m	Min 2m	N/A	Min 0.5	Min 2m up to 7.5m in height; plus 0.5m for every 3m in height or part thereof over 7.5m	Min 5m	Min 4.5m

Table 6.2.3.2.2.3 Setbacks (Residential uses) - All other areas

Table 6.2.3.2.2.4 Setbacks (Residential uses) - Morayfield South urban area

Height of wall	Frontage primary		Frontage secondary to street		Frontage Side secondary to lane to boundary wall		Rear To OMP and wall	Canal To OMP and wall		
	To wall	To OMP	To covered car parking space	To wall	То ОМР	To covered car parking space	To OMP, wall and covered car parking space	To OMP and wall		
Less than 4.5m	Min 1m	Min 1m	Min 5.4m*	Min 1m	Min 1m	Min 5.4m*	Min 0.5	Min 1.5m	Min 1.5m	Min 4.5m
4.5 to 8.5m	Min 1m	Min 1m	N/A	Min 1m	Min 1m	N/A	Min 0.5	Min 2m	Min 2m	Min 4.5m
Greater than 8.5m	Min 5m	Min 3m	N/A	Min 2m	Min 1m	N/A	Min 0.5	Min 2m up to 8.5m in height; plus 0.5m for every 3m in height or part thereof over 8.5m	Min 5	Min 4.5m

Note - * for Dwelling Houses⁽²²⁾ and Dual Occupancies⁽²¹⁾ only

Table 6.2.3.2.2.5 Built to boundary walls (Residential uses) - All other areas

Lot frontage width	Mandatory / optional	Length and height of built to boundary wall	
--------------------	----------------------	---	--

		Transition precinct - all other areas
Less than 7.5m	Mandatory - both sides unless a corner lot	Max Length: 80% of the length of the boundary Max Height: 7.5m
7.5m to 12.5m	Mandatory - one side	Max Length: 60% of the length of the boundary Max Height: 7.5m
>12.5m to 18m	Optional: i. on 1 boundary only; ii. where the built to boundary wall adjoins a lot with a frontage less than 18m.	Max Length: the lesser of 15m or 60% of the length of the boundary Max Height: 7.5m
Greater than 18m	As per QDC	

Table 6.2.3.2.2.6 Built to boundary walls (Residential uses) - Morayfield South urban area

Lot frontage width	Mandatory / Optional	Length and height of built to boundary wall
		Transition precinct - Morayfield South urban area
Less than 7.5m	Mandatory - both sides unless a corner lot	Max Length: 80% of the length of the boundary Max Height: 8.5m
7.5m to 12.5m	Mandatory - one side	Max Length: 70% of the length of the boundary Max Height: 10.5m
>12.5m to 18m	Optional: i. on 1 boundary only; ii. where the built to boundary wall adjoins a lot with a frontage less than 18m.	Max Length: the lesser of 15m or 60% of the length of the boundary Max Height: 10.5m
Greater than 18m	As per QDC	

Table 6.2.3.2.2.7 Car parking spaces


Site proximity	Land use	Maximum number of car spaces to be provided	Minimum number of car spaces to be provided
Within 800m walkable	Non-residential	1 per 30m ² GFA	1 per 50m ² GFA
Catchment* of a Higher order c	Residential – permanent/long term	N/A	1 per dwelling
entre	Residential – serviced/short term	3 per 4 dwellings + staff spaces	1 per 5 dwellings + staff spaces
Other (Wider catchment)	Non-residential	1 per 20m ² GFA	1 per 30m ² GFA
	Residential – permanent/long term	N/A	1 per dwelling
	Residential – serviced/short term	1 per dwelling + staff spaces	1 per 5 dwellings + staff spaces


Note - Car parking rates are to be rounded up to the nearest whole number.

Note - Allocation of car parking spaces to dwellings is at the discretion of the developer.

Note - Residential - Permanent/long term includes: Multiple dwelling⁽⁴⁹⁾, Relocatable home park⁽⁶²⁾, Residential care facility⁽⁶⁵⁾, Retirement facility⁽⁶⁷⁾.

Note - Residential - Services/short term includes: Rooming accommodation⁽⁶⁹⁾ or Short-term accommodation⁽⁷⁷⁾.



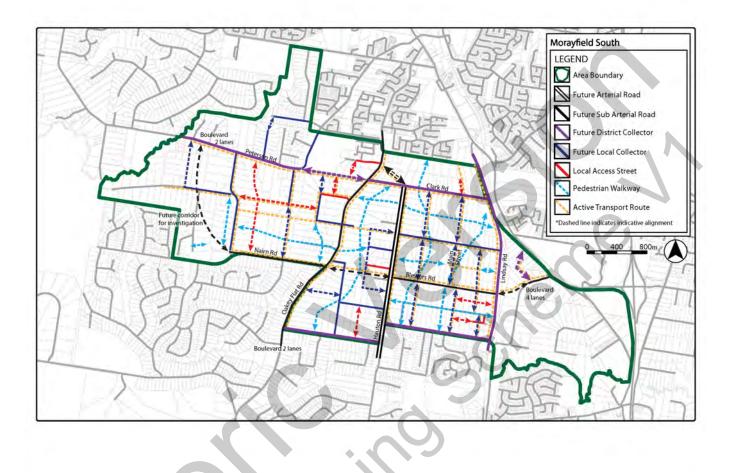

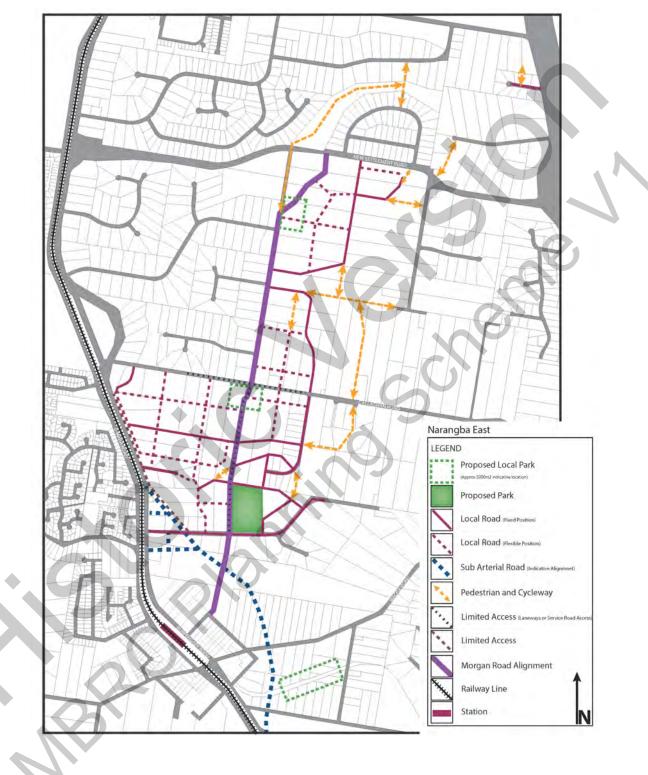


Figure 6.2.3.2.2.3 - Narangba East