9.4.1.7 Industry zone

9.4.1.7.1 Purpose - Industry zone

- The purpose of this part of the Reconfiguring a lot code is to facilitate and manage the outcomes of development 1. for reconfiguring a lot and its associated Operational Works in the Industry zone, to achieve the Overall Outcomes.
- 2. The purpose of this part of the code will be achieved through the overall outcomes as identified in Part 9.4.1 -Reconfiguring a lot code and the following additional Industry zone specific overall outcomes:
- Industrial lots have access to a sufficient level of infrastructure and essential services and convenient access a. to major transport routes.
- Reconfiguring a lot for industrial purposes ensures that lot sizes and dimensions are appropriate for the scale, b. intensity and operation of uses consistent in the applicable precinct.
- Reconfiguring a lot avoids areas subject to constraint, limitation, or environmental values. Where reconfiguring C. a lot cannot avoid these identified areas, it responds by:
 - adopting a 'least risk, least impact' approach when designing, siting and locating development to minimise the potential risk to people, property and the environment;
 - ensuring no further instability, erosion or degradation of the land, water or soil resource; ii.
 - maintaining environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of environmental offsets, landscaping and facilitating safe wildlife movement through the environment;
 - protecting native species and protecting and enhancing native species habitat; iv
 - protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
 - establishing effective separation distances, buffers and mitigation measures associated with major infrastructure to minimise adverse effects on sensitive land uses from noise, dust and other nuisance generating activities;
 - ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of major infrastructure;
 - Ensuring effective and efficient disaster management response and recovery capabilities.
- The Reconfiguring a lot, Operational works associated with the Reconfiguring a lot, and uses expected to occur d. as a result of the Reconfiguring a lot:
 - responds to the risk presented by overland flow and minimises risk to personal safety; i.
 - ii. is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
 - does not impact on the conveyance of overland flow up to and including the Overland Flow Defined Flood Event:
 - directly, indirectly and cumulatively avoids an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- Reconfiguring a lot achieves the intent and purpose of the Industry zone outcomes as identified in Part 6. e.

9.4.1.7.2 Criteria for assessment

To determine if boundary realignment is self-assessable development, it must comply with the self-assessable acceptable outcomes set out in Part Q, Table 9.4.1.7.1. Where development does not meet any of the relevant criteria in Part Q, Table 9.4.1.7.1, assessment is limited to the subject matter of the self-assessable acceptable outcomes that were not complied with. The following table identifies the corresponding performance outcomes where a development does not comply with a self-assessable acceptable outcome.

Self-assessable acceptable outcomes	Corresponding performance outcomes
SAO1	PO11

Self-assessable acceptable outcomes	Corresponding performance outcomes
SAO2	PO10
SAO3	PO1
SAO4	PO1
SAO5	PO31-PO56
SAO6	PO35-PO36
SAO7	PO29

Where reconfiguring a lot is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part R, Table 9.4.1.7.2.

Part Q—Criteria for self-assessable development - Industry zone

Table 9.4.1.7.1 Self-assessable development - Industry zone

Self-assessable acceptable outcomes			
	General criteria		
Bounda	ary realignment		
SAO1	Lots created by boundary realignment:		
	a. contain all service connections to water, sewer, electricity and other infrastructure wholly within the lot they serve;		
	b. have constructed road access;		
	c. do not require additional infrastructure connections or modification to existing connections.		
	d. do not result in the creation of any additional lots;		
SAO2			
SAO3	Resulting lots comply with the following minimum lot sizes:		
	Zone (Precinct) Area		
	Industry Zone		

	T		
	Mixed industry and business precinct	1,000 m ²	
	Light industry precinct	2,500 m ²	
	General industry precinct	4,000 m ²	
	Restricted industry precinct	6,000 m²	
	Marine industry precinct	4,000 m ²	
SAO4	Resulting lots comply with a minimum frontage to depth ratio of 1:2 or 2:1.		
		Figure - Frontage to Denth Ratio	
	Figure - Frontage to Depth Ratio		
	1:2 70m 35m 1:2 Road frontage		
	Road frontage 70m		
	Minimum Width to Depth Ratio		
		imum Width to	
SAO5	Boundary realignment does not result in the creation of additional building development opportunity within an area subject to an Overlay map.		
SAO6	No new boundaries are located within 2m of High Value Areas as identified in Overlay map - Environmental		
3,00	areas.	Within 211 of Fight value Areas as identified in Overlay map - Environmental	
SAO7	Boundary realignment does not	result in the clearing of any Habitat trees.	
		* / *	

Part R—Criteria for assessable development - Industry zone

Table 9.4.1.7.2 Assessable development - Industry zone

Performance outcomes	Acceptable outcomes
Lot size and design	
PO1	AO1.1
Lots have appropriate area and dimension for the	Lots comply with the following minimum lot sizes:
establishment of uses consistent with the applicable precinct of the Industry zone, having regard to areas required for:	a. 1000 m² in the Mixed industry business precinct;
a. convenient and safe access;	b. 2500m ² in the Light industry precinct;
b. on-site car parking;	c. 4000m² in the General industry precinct;
c. on-site manoeuvring to ensure vehicle egress and access in forward gear;	

- d. appropriately sited loading and servicing areas;
- setbacks, buffers and landscaping where required. e.


Note - Refer to the overall outcomes for the Industry zone (applicable precinct) for uses consistent in this precinct.

- d. 6000m² in the Restricted industry precinct.
- 4000m² in the Marine industry precinct. e.

AO1.2

Lots have a minimum width to depth ratio of 1:2 or

Figure - Frontage to Depth Ratio Examples



PO₂

Road layouts facilitate regular and consistent shaped lots through the use of rectilinear grid patterns where not unduly constrained by topographical barriers.

No acceptable outcome provided.

PO₃

Road layouts provides for:

- safe and efficient access and movement for the a. expected levels and type of traffic;
- an efficient and legible movement network with high levels of connectivity within and external to the development;
- increased active transport through a focus on safety C. and amenity for pedestrians and cyclists;
- retention of special features such as significant trees d. and vegetation.

Note - Refer to Planning scheme policy - Integrated design and Planning scheme policy - Neighbourhood design for guidance on how to demonstrate achievement of this performance outcome.

No acceptable outcome provided.

Movement network

PO4

A04.1

Development provides and maintains the connections shown on Figure 1 - Dakabin.

Street layouts are designed to connect to surrounding neighbourhoods by providing an interconnected street, pedestrian and cyclist networks that connects nearby centres, neighbourhood hub's, community facilities, public transport nodes and open space to residential areas for access and emergency management purposes. The layout ensures that new development is provided with multiple points of access. The timing of transport works ensures that multiple points of access are provided during early stages of a development.

Note - Refer to Planning Scheme Policy - Neighbourhood design for guidance on when alternative access points should be provided for emergency management purposes.

AO4.2

For land located at Deception Bay, all vehicle access to Deception Bay Road is via a future 4-way signalised intersection at Deception Bay Road and Zammit Street, as illustrated in Figure 2 - Deception Bay Road Mixed Industry and Business, except where an alternative access has been previously approved by TMR or allowed through an existing development approval. No direct property access is provided to Deception Bay Road.

AO4.3

All other areas, no acceptable outcome provided.

Note - Refer to Planning Scheme Policy - Neighbourhood design for guidance on when alternative access points should be provided for emergency management purposes.

PO5

The road network creates convenient access to arterial and sub-arterial roads for heavy vehicles and commercial traffic without introducing through traffic to residential streets.

No acceptable outcome provided.

PO6

The road network has sufficient reserve and pavement widths to cater for the current and intended function of the road in accordance with the road type.

A06

Roads are designed and constructed in accordance with the appropriate road type in Planning scheme policy - Integrated design.

PO7

Movement networks encourage walking and cycling and provide a safe environment for pedestrians and cyclists.

AO7

Pedestrian paths, bikeways and on-road bicycle facilities are provided for the street type in accordance with Planning scheme policy - Integrated design.

PO8

Upgrade works (whether trunk or non-trunk) are provided where necessary to:

- ensure the type or volume of traffic generated by the a. development does not have a negative impact on the external road network;
- ensure the orderly and efficient continuation of the active b. transport network;
- ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.

Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome refer to Planning scheme policy - Integrated transport assessment for guidance on when

an ITA is required. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - The primary and secondary active transport network is mapped on Overlay map - Active transport.

Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:

- Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required;
- ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.

Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.



Reticulated supply

PO9

Each lot is provided with an appropriate level of service and infrastructure commensurate with the Industry zone. All services, including water supply, stormwater management, sewage disposal, electricity, telecommunications and gas (if available) are provided in a manner that:

- is efficient in delivery of service;
- is effective in delivery of service;
- is conveniently accessible in the event of maintenance or repair;
- minimises whole of life cycle costs for that infrastructure;
- minimises risk of potential adverse impacts on the natural and built environment;
- f. minimises risk of potential adverse impact on amenity and character values;
- recognises and promotes Councils Total Water Cycle g. Management policy and the efficient use of water resources:

AQ9

Lots are provided with:

- a connection to the reticulated water supply infrastructure network;
- b. a connection to the sewerage infrastructure network;
- a connection to the reticulated electricity infrastructure network; and
- d. a physical connection to the telecommunication network, that where available to the land is part of the high speed broadband network.

Boundary realignment

PO10

Boundary realignments do not result in existing land uses on site becoming non-compliant due to:

- lot size; a.
- b. parking requirements;
- C. servicing;
- d. dependant elements of an existing or approved land use being separately titled.

Note - Examples may include but are not limited to:

Where a commercial or industrial land use contains an ancillary office $^{(53)}$, the office $^{(53)}$ cannot be separately titled as it is considered part of the commercial or industrial use.

No acceptable outcome provided.

PO11

Boundary alignments ensure that infrastructure and services are wholly contained within the lot they serve.

Reconfiguring a lot other than creating freehold lots

PO12

Reconfiguring a lot which creates or amends a community title scheme as described in the Body Corporate and Community Management Act 1997 is undertaken in a way that does not result in existing uses on the land becoming unlawful or otherwise operating in a manner that is:

- inconsistent with any approvals on which those uses relv: or
- inconsistent with the self-assessable development b. requirements applying to those uses at the time that they were established.

Note -An examples of land uses becoming unlawful includes, but are not limited to the following land on which a building has been established is reconfigured in a way that precludes lawful access to required communal facilities by either incorporating some of those facilities into private lots or otherwise obstructing the normal access routes to those facilities. Those communal facilities may have been required under self-assessment requirements for the use or conditions of development approval.

Editor's note - To satisfy this performance outcome, the development application may need to be a combined application for reconfiguring a lot and a material change of use or otherwise be supported by details that confirm that the land use still satisfies all relevant land use requirements.

Reconfiguring by Lease

PO13

Reconfiguring a lot which divides land or buildings by lease in a way that allows separate occupation or use of those facilities is undertaken in a way that does not result in existing uses on the land becoming unlawful or otherwise operating in a manner that is:

No acceptable outcome provided.


- inconsistent with any approvals on which those uses rely; or
- b. inconsistent with the self-assessable development requirements applying to those uses at the time that they were established.

Note - An example of a land use becoming unlawful is a building over which one or more leases have been created in a way that precludes lawful access to some of the required communal facilities. Some of the communal car parking facilities have been incorporated into lease areas while other leases are located in a way that obstructs the normal access routes to other communal facilities. Those communal facilities may have been required under self-assessment requirements for the use or conditions of development approval, but they are no longer freely available to all occupants of the building.

Editor's note -To satisfy this performance outcome, the development application may need to be supported by details that confirm that the land use still satisfies all relevant land use requirements.

Editor's note - Under the Sustainable Planning Act, the following do not constitute reconfiguring a lot and are not subject to this performance outcome:

- a lease for a term, including renewal options, not exceeding 10 years; and
- h an agreement for the exclusive use of part of the common property for a community titles scheme under the Body Corporate and Community Management Act 1997.

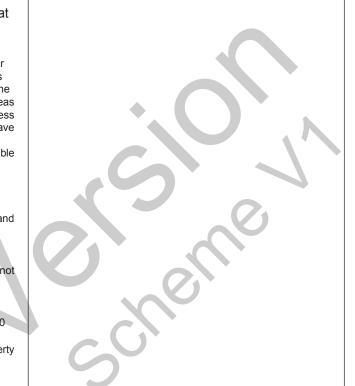

Volumetric subdivision

PO14

The reconfiguring of the space above or below the surface of the land ensures appropriate area, dimensions and access arrangements to cater for uses consistent with the zone and does not result in existing land uses on site becoming non-compliant.

Note - Example include but are not limited to:

Where a commercial of industrial land use contains an ancillary office $^{(53)}$, the office $^{(53)}$ cannot be separately titled as it is considered part of the commercial or industrial use.

No acceptable outcome provided.

Stormwater location and design

PO15

Lots are of a sufficient grade to accommodate effective stormwater drainage to a lawful point of discharge.

AO15

The surface level of a lot is at a minimum grade of 1:100 and slopes towards the street frontage, or other lawful point of discharge

PO16

The development is planned and designed considering the land use constraints of the site and incorporates water sensitive urban design principles.

	T
PO17	No acceptable outcome provided.
Stormwater drainage pipes and structures through or within private land are protected by easements in favour of Council with sufficient area for practical access for maintenance.	
Note - Refer to Planning scheme policy - Integrated design for guidance on how to demonstrate achievement of this performance outcome.	
PO18	No acceptable outcome provided.
Stormwater management facilities are located outside of riparian areas and prevent increased channel bed and bank erosion.	36)
PO19	No acceptable outcome provided.
Natural streams and riparian vegetation are retained and enhanced through revegetation.	
PO20	No acceptable outcome provided.
Areas constructed as detention basins are adaptable for passive recreation.	600
PO21	No acceptable outcome provided.
Development maintains the environmental values of waterway ecosystems.	
PO22 Constructed water bodies which are not dedicated as public assets.	No acceptable outcome provided.
Stormwater management system	
PO23	AO23
The major drainage system has the capacity to safely convey stormwater flows for the defined flood event (DFE).	The roads, drainage pathways, drainage features and waterways safely convey the stormwater flows for the defined flood event (DFE) without allowing flows to encroach upon private lots.
PO24	AO24
Overland flow paths (for any storm event) from newly constructed roads and public open space areas do not pass through private lots.	Drainage pathways are provided to accommodate overland flows from roads and public open space areas.
PO25	No acceptable outcome provided.
Where located within the Upper Pine, Hays Inlet and Burpengary Creek catchments, development achieves the greater pollutant removal of:	

- a. 100% reductions in mean annual loads from unmitigated development for total suspended solids, total phosphorus, total nitrogen and gross pollutants >5mm;
- the stormwater management design objectives relevant b. for Moreton Bay Regional Council identified in Table A and B in Appendix 3 of the SPP.

Note - To demonstrate compliance with this PO a stormwater quality management plan is to be prepared by a suitable qualified person demonstrating compliance with the Urban Stormwater Planning Guideline 2010, Planning Scheme Policy – Stormwater Management, Planning Scheme Policy - Integrated Design and considering any local area stormwater management planning prepared by Council.

Note - Refer to Overlay map - Stormwater catchments for catchment boundaries.

No acceptable outcome provided

PO26

Where located outside the Upper Pine, Hays Inlet and Burpengary Creek catchments, development achieves the stormwater management design objectives relevant for Moreton Bay Regional Council identified in Tables A and B in Appendix 2 of the SPP.

Note - To demonstrate compliance with this PO a stormwater quality management plan is to be prepared by a suitable qualified person demonstrating compliance with the Urban Stormwater Planning Guideline 2010, Planning Scheme Policy – Stormwater Management, Planning Scheme Policy - Integrated Design and considering any local area stormwater management planning prepared by Council.

Note - Refer to Overlay map - Stormwater catchments for catchment boundaries.

PO27

The stormwater management system is designed to:

- protect the environmental values in downstream waterways;
- b. maintain ground water recharge areas;
- preserve existing natural wetlands and associated vegetation buffers;
- d. avoid disturbing soils or sediments;
- e. avoid altering the natural hydrologic regime in acid sulphate soil and nutrient hazardous areas;
- f. maintain and improve receiving water quality;
- protect natural waterway configuration; g.
- h. protect downstream and adjacent properties;
- protect and enhance riparian areas.

PO28

Design and construction of the stormwater management system:

- utilise methods and materials to minimise the whole of lifecycle costs of the stormwater management system;
- b. are coordinated with civil and other landscaping works.

Note - Refer to Planning scheme policy - Integrated design for guidance on how to demonstrate achievement of this performance outcome.

No acceptable outcome provided.

Native vegetation where not located in the Environmental areas overlay

PO29

Reconfiguring a lot facilitates the retention of native vegetation by:

- incorporating native vegetation and habitat trees into a. the overall subdivision design, development layout, on-street amenity and landscaping where practicable;
- ensuring habitat trees are located outside a b. development footprint. Where habitat trees are to be cleared, replacement fauna nesting boxes are provided at the rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.
- providing safe, unimpeded, convenient and ongoing wildlife movement;
- avoiding creating fragmented and isolated patches of d. native vegetation.
- ensuring that biodiversity quality and integrity of habitats is not adversely impacted upon but are maintained and protected;
- ensuring that soil erosion and land degradation does not occur;
- ensuring that quality of surface water is not adversely impacted upon by providing effective vegetated buffers to water bodies.

No acceptable outcome provided

Noise

PO30

Noise attenuation structure (e.g. walls, barriers or fences):

- contribute to safe and usable public spaces, through a. maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);
- maintain the amenity of the streetscape.

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.

AO30

Noise attenuation structures (e.g. walls, barriers or fences):

- are not visible from an adjoining road or public area unless:
- adjoining a motorway or rail line; or i.
- adjoining part of an arterial road that does not ii. serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.

Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.

- do not remove existing or prevent future active transport routes or connections to the street network:
- C. are located, constructed and landscaped in accordance with Planning scheme policy -Integrated design.

Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.

Note - Refer to Overlay map - Active transport for future active transport routes.

Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development, the subject of the application, is associated and consistent with, and subsequent to a current Development permit for Reconfiguring a lot or Material change of use, where that approval, under this or a superseded planning scheme, has considered and addressed (e.g. through a development footprint plan or similar, or conditions of approval) the identified value or constraint under this planning scheme.

Bushfire hazard areas (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - The preparation of a bushfire management plan in accordance with Planning scheme policy - Bushfire prone areas can assist in demonstrating compliance with the following performance criteria. The identification of a development footprint will assist in demonstrating compliance with the following performance criteria.

PO31

Lots are designed to:

- minimise the risk from bushfire hazard to each lot and provide the safest possible siting for buildings and
- limit the possible spread paths of bushfire within the reconfiguring;
- achieve sufficient separation distance between development and hazardous vegetation to minimise the risk to future buildings and structures during bushfire events;
- maintain the required level of functionality for emergency services and uses during and immediately after a natural hazard event.

AO31

Reconfiguring a lot ensures that all new lots are of an appropriate size, shape and layout to allow for the siting of future buildings being located:

- a. within an appropriate development footprint;
- within the lowest hazard locations on a lot; b.
- to achieve minimum separation between C. development or development footprint and any source of bushfire hazard of 20m or the distance required to achieve a Bushfire Attack Level BAL (as identified under AS3959-2009), whichever is the greater;
- d. to achieve a minimum separation between development or development footprint and any retained vegetation strips or small areas of vegetation of 10m or the distance required to achieve a Bushfire Attack Level BAL (as identified under AS3959-2009), whichever is the greater;
- away from ridgelines and hilltops; e.
- f. on land with a slope of less than 15%;
- away from north to west facing slopes. g.

PO32

Lots provide adequate water supply and infrastructure to support fire-fighting.

AO32

For water supply purposes, reconfiguring a lot ensures that:

- lots have access to a reticulated water supply provided by a distributer retailer for the area; or
- where no reticulated water supply is available, b. on-site fire fighting water storage containing not less than 10000 litres and located within a development footprint.

PO33

Lots are designed to achieve:

- safe site access by avoiding potential entrapment a. situations;
- accessibility and manoeuvring for fire-fighting during b.

PO33

Reconfiguring a lot ensures a new lot is provided with:

- direct road access and egress to public roads; a.
- b. an alternative access where the private driveway is longer than 100m to reach a public road;
- driveway access to a public road that has a C. gradient no greater than 12.5%;
- minimum width of 3.5m.

PO34

The road layout and design supports:

- safe and efficient emergency services access to all lots; and manoeuvring within the subdivision;
- availability and maintenance of access routes for the purpose of safe evacuation.

AO34

Reconfiguring a lot provides a road layout which:

- includes a perimeter road that separating the new lots from hazardous vegetation on adjacent lots incorporating by:
 - a cleared width of 20m;
 - ii. road gradients not exceeding 12.5%;
 - pavement and surface treatment capable of being used by emergency vehicles;
 - Turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guidelines.
- Or if the above is not practicable, a fire maintenance trail separates the lots from hazardous vegetation on adjacent lots incorporating:
 - a minimum cleared width of 6m and minimum formed width of 4m;
 - ii. gradient not exceeding 12.5%;

- iii. cross slope not exceeding 10%;
 - a formed width and erosion control devices to the standards specified in Planning scheme policy - Integrated design;
- a turning circle or turnaround area at the end of the trail to allow fire fighting vehicles to manoeuvre;
- passing bays and turning/reversing bays every 200m;
- vii. an access easement that is granted in favour of the Council and the Queensland Fire and Rescue Service or located on public land.
- excludes cul-de-sacs, except where a perimeter road with a cleared width of 20m isolates the lots from hazardous vegetation on adjacent lots; and
- excludes dead-end roads.

Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note - the identification of a development footprint will assist in demonstrating compliance with the following performance standards.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

PO3	5	No acceptable outcome provided
No r Area	new boundaries are located within 2m of High Value as.	
PO3	are designed to:	Reconfiguring a lot ensures that no additional lots are created within a Value Offset Area.
a.	minimise the extent of encroachment into the MLES waterway buffer or a MLES wetland buffer;	
b.	ensure quality and integrity of biodiversity and ecological values is not adversely impacted upon but are maintained and protected;	
C.	incorporate native vegetation and habitat trees into the overall subdivision design, development layout, on-street amenity and landscaping where practicable;	
d.	provide safe, unimpeded, convenient and ongoing wildlife movement;	
e.	avoid creating fragmented and isolated patches of native vegetation;	

- f. ensuring that soil erosion and land degradation does not occur;
- ensuring that quality of surface water is not adversely g. impacted upon by providing effective vegetated buffers to water bodies.

AND

Where development results in the unavoidable loss of native vegetation within a MLES waterway buffer or a MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas.

Extractive resources transport route buffer (refer Overlay map - Extractive resources to determine if the following assessment criteria apply)

Note - the identification of a development footprint will assist in demonstrating compliance with the following performance standards.

PO37

No acceptable outcome provided.

Lots provide a development footprint outside of the buffer.

PO38

No acceptable outcome provided.

Access to a lot is not from an identified extractive industry transportation route, but to an alternative public road.

Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - the identification of a development footprint will assist in demonstrating compliance with the following performance standards.

PO39

Lots do not:

- No acceptable outcome provided.
- reduce public access to a heritage place, building, item or object;
- create the potential to adversely affect views to and from the heritage place, building, item or object;
- obscure or destroy any pattern of historic subdivision, historical context, landscape setting or the scale and consistency of the urban fabric relating to the local heritage place.

PO40

No acceptable outcome provided.

Reconfiguring a lot retains significant trees and incorporates them into the subdivision design, development layout and provision of infrastructure.

High voltage electricity line buffer (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

Note - the identification of a development footprint will assist in demonstrating compliance with the following performance standards.

PO41	No acceptable outcome provided.
New lots provide a development footprint outside of the buffer.	
PO42	AO42
The creation of new lots does not compromise or adversely impact upon the efficiency and integrity of supply.	No new lots are created within the buffer area.
PO43	AO43
The creation of new lots does not compromise or adversely impact upon access to the supply line for any required maintenance or upgrading work.	No new lots are created within the buffer area.
PO44	No acceptable outcome provided.
Boundary realignments:	
i. do not result in the creation of additional building development opportunities within the buffer;	
ii. result in the reduction of building development opportunities within the buffer.	

Landfill buffer (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

Note - The identification of a development footprint will assist in demonstrating compliance with the following performance criteria.

PO45 Lots provide a development footprint outside of the buffer.		No acceptable outcome provided.
PO46		No acceptable outcome provided.
Boundary realig	nments:	
	ult in the creation of additional building ent opportunities within the buffer;	
	he reduction of building development ies within the buffer.	

Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)

Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.

PO47	No acceptable outcome provided.
Development:	The decopage of the control of the c
 a. minimises the risk to persons from overland flow; b. does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure. 	
PO48	AO48
 a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment; b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow 	Development ensures that any buildings are not located in an Overland flow path area. Note: A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding property.
Development does not: a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level; b. increase the potential for flood damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure. Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	No acceptable outcome provided.
PO50 Development ensures that overland flow is not conveyed from a road or public open space onto a private lot, unless the development is in a Rural zone.	Development ensures that overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot, unless the development is in the Rural zone.
PO51	AO51.1

Development ensures that Council and inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment flows and are able to be easily maintained.

Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.

Note - Reporting to be prepared in accordance with Planning scheme policy - Flood hazard, Coastal hazard and Overland flow

Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:

- Urban area Level III; a.
- b. Rural area – N/A;
- Industrial area Level V: C.
- d. Commercial area - Level V

AO51.2

Development ensures that all Council and allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.

PO52

Development protects the conveyance of overland flow such that easements for drainage purposes are provided over:

- a stormwater pipe if the nominal pipe diameter exceeds 300mm:
- an overland flow path where it crosses more than one b. property; and
- inter-allotment drainage infrastructure. C.

Note - Refer to Planning scheme policy - Integrated design for details and examples.

Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.

No acceptable outcome provided

Additional criteria for development for a Park (57)

PO53

Development for a Park⁽⁵⁷⁾ ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:

- public benefit and enjoyment is maximised; a.
- b. impacts on the asset life and integrity of park structures is minimised:
- maintenance and replacement costs are minimised.

AO53

Development for a Park ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy -Integrated Design.

Riparian and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the following assessment criteria apply)

Note - - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

PO54

Lots are designed to:

- minimise the extent of encroachment into the riparian and wetland setback;
- ensure the protection of wildlife corridors and b. connectivity;
- reduce the impact on fauna habitats; C.
- d. minimise edge effects;
- ensure an appropriate extent of public access to e. waterways and wetlands.

AO54

Reconfiguring a lot ensures that:

- no new lots are created within a riparian and wetland setback;
- new public roads are located between the b. riparian and wetland setback and the proposed new lots.


Note - Riparian and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

Wastewater treatment plant buffer (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

Note - The identification of a development footprint will assist in demonstrating compliance with the following performance criteria.

PO5	5	No acceptable outcome provided.
New	lots provide a development footprint outside of the buffer.	5
PO5	6	No acceptable outcome provided.
Bour	ndary realignments:	
i.	do not result in the creation of additional building development opportunities within the buffer;	
ii.	results in the reduction of building development opportunities within the buffer.	

Figure 1 - Dakabin

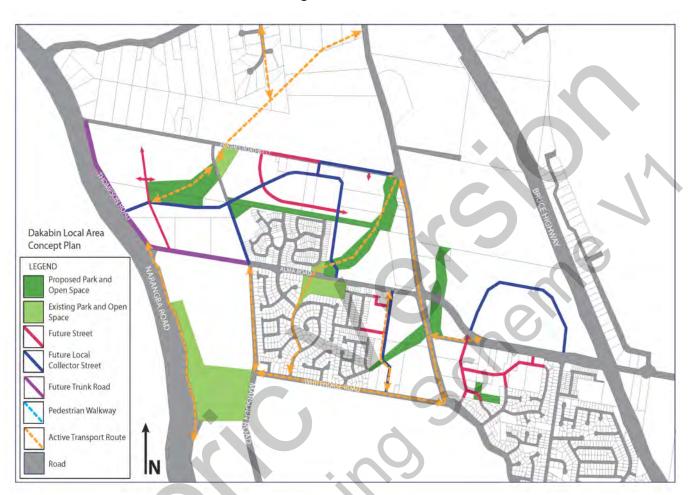

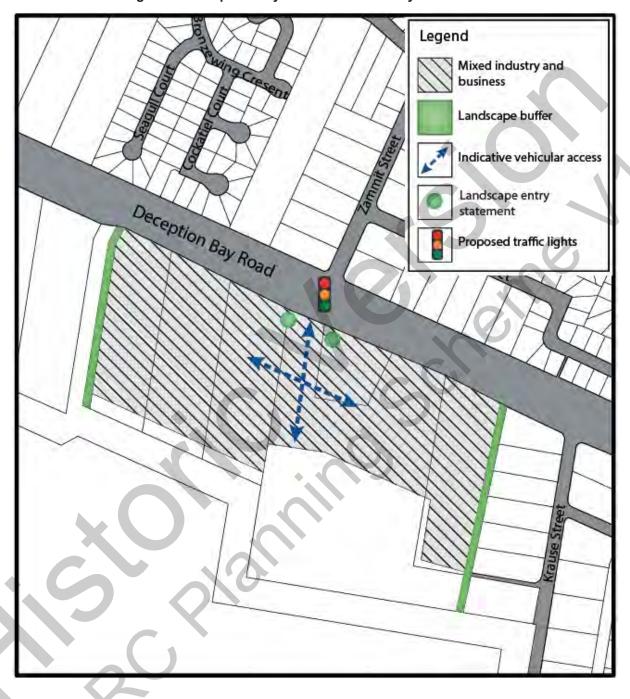


Figure 2 - Deception Bay Road Mixed Industry and Business