# 6.2.3 Emerging community zone code

# 6.2.3.1 Application - Emerging community zone

This code applies to assessing development in the Emerging community zone, if:

- self-assessable or assessable development where this code is an applicable code identified in the assessment 1. criteria column of a table of assessment (Part 5);
- 2. impact assessable development (Part 5).

When using this code, reference should be made to section 5.3.2 and, where applicable, section 5.3.3 located in Part 5.

For self-assessable or assessable development for this Code Part 6.2.3:

- Part A of the code applies to self-assessable development in the 6.2.3.1 'Interim precinct' 1.
- Part B of the code applies to assessable development in the 6.2.3.1 'Interim precinct' 2.
- Part C of the code applies to self-assessable interim development on a developable lot in the 6.2.3.2.1 3. 'Developable lots':
- 4. Part D of the code applies to assessable, interim development on a developable lot in the 6.2.3.2.1 'Developable lots';
- Part E of the code applies to self-assessable, on a developed lot in the 6.2.3.2.2 'Developed lots'; 5.
- Part F of the code applies to assessable, on a developed lot in the 6.2.3.2.2 'Developed lots'. 6.

# 6.2.3.2 Purpose - Emerging community zone

- 1. The purpose of the Emerging community zone code is to:
  - identify land that is suitable for urban purposes and conserve land that may be suitable for urban a. development in the future;
  - b. manage the timely conversion of non-urban land to urban purposes;
  - prevent or discourage development that is likely to compromise appropriate longer term land use.
- 2. The Emerging community zone has 2 precincts which have the following purpose;
  - The Interim precinct is to identify and conserve land that may be suitable for urban development in the a. future, allowing interim uses that will not compromise the best longer term use of the land pending further investigation.
  - The Transition precinct is to: b.
    - i. identify and conserve land that may be suitable for urban development in the future, allowing interim uses that will not compromise the best longer term use of the land;
    - provide mechanisms to promote and implement an appropriate mix of dwelling types, consistent with a next generation neighbourhood across the transition precinct once this land is developed and serviced with all local government networks including water and sewer and is suitable for urban development.

Once serviced by all local government networks, including water and sewer the Transition precinct is to provide a mix of dwelling types to support densities that are moderately higher than traditional suburban areas. Housing forms include predominantly detached dwellings on a variety of lot sizes with a greater range of attached dwellings and low to medium rise apartment buildings. These areas will have convenient access to centres, community facilities and higher frequency public transport.

The Emerging community zone seeks to implement the policy direction set in Part 3, Strategic Framework. 3.

# 6.2.3.1 Interim precinct

# 6.2.3.1.1 Purpose - Interim precinct

- The purpose of the Emerging community zone Interim precinct will be achieved through the following overall outcomes:
  - a. Development is to maintain a semi-rural character until such time as infrastructure is delivered and relevant site specific constraints are resolved.
  - b. Development will consist of interim uses on large lots.
  - Interim uses are appropriate in this precinct where they: C.
    - i. would be compatible with the existing semi-rural character;
    - would not prejudice or delay the development of the site and adjoining areas for urban purposes; ii.
    - iii. are low intensity in nature and characterised by low investment in buildings and infrastructure relative to the value of the site.
  - Residential activities consist of detached dwelling houses (22) or caretaker's accommodation (10), predominantly d. on large lots.
  - The character and scale of dwelling houses (22) are compatible with the intended character for the precinct. e.
  - Secondary dwellings associated with a principal dwelling, remain subordinate and ancillary to the principal f. dwelling to retain the low density, low intensity, residential form of a dwelling house<sup>(22)</sup>.
  - Garages, car ports and domestic outbuildings remain subordinate and ancillary to the principal dwelling g. and are located and designed to reduce amenity impacts on the streetscape and adjoining properties.
  - Dwelling houses<sup>(22)</sup> are designed to add visual interest and contribute to an attractive streetscape and h. public realm.
  - Dwelling houses (22) are provided with infrastructure and services at a level suitable for the area as a interim i. precinct.
  - Dwelling houses<sup>(22)</sup> are responsive to the lot shape, dimensions and topographic features.
  - Non-residential uses do not result in adverse or nuisance impacts on adjoining properties or the wider environment. Any adverse or nuisance impacts are contained and internalised to the site through location, design, operation and on-site management practices.
  - General works associated with the development achieves the following: Ι.
    - a high standard of electricity, telecommunications, roads, sewerage, water supply and street lighting services is provided to new developments to meet the current and future needs of users of the site;
    - the development manages stormwater to:
      - ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
      - В. prevent stormwater contamination and the release of pollutants;
      - C. maintain or improve the structure and condition of drainage lines and riparian areas;
      - avoid off-site adverse impacts from stormwater.
    - the development does not result in unacceptable impacts on the capacity on the capacity and safety of the external road network;
    - the development ensures the safety, efficiency and useability of access ways and parking areas; iv.
    - site works including earthworks are managed to be safe and have minimal impacts on adjoining or ٧. adjacent premises, the streetscape or the environment.

- Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- Noise generating uses are designed, sited and constructed to minimise the transmission of noise to n. appropriate levels and do not cause environmental harm or nuisance.
- Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels 0. of noise.
- Development in a Water supply buffer is undertaken in a manner which contributes to the maintenance p. and enhancement where possible of water quality to protect the drinking water and aquatic ecosystem environmental values in those catchments.
- Development avoids areas subject to constraint, limitation, or environmental value. Where development q. cannot avoid these identified areas, it responds by:
  - adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
  - ensuring no further instability, erosion or degradation of the land, water or soil resource; ii.
  - when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Segwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
  - iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
    - the provision of replacement, restoration, rehabilitation planting and landscaping;
    - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
    - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
  - protecting native species and protecting and enhancing species habitat; V.
  - protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
  - establishing effective separation distances, buffers and mitigation measures associated with identified vii. infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
  - establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation viii. and significant fauna habitat;
  - ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
  - ensuring effective and efficient disaster management response and recovery capabilities;
  - where located in an overland flow path: Χİ.
    - development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
    - development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
    - development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
    - development directly, indirectly and cumulatively avoid an increase in the severity of overland D. flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- Development in the Interim precinct includes one or more of the following: r.

- Dwelling House<sup>(22)</sup> Rural Industry<sup>(70)</sup> - if on a Animal husbandry<sup>(4)</sup> lot greater than 1ha and Animal keeping<sup>(5)</sup> - where **Emerging services** having a GFA of 150m<sup>2</sup> or not for a cattery or kennel less Environment facility<sup>(26)</sup> Sales office<sup>(72)</sup> Caretaker's accommodation<sup>(10)</sup> Home based business (35) Veterinary services<sup>(87)</sup> Cropping<sup>(19)</sup> - if not forestry for wood production Intensive horticulture (40) - if Wholesale nursery<sup>(89)</sup> on a lot greater than 1ha Roadside stall (68)
- Development in the Interim precinct does not include any of the following: S.

4	•	Adult store <sup>(1)</sup>	•	Health care services <sup>(33)</sup>	•	Port services <sup>(61)</sup>
		Agricultural supplies store <sup>(2)</sup>	•	High impact industry <sup>(34)</sup>	•	Relocatable home park <sup>(62)</sup>
		Air services <sup>(3)</sup>	•	Hospital <sup>(36)</sup>		Renewable energy facility <sup>(63)</sup>
•		Animal keeping <sup>(5)</sup> - if for a cattery or kennel		Hotel <sup>(37)</sup>		Research and technology
		Aquaculture <sup>(6)</sup>		Indoor sport and recreation <sup>(38)</sup>		industry <sup>(64)</sup>
•		Bar <sup>(7)</sup>		Intensive animal industry <sup>(39)</sup>	•	Residential care facility <sup>(65)</sup>
		Brothel <sup>(8)</sup>	•	Low impact industry <sup>(42)</sup>	•	Resort complex <sup>(66)</sup>
		Bulk landscape supplies <sup>(9)</sup>	•	Major sport, recreation and	•	Retirement facility <sup>(67)</sup>
		Car wash <sup>(11)</sup>		entertainment facility <sup>(44)</sup>	•	Rooming accommodation <sup>(69)</sup>
		Cemetery <sup>(12)</sup>		Marine industry <sup>(45)</sup> Market <sup>(46)</sup>	•	Rural workers' accommodation <sup>(71)</sup>
		Community residence <sup>(16)</sup> Crematorium <sup>(18)</sup>	•	Medium impact industry <sup>(47)</sup>	•	Service industry <sup>(73)</sup>
		Cropping <sup>(19)</sup> - if forestry for	•	Motor sport facility <sup>(48)</sup>	•	Service station <sup>(74)</sup>
.   "		wood production	•	Multiple dwelling <sup>(49)</sup>	•	Shop <sup>(75)</sup>
4		Detention facility <sup>(20)</sup>	•	Nature-based tourism <sup>(50)</sup>	•	Shopping centre <sup>(76)</sup>
1		Dual occupancy <sup>(21)</sup>	•	Nightclub entertainment facility <sup>(51)</sup>	•	Short-term accommodation <sup>(77)</sup>
*	7	Dwelling unit <sup>(23)</sup>		Non-resident workforce		Showroom <sup>(78)</sup>
1		Extractive industry <sup>(27)</sup>		accommodation <sup>(52)</sup>		Special industry <sup>(79)</sup>
•		Food and drink outlet <sup>(28)</sup>	•	Office <sup>(53)</sup>	•	Theatre <sup>(82)</sup>
•		Function facility <sup>(29)</sup>	•	Outdoor sales <sup>(54)</sup>	•	
		Funeral parlour <sup>(30)</sup>	•	Outdoor sport and recreation <sup>(55)</sup>	•	Tourist attraction <sup>(83)</sup> Tourist park <sup>(84)</sup>

Garden centre <sup>(31)</sup>	•	Parking station <sup>(58)</sup>	•	Transport depot <sup>(85)</sup>
<ul> <li>Hardware trade and supplies<sup>(32)</sup></li> </ul>	•	Permanent plantation <sup>(59)</sup>	•	Warehouse <sup>(88)</sup>

t. Development not listed in the tables above may be considered on its merits and where it reflects and support the outcomes of the zone.

#### 6.2.3.1.2 Criteria for assessment

To determine if development is self-assessable, development must comply with the self-assessable acceptable outcomes set out in Part A, Table 6.2.3.1.1. Where development does not meet a self-assessable acceptable outcome (SAO) of the relevant criteria Part A Table 6.2.3.1.1, assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a SAO is not met, and is therefore limited to the subject matter of the SAOs that are not complied with. To remove any doubt, for those SAOs that are complied with, there is no need for assessment against the corresponding PO.

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO1	PO4
SAO2	PO6
SAO3	PO5
SAO4	PO7
SAO5	PO8
SA06	PO9
SA07	PO10-PO13
SAO8	PO10-PO13
SA09	PO14
SAO10	PO15
SAO11	PO18
SAO12	PO19-PO24
SAO13	PO27
SA014	PO27
SAO15	PO29
SAO16	PO33
SAO17	PO35
SAO18	PO37
SAO19	PO38
SAO20	PO35
SAO21	PO39
SAO22	PO39-PO44

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO23	PO41
SAO24	PO45
SAO25	PO45
SAO26	PO45
SAO27	PO46
SAO28	PO47
SAO29	PO48
SAO30	PO48
SAO31	PO48
SAO32	PO49
SAO33	PO50
SAO34	PO50
SAO35	PO50
SAO36	PO51
SAO37	PO50
SAO38	PO50
SAO39	PO50
SAO40	PO52
SAO41	PO52
SAO42	PO53
SAO43	PO53
SAO44	PO54
SAO45	PO58
SAO46	PO58
SAO47	PO58
SAO48	PO58
SAO49	PO58
SAO50	PO60
SAO51	PO62
SAO52	PO63
SAO53	PO64
SAO54	PO64
SAO55	PO64
SAO56	PO64

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO57	PO66
SAO58	PO70
SAO59	PO70
SAO60	PO71
SAO61	PO72
SAO62	PO73
SAO63	PO74-PO85
SAO64	PO74-PO85
SAO65	PO86
SAO66	PO87
SAO67	PO87
SAO68	PO88
SAO69	PO88
SAO70	PO91
SAO71	PO91
SAO72	PO91
SAO73	PO93
SA074	PO94
SAO75	PO95
SAO76	PO96-PO98, PO100-PO102
SA077	PO96-PO98, PO100-PO102
SAO78	PO96-PO98
SAO79	PO99
SAO80	PO103
SAO81	PO104

Part A — Criteria for self-assessable development - Interim precinct

Table 6.2.3.1.1 Self-assessable development - Interim precinct

Self-asses	ssable acceptable outcomes
	General criteria
Building h	neight
SAO1	Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m.
Setbacks	

# **SAO2**

Buildings and structures associated with the following uses are setback from all lot boundaries as follows:

- Animal husbandry (4) (buildings only) 10m; a.
- Cropping<sup>(19)</sup> (buildings only) 10m; b.
- Animal keeping<sup>(5)</sup>, excluding catteries and kennels 20m; C.
- Cropping<sup>(19)</sup> (buildings only) 10m; d.
- Intensive horticulture (40) 10m; e.
- Rural Industry<sup>(70)</sup> 20m; f.
- Wholesale nursery (89) 10m; g.
- Veterinary services (87) 10m. h.

#### SAO3

Unless specified elsewhere in the zone code, all other buildings and structures are setback:

- a. Road frontage - 6m minimum;
- Side and Rear 4.5m minimum. b.

Note - For a Dwelling house (22) where located in a bushfire hazard area (see Overlay map - Bushfire hazard) a greater setback may be required. See values and constraints criteria Bushfire hazard.

Note - This provision does not apply where a development footprint exists for a lot.

# **Development footprint**

# **SAO4**

Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within that development footprint.

# **Building on sloping land**

# **SA05**

Building and site design on slopes between 10% and 15%:

- use split-level, multiple-slab, pier or pole construction; a.
- avoid single-plane slabs and benching; and b.
- ensure the height of any cut or fill, whether retained or not, does not exceed 900mm.

Note - this does not apply to outbuildings or building work.

# Lighting

#### **SA06**

Artificial lighting is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of the Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.

Note - "Curfewed hours" are taken to be those between 10pm and 7am the following day.

# **Hazardous Chemicals SA07** All development that involves the storage or handling of hazardous chemicals listed in Schedule 9, Table 9.0.1 Hazardous Chemicals Self-Assessable Thresholds complies with Schedule 9, Table 9.0.3 Hazardous Chemicals Self-Assessable Criteria. SAO8 Development does not involve the storage or handling of hazardous chemicals listed in Schedule 9, Table 9.0.2 Hazardous Chemicals Assessable Thresholds. Waste treatment **SA09** All concentrated animal use areas (e.g. sheds, pens, holding yards, stables) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment areas. Car parking On-site car parking is provided in accordance with Schedule 7 - Car parking. **SAO10** Clearing of habitat trees where not located in the Environmental areas overlay map **SA011** Development does not result in the damaging, destroyed or clearing of a habitat tree. This does not apply to: Clearing of a habitat tree located within an approved development footprint; a. Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary h. for emergency access or immediately required in response to an accident or emergency; Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to C. serious personal injury or damage to infrastructure; Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary d. fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence; Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes; Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council; Clearing of a habitat tree associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens; h. Native forest practice where exempt under Part 1, 1.7.7 Exempt development. Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridors. Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A. Works criteria **Utilities**

**SAO12** 


h

Where available, the development is connected to:

an existing reticulated electricity supply; telecommunications and broadband;

# Moreton Bay Regional Council Planning Scheme Commenced 1 February 2016 1153

	c. reticulated sewerage;
	d. reticulated water;
	e. constructed and dedicated road.
Access	
SAO13	Any new or changes to existing site access and driveways are designed and located in accordance with:
	<ul> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul>
SAO14	Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
Stormwate	er
SAO15	Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy – Integrated design.
	Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.
Site works	s and construction management
SAO16	Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design.
SA017	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
SAO18	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.
SAO19	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
SAO20	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
Earthwork	is
SAO21	The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures
SAO22	The total of all cut and fill on-site does not exceed 900mm in height.

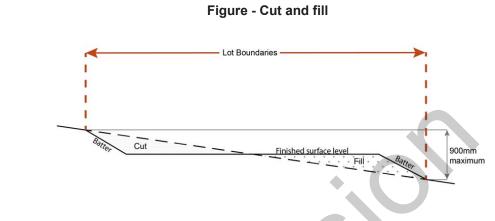

Note - This is site earthworks not building work.

# **SAO23**

Filling or excavation does not result in:

- a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;
- an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.

Note - Public sector entity is defined in the Sustainable Planning Act 2009

#### Fire services

Note - The provisions under this heading only apply if:

- the development is for, or incorporates:
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park (84) with accommodation in the form of caravans or tents; or ii.

  - material change of use for outdoor sales (54), outdoor processing or outdoor storage where involving combustible materials.

#### AND

- none of the following exceptions apply
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

# **SAO24**

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations.

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):

in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks (84) or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;

- in regard to the general locational requirements for fire hydrants Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix b. B of AS 2419.1 (2005);
- C. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception
  - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external i. walls of those buildings;
  - for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans; ii
  - for outdoor sales  $\binom{(54)}{r}$ , processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales (54), outdoor processing and outdoor storage facilities; and
- in regard to fire hydrant accessibility and clearance requirements Part 3.5 and where applicable, Part 3.

#### **SAO25**

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- an unobstructed width of no less than 3.5m; a.
- an unobstructed height of no less than 4.8m; b.
- C. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

# **SAO26**

On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.

# **SAO27**

For development that contains on-site fire hydrants external to buildings:

- those external hydrants can be seen from the vehicular entry point to the site; or
- a sign identifying the following is provided at the vehicular entry point to the site: h
  - the overall layout of the development (to scale);
  - internal road names (where used);
  - iii. all communal facilities (where provided);
  - the reception area and on-site manager's office (where provided);
  - external hydrants and hydrant booster points;
  - physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.

Note - The sign prescribed above, and the graphics used are to be:

- a in a form:
- of a size:
- illuminated to a level: C.

which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.

#### **SAO28**

For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note Fire hydrant indication system produced by the Queensland Department of Transport and Main Roads.

Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.

# Use specific criteria

# Dwelling house<sup>(22)</sup> - Secondary dwelling

# **SAO29**

The siting and design of dwellings ensures that the secondary dwelling is:

- a. not located in front of the primary dwelling;
- annexed to (adjoining, below or above) or located within 50.0m of the primary dwelling (excluding b. domestic outbuildings);
- accessed from the existing driveway giving access to the dwelling house (22)

# **SAO30**

No more than 1 secondary dwelling is located on an allotment.

**SAO31** 

The GFA of the secondary dwelling does not exceed 100m<sup>2</sup> GFA

# Dwelling house<sup>(22)</sup> - Domestic outbuildings

# **SAO32**

Domestic outbuildings:

have a maximum GFA as outlined below:

Size of lot	Max. GFA
Less than 600m <sup>2</sup>	50m²
600m² - 1000m²	70m²
>1000m² – 2000m²	80m²
Greater than 2000m <sup>2</sup>	150m²

Note - Building Work is excluded from the GFA calculations.

- have a maximum building height of 4m;
- are located behind the main building line and not within primary or secondary frontage setbacks.

Home bas	sed business (35)
SAO33	Home based business(s) <sup>(35)</sup> are fully contained within a dwelling or on-site structure, except for a home based child care facility.
SAO34	The maximum total use area is 100m <sup>2</sup> .
SAO35	Up to 2 additional non-residents, either employees or customers, are permitted on the site at any one time, except where involving the use of heavy vehicles, where no employees are permitted.
	Note - This provision does not apply to Bed and Breakfast or farmstay business.

SAO36	Hours of operation to be restricted to 8:00am to 6:00pm Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday or Anzac Day, except for:
	a. bed and breakfast or farmstay business which may operate on a 24 hour basis;
	b. office or administrative activities that do not generate non-residents visiting the site, such as book keeping and computer work.
SAO37	The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:
	a. 1 heavy vehicle;
	b. 1 trailer;
	c. Up to 3 motor vehicles.
	Note - The car parking provision associated with the dwelling house (22) is in addition to this requirement.
	Note - The number of motor vehicles stated is in addition to motor vehicles associated with a dwelling house (22).
SAO38	Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.
	Note - Planting for screening is to have a minimum depth of 3m.
SAO39	Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.
SAO40	The use does not involve vehicle servicing or major repairs, including spray painting or panel beating.
	Note - Vehicle servicing excludes general maintenance of a vehicle such as, but not limited to, changing engine fluids, filters and parts such as batteries and plugs.
SAO41	The use is not an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection</i> Regulation 2008.
SAO42	Only goods grown, produced or manufactured on-site are sold from the site.
SAO43	Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from boundary of the site.
SA044	For bed and breakfast and farmstays:
	a. overnight accommodation is provided in the dwelling house <sup>(22)</sup> of the accommodation operator.
	b. maximum 4 bedrooms are provided for a maximum of 10 guests.
	c. meals are served to paying guests only.
	d. rooms do not contain food preparation facilities.
	Note - SAO36 - SAO46 above do not apply to home based business <sup>(35)</sup>

Roadside s	stalls <sup>(68)</sup>
SAO45	No more than one roadside stall <sup>(68)</sup> per property.
SAO46	Goods offered for sale are only goods grown, produced or manufactured on the site.
SAO47	The maximum area associated with a roadside stall <sup>(68)</sup> , including any larger separate items displayed for sale, does not exceed 20m².
SAO48	Car parking for 2 vehicles is provided off the road carriage and located on the property.
SAO49	The roadside stall <sup>(68)</sup> is located no closer than 100m from an intersection.
Sales offic	e <sup>(72)</sup>
SAO50	A sales office <sup>(72)</sup> is located on the site for no longer than 2 years.
Editor's note that will not c	unications facility <sup>(81)</sup> - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic uman Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
SAO51	A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
SAO52	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
SAO53	<ul> <li>Equipment shelters and associated structures are located:</li> <li>a. directly beside the existing equipment shelter and associated structures;</li> <li>b. behind the main building line;</li> <li>c. further away from the frontage than the existing equipment shelter and associated structures;</li> <li>d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.</li> </ul>
SAO54	Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.
SAO55	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
SAO56	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.  Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with Planning scheme policy - Integrated design.
SAO57	All equipment comprising the telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.
	Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.


# Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - For the purposes of section 12 of the Building Regulation 2006, land identified as very high potential bushfire intensity, high potential bushfire intensity, medium potential bushfire intensity or potential impact buffer on the Bushfire hazard overlay map is the 'designated bushfire hazard area'. AS 3959-2009 Construction of buildings in bushfire hazard areas applies within these areas.

#### **SAO58**

- Building and structures are:
  - not located on a ridgeline
  - not located on land with a slope greater than 15% (see Overlay map Landslide hazard) ii.
- Dwellings are located on east to south facing slopes b.

House Sites Numbered in Order of Degree of Fire Safety

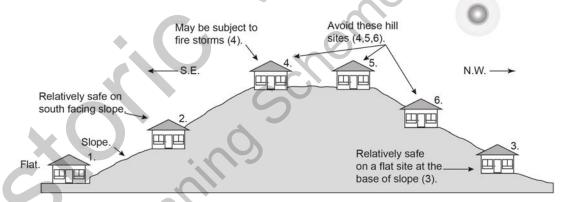

(1 being the safest, 6 being the most hazardous.) From Bushfire Prone Areas: Siting and Design of Residential Buildings (1997), Queensland Department of Local Government and Planning, and Queensland Fire & Rescue Service.

#### **SAO59**

Buildings and structures have contained within the site:

- a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- b. a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- a separation of no less than 10m between a fire fighting water supply extraction point and any C. classified vegetation, buildings and other roofed structures;
- d. an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and
- an access path suitable for use by a standard fire fighting appliance having a formed width of at e. least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%:

- to, and around, each building and other roofed structure; and
- ii. to each fire fighting water supply extraction point.

Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS 3959.

#### **SAO60**

The length of driveway:

- to a public road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road;
- b. has a maximum gradient no greater than 12.5%;
- have a minimum width of 3.5m; C.
- accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency d. Services' Fire Hydrant and Vehicle Access Guideline.

#### **SAO61**

- A reticulated water supply is provided by a distributer retailer for the area or, where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m of buildings and structures.
- b. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.
- Where a tank is the nominated on-site fire fighting water storage source, it includes:
  - a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank:
  - fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.

#### **SAO62**

Development does not involve the manufacture or storage of hazardous chemicals.

# Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note - The following are exempt from the native clearing provisions of this planning scheme:

- Clearing of native vegetation located within an approved development footprint;
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately b. required in response to an accident or emergency;
- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage C. to infrastructure;
- Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width d. either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping g. land, windbreaks, lawns or created gardens;

- Grazing of native pasture by stock; h
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development.

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.

#### **SAO63**

Where no suitable land cleared of native vegetation exists, clearing of native vegetation in High Value Area or Value Offset Area is for the purpose of a new dwelling house<sup>(22)</sup> and all associated facilities\* or an extension to an existing dwelling house<sup>(22)</sup> only, and comprises an area no greater than 1500m<sup>2</sup>.

Note - \*All associated facilities includes: on-site wastewater treatment, all areas of disturbance, on-site parking, access and manoeuvring areas.

Editor's note - See in heading above for other uses exempt from native vegetation clearing requirements.

Editor's note - Where self-assessable vegetation clearance is being undertaken, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:

- co-locating all associated activities, infrastructure and access strips;
- ii be the least valued area of koala habitat on the site;
- iii minimise the footprint of the development envelope area;
- minimise edge effects to areas external to the development envelope;
- location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy - Environmental areas;
- sufficient area between the development and koala habitat trees to achieve their long-term viability.

Editor's note - Where self-assessable vegetation clearing is being undertaken, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.

#### **SAO64**

No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.

This does not apply to the following:

- Clearing of native vegetation located within an approved development footprint;
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;

- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining g. existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development. i.

# Extractive resources transport routes (refer Overlay map - Extractive resources (transport route and buffer) to determine if the following assessment criteria apply)

#### **SAO65**

The following uses are not located within the 100m wide transport route buffer:

- Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;
- Community residence<sup>(16)</sup>: b.
- Dual occupancy<sup>(21)</sup>: C.
- Dwelling house; (22) d.
- Dwelling unit<sup>(23)</sup>: e.
- Hospital (36): f.
- Rooming accommodation (69) g.
- Multiple dwelling<sup>(49)</sup>; h.
- Non-resident workforce accommodation (52) i.
- Relocatable home park (62). j.
- Residential care facility (65): k.
- Resort complex (66): I.
- Retirement facility (67) m.
- Rural workers' accommodation<sup>(71)</sup>: n.
- Short-term accommodation<sup>(77)</sup>; Ο.
- Tourist park (84). p.

#### **SAO66**

Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive resources transport route.

# SA067

A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.

# Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

# **SAO68**

Development is for the preservation, maintenance, repair and restoration of the site, object or building.

This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.

Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions

# **SAO69**

A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.

	This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.
SAO70	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.
SA071	The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character:
	<ul> <li>a. construction of any building;</li> <li>b. laying of overhead or underground services;</li> <li>c. any sealing, paving, soil compaction;</li> <li>d. any alteration of more than 75mm to the ground level prior to work commencing.</li> </ul>
SA072	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.
Landslide apply)	e hazard (refer Overlay map - Landslide hazard to determine if the following assessment criteria
SA073	Development does not:
	a. involve earthworks exceeding 50m³;
	b. involve cut and fill having a height greater than 600mm;
	c. involve any retaining wall having a height greater than 600mm;
	d. redirect or alter the existing flow of surface or groundwater.
SA074	Buildings, excluding domestic outbuildings:
	<ul><li>a. are split-level, multiple-slab, pier or pole construction;</li><li>b. are not single plane slab on ground.</li></ul>
SA075	a. are split-level, multiple-slab, pier or pole construction;
•	<ul><li>a. are split-level, multiple-slab, pier or pole construction;</li><li>b. are not single plane slab on ground.</li></ul>
Overland	<ul> <li>a. are split-level, multiple-slab, pier or pole construction;</li> <li>b. are not single plane slab on ground.</li> </ul> Development does not involve the manufacture, handling or storage of hazardous chemicals.
Overland apply)	<ul> <li>a. are split-level, multiple-slab, pier or pole construction;</li> <li>b. are not single plane slab on ground.</li> <li>Development does not involve the manufacture, handling or storage of hazardous chemicals.</li> <li>flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria</li> <li>Development for a material change of use or building work does not involve the construction of a building</li> </ul>
Overland apply) SAO76	<ul> <li>a. are split-level, multiple-slab, pier or pole construction;</li> <li>b. are not single plane slab on ground.</li> <li>Development does not involve the manufacture, handling or storage of hazardous chemicals.</li> <li>flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria</li> <li>Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.</li> <li>Development for a material change of use or operational work does not impede the flow of flood waters</li> </ul>
Overland apply) SAO76	<ul> <li>a. are split-level, multiple-slab, pier or pole construction;</li> <li>b. are not single plane slab on ground.</li> <li>Development does not involve the manufacture, handling or storage of hazardous chemicals.</li> <li>flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria</li> <li>Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.</li> <li>Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development</li> </ul>
Overland apply) SAO76	<ul> <li>a. are split-level, multiple-slab, pier or pole construction;</li> <li>b. are not single plane slab on ground.</li> <li>Development does not involve the manufacture, handling or storage of hazardous chemicals.</li> <li>flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria</li> <li>Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.</li> <li>Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland</li> </ul>

#### **SAO80**

Development for a material change of use or building work for a Park<sup>(57)</sup> ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated desian.

# Riparian and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the following assessment criteria apply)

Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

#### **SAO81**

No development is to occur within:

- 50m from top of bank for W1 waterway and drainage line a.
- 30m from top of bank for W2 waterway and drainage line b.
- 20m from top of bank for W3 waterway and drainage line C.
- 100m from the edge of a Ramsar wetland, 50m from all other wetlands d.

Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations

Note - The minimum setback distance applies to the each side of waterway.

# Part B — Criteria for assessable development - Interim precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part B, Table 6.2.3.1.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

Table 6.2.3.1.2 Assessable development - Interim precinct

Performance outcomes		Acceptable outcomes	
General criteria			
Interim uses			
PO'		No acceptable outcome provided.	
Interim uses:			
a.	do not fragment or alienate the land or result in the loss of land for future urban purposes;		
b.	result in minimal investment;		
C.	do not prejudice or delay the use of the land for urban purposes.		

#### P<sub>0</sub>2

Interim uses:

- are adequately serviced with necessary infrastructure to meet on-site needs and requirements:
- b. are of a size and scale that maintains the low density, low intensity and open area landscape character anticipated in the interim precinct;
- are designed, located and operated in a manner C. that avoids nuisance impacts on adjoining properties;
- requires minimal filling or excavation. Where d. this occurs, visual impacts are reduced through screening;
- are not visually dominant from the streetscape e. or adjoining properties;
- utilise materials, finishes and colours that are consistent with existing semi-rural environment.

No acceptable outcome provided.

# Site density

#### PO<sub>3</sub>

Development does not result in residential density exceeding more than one dwelling house (22) per lot. No acceptable outcome provided

# **Building height**

# **PO4**

The height of buildings and structures:

- is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct;
- b. does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by adjoining premises.

# AO4.1

Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m.

# Setbacks

#### **PO5**

Buildings and structures are setback to:

be consistent with the semi-rural character of a. the area:

# AO5

Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows:

Front boundary – 6m;

- b. result in development not being visually dominant or overbearing with respect on adjoining properties;
- C. maintain the privacy of adjoining.
- b. Side boundary - 4.5m;
- C. Rear boundary – 4.5m.

Note - This provision does not apply where a development footprint exists for a lot.

#### **PO6**

Non-residential uses are setback to ensures:

- chemical spray, fumes, odour, dust are a. contained on-site:
- b. unreasonable nuisance or annoyance resulting from, but not limited to; noise, storage of materials and rubbish does not adversely impact upon land users adjacent to, or within the general vicinity; and
- buildings and other structures are consistent with the open area, low density, low built form character and amenity associated with the interim precinct.

#### **A06**

The following uses and associated buildings are setback from all property boundaries as follows:

- Animal husbandry (4) (buildings only) 10m; a.
- Cropping<sup>(19)</sup> (buildings only) 10m; b.
- Animal keeping<sup>(5)</sup>, excluding catteries and kennels -C. 20m;
- Cropping (19) (buildings only) d.
- Intensive horticulture (40) 10m; e.
- Rural Industry<sup>(70)</sup> 20m: f.
- Wholesale nursery<sup>(89)</sup> 10m; g.
- Veterinary services (87) 10m. h.

# **Development footprint**

### **PO7**

Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within that development footprint.

No acceptable outcome provided.

# **Building on sloping land**

# **PO8**

Building and site design on slopes between 10% and 15% must:

- use split-level, multiple-slab, pier or pole a. construction;
- avoid single-plane slabs and benching; b.
- ensure the height of any cut or fill, whether C. retained or not, does not exceed 900mm;
- d. minimise any visual impact on the landscape character; and
- protect the amenity of adjoining properties. e.

No acceptable outcome provided.

# **Amenity**

# **PO9**

The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, light, chemicals and other environmental nuisances No acceptable outcome provided.

#### **Hazardous Chemicals**

Note - To assist in demonstrating compliance with the following performance outcomes, a Hazard Assessment Report may be required to be prepared and submitted by a suitably qualified person in accordance with 'State Planning Policy Guideline - Guidance on development involving hazardous chemicals'.

Note - Terms used in this section are defined in 'State Planning Policy Guideline - Guidance on development involving hazardous chemicals'.

# PO10

Off sites risks from foreseeable hazard scenarios involving hazardous chemicals are commensurate with the sensitivity of the surrounding land use zones.

# AO10.1

Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land uses as described below:

Dangerous Dose

- For any hazard scenario involving the release of gases or vapours:
  - AEGL2 (60minutes) or if not available ERPG2;
  - An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
- b. For any hazard scenario involving fire or explosion:
  - 7kPa overpressure;
  - 4.7kW/m2 heat radiation. ii.

If criteria AO1.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 0.5 x 10-6/year.

# AO10.2

Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below:

**Dangerous Dose** 

For any hazard scenario involving the release of gases or vapours:

	i. AEGL2 (60minutes) or if not available ERPG2;
	ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	b. For any hazard scenario involving fire or explosion:
	i. 7kPa overpressure;
	ii. 4.7kW/m2 heat radiation.
	If criteria AO1.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.
	AO10.3
	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below:
	Dangerous Dose
<b>.</b>	For any hazard scenario involving the release of gases or vapours:
	i. AEGL2 (60minutes) or if not available ERPG2;
	ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	b. For any hazard scenario involving fire or explosion:
	i. 14kPa overpressure;
	ii. 12.6kW/m2 heat radiation.
ORC X	If criteria AO1.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.
PO11	AO11
Buildings and package stores containing fire-risk hazardous chemicals are designed to detect the early stages of a fire situation and notify a designated person.	Buildings and package stores containing fire-risk hazardous chemicals are provided with 24 hour monitored fire detection system for early detection of a fire event.
PO12	AO12
	Storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) capable of containing a minimum of the total

Common storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) that are adequate to contain releases, including fire fighting media.

aggregate capacity of all packages plus the maximum operating capacity of any fire protection system for the storage area(s) over a minimum of 60 minutes.

#### **PO13**

Storage and handling areas, including manufacturing areas, containing hazardous chemicals in quantities greater than 2,500L or kg within a Local Government "flood hazard area" are located and designed in a manner to minimise the likelihood of inundation of flood waters from creeks, rivers, lakes or estuaries.

#### AO13.1

The base of any tank with a WC >2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively:

- bulk tanks are anchored so they cannot float i a. submerged or inundated by water; and
- tank openings not provided with a liquid tight seal, i.e. b. an atmospheric vent, are extended above the relevant flood height level.

# AO13.2

The lowest point of any storage area for packages

>2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively, package stores are provided with impervious bund walls or racking systems higher than the relevant flood height level.

#### Waste treatment

# **PO14**

Stormwater generated on-site is treated and disposed of in an acceptable manner to mitigate any impacts on soil, surface water or ground water quality. Development resulting in the degradation of soil, surface water or ground water quality is avoided.

# AO14

All concentrated animal use areas (e.g. Sheds, pens, holding yards, stables, kennels and other animal enclosures) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment areas.

#### Car parking

# PO15

Traffic generation, vehicle movement and on-site car parking associated with an activity:

- provides safe, convenient and accessible a. access for vehicles and pedestrians;
- b. provides safe and convenient on-site parking and manoeuvring to meet anticipated parking demand:

#### **AO15**

On-site car parking is provided in accordance with Schedule 7 - Car parking.

- is appropriate to the road classification and carrying capacity of the local network and able to meet the additional demands generated by the development; and
- d. does not result adverse impacts on the efficient and safe functioning of the road network.

Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.

# **Noise**

# **PO16**

Noise generating uses do not adversely affect existing or potential noise sensitive uses.

Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.

No acceptable outcome provided.

# **PO17**

Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:

- contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);
- b. maintaining the amenity of the streetscape.

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.

Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.

Development is designed to meet the criteria outlined in the Planning Scheme Policy - Noise.

# AO17.2

Noise attenuation structures (e.g. walls, barriers or fences):

- are not visible from an adjoining road or public area a. unless:
  - adjoining a motorway or rail line; or
  - adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.
- b. do not remove existing or prevent future active transport routes or connections to the street network;
- are located, constructed and landscaped in accordance C. with Planning scheme policy - Integrated design.

Note - Refer to Planning scheme policy - Integrated design for details and examples of noise attenuation structures.

Note - Refer to Overlay map - Active transport for future active transport routes.

# Clearing of habitat trees where not located within the Environmental areas overlay map

#### **PO18**

- a. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.
- Development does not result in the net loss of fauna habitat. Where development does result in the loss of a habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.
- Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner

Note: Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas

No acceptable outcome provided

# Works criteria

#### **Utilities**

# PO19

The development is connected to an existing reticulated electricity supply system approved by the relevant energy regulating authority.

# **AO19**

Development is connected to underground electricity.

# PO20

The development has access to telecommunications and broadband services in accordance with current standards.

# No acceptable outcome provided

# **PO21**

Where available the development is to safely connect to reticulated gas.

# No acceptable outcome provided

# **PO22**

The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk to public health.

#### AO22.1

Where in a sewered area, the development is connected to a reticulated sewerage network.

# AO22.2

Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.

Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater Code.

#### AO22.3

Trade waste is pre-treated on-site prior to discharging into the sewerage network.

# **PO23**

The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.

# AO23.1

Where in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is connected to the reticulated water supply system in accordance with the South East Queensland Water Supply and Sewerage Design and Construction Code and the relevant Water Service Association of Australia (WSAA) codes and standards.

# AO23.2

Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development.

#### **PO24**

The development is provided with constructed and dedicated road access.

No acceptable outcome provided

#### Access

#### **PO25**

Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.

No acceptable outcome provided

#### **PO26**

The layout of the development does not compromise:

- a. the development of the road network in the area:
- b. the function or safety of the road network;
- the capacity of the road network. C.

#### AO26.1

The development provides for the extension of the road network in the area in accordance with Council's road network planning.

#### AO26.2

Note - The road hierarchy is mapped on Overlay map - Road hierarchy.

The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.

#### AO26.3

The lot layout allows forward access to and from the site.

#### **PO27**

Safe access is provided for all vehicles required to access the site.

#### AO27.1

Site access and driveways are designed and located in accordance with:

- Where for a Council-controlled road, AS/NZS2890.1 section 3: or
- Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.

#### AO27.2

Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.

Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.

# AO27.3

Access driveways, manoeuvring areas and loading facilities provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements.

# **PO28**

Upgrade works (whether trunk or non-trunk) are provided where necessary to:

- ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;
- b. ensure the orderly and efficient continuation of the active transport network;
- ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.

Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome refer to Planning scheme policy - Integrated transport assessment for guidance on when an ITA is required. An ITA

No acceptable outcome provided

should be prepared in accordance with Planning scheme policy - Integrated transport assessment.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - The primary and secondary active transport network is mapped on Overlay map - Active transport.

Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:

- Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or
- Where the street is not established to an urban standard. prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.

Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.

#### **Stormwater**

#### **PO29**

Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.

Note - Refer to Planning scheme policy - Integrated design for details.

Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.

Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.

No acceptable outcome provided

#### **PO30**

Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.

Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may

No acceptable outcome provided

be required to demonstrate achievement of this performance outcome. **PO31** No acceptable outcome provided Stormwater quality management systems are designed and constructed to minimise the environmental impact of stormwater discharge on surface and underground receiving water quality and meet the design objectives in Tables A and B in Appendix 3 of the SPP. Note - A stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management. Site works and construction managment No acceptable outcome provided **PO32** The site and any existing structures are maintained in a tidy and safe condition. **PO33** AO33.1 Works incorporate temporary stormwater runoff, erosion and All works on-site are managed to: sediment controls and trash traps designed in accordance minimise as far as practicable, impacts on а with the Urban Stormwater Quality Planning Guidelines, adjoining or adjacent premises and the Planning scheme policy - Stormwater management and streetscape in regard to erosion and Planning scheme policy - Integrated design, including but sedimentation, dust, noise, safety and light; not limited to the following: b. minimise as far as possible, impacts on the natural environment; stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing ensure stormwater discharge is managed in a C. conditions: manner that does not cause nuisance or annoyance to any person or premises; b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion; avoid adverse impacts on street trees and their d. stormwater discharge rates do not exceed pre-existing critical root zone. C. conditions: the 10% AEP storm event is the minimum design storm d. for all temporary diversion drains; and the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins. AO33.2 Stormwater runoff, erosion and sediment controls are constructed prior to commencement of any clearing or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness. Note - The measures are adjusted on-site to maximise their effectiveness.

AO33.3

The completed earthworks area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property. AO33.4 Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a qualified arborist which demonstrates and ensures that no permanent damage is caused to the tree. **PO34 AO34** Dust suppression measures are implemented during No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works. soil disturbances and construction works to protect nearby premises from unreasonable dust impacts. **PO35** AO35.1 All works on-site and the transportation of material Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, to and from the site are managed to not negatively impact the existing road network, the amenity of the prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to surrounding area or the streetscape. and from the site are safe. Note - Where the amount of imported or exported material is greater than 50m3, a haulage route must be identified and AO35.2 approved by Council. All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads. Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD). AO35.3 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times. **PO36 AO36** All disturbed areas are rehabilitated at the completion At completion of construction all disturbed areas of the site of construction. are to be: a. topsoiled with a minimum compacted thickness of fifty Note - Refer to Planning scheme policy - Integrated design for (50) millimetres; details b. grassed. Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas. **PO37** AO37.1

The clearing of vegetation on-site:

- is limited to the area of infrastructure works, building areas and other necessary areas for the works; and
- b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land:
- is disposed of in a manner which minimises C. nuisance and annoyance to existing premises.

Note - No burning of cleared vegetation is permitted.

All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.

Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.

#### AO37.2

Disposal of materials is managed in one or more of the following ways:

- all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
- all native vegetation with a diameter below 400mm is to be chipped and stored on-site.

Note - The chipped vegetation must be stored in an approved location, preferably a park or public land.

#### **PO38**

Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.

No acceptable outcome provided

# **Earthworks**

# **PO39**

On-site earthworks are designed to consider the visual and amenity impact as they relate to:

- the natural topographical features of the site; a.
- b. short and long-term slope stability;
- soft or compressible foundation soils; C.
- reactive soils; d.
- low density or potentially collapsing soils; e.
- f. existing fill and soil contamination that may exist on-site;
- the stability and maintenance of steep rock g. slopes and batters;
- h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential).

Note - Filling or excavation works are to be completed within six months of the commencement date.

# AO39.1

All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.

# AO39.2

Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.

#### AO39.3

Inspection and certification of steep rock slopes and batters is required by a suitably qualified and experienced RPEQ.

# AO39.4

All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.

#### AO39.5

All filling or excavation is contained on-site.

#### AO39.6

All fill placed on-site is:

- limited to that required for the necessary approved use;
- clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).

#### AO39.7

The site is prepared and the fill placed on-site in accordance with AS3798.

Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.


#### **PO40**

Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area.

# **AO40**

Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.

Figure - Embankment

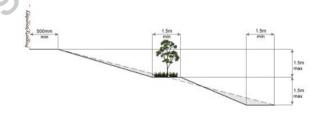

# PO41

Filling or excavation is undertaken in a manner that:

- does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;
- does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.

Note - Public sector entity as defined in the Sustainable Planning Act 2009.

# AO41.1

No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity.

Note - Public sector entity as defined in the Sustainable Planning Act 2009

#### AO41.2

Filling or excavation that would result in any of the following is not carried out on-site:

- a reduction in cover over any Council or public sector a. entity infrastructure service to less than 600mm;
- an increase in finished surface grade over, or within b. 1.5m on each side of, the Council or public sector entity

infrastructure above that which existed prior to the earthworks being undertaken.

Note - Public sector entity as defined in the Sustainable Planning Act 2009.

#### **PO42**

Filling or excavation does not result in land instability.

Note - Steep rock slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.

No acceptable outcome provided

#### **PO43**

Development does not result in

- adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;
- b. increased flood inundation outside the site;
- any reduction in the flood storage capacity in the floodway;
- d. and any clearing of native vegetation.

Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements.

No acceptable outcome provided.

### Retaining walls and structures

#### **PO44**


All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents.

#### **AO44**

Earth retaining structures:

- are not constructed of boulder rocks or timber; a.
- b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;

Figure - Retaining on boundary

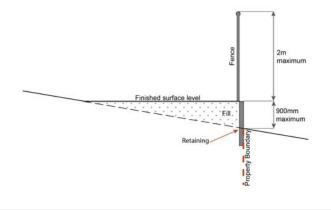

- where height is greater than 900mm but no greater than 1.5m, are to be setback at least the equivalent height of the retaining structure from any property boundary;
- where height is greater than 1.5m, are to be setback and stepped 1.5m vertical: 1.5m horizontal, terraced, landscaped and drained as shown below.

Figure - Cut


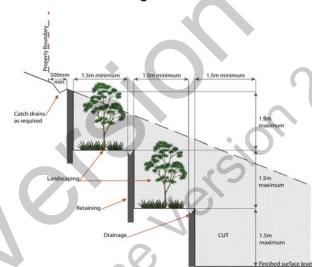


Figure - Fill

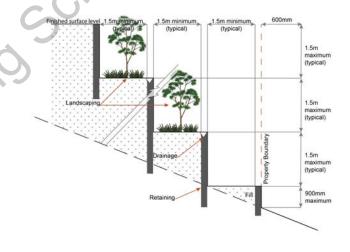

#### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates:
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.

#### AND

none of the following exceptions apply:

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

#### **PO45**

Development incorporates a fire fighting system that:

- a. satisfies the reasonable needs of the fire fighting entity for the area;
- is appropriate for the size, shape and b. topography of the development and its surrounds:
- is compatible with the operational equipment C. available to the fire fighting entity for the area;
- considers the fire hazard inherent in the d. materials comprising the development and their proximity to one another;
- considers the fire hazard inherent in the e. surrounds to the development site;
- f. is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

#### AO45.1

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations.

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:

- in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks  $^{(84)}$  or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
- in regard to the general locational requirements for fire hydrants b. - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005)
- in regard to the proximity of hydrants to buildings and other facilities C. - Part 3.2.2.2 (b), (c) and (d), with the exception that:
  - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
  - for caravans and tents, hydrant coverage need only extend
  - to the roof of those tents and caravans; for outdoor sales <sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales <sup>(54)</sup>, outdoor processing and outdoor storage facilities:
- in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.

#### AO45.2

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- an unobstructed width of no less than 3.5m; a.
- an unobstructed height of no less than 4.8m;
- constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

#### AO45.3

On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.

#### **PO46**

On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.

#### **AO46**

For development that contains on-site fire hydrants external to buildings:

- those external hydrants can be seen from the vehicular a. entry point to the site; or
- b. a sign identifying the following is provided at the vehicular entry point to the site:
  - the overall layout of the development (to scale);
  - internal road names (where used);
  - all communal facilities (where provided);
  - the reception area and on-site manager's office (where provided);
  - external hydrants and hydrant booster points;
  - physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.

Note - The sign prescribed above, and the graphics used are to be:

- in a form:
- of a size;
- illuminated to a level;

which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.

#### **PO47**

Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.

#### **AO47**

For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note Fire hydrant indication system produced by the Queensland Department of Transport and Main Roads.

Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.

#### Use specific criteria

## Dwelling house<sup>(22)</sup> - Secondary dwelling

#### **PO48**

Secondary dwellings:

- are subordinate and ancillary to the primary dwelling in size and function;
- are not larger than 100m<sup>2</sup> GFA; b.
- C. have the appearance, bulk and scale of a single dwelling from the street;
- d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the dwelling house<sup>(22)</sup> on-site.

No acceptable outcome provided.

# Dwelling house<sup>(22)</sup> - Domestic outbuildings

#### **PO49**

Domestic outbuildings and car ports are:

- of a height that does not negatively impact the visual amenity of adjoining properties;
- b. located on-site to not dominate the streetscape.

No acceptable outcome provided

### Home based business (35)

#### **PO50**

The Home based business(s)(35):

- is subordinate in size and function to the primary use on the site being a permanent residence;
- are of a scale and intensity that does not result in adverse visual or nuisance impacts on the residents in adjoining or nearby dwellings;
- store no more heavy vehicles, trailer and motor vehicles on-site than follows:
  - 1 heavy vehicle;
  - i. 1 trailer:
  - ii. Up to 3 motor vehicles.
- results in a vehicular and pedestrian traffic generation consistent with that reasonably expected in the surrounding low density, low built form and open area character and amenity anticipated in the Interim precinct;

#### AO50.1

The home based business(s)<sup>(35)</sup>, including any storage, are fully enclosed within a dwelling or on-site structure.

#### AO50.2

Up to 2 additional non-resident, either employees or customers, are permitted on the site at any one time, except where involving the use of heavy vehicles, where no employees are permitted.

Note - This provision does not apply to Bed and Breakfast or farmstay business

### AO50.3

The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:

- 1 heavy vehicle; a.
- b. 1 trailer;
- Up to 3 motor vehicles. C.

- are suitably screened to ensure adverse visual impacts on the residents in adjoining or nearby dwellings are minimised;
- f. sufficiently separated from adjoining properties so development does not result in adverse visual, noise, or nuisance impacts on adjoining residents.

Note - The car parking provision associated with the dwelling house (22) is in addition to this requirement.

Note - The number of motor vehicles stated is in addition to motor vehicles associated with a dwelling house (22).

#### AO50.4

Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.

Note - Planting for screening is to have a minimum depth of 3m.

#### AO50.5

Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.

#### **PO51**

The hours of operation for home based business(s)<sup>(35)</sup> are managed so that the activity does not adversely impact on the low intensity character and amenity anticipated in the Interim precinct.

#### AO51

Hours of operation to be restricted to 8:00am to 6:00pm Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday or Anzac Day, except for:

- bed and breakfast or farm stay business which may a. operate on a 24 hour basis;
- office or administrative activities that do not generate non-residents visiting the site such as book keeping and computer work;
- starting and warming up of heavy vehicles, which can commence at 7.00am.

### **PO52**

The Home based business(s)<sup>(35)</sup> does not result in:

- an adverse visual, odour, particle drift or noise nuisance impact on the residents in adjoining or nearby dwellings;
- an adverse impact upon the low intensity and open area character and amenity anticipated in the locality;
- the establishment of vehicle servicing or major repairs, spray painting, panel beating or any environmentally relevant activity (ERA).

### AO52.1

The use does not involve heavy vehicle servicing or major repairs, including spray painting or panel.

#### AO52.2

Home based business(s)<sup>(35)</sup> do not comprise an environmentally relevant activity (ERA) as defined in the Environmental Protection Regulation 2008.

#### AO52.3

Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.

Note - Nuisance is defined in the Environmental Protection Act 1994. **PO53** AO53.1 On-site display and sales of goods is limited to the Only goods grown, produced or manufactured on-site are activities being undertaken from the site and does sold from the site. not result in: AO53.2 the display and sale of goods being viewed a. from outside of the site; Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the overall development on the site having a display of goods is not visible from the boundary of the site. predominantly commercial appearance. **PO54 AO54** For bed and breakfast and farmstays Bed and breakfast and farmstays are of a size and scale that: short-term accommodation (77) is provided in the dwelling house (22) of the accommodation operator; are consistent with the low intensity, open area а character and amenity of the rural residential b. maximum 4 bedrooms are provided for a maximum of 10 guests; ensures acceptable levels of privacy and meals are served to paying guests only; amenity for the residents in adjoining or nearby C. dwellings. d. rooms do not contain food preparation facilities. Major electricity infrastructure (43), Substation (80) and Utility installation<sup>(86)</sup> **PO55** AO55.1 The development does not have an adverse impact Development is designed to minimise surrounding land use on the visual amenity of a locality and is: conflicts by ensuring infrastructure, buildings, structures and other equipment: high quality design and construction; a. visually integrated with the surrounding area; are enclosed within buildings or structures; b. are located behind the main building line; not visually dominant or intrusive; b. C. C. have a similar height, bulk and scale to the surrounding d. located behind the main building line; fabric: below the level of the predominant tree canopy d. have horizontal and vertical articulation applied to all or the level of the surrounding buildings and exterior walls. f. camouflaged through the use of colours and AO55.2 materials which blend into the landscape; treated to eliminate glare and reflectivity; g. A minimum 3m wide strip of dense planting is provided around landscaped; h. the outside of the fenced area, between the development i. otherwise consistent with the amenity and and street frontage, side and rear boundaries. character of the zone and surrounding area. **PO56 AO56** Infrastructure does not have an impact on pedestrian Access control arrangements: health and safety. do not create dead-ends or dark alleyways adjacent to the infrastructure:

b.

points;

minimise the number and width of crossovers and entry

### provide safe vehicular access to the site;

d. do not utilise barbed wire or razor wire.

#### **PO57**

All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:

- generates no audible sound at the site a. boundaries where in a residential setting; or
- meet the objectives as set out in the b. Environmental Protection (Noise) Policy 2008.

#### **AO57**

All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.

# Roadside stall (68)

#### **PO58**

A roadside stall<sup>(68)</sup>:

- comprises only one roadside stall (68) per a. property;
- only offers goods grown, produced or b. manufactured on the site:
- is of a size and in a location that will not result C. in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and surrounding properties;
- d. is designed and located to ensure safe and accessible access, egress and on-site parking and not negatively impact the road network.

### AO58.1

For a roadside stall (68):

- no more than one roadside stall (68) per property;
- b. goods offered for sale are only goods grown, produced or manufactured on the site:
- the maximum area associated with a roadside stall (68). C. including any larger separate items displayed for sale, does not exceed 20m2.

#### AO58.2

Roadside stall<sup>(68)</sup>:

- provide car parking for 2 vehicles off the road carriage a. and located on the property;
- is located no closer than 100m from an intersection. b.

Note - Refer to Overlay map - Road hierarchy for road classification.

# Rural industry (70)

### **PO59**

Rural industry<sup>(70)</sup>:

- adopt construction materials and use of colour for buildings and structures are visually compatible with the rural residential character and amenity;
- is of a size, scale and design that is not visually dominant, overbearing and inconsistent with the low intensity built form and open area character and amenity of the rural residential environment.

No acceptable outcome provided

# Sales office (72)

#### **PO60**

Sales office<sup>(72)</sup> remain temporary in duration and retain a physical connection to land or building being displayed or sold.

#### **AO60**

Development is carried out for no longer than 2 years.

# Telecommunications facility (81)

Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup>must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz

#### **PO61**

Telecommunications facilities  $^{(81)}$  are co-located with existing telecommunications facilities  $^{(81)}$ , Utility installation  $^{(86)}$ , Major electricity infrastructure  $^{(43)}$  or Substation if there is already a facility in the same coverage area.

#### AO61.1

New telecommunication facilities (81) are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.

#### AO61.2

If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.

#### **PO62**

A new Telecommunications facility<sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.

#### **AO62**

A minimum of 45m<sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.

#### **PO63**

Telecommunications facilities (81) do not conflict with lawful existing land uses both on and adjoining the site.

#### **AO63**

The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.

#### **PO64**

The Telecommunications facility (81) does not have an adverse impact on the visual amenity of a locality and is:

- high quality design and construction; a.
- b. visually integrated with the surrounding area;
- not visually dominant or intrusive; C.
- d. located behind the main building line;
- below the level of the predominant tree canopy e. or the level of the surrounding buildings and
- camouflaged through the use of colours and f. materials which blend into the landscape;
- treated to eliminate glare and reflectivity;

### AO64.1

Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.

#### AO64.2

In all other areas towers do not exceed 35m in height.

#### AO64.3

Towers, equipment shelters and associated structures are of a design, colour and material to:

- h. landscaped;
- i. otherwise consistent with the amenity and character of the zone and surrounding area.
- a. reduce recognition in the landscape;
- b. reduce glare and reflectivity.

#### AO64.4

All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.

Where there is no established building line the facility is located at the rear of the site.

#### AO64.5

The facility is enclosed by security fencing or by other means to ensure public access is prohibited.

#### AO64.6

A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.

Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.

Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.

#### **PO65**

Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.

### **AO65**

An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.

#### **PO66**

All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.

#### **AO66**

All equipment comprising the Telecommunications facility<sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.

### Wholesale nursery (89)

### **PO67**

Buildings and activities associated with a wholesale nursery <sup>(89)</sup>:

ensures the propagation of plants, whether or not in the open, occur without loss of amenity to adjacent properties;

No acceptable outcome provided.

- do not result in any form of environmental degradation, including, but not limited to, soil degradation, pollution of natural water courses and introduction of exotic plant species into the natural on-site or adjoining flora;
- are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;
- have vehicle access from a road classified as d. a arterial or sub-arterial.

Note - Refer to Overlay map - Road hierarchy for road classification.

# No acceptable outcome provided

# Veterinary services (87)

#### **PO68**

Buildings and activities associated with veterinary services (87).

- are for veterinary care, surgery and treatment a. of animals only;
- are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;
- have vehicle access from a road classified as a arterial or sub-arterial.

Note - Refer to Overlay map - Road hierarchy for road classification

# Winery (90)

#### **PO69**

Buildings and activities associated with winery (90):

- are for a winery<sup>(90)</sup> and ancillary activities only. Uses not affiliated with winery<sup>(90)</sup> activities, or the sale of products produced or manufactured on-site, are avoided;
- b. are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas; and
- have vehicle access from a road classified as a arterial or sub-arterial.

No acceptable outcome provided.

Note - Refer to Overlay map - Road hierarchy for road classification.

#### Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

### Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a bushfire management plan is prepared by a suitably qualified person. Guidance for the preparation of a bushfire management plan is provided in Planning scheme policy – Bushfire prone areas.

Note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.

#### **PO70**

#### Development:

- minimises the number of buildings and people working and living on a site exposed to bushfire
- ensures the protection of life during the b. passage of a fire front;
- is located and designed to increase the chance of survival of buildings and structures during a bushfire:
- minimises bushfire risk from build up of fuels around buildings and structures;
- ensure safe and effective access for emergency services during a bushfire.

#### A070.1

Buildings and structures are:

- not located on a ridgeline; a.
- not located on land with a slope greater than 15% (see Overlay map - Landslide hazard);
- dwellings are located on east to south facing slopes. C.

### AO70.2

Buildings and structures have contained within the site:

- a separation from classified vegetation of 20m or the a. distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures;
- d. an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and
- an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%:
  - to, and around, each building and other roofed structure; and
  - to each fire fighting water supply extraction point.

Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS 3959

#### **PO71**

Development and associated driveways and access ways:

- avoid potential for entrapment during a bushfire; a.
- b. ensure safe and effective access for emergency services during a bushfire;
- enable safe evacuation for occupants of a site C. during a bushfire.

#### AO71

A length of driveway:

- to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road;
- b. has a maximum gradient no greater than 12.5%;
- have a minimum width of 3.5m; C.
- d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.

#### **PO72**

Development provides an adequate water supply for fire-fighting purposes.

#### A072

- a reticulated water supply is provided by a distributer retailer for the area or:
- where not connected to a reticulated water supply, b. on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is located within 10m of buildings and structures.
- Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access is provided to within 3m of that water storage source.
- Where a tank is the nominated on-site fire fighting water storage source, it includes:
  - a hardstand area allowing medium rigid vehicles (15 tonne fire appliance) access within 6m of the tank;
  - fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.

#### **PO73**

Development:

- does not present unacceptable risk to people a. or environment due to the impact of bushfire on dangerous goods or combustible liquids;
- does not present danger or difficulty to b. emergency services for emergency response or evacuation.

Editor's note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.

#### **AO73**

Development does not involve the manufacture or storage of hazardous chemicals.

### Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note – The following are exempt from the native vegetation clearing provisions of this planning scheme:

- Clearing of native vegetation located within an approved development footprint; a.
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately b. required in response to an accident or emergency;
- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage C. to infrastructure;
- Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width d either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public e. infrastructure or drainage purposes;
- Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping q. land, windbreaks, lawns or created gardens;
- Grazing of native pasture by stock; h.
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development

Note - Definition for native vegetation is located in Schedule 1 Definitions

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

### Vegetation clearing, ecological value and connectivity

#### **PO74**

Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:

- the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded;
- on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For

No acceptable outcome provided.

example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas\*.

\* Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014.

#### **PO75**

Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by:

- retaining habitat trees; a.
- b. providing contiguous patches of habitat;
- provide replacement and rehabilitation planting C. to improve connectivity;
- avoiding the creation of fragmented and d. isolated patches of habitat;
- providing wildlife movement infrastructure. e.

Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy - Environmental areas.

No acceptable outcome provided.

### Vegetation clearing and habitat protection

#### PO76

Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.

No acceptable outcome provided.

### PO77

Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development will:

- a. rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a viable and healthy habitat area;
- provide replacement fauna nesting boxes in b. the event of habitat tree loss in accordance with Planning scheme policy - Environmental areas;
- undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework.

No acceptable outcome provided.

### **PO78** No acceptable outcome provided. Development ensures safe, unimpeded, convenient and ongoing wildlife movement and habitat connectivity by: providing contiguous patches of habitat; a. b. avoiding the creation of fragmented and isolated patches of habitat; providing wildlife movement infrastructure; C. providing replacement and rehabilitation planting to improve connectivity. Vegetation clearing and soil resource stability **PO79** No acceptable outcome provided. Development does not: result in soil erosion or land degradation; h. leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner. Vegetation clearing and water quality **PO80** No acceptable outcome provided. Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by: ensuring an effective vegetated buffers and a. setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads: avoiding or minimising changes to landforms to maintain hydrological water flows; adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry<sup>(4)</sup> and animal keeping<sup>(5)</sup> activities. **PO81** No acceptable outcome provided. Development minimises adverse impacts of stormwater run-off on water quality by: minimising flow velocity to reduce erosion; a. b. minimising hard surface areas; C. maximising the use of permeable surfaces; d. incorporating sediment retention devices; minimising channelled flow. e. Vegetation clearing and access, edge effects and urban heat island effects **PO82** No acceptable outcome provided.

Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment.

#### **PO83**

Development minimises potential adverse 'edge effects' on ecological values by:

- providing dense planting buffers of native vegetation between a development and environmental areas;
- b. retaining patches of native vegetation of greatest possible size where located between a development and environmental areas;
- restoring, rehabilitating and increasing the size of existing patches of native vegetation;
- d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors;
- landscaping with native plants of local origin. e.

Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the groundwater and surface water flow.

No acceptable outcome provided.

#### **PO84**

Development avoids adverse microclimate change and does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by:

- a. pervious surfaces;
- providing deeply planted vegetation buffers and green linkage opportunities;
- landscaping with local native plant species to achieve well-shaded urban places;
- d. increasing the service extent of the urban forest canopy.

No acceptable outcome provided.

### Vegetation clearing and Matters of Local Environmental Significance (MLES) environmental offsets

#### **PO85**

Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy -Environmental areas.

Editor's note - For MSES Koala Offsets, State Planning Regulatory Provision environmental offset provisions apply. No acceptable outcome provided.

### Extractive resources transport route (refer Overlay map - Extractive resources (transport route and buffer) to determine if the following assessment criteria apply)

#### **PO86**

### Development:

- does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route:
- b. does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes;
- adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to:
  - i. locating the furthest distance possible from the transportation route;
  - ii. habitable rooms being located the furthest from the transportation route;
  - shielding and screening private outdoor iii. recreation space from the transportation routes.

#### **A086**

The following uses are not located within the 100m wide transport route buffer:

- Caretaker's accommodation<sup>(10)</sup>, except where located a. in the Extractive industry zone;
- Community residence (16): b.
- Dual occupancy<sup>(21)</sup>; C.
- Dwelling house (22): d.
- Dwelling unit<sup>(23)</sup> e.
- Hospital (36): f.
- Rooming accommodation (69); g.
- Multiple dwelling (49): h.
- Non-resident workforce accommodation (52); i.
- Relocatable home park (62): j.
- Residential care facility (65): k.
- Resort complex<sup>(66)</sup>; I.
- Retirement facility (67): m.
- Rural workers' accommodation<sup>(71)</sup>; n.
- Short-term accommodation<sup>(77)</sup>; Ο.
- Tourist park<sup>(84)</sup>. p.

#### **PO87**

#### Development:

- does not adversely impact upon the efficient a. and effective transportation of extractive material along a transportation route;
- ensures vehicle access and egress along b. transportation routes are designed and located to achieve a high degree of safety, having good visibility;
- utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.

#### AO87.1

Development does not create a new vehicle access point onto an Extractive resources transport route.

### AO87.2

A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.

### Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy - Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

#### **PO88**

Development will:

- not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;
- protect the fabric and setting of the heritage b. site, object or building;
- be consistent with the form, scale and style of C. the heritage site, object or building;
- utilise similar materials to those existing, or d. where this is not reasonable or practicable. neutral materials and finishes;
- incorporate complementary elements, detailing e. and ornamentation to those present on the heritage site, object or building;
- f. retain public access where this is currently provided.

#### **880A**

Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value.

Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.

#### **PO89**

Demolition and removal is only considered where:

- a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or
- b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or
- limited demolition is performed in the course of C. repairs, maintenance or restoration; or
- demolition is performed following a catastrophic d. event which substantially destroys the building or object.

No acceptable outcome provided

#### PO90

Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.

No acceptable outcome provided.

#### **PO91**

Development does not adversely impact upon the health and vitality of significant trees. Where development occurs in proximity to a significant tree, construction measures and techniques as detailed in AS 4970-2009 Protection of trees on development sites are adopted to ensure a significant tree's health, wellbeing and vitality.

#### **AO91**

Development does:

- not result in the removal of a significant tree; a.
- b. not occur within 20m of a protected tree;
- involve pruning of a tree in accordance with Australian C. Standard AS 4373-2007 – Pruning of Amenity Trees.

Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably qualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome.

### Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

#### **PO92**

Development within a Pumping station buffer is located, designed and constructed to:

- a. ensure that odour or other air pollutant impacts on the amenity of the development met the air quality of objectives in the Environmental Protection (Air) Policy 2008;
- ensure that noise impacts on the amenity of the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008.

#### **AO92**

Development does not involve the construction of any buildings or structures within a Pumping station buffer.

### Landslide hazard (refer Overlay map - Landslide hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a site-specific geotechnical assessment report is prepared by a qualified engineer. Guidance for the preparation of a geotechnical assessment report is provided in Planning scheme policy - Landslide hazard.

#### **PO93**

#### Development:

- maintains the safety of people and property on a site and neighbouring sites from landslides;
- ensures the long-term stability of the site considering the full nature and end use of the development;
- ensures site stability during all phases of C. construction and development;
- minimises disturbance of natural drainage d. patterns of the site and does not result in the redirection or alteration of the existing flow if surface or groundwater
- minimises adverse visual impacts on the amenity of adjoining residents and provides a positive interface with the streetscape.

#### **AO93**

Development does not:

- involve earthworks exceeding 50m<sup>3</sup>;
- b. involve cut and fill having a height greater than 600mm;
- involve any retaining wall having a height greater than C. 600mm;
- d. redirect or alter the existing flow of surface or groundwater.

### **PO94**

Buildings are designed to respond to sloping topography in the siting, design and form of buildings and structures by:

### **AO94**

Buildings, excluding domestic outbuildings:

- a. are split-level, multiple-slab, pier or pole construction;
- b. are not single plane slab on ground.

- minimising overuse of cut and fill to create a. single flat pads and benching;
- avoiding expanses of retaining walls, loss of b. trees and vegetation and interference with natural drainage systems;
- minimising any adverse visual impact on the C. landscape character;
- d. Protect the amenity of adjoining properties.

#### **PO95**

Development protects the safety of people, property and the environment from the impacts of landslide on hazardous chemicals manufactured, handled or stored by incorporating design measures to ensure:

- the long-term stability of the development site considering the full nature and end use of the development;
- b. site stability during all phases of construction and development;
- the development is not adversely affected by landslide activity originating on sloping land above the site:
- emergency access and access from the site for the public and emergency vehicles is available and is not at risk from landslide.

#### **AO95**

Development does not involve the manufacture, handling or storage of hazardous chemicals.

### Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)

Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.

#### **PO96**

Development:

- minimises the risk to persons from overland
- does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.

No acceptable outcome provided.

### **PO97**

Development:

- maintains the conveyance of overland flow a. predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;
- does not concentrate, intensify or divert b. overland flow onto an upstream, downstream or surrounding property.

Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the

#### **AO97**

No acceptable outcome provided.

development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.

Note - Reporting to be prepared in accordance with Planning scheme policy - Flood hazard, Coastal hazard and Overland flow

#### **PO98**

Development does not:

- a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;
- increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.

Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.

No acceptable outcome provided.

#### **PO99**

Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.

#### **AO99**

Development ensures that a hazardous chemical is not located or stored in an Overland flow path area.

Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.

#### PO100

Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.

#### AO100

Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.

#### PO101

Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained.

Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.

### AO101.1

Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:

- Urban area Level III; a.
- b. Rural area – N/A;
- Industrial area Level V: C.
- Commercial area Level V.

#### AO101.2

Note - Reporting to be prepared in accordance with Planning scheme policy - Flood hazard, Coastal hazard and Overland

Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.

#### PO102

Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:

- a stormwater pipe if the nominal pipe diameter exceeds 300mm:
- an overland flow path where it crosses more b. than one premises;
- C. inter-allotment drainage infrastructure.

Note - Refer to Planning scheme policy - Integrated design for details and examples.

Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.

No acceptable outcome provided.

# Additional criteria for development for a Park (57)

#### PO103

Development for a Park<sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:

- public benefit and enjoyment is maximised; a.
- impacts on the asset life and integrity of park h. structures is minimised;
- maintenance and replacement costs are minimised.

### AO103

Development for a Park<sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.

### Riparian and wetland setbacks

#### PO104

Development provides and maintains a suitable setback from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following matters:

- impact on fauna habitats:
- b. impact on wildlife corridors and connectivity;
- C. impact on stream integrity;


#### AO104

Development does not occur within:

- a. 50m from top of bank for W1 waterway and drainage
- b. 30m from top of bank for W2 waterway and drainage line
- 20m from top of bank for W3 waterway and drainage C.
- d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.

- impact of opportunities for revegetation and d. rehabilitation planting;
- e. edge effects.

Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.

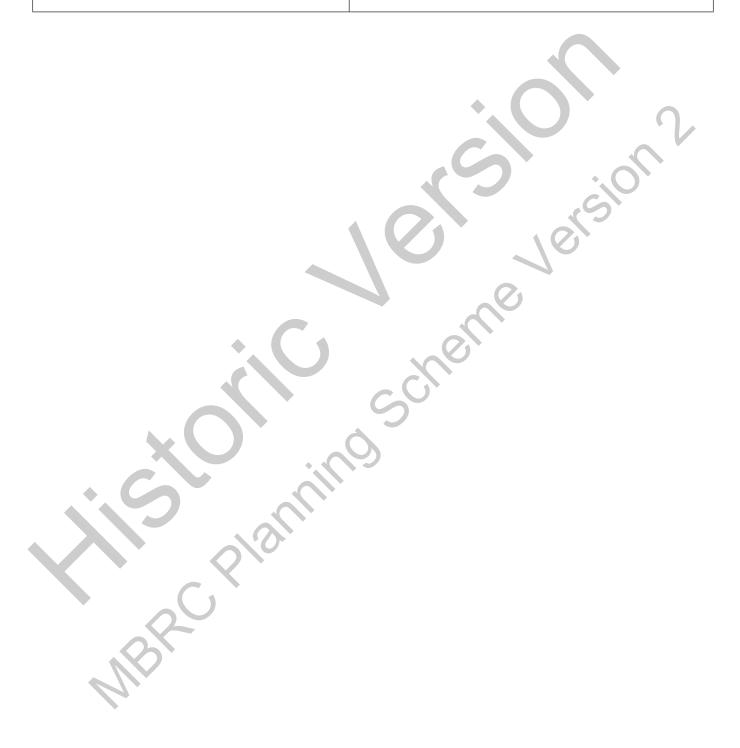

### 6.2.3.2 Transition precinct

### 6.2.3.2.1 Developable lots

### 6.2.3.2.1 Purpose - Transition precinct, developable lot

Editor's note -The outcomes in this section are generally the same as Interim precinct but for developable lots

- For uses on developable lots the purpose of the Emerging Community Zone transition precinct will be achieved through the following overall outcomes:
  - For interim uses development only occurs on a developable lot that is not serviced by all local government a. networks including water and sewer.
  - Development is to maintain a semi-rural character until such time as availability and provision of infrastructure h. is delivered and relevant site specific constraints are resolved.
  - Interim uses are appropriate in this precinct where they:
    - would be compatible with the existing semi-rural character and urban uses; i.
    - would not prejudice or delay the development of the site and adjoining areas: ii.
    - iii. are low intensity in nature and characterised by low investment in buildings and infrastructure relative to the value of the site.
  - Residential activities consist of detached dwelling houses (22) or caretaker's accommodation (10), predominantly d. on large lots.
  - The character and scale of dwelling houses (22) are compatible with the intended character for the precinct. e.
  - Secondary dwellings associated with a principal dwelling, remaining subordinate and ancillary to the f. principal dwelling to retain the low density, low intensity, residential form of a dwelling house (22).
  - Garages, car ports and domestic outbuildings remain subordinate and ancillary to the principal dwelling and are located and designed to reduce amenity impacts on the streetscape and adjoining properties.
  - Dwelling houses<sup>(22)</sup> are designed to add visual interest and contribute to an attractive streetscape and public realm.
  - Dwelling houses (22) are provided with infrastructure and services at a level suitable for the area as a transition precinct.
  - Dwelling houses<sup>(22)</sup> are responsive to the lot shape, dimensions and topographic features. j.
  - k. Non-residential uses do not result in adverse or nuisance impacts on adjoining properties or the wider environment. Any adverse or nuisance impacts are contained and internalised to the site through location, design, operation and on-site management practices.
  - ١. General works associated with the development achieves the following:
    - i. a high standard of electricity, telecommunications, roads, sewerage, water supply and street lighting services is provided to new developments to meet the current and future needs of users of the site;
    - ii. the development manages stormwater to:
      - Α. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
      - B. prevent stormwater contamination and the release of pollutants;
      - maintain or improve the structure and condition of drainage lines and riparian areas; C.
      - avoid off-site adverse impacts from stormwater.

- the development does not result in unacceptable impacts on the capacity on the capacity and safety of the external road network;
- the development ensures the safety, efficiency and useability of access ways and parking areas; iv.
- site works including earthworks are managed to be safe and have minimal impacts on adjoining or V. adjacent premises, the streetscape or the environment.
- Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke
- Development avoids areas subject to constraint, limitation, or environmental value. Where development n. cannot avoid these identified areas, it responds by:
  - adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
  - ensuring no further instability, erosion or degradation of the land, water or soil resource; ii.
  - when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Segwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
  - maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, iv. aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
    - the provision of replacement, restoration, rehabilitation planting and landscaping;
    - the location, design and management of development to avoid or minimise adverse impacts on В. ecological systems and processes;
    - the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014. C.
  - protecting native species and protecting and enhancing species habitat;
  - protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
  - vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
  - viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
  - ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
  - ensuring effective and efficient disaster management response and recovery capabilities;
  - xi. where located in an overland flow path:
    - development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
    - development is resilient to the impacts of overland flow by ensuring the siting and design accounts В. for the potential risks to property associated with the overland flow;
    - development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
    - development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- Development in the Transition precinct, on a developable lot includes one or more of the following:

Animal husbandry <sup>(4)</sup>	•	Dwelling House <sup>(22)</sup>	Rural Industry <sup>(70)</sup> - if on a
Animal keeping <sup>(5)</sup> - if not for a cattery or kennel		Emergency services	lot greater than 1ha and having a GFA of 150m <sup>2</sup> or less
	•	Environment facility <sup>(26)</sup>	

Caretaker's	•	Home based business <sup>(35)</sup>	•	Sales office <sup>(72)</sup>
<ul> <li>accommodation<sup>(10)</sup></li> <li>Cropping<sup>(19)</sup> - if not forestry for wood production</li> </ul>		Intensive horticulture <sup>(40)</sup> - if on a lot greater than 1ha  Roadside stall <sup>(68)</sup>		Veterinary services <sup>(87)</sup> Wholesale nursery <sup>(89)</sup>

Development in the Transition precinct, on a developable lot does not include any of the following:

•	Adult store <sup>(1)</sup>	•	High impact industry <sup>(34)</sup>	•	Port services <sup>(61)</sup>
•	Agricultural supplies store <sup>(2)</sup>	•	Hospital <sup>(36)</sup>		Relocatable home park <sup>(62)</sup>
•	Air services <sup>(3)</sup>	•	Hotel <sup>(37)</sup>		Renewable energy facility <sup>(63)</sup>
•	Animal keeping <sup>(5)</sup> - if for a cattery or kennel	•	Indoor sport and recreation (38)	•	Research and technology industry <sup>(64)</sup>
•	Aquaculture <sup>(6)</sup>	•	Intensive animal industry <sup>(39)</sup>		
•	Bar <sup>(7)</sup>	•	Low impact industry <sup>(42)</sup>		Residential care facility <sup>(65)</sup>
•	Brothel <sup>(8)</sup>	•	Major sport, recreation and	3	Resort complex <sup>(66)</sup>
•	Bulk landscape supplies (9)		entertainment facility <sup>(44)</sup>	•	Retirement facility <sup>(67)</sup>
•	Car wash <sup>(11)</sup>	•)	Marine industry <sup>(45)</sup>	•	Rooming accommodation <sup>(69)</sup>
	Cemetery <sup>(12)</sup>		Market <sup>(46)</sup>		Rural workers'
	Community residence <sup>(16)</sup>	•	Medium impact industry <sup>(47)</sup>		accommodation <sup>(71)</sup>
	Crematorium <sup>(18)</sup>	•	Motor sport facility <sup>(48)</sup>	•	Service industry <sup>(73)</sup>
	Cropping <sup>(19)</sup> - if forestry for	11	Multiple dwelling <sup>(49)</sup>	•	Service station <sup>(74)</sup>
	wood production		Nature-based tourism <sup>(50)</sup>	•	Shop <sup>(75)</sup>
	Detention facility <sup>(20)</sup>	•	Nightclub entertainment facility <sup>(51)</sup>	•	Shopping centre <sup>(76)</sup>
•	Dual occupancy <sup>(21)</sup>		•	•	Short-term
•	Dwelling unit <sup>(23)</sup>	•	Non-resident workforce accommodation <sup>(52)</sup>		accommodation <sup>(77)</sup>
•	Extractive industry <sup>(27)</sup>	•	Office <sup>(53)</sup>	•	Showroom <sup>(78)</sup>
<	Food and drink outlet <sup>(28)</sup>	•	Outdoor sales <sup>(54)</sup>	•	Special industry <sup>(79)</sup>
	Function facility <sup>(29)</sup>	•	Outdoor sport and	•	Theatre <sup>(82)</sup>
	Funeral parlour <sup>(30)</sup>		recreation <sup>(55)</sup>	•	Tourist attraction <sup>(83)</sup>

•	Garden centre <sup>(31)</sup>	•	Parking station <sup>(58)</sup>	•	Tourist park <sup>(84)</sup>
•	Hardware and trade supplies <sup>(32)</sup>	•	Permanent plantation <sup>(59)</sup>	•	Transport depot <sup>(85)</sup> Warehouse <sup>(88)</sup>
•	Health care services (33)				Transingues

Development not listed in the tables above may be considered on its merits and where it reflects and q. support the outcomes of the zone.

#### 6.2.3.2.2.2 Criteria for assessment

To determine if development is self-assessable, development must comply with the self-assessable acceptable outcomes set out in Part C, Table 6.2.3.2.1.1. Where development does not meet a self-assessable acceptable outcome (SAO) of the relevant criteria Part C Table 6.2.3.2.1.1, assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a SAO is not met, and is therefore limited to the subject matter of the SAOs that are not complied with. To remove any doubt, for those SAOs that are complied with, there is no need for assessment against the corresponding PO.

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO1	PO1
SAO2	PO5
SAO3	PO7
SAO4	PO6
SAO5	PO8
SAO6	PO9
SA07	PO10-PO11
SAO8	PO12-PO15
SAO9	PO12-PO15
SAO10	PO16
SAO11	PO17
SAO12	PO20
SAO13	PO21-PO26
SAO14	PO29
SAO15	PO29
SAO16	PO31
SAO17	PO35
SAO18	PO37
SAO19	PO39
SAO20	PO40
SAO21	PO37

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO22	PO41
SAO23	PO41-PO46
SAO24	PO43
SAO25	PO47
SAO26	PO47
SAO27	PO47
SAO28	PO48
SAO29	PO49
SAO30	PO50
SAO31	PO50
SAO32	PO50
SAO33	PO51
SAO34	PO52
SAO35	PO52
SAO36	PO52
SAO37	PO53
SAO38	PO52
SAO39	PO52
SAO40	PO52
SAO41	PO54
SAO42	PO54
SAO43	PO55
SAO44	PO55
SAO45	PO56
SAO46	PO60
SAO47	PO60
SAO48	PO60
SAO49	PO60
SAO50	PO60
SAO51	PO62
SAO52	PO64
SAO53	PO65
SAO54	PO66
SAO55	PO66



Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO56	PO66
SAO57	PO66
SAO58	PO68
SAO59	PO72
SAO60	PO73
SAO61	PO73
SAO62	PO74
SAO63	PO75
SAO64	PO76
SAO65	PO77-PO88
SAO66	PO77-PO88
SAO67	PO89
SAO68	PO90
SAO69	PO90
SAO70	PO91
SAO71	PO91
SAO72	PO94
SAO73	PO94
SA074	PO94
SAO75	PO95
SAO76	PO96
SA077	PO97
SAO78	PO104
SAO79	PO98
SAO80	PO98
SAO81	PO100
SAO82	PO99
SAO83	PO99
SAO84	PO99
SAO85	PO98
SAO86	PO100
SAO87	PO100
SAO88	PO102-PO103
SAO89	PO106-PO108, PO110-PO112

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO90	PO106-PO108, PO110-PO112
SAO91	PO106-PO108
SAO92	PO109
SAO93	PO113
SAO94	PO114

# Part C - Criteria for self-assessable development - Transition precinct, <u>developable</u> lot

# Table 6.2.3.2.1.1 Self-assessable development - Transition precinct, developable lot

Self-asses	sable acceptable outcomes - For developable lots only
	General criteria
Servicing	
SAO1	The site is a developable lot that is not serviced with all local government networks including water and sewer.
Building h	eight
SAO2	Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m.
Setbacks	
SAO3	Buildings and structures associated with the following uses are setback from all lot boundaries as follows:  a. Animal husbandry <sup>(4)</sup> (buildings only) - 10m;  b. Cropping <sup>(19)</sup> (buildings only) - 10m;  c. Animal keeping <sup>(5)</sup> , excluding catteries and kennels - 20m;  d. Cropping <sup>(19)</sup> (buildings only) - 10m;  e. Intensive horticulture <sup>(40)</sup> - 10m;  f. Rural Industry <sup>(70)</sup> - 20m;  g. Wholesale nursery <sup>(89)</sup> - 10m;  h. Veterinary services <sup>(87)</sup> - 10m.
SAO4	Unless specified elsewhere in the zone code, all other buildings and structures are setback:  a. Road frontage - 6m minimum;  b. Side and Rear - 4.5m minimum.  Note - For a Dwelling house (22) where located in a bushfire hazard area (see Overlay map - Bushfire hazard) a greater setback may be required. See values and constraints criteria Bushfire hazard.  Note - This provision does not apply where a development footprint exists for a lot.

### **Development footprint**

#### **SAO5**

Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within that development footprint.

#### **Building on sloping land**

#### **SA06**

Building and site design on slopes between 10% and 15%:

- а use split-level, multiple-slab, pier or pole construction;
- b. avoid single-plane slabs and benching;
- ensure the height of any cut or fill, whether retained or not, does not exceed 900mm. C.

Note - This does not apply to outbuildings or building work.

### Lighting

#### **SA07**

Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of the Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.

Note - "Curfewed hours" are taken to be those between 10pm and 7am the following day.

#### Hazardous chemicals

#### SAO8

All development that involves the storage or handling of hazardous chemicals listed in Schedule 9, Development involving hazardous chemicals, Table 9.0.1 Hazardous Chemicals Self-Assessable Thresholds complies with Table 9.0.3 Hazardous Chemicals Self-Assessable Criteria.

### SAO9

Development does not involve the storage or handling of hazardous chemicals listed in Schedule 9, Development involving hazardous chemicals, Table 9.0.2 Hazardous Chemicals Assessable Thresholds.

#### Waste treatment

### **SAO10**

All concentrated animal use areas (e.g. sheds, pens, holding yards, stables) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment areas.

#### Car parking

#### **SA011**

On-site car parking is provided in accordance with Schedule 7 - Car parking.

### Clearing of habitat trees where not located in the Environmental areas overlay map

### **SAO12**

Development does not result in the damaging, destroyed or clearing of a habitat tree. This does not apply to:

- Clearing of a habitat tree located within an approved development footprint; a.
- Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary b. for emergency access or immediately required in response to an accident or emergency;
- C. Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure:

- Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suitably f. qualified person, submitted to and accepted by Council;
- Clearing of a habitat tree associated with removal of recognised weed species, maintaining existing g. open pastures and cropping land, windbreaks, lawns or created gardens;
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development. h.

Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridors. Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.

#### Works criteria

#### **Utilities**

#### **SAO13**

Where available, the development is connected to:

- an existing reticulated electricity supply; a.
- telecommunications and broadband; b.
- reticulated sewerage; C.
- d. reticulated water;
- constructed and dedicated road

### **Access**

#### **SAO14**

Any new or changes to existing site access and driveways are designed and located in accordance with:

- Where for a Council-controlled road, AS/NZS2890.1 section 3; or
- Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.

#### **SAO15**

Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities - Off street car parking and the relevant standards in Planning scheme policy - Integrated design.

#### Stormwater

#### **SAO16**

Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy - Integrated design.

Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.

trash traps designed in accordance with the Úrban Stormwater Quality Planning Guidelines, Plannin scheme policy - Stormwater management and Planning scheme policy - Integrated design.  Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.  SAO19  All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.  Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.  SAO20  Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.  SAO21  Any material dropped, deposited or spilled on the road(s) as a result of construction processes associate with the site are to be cleaned at all times.  Earthworks  SAO22  The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.  Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures  Figure - Cut and fill  Let Boundaries  Figure - Cut and fill  Let Boundaries	trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Plann
plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.  SAO19 All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.  Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.  SAO20 Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.  SAO21 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associate with the site are to be cleaned at all times.  SAO22 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.  Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures  SAO23 The total of all cut and fill on-site does not exceed 900mm in height.  Figure - Cut and fill  Lot Boundaries  Note - This is site earthworks not building work.  SAO24 Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;  b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	scheme policy - Stormwater management and Planning scheme policy - Integrated design.
Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.  Any material dropped, deposited or spilled on the road(s) as a result of construction processes associate with the site are to be cleaned at all times.  Earthworks  SAO22 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.  Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures  ANO23 The total of all cut and fill on-site does not exceed 900mm in height.  Figure - Cut and fill  Lot Boundaries  Lot Boundaries  ANO24 Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;  b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensu
plan sealing, or final building classification.  Any material dropped, deposited or spilled on the road(s) as a result of construction processes associate with the site are to be cleaned at all times.  Earthworks  SAO22 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.  Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures  SAO23 The total of all cut and fill on-site does not exceed 900mm in height.  Figure - Cut and fill  Note - This is site earthworks not building work.  SAO24 Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;  b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works bein undertaken.	development works.
with the site are to be cleaned at all times.  Earthworks  SAO22 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.  Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures  The total of all cut and fill on-site does not exceed 900mm in height.  Figure - Cut and fill  Lot Boundaries  Note - This is site earthworks not building work.  SAO24 Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	
The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.  Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures  The total of all cut and fill on-site does not exceed 900mm in height.  Figure - Cut and fill  Lot Boundaries  Note - This is site earthworks not building work.  SAO24  Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;  b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	
Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures  The total of all cut and fill on-site does not exceed 900mm in height.  Figure - Cut and fill  Lot Boundaries  Note - This is site earthworks not building work.  Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	Earthworks
The total of all cut and fill on-site does not exceed 900mm in height.  Figure - Cut and fill  Lot Boundaries  Note - This is site earthworks not building work.  SAO24  Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;  b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	SAO22 The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.
Figure - Cut and fill  Lot Boundaries  SAO24  Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	
Note - This is site earthworks not building work.  Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;  b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	SAO23 The total of all cut and fill on-site does not exceed 900mm in height.
Filling or excavation does not result in:  a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;  b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	Lot Boundaries  Lot Boundaries  Finished surface level  900mm
<ul> <li>a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.</li> </ul>	Note - This is site earthworks not building work.
b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.	SAO24 Filling or excavation does not result in:
Note - Public sector entity is defined in the Sustainable Planning Act 2009.	b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works be
	Note - Public sector entity is defined in the Sustainable Planning Act 2009.

Note - The provisions under this heading only apply if:

- the development is for, or incorporates:
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park  $\binom{84}{(54)}$  with accommodation in the form of caravans or tents; or ii.
  - iii.
  - material change of use for outdoor sales (54), outdoor processing or outdoor storage where involving combustible materials.

#### **AND**

- b. none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated ii. water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

#### **SAO25**

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations.

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):

- in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks (84) or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
- in regard to the general locational requirements for fire hydrants Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix b. B of AS 2419.1 (2005);
- in regard to the proximity of hydrants to buildings and other facilities Part 3.2.2.2 (b), (c) and (d), with the exception
  - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
  - for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
  - for outdoor sales  $^{(54)}$ , processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales  $^{(54)}$ , outdoor processing and outdoor storage facilities; and
- d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.

#### **SAO26**

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- an unobstructed width of no less than 3.5m; a.
- an unobstructed height of no less than 4.8m; b.
- constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance; C.
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

# **SAO27** On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) - Routine service of fire protection systems and equipment. **SAO28** For development that contains on-site fire hydrants external to buildings: a. those external hydrants can be seen from the vehicular entry point to the site; or b. a sign identifying the following is provided at the vehicular entry point to the site: the overall layout of the development (to scale); ii. internal road names (where used); all communal facilities (where provided); the reception area and on-site manager's office (where provided); external hydrants and hydrant booster points; V. physical constraints within the internal roadway system which would restrict access by fire vi. fighting appliances to external hydrants and hydrant booster points. Note - The sign prescribed above, and the graphics used are to be: in a form; b. of a size: illuminated to a level: which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign. For development that contains on-site fire hydrants external to buildings, those hydrants are identified **SAO29** by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note Fire hydrant indication system produced by the Queensland Department of Transport and Main Roads. Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads Use specific criteria Dwelling house<sup>(22)</sup> - Secondary dwelling **SAO30** The siting and design of dwellings ensures that the secondary dwelling is: not located in front of the primary dwelling; a. annexed to (adjoining, below or above) or located within 50.0m of the primary dwelling (excluding domestic outbuildings). **SAO31** No more than 1 secondary dwelling is located on an allotment. **SAO32** The GFA of the secondary dwelling does not exceed 100m<sup>2</sup> GFA. Dwelling house<sup>(22)</sup> - Domestic outbuildings **SAO33** Domestic outbuildings: have a maximum GFA as outlined below: а

	Size of lot	Max. GFA
	Less than 600m <sup>2</sup>	50m²
	600m² - 1000m²	70m²
	>1000m² – 2000m²	80m²
	Greater than 2000m²	150m²
	Note - Building Work is excluded from the GFA calculations.	
	b. have a maximum building height of 4m;	
	c. are located behind the main building line and not within p	rimary or secondary frontage setbacks.
Home bas	ed business <sup>(35)</sup>	45
SAO34	Home based business(s) <sup>(35)</sup> are fully contained within a dwelling based child care facility.	g or on-site structure, except for a home
SAO35	The maximum total use area is 100m <sup>2</sup> .	
SAO36	Up to 2 additional non-resident, either employees or customers, are permitted on the site at any one time, except where involving the use of heavy vehicles, where no employees are permitted.  Note - This provision does not apply to Bed and Breakfast or farmstay business.	
SAO37	Hours of operation to be restricted to 8:00am to 6:00pm Monda public on Sunday's, Christmas Day, Good Friday or Anzac Day	
	a. bed and breakfast or farmstay business which may opera	ate on a 24 hour basis;
	b. office or administrative activities that do not generate non- keeping and computer work.	residents visiting the site, such as book
SAO38	The maximum number of heavy vehicles, trailer and motor veh	nicles stored on-site is as follows:
	a. 1 heavy vehicle;	
	b. 1 trailer;	
	c. Up to 3 motor vehicles.	
	Note - The car parking provision associated with the dwelling house <sup>(22)</sup> is in	addition to this requirement.
	Note - The number of motor vehicles stated is in addition to motor vehicles a	ssociated with a dwelling house <sup>(22)</sup> .
SAO39	Vehicle parking areas, vehicle standing areas and outdoor stor screened from adjoining sites by either planting, wall(s), fence height along the length of those areas.	
	Note - Planting for screening is to have a minimum depth of 3m.	

SAO40	Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.	
SAO41	The use does not involve vehicle servicing or major repairs, including spray painting or panel beating	
	Note - Vehicle servicing excludes general maintenance of a vehicle such as, but not limited to, changing engine fluids, filters and parts such as batteries and plugs.	
SAO42	The use is not an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection</i> Regulation 2008.	
SAO43	Only goods grown, produced or manufactured on-site are sold from the site.	
SAO44	Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from boundary of the site.	
SAO45	For bed and breakfast and farmstays:	
	a. overnight accommodation is provided in the dwelling house <sup>(22)</sup> of the accommodation operator.	
	b. maximum 4 bedrooms are provided for a maximum of 10 guests.	
	c. meals are served to paying guests only.	
	d. rooms do not contain food preparation facilities.	
	Note - SAO34 - SAO44 above do not apply to home based business (35).	
Roadside	stalls (68)	
SAO46	No more than one roadside stall <sup>(68)</sup> per property.	
SAO47	Goods offered for sale are only goods grown, produced or manufactured on the site.	
SAO48	The maximum area associated with a roadside stall (68), including any larger separate items displayed for sale, does not exceed 20m².	
SAO49	Car parking for 2 vehicles is provided off the road carriage and located on the property.	
SAO50	The roadside stall <sup>(68)</sup> is located no closer than 100m from an intersection.	
Sales office	ce <sup>(72)</sup>	
SAO51	A sales office <sup>(72)</sup> is located on the site for no longer than 2 years.	
Telecomm	nunications facility <sup>(81)</sup>	
that will not	e - In accordance with the Federal legislation Telecommunications facilities (81) must be constructed and operated in a manner cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz	
SAO52	A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.	
SAO53	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under	

SAO54	Equipment shelters and associated structures are located:	
	<ul> <li>a. directly beside the existing equipment shelter and associated structures;</li> <li>b. behind the main building line;</li> <li>c. further away from the frontage than the existing equipment shelter and associated structures;</li> <li>d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.</li> </ul>	
SAO55	Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.	
SAO56	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.	
SAO57	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.	
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.	
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with Planning scheme policy - Integrated design.	
SAO58	All equipment comprising the telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.	
	Volume and a sustaints suited	


## Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

## Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - Planning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid sulfate soils i.e. development involving filling or excavation works below the thresholds of 100m³ and 500m³ respectively.

# **SAO59** Development does not involve: excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below 5m Australian Height Datum AHD, or filling of land of more than 500m3 of material with an average depth of 0.5m or greater where below the 5m AHD.

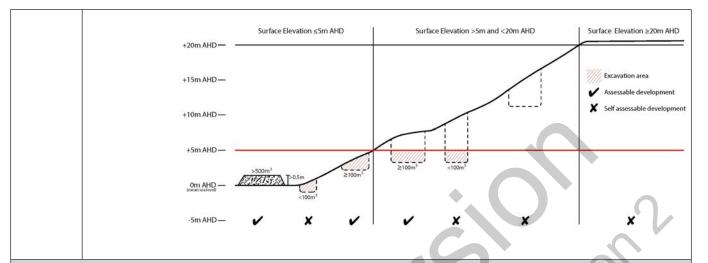


# Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - For the purposes of section 12 of the Building Regulation 2006, land identified as very high potential bushfire intensity, high potential bushfire intensity, medium potential bushfire intensity or potential impact buffer on the Bushfire hazard overlay map is the 'designated bushfire hazard area'. AS 3959-2009 Construction of buildings in bushfire hazard areas applies within these areas.

#### **SAO60**

- Building and structures are: a.
  - i. not located on a ridgeline
  - not located on land with a slope greater than 15% (see Overlay map Landslide hazard)
- Dwellings are located on east to south facing slopes. b.

House Sites Numbered in Order of Degree of Fire Safety

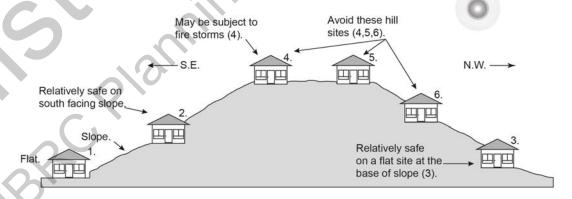

(1 being the safest, 6 being the most hazardous.) From Bushfire Prone Areas: Siting and Design of Residential Buildings (1997), Queensland Department of Local Government and Planning, and Queensland Fire & Rescue Service.

#### **SAO61**

Buildings and structures have contained within the site:

a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;

- a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- a separation of no less than 10m between a fire fighting water supply extraction point and any C. classified vegetation, buildings and other roofed structures;
- an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water d. supply extraction point; and
- e. an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%:
  - i. to, and around, each building and other roofed structure; and
  - ii. to each fire fighting water supply extraction point.

Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS 3959.

#### **SAO62**

The length of driveway:

- to a public road does not exceed 100m between the most distant part of a building used for any a. purpose other than storage and the nearest part of a public road;
- has a maximum gradient no greater than 12.5%; b.
- C. have a minimum width of 3.5m;
- accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency d. Services' Fire Hydrant and Vehicle Access Guideline.

## **SAO63**

- A reticulated water supply is provided by a distributer retailer for the area or, where not connected a. to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m of buildings and structures.
- b. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.
- Where a tank is the nominated on-site fire fighting water storage source, it includes:
  - a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank:
  - fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.

## **SAO64**

Development does not involve the manufacture or storage of hazardous chemicals.

## Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note - The following are exempt from the native clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately b. required in response to an accident or emergency;
- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage C. to infrastructure:

- d Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public e. infrastructure or drainage purposes;
- Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping g. land, windbreaks, lawns or created gardens;
- Grazing of native pasture by stock; h.
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development.

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.

## **SAO65**

Where no suitable land cleared of native vegetation exists, clearing of native vegetation in High Value Area or Value Offset Area is for the purpose of a new dwelling house<sup>(22)</sup> and all associated facilities\* or an extension to an existing dwelling house<sup>(22)</sup> only, and comprises an area no greater than 1500m<sup>2</sup>.

Note - \*All associated facilities includes: on-site wastewater treatment, all areas of disturbance, on-site parking, access and manoeuvring areas.

Editor's note - See in heading above for other uses exempt from native vegetation clearing requirements.

Editor's note - Where self-assessable vegetation clearance is being undertaken, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:

- co-locating all associated activities, infrastructure and access strips;
- be the least valued area of koala habitat on the site:
- minimise the footprint of the development envelope area;
- minimise edge effects to areas external to the development envelope;
- location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy - Environmental areas;
- sufficient area between the development and koala habitat trees to achieve their long-term viability.

Editor's note - Where self-assessable vegetation clearing is being undertaken, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy - Environmental areas.

#### **SAO66**

No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.

This does not apply to the following:

- Clearing of native vegetation located within an approved development footprint; a.
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary b. for emergency access or immediately required in response to an accident or emergency;
- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses C. to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of native vegetation reasonably necessary for the purpose of maintenance or works e. within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining g. existing open pastures and cropping land, windbreaks, lawns or created gardens;
- Grazing of native pasture by stock; h.
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development. i.

# Extractive resources transport routes (refer Overlay map - Extractive resources (transport route and buffer)

# to determine if the following assessment criteria apply)

- The following uses are not located within the 100m wide transport route buffer: **SAO67** 
  - Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone; a.
  - Community residence (16): b.
  - Dual occupancy<sup>(21)</sup>: C.
  - Dwelling house; (22) d.
  - Dwelling unit<sup>(23)</sup>. e.
  - Hospital (36): f.
  - Rooming accommodation (69); g.
  - Multiple dwelling<sup>(49)</sup>: h.
  - Non-resident workforce accommodation (52): i.
  - Relocatable home park (62); j.
  - Residential care facility (65) k.
  - Resort complex<sup>(66)</sup>;
  - Retirement facility (67) m.
  - Rural workers' accommodation<sup>(71)</sup>: n.
  - Short-term accommodation (77); 0.
  - Tourist park (84)

#### **SA068** Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive resources transport route.

#### **SAO69** A vehicle access point is located, designed and constructed in accordance with Planning scheme policy Integrated design.

## Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

## **SAO70**

Development is for the preservation, maintenance, repair and restoration of the site, object or building.

This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.

	Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions	
SA071	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.	
	This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.	
SA072	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.	
SAO73	The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character:	
	<ul> <li>a. construction of any building;</li> <li>b. laying of overhead or underground services;</li> <li>c. any sealing, paving, soil compaction;</li> <li>d. any alteration of more than 75mm to the ground level prior to work commencing.</li> </ul>	
SA074	Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.	
Landslide apply)	hazard (refer Overlay map - Landslide hazard to determine if the following assessment criteria	
SA075	Development does not:  a. involve earthworks exceeding 50m³; b. involve cut and fill having a height greater than 600mm; c. involve any retaining wall having a height greater than 600mm; d. redirect or alter the existing flow of surface or groundwater.	
SA076	Buildings, excluding domestic outbuildings:	
	<ul><li>a. are split-level, multiple-slab, pier or pole construction;</li><li>b. are not single plane slab on ground.</li></ul>	
SA077	Development does not involve the manufacture, handling or storage of hazardous chemicals.	
	Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)	
SAO78	Development does not involve the construction of any buildings or structures containing habitable rooms or sensitive land uses within a High voltage electricity line buffer.	
SAO79	Development within a Water supply buffer does not include the incineration or burial of waste and all other waste is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.	
SAO80	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.	

SAO81	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):	
	a. buildings or structures;	
	b. gates and fences;	
	c. storage of equipment or materials;	
	d. landscaping or earthworks or stormwater or other infrastructure.	
SAO82	On-site sewerage facilities in a Water supply buffer produce a minimum secondary treated effluent (90th percentile) and effluent application to ensure water quality is maintained and protected.	
SAO83	On-site sewerage facilities in a Water supply buffer for a dwelling house <sup>(22)</sup> include:	
	<ul> <li>a. emergency storage capacity of 1,000 litres and adequate buffering for shock loading/down time;</li> <li>b. a reserve land application area of 100% of the effluent irrigation design area;</li> <li>c. land application areas that are vegetated;</li> </ul>	
	d. the base of the land application field is at least 2 metres above the seasonal high water table/bedrock (whichever is the closest to the base of the application area);	
	e. wastewater collection and storage systems must have capacity to accommodate full load at peak times.	
SAO84	On-site sewerage facilities in a Water supply buffer for development other than a dwelling house include emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies/overload with provision for de-sludging.	
SAO85	Development involving Permanent plantation <sup>(59)</sup> within a Water supply buffer maintains a minimum of 30% ground cover at all times.	
SAO86	Development does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer.	
SAO87	Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.	
SAO88	All habitable rooms located within an Electricity supply substation buffer are:	
	a. located a minimum of 10m from an electricity supply substation <sup>(80)</sup> ; and	
	b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.	
Overland apply)	flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria	
SAO89	Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.	
SAO90	Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.	
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.	
	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	

the hazardous chemicals is not located within an overland flow path area.  SAO93 Development for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provide	SAO91	Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.	
in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrate	SAO92	Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area.	
	SAO93	Development for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.	

## Riparian and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the following assessment criteria apply)

Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

## **SAO94**

No development is to occur within:

- 50m from top of bank for W1 waterway and drainage line
- b. 30m from top of bank for W2 waterway and drainage line
- 20m from top of bank for W3 waterway and drainage line C.
- d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.

Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations.

Note - The minimum setback distance applies to the each side of waterway.

## Part D - Criteria for assessable development - Transition precinct, developable lot

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part F, Table 6.2.3.2.2.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

Table 6.2.3.2.1.2 Assessable development - Transition precinct, developable lot

Performance outcomes	Acceptable outcomes	
General criteria		
Servicing		
PO1	No acceptable outcome provided.	
The site is a developable lot that is not serviced with all local government networks including water and sewer.		
Interim uses		

# P<sub>0</sub>2 No acceptable outcome provided. Interim uses: do not fragment or alienate the land or result in the loss of land for future urban purposes; result in minimal investment; b. C. do not prejudice or delay the use of the land for urban purposes. PO<sub>3</sub> No acceptable outcome provided. Interim uses: a. are adequately serviced with necessary infrastructure to meet on-site needs and requirements; are of a size and scale that maintains the low b. density, low intensity and open area landscape character anticipated in the interim precinct; are designed, located and operated in a manner that avoids nuisance impacts on adjoining properties; requires minimal filling or excavation. Where this d. occurs, visual impacts are reduced through screening; e. are not visually dominant from the streetscape or adjoining properties; f. utilise materials, finishes and colours that are consistent with existing semi-rural environment. Site density **PO4** No acceptable outcome provided Development does not result in residential density exceeding more than one dwelling house (22) per lot. **Building height PO5 AO5** The height of buildings and structures: Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m. a. is consistent with the existing low rise, open area and low density character and amenity of the Interim precinct;

does not unduly impact on access to daylight, sunlight, overshadowing or privacy experienced by

adjoining premises.

#### **Setbacks**

#### **PO6**

Buildings and structures are setback to:

- be consistent with the semi-rural character of the area;
- result in development not being visually dominant b. or overbearing with respect on adjoining properties;
- maintain the privacy of adjoining. C.

## **A06**

Unless specified elsewhere in the zone code, the minimum setback from a boundary is as follows:

- a. Front boundary - 6m;
- b. Side boundary - 4.5m;
- C. Rear boundary - 4.5m.

Note - This provision does not apply where a development footprint exists for a lot.

#### **PO7**

Non-residential uses are setback to ensure:

- chemical spray, fumes, odour, dust are contained on-site;
- b. unreasonable nuisance or annoyance resulting from, but not limited to; noise, storage of materials and rubbish does not adversely impact upon land users adjacent to, or within the general vicinity; and
- buildings and other structures are consistent with C. the open area, low density, low built form character and amenity associated with the interim precinct.

## **A07**

The following uses and associated buildings are setback from all property boundaries as follows:

- Animal husbandry<sup>(4)</sup> (buildings only) 10m; a.
- Cropping<sup>(19)</sup> (buildings only) 10m; b.
- Animal keeping<sup>(5)</sup>, excluding catteries and kennels C. - 20m;
- Cropping<sup>(19)</sup> (buildings only) 10m; d.
- Intensive horticulture (40) 10m: e.
- Rural Industry<sup>(70)</sup> 20m; f.
- Wholesale nursery (89) 10m; g.
- Veterinary services (87) 10m. h.

## **Development footprint**

## PO8

Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within that development footprint No acceptable outcome provided.

## **Building on sloping land**

#### PO9

Building and site design on slopes between 10% and 15% must:

- use split-level, multiple-slab, pier or pole a. construction;
- avoid single-plane slabs and benching; b.

No acceptable outcome provided.

- ensure the height of any cut or fill, whether retained or not, does not exceed 900mm:
- d. minimise any visual impact on the landscape character; and
- protecting the amenity of adjoining.

## **Amenity**

## **PO10**

The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.

No acceptable outcome provided.

#### **PO11**

Development is located, designed and operated to avoid nuisance impacts caused by glare and lighting on another property. Nuisance effects generated as a result of development are to be contained to the development site.

## **A011**

Illumination does not exceed the recommended maximum values of light technical parameters for the control of obtrusive light in Table 2.1 of the Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.

## Hazardous chemicals

Note - To assist in demonstrating compliance with the following performance outcomes, a Hazard Assessment Report may be required to be prepared and submitted by a suitably qualified person in accordance with 'State Planning Policy Guideline - Guidance on development involving hazardous chemicals'.

## **PO12**

Off sites risks from foreseeable hazard scenarios involving hazardous chemicals are commensurate with the sensitivity of the surrounding land use zones.

## A012.1

Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land uses as described below:

#### **Dangerous Dose**

- For any hazard scenario involving the release of gases or vapours:
  - AEGL2 (60minutes) or if not available ERPG2;
  - An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
- For any hazard scenario involving fire or explosion:
  - i. 7kPa overpressure:
  - 4.7kW/m2 heat radiation.

If criteria AO12.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 0.5 x 10-6/year.

## AO12.2

Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below:

## Dangerous Dose

- For any hazard scenario involving the release of gases or vapours:
  - AEGL2 (60minutes) or if not available ERPG2;
  - An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
- For any hazard scenario involving fire or explosion:
  - 7kPa overpressure;
  - 4.7kW/m2 heat radiation.

If criteria AO12.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.

## AO12.3

Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below:

## Dangerous Dose

- For any hazard scenario involving the release of gases or vapours:
  - i. AEGL2 (60minutes) or if not available ERPG2;
  - An oxygen content in air <19.5% or >23.5% ii. at normal atmospheric pressure.
- For any hazard scenario involving fire or explosion: b.
  - i. 14kPa overpressure;
  - ii. 12.6kW/m2 heat radiation.

If criteria AO12.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.

**PO13 AO13**  Buildings and package stores containing fire-risk hazardous chemicals are designed to detect the early stages of a fire situation and notify a designated person.

Buildings and package stores containing fire-risk hazardous chemicals are provided with 24 hour monitored fire detection system for early detection of a fire event.

## **PO14**

Common storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) that are adequate to contain releases, including fire fighting media.

## **AO14**

Storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) capable of containing a minimum of the total aggregate capacity of all packages plus the maximum operating capacity of any fire protection system for the storage area(s) over a minimum of 60 minutes.

#### **PO15**

Storage and handling areas, including manufacturing areas, containing hazardous chemicals in quantities greater than 2,500L or kg within a Local Government "flood hazard area" are located and designed in a manner to minimise the likelihood of inundation of flood waters from creeks, rivers, lakes or estuaries.

## AO15.1

The base of any tank with a WC >2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively:

- a) bulk tanks are anchored so they cannot float if submerged or inundated by water; and
- b) tank openings not provided with a liquid tight seal, i.e. an atmospheric vent, are extended above the relevant flood height level.

## AO15.2

The lowest point of any storage area for packages >2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively, package stores are provided with impervious bund walls or racking systems higher than the relevant flood height level.

## **Waste Treatment**

## **PO16**

Stormwater generated on-site is treated and disposed of in an acceptable manner to mitigate any impacts on soil, surface water or ground water quality. Development resulting in the degradation of soil, surface water or ground water quality is avoided.

## **AO16**

All concentrated animal use areas (e.g. Sheds, pens, holding yards, stables, kennels and other animal enclosures) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment areas.

## Car parking

## **PO17**

Traffic generation, vehicle movement and on-site car parking associated with an activity:

- provides safe, convenient and accessible access a. for vehicles and pedestrians:
- b. provides safe and convenient on-site parking and manoeuvring to meet anticipated parking demand;

## **AO17**

On-site car parking is provided in accordance with Schedule 7 - Car parking.

- is appropriate to the road classification and carrying capacity of the local network and able to meet the additional demands generated by the development; and
- d. does not result adverse impacts on the efficient and safe functioning of the road network.

Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.

## **Noise**

## **PO18**

Noise generating uses do not adversely affect existing or potential noise sensitive uses. Noise is to be mitigated in accordance with Planning scheme policy - Noise.

Note - The use of walls, barriers or fences that are visible from a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line.

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.

No acceptable outcome provided

## **PO19**

Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:

- contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);
- maintaining the amenity of the streetscape.

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.

Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.

## AO19.1

Development is designed to meet the criteria outlined in the Planning Scheme Policy - Noise.

## AO19.2

Noise attenuation structures (e.g. walls, barriers or fences):

- a. are not visible from an adjoining road or public area unless:
  - i. adjoining a motorway or rail line; or
  - adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.
- b. do not remove existing or prevent future active transport routes or connections to the street network:
- are located, constructed and landscaped in C accordance with Planning scheme policy -Integrated design.

Note - Refer to Planning scheme policy - Integrated design for details and examples of noise attenuation structures.

Note - Refer to Overlay map - Active transport for future active transport routes.

## Clearing of habitat trees where not located within the Environmental areas overlay map

## **PO20**

- a. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.
- Development does not result in the net loss of fauna habitat. Where development does result in the loss of a habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.
- Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner

Note: Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas

No acceptable outcome provided

## Works criteria

## **Utilities**

# **PO21**

The development is connected to an existing reticulated electricity supply system approved by the relevant energy regulating authority.

# AO21

Development is connected to underground electricity.

## **PO22**

The development has access to telecommunications and broadband services in accordance with current standards. No acceptable outcome provided

## **PO23**

Where available the development is to safely connect to reticulated gas.

No acceptable outcome provided

## **PO24**

The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk to public health.

## AO24.1

Where in a sewered area, the development is connected to a reticulated sewerage network.

## AO24.2

Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility. Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater Code. AO24.3 Trade waste is pre-treated on-site prior to discharging into the sewerage network. AO25.1 **PO25** Where in an existing connections area or a future The development is provided with an adequate and sustainable supply of potable (drinking and general use connections area as detailed in the Unitywater e.g. gardening, washing, fire fighting) water. Connections Policy, the development is connected to the reticulated water supply system in accordance with the South East Queensland Water Supply and Sewerage Design and Construction Code and the relevant Water Service Association of Australia (WSAA) codes and standards. AO25.2 Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development. **PO26** No acceptable outcome provided The development is provided with constructed and dedicated road access. Access **PO27** No acceptable outcome provided Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design. **PO28** AO28.1 The layout of the development does not compromise: The development provides for the extension of the road network in the area in accordance with Council's road the development of the road network in the area; a. network planning. b. the function or safety of the road network; the capacity of the road network. C. AO28.2

The development does not compromise future road Note - The road hierarchy is mapped on Overlay map - Road widening of frontage roads in accordance with the hierarchy. relevant standard and Council's road planning. AO28.3 The lot layout allows forward access to and from the site. **PO29** AO29.1 Safe access is provided for all vehicles required to access Site access and driveways are designed and located in accordance with: the site. Where for a Council-controlled road, AS/NZS2890.1 a. section 3: or Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval. AO29.2 Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities - Off street car parking and the relevant standards in Planning scheme policy - Integrated design. Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction. AO29.3 Access driveways, manoeuvring areas and loading facilities provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements. PO30 No acceptable outcome provided Upgrade works (whether trunk or non-trunk) are provided where necessary to: ensure the type or volume of traffic generated by a. the development does not have a negative impact on the external road network; b. ensure the orderly and efficient continuation of the active transport network; ensure the site frontage is constructed to a suitable C. urban standard generally in accordance with Planning scheme policy - Integrated design.

Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome refer to Planning scheme policy - Integrated transport assessment for guidance on when an ITA is required. An ITA should be prepared

in accordance with Planning scheme policy - Integrated transport assessment.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - The primary and secondary active transport network is mapped on Overlay map - Active transport.

Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:

- Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or
- Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.

Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.



## **Stormwater**

## **PO31**

Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.

Note - Refer to Planning scheme policy - Integrated design for details.

Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.

Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.

No acceptable outcome provided

# **PO32**

Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.

Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.

No acceptable outcome provided

#### **PO33**

Stormwater quality management systems are designed and constructed to minimise the environmental impact of stormwater discharge on surface and underground receiving water quality and meet the design objectives in Tables A and B in Appendix 3 of the SPP.

Note - A stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.

No acceptable outcome provided

## Site works and construction management

#### **PO34**

The site and any existing structures are maintained in a tidy and safe condition.

No acceptable outcome provided

## **PO35**

All works on-site are managed to:

- minimise as far as practicable, impacts on adjoining a. or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety
- minimise as far as possible, impacts on the natural b. environment:
- ensure stormwater discharge is managed in a C. manner that does not cause nuisance or annoyance to any person or premises;
- avoid adverse impacts on street trees and their d. critical root zone.

## AO35.1

Works incorporate temporary stormwater runoff, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:

- stormwater is not discharged to adjacent properties a. in a manner that differs significantly from pre-existing conditions;
- stormwater discharged to adjoining and b. downstream properties does not cause scour and erosion;
- stormwater discharge rates do not exceed pre-existing conditions;
- d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and
- the 50% AEP storm event is the minimum design e. storm for all silt barriers and sedimentation basins.

## AO35.2

Stormwater runoff, erosion and sediment controls are constructed prior to commencement of any clearing or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.

Note - The measures are adjusted on-site to maximise their effectiveness

## AO35.3

The completed earthworks area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.

## AO35.4 Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a qualified arborist which demonstrates and ensures that no permanent damage is caused to the tree. **PO36 AO36** No dust emissions extend beyond the boundaries of the Dust suppression measures are implemented during soil disturbances and construction works to protect nearby site during soil disturbances and construction works. premises from unreasonable dust impacts. **PO37** AO37.1 Construction traffic including contractor car parking is All works on-site and the transportation of material to and from the site are managed to not negatively impact the controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform existing road network, the amenity of the surrounding area or the streetscape. Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe. Note - Where the amount of imported or exported material is greater than 50m3, a haulage route must be identified and approved by AO37.2 Council. All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads. Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD). AO37.3 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times. **PO38 AO38** All disturbed areas are rehabilitated at the completion of At completion of construction all disturbed areas of the construction. site are to be: topsoiled with a minimum compacted thickness of Note - Refer to Planning scheme policy - Integrated design for fifty (50) millimetres; details. grassed. b. Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas. AO39.1 **PO39**

The clearing of vegetation on-site:

- is limited to the area of infrastructure works, building areas and other necessary areas for the works; and
- includes the removal of declared weeds and other b. materials which are detrimental to the intended use of the land:
- is disposed of in a manner which minimises C. nuisance and annoyance to existing premises.

Note - No burning of cleared vegetation is permitted.

All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.

Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.

#### AO39.2

Disposal of materials is managed in one or more of the following ways:

- all cleared vegetation, declared weeds, stumps, a. rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
- all native vegetation with a diameter below 400mm is to be chipped and stored on-site.

Note - The chipped vegetation must be stored in an approved location, preferably a park or public land.

#### **PO40**

Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities. the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.

No acceptable outcome provided

## **Earthworks**

#### PO41

On-site earthworks are designed to consider the visual and amenity impact as they relate to:

- the natural topographical features of the site; a.
- short and long-term slope stability; b.
- soft or compressible foundation soils; C.
- d. reactive soils;
- low density or potentially collapsing soils; e.
- f. existing fill and soil contamination that may exist on-site;
- the stability and maintenance of steep rock slopes g. and batters:
- h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential).

Note - Filling or excavation works are to be completed within six months of the commencement date.

## AO41.1

All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.

#### AO41.2

Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.

#### AO41.3

Inspection and certification of steep rock slopes and batters is required by a suitably qualified and experienced RPEQ.

## AO41.4

All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.

## AO41.5

All filling or excavation is contained on-site.

## AO41.6

All fill placed on-site is:

- limited to that required for the necessary approved
- clean and uncontaminated (i.e. no building waste, b. concrete, green waste or contaminated material etc. is used as fill).

## A041.7

The site is prepared and the fill placed on-site in accordance with AS3798.

Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.


## **PO42**

Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area.

## A042

Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.

Figure - Embankment

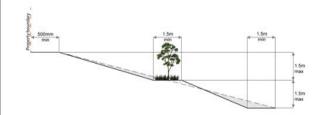

#### **PO43**

Filling or excavation is undertaken in a manner that:

- does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;
- b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.

Note - Public sector entity as defined in the Sustainable Planning Act 2009.

#### AO43.1

No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity.

Note - Public sector entity as defined in the Sustainable Planning Act 2009.

## AO43.2


Filling or excavation that would result in any of the following is not carried out on-site:

a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm: an increase in finished surface grade over, or within b. 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken. Note - Public sector entity as defined in the Sustainable Planning Act 2009. **PO44** No acceptable outcome provided Filling or excavation does not result in land instability. Note - Steep rock slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance. **PO45** No acceptable outcome provided. Development does not result in adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway; increased flood inundation outside the site; b. C. any reduction in the flood storage capacity in the d. and any clearing of native vegetation. Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy -Integrated design for guidance on infrastructure design and modelling requirements. Retaining walls and structures **PO46 AO46** 

All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents.

Earth retaining structures:

- are not constructed of boulder rocks or timber; a.
- where height is no greater than 900mm, are b. provided in accordance with Figure - Retaining on a boundary;

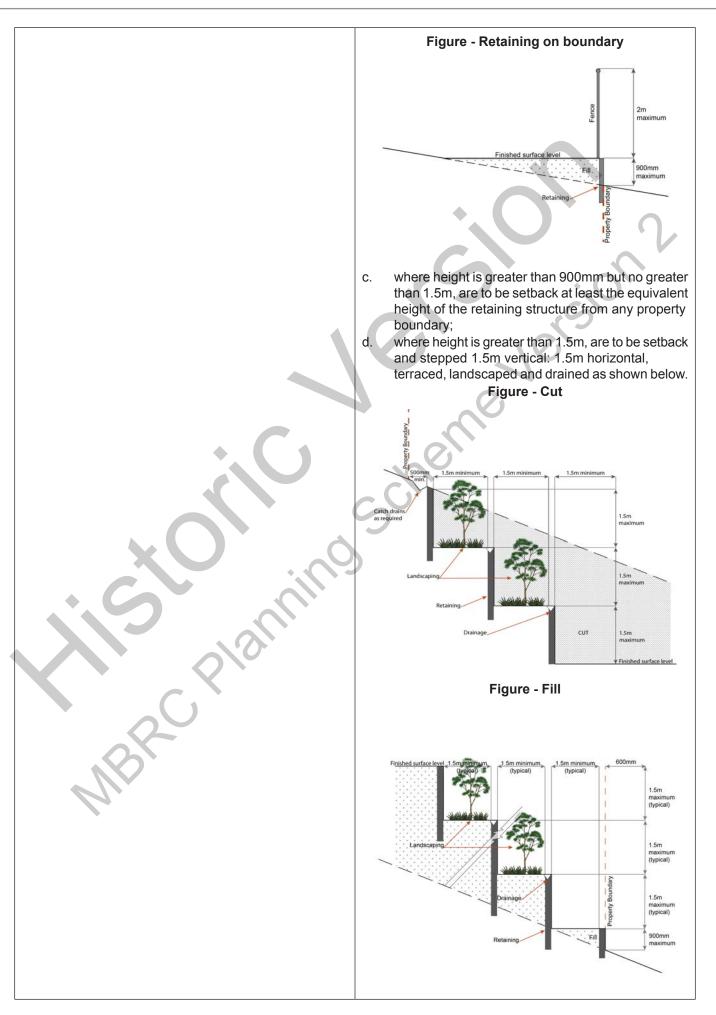

## **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates:
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or

  - iii.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park (84) with accommodation in the form of caravans or tents; or material change of use for outdoor sales (54), outdoor processing or outdoor storage where involving combustible materials.

#### AND

- none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent

#### **PO47**

Development incorporates a fire fighting system that:

- satisfies the reasonable needs of the fire fighting a. entity for the area;
- b. is appropriate for the size, shape and topography of the development and its surrounds;
- is compatible with the operational equipment C. available to the fire fighting entity for the area;
- d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;
- considers the fire hazard inherent in the surrounds e. to the development site;
- is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

#### AO47.1

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:

- in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks  $^{(84)}$  or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
- b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
- in regard to the proximity of hydrants to buildings and other C. facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
  - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
  - for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans; for outdoor sales (54), processing or storage facilities,
  - iii. hydrant coverage is required across the entire area of the outdoor sales <sup>(54)</sup>, outdoor processing and outdoor storage facilities;
- in regard to fire hydrant accessibility and clearance d. requirements - Part 3.5 and, where applicable, Part 3.6.

#### AO47.2

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- a. an unobstructed width of no less than 3.5m;
- b. an unobstructed height of no less than 4.8m;
- constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- an area for a fire brigade pumping appliance to d. stand within 20m of each fire hydrant and 8m of each hydrant booster point.

#### AO47.3

On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) - Routine service of fire protection systems and equipment.

## **PO48**

On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.

#### **AO48**

For development that contains on-site fire hydrants external to buildings:

- those external hydrants can be seen from the a. vehicular entry point to the site; or
- b. a sign identifying the following is provided at the vehicular entry point to the site:
  - the overall layout of the development (to scale);
  - internal road names (where used);
  - iii. all communal facilities (where provided);
  - iv. the reception area and on-site manager's office (where provided);
  - external hydrants and hydrant booster points;
  - physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.

Note - The sign prescribed above, and the graphics used are to be:

- in a form; a.
- of a size; b.
- illuminated to a level;

which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sian. **PO49 AO49** Each on-site fire hydrant that is external to a building is For development that contains on-site fire hydrants signposted in a way that enables it to be readily identified external to buildings, those hydrants are identified by at all times by the occupants of any firefighting appliance way of marker posts and raised reflective pavement traversing the development site. markers in the manner prescribed in the technical note Fire hydrant indication system produced by the Queensland Department of Transport and Main Roads. Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Use specific criteria Dwelling house<sup>(22)</sup> - Secondary dwelling **PO50** No acceptable outcome provided. Secondary dwellings: are subordinate and ancillary to the primary dwelling a. in size and function; b. are not larger than 100m<sup>2</sup> GFA have the appearance, bulk and scale of a single C. dwelling from the street; maintain sufficient area for the siting of all buildings, d. structures, landscaping and car parking spaces for the dwelling house (22) on-site. Dwelling house<sup>(22)</sup> - Domestic outbuildings PO51 No acceptable outcome provided. Domestic outbuildings and car ports are: of a height that does not negatively impact the visual amenity of adjoining properties; h. located on-site to not dominate the streetscape. Home based business (35) **PO52** AO52.1 Home based business(s)(35): Home based business(s)<sup>(35)</sup> having a maximum total use area is 100m<sup>2</sup>, are fully contained within a dwelling or Are subordinate in size and function to the primary on-site structure, except for a home based child care use on the site being a permanent residence; facility.

- b. Are of a scale and intensity that does not result in adverse visual or nuisance impacts on the residents in adjoining or nearby dwellings;
- Store no more heavy vehicles, trailer and motor C. vehicle on-site, as follows:
  - i. 1 heavy vehicle;
  - ii. 1 trailer:
  - iii. Up to 3 motor vehicles.
- d. Results in a vehicular and pedestrian traffic generation consistent with that reasonably expected in the surrounding low density, low built form and open area character and amenity anticipated in the precinct;
- Are suitably screened to ensure adverse visual impacts on the residents in adjoining or nearby dwellings are minimised;
- Sufficiently separated from adjoining properties so development does not result in adverse visual, noise or nuisance impacts on adjoining residents

#### AO52.2

Up to 2 additional non-resident, either an employee or customer, are permitted on the site at any one time.

Note - This provision does not apply to Bed and Breakfast or farmstay business.

## AO52.3

The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:

- 1 heavy vehicle;
- 1 trailer; b.
- Up to 3 motor vehicles

Note - The car parking provision associated with the dwelling house  $^{(22)}$  is in addition to this requirement.

Note - The number of motor vehicles stated is in addition to motor vehicles associated with a dwelling house  $^{(22)}$ .

## AO52.4

Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.

Note - Planting for screening is to have a minimum depth of 3m.

## AO52.5

Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.

#### **AO53**

The hours of operation for home based business(s)<sup>(35)</sup> are managed so that the activity does not adversely impact on the low intensity character and amenity anticipated in the precinct.

## **AO53**

Hours of operation to be restricted to 8:00am to 6:00pm Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday or Anzac Day, except for:

a. bed and breakfast or farm stay business which may operate on a 24 hour basis;

## b. office or administrative activities that do not generate non-residents visiting the site such as book keeping and computer work; starting and warming up of heavy vehicles, which can commence at 7.00am. **PO54** AO54.1 The Home based business(s)<sup>(35)</sup> does not result in: The use does not involve heavy vehicle servicing or major repairs, including spray painting or panel. an adverse visual, odour, particle drift or noise nuisance impact on the residents in adjoining or AO54.2 nearby dwellings; Home based business(s)<sup>(35)</sup> do not comprise an b. an adverse impact upon the low intensity and open environmentally relevant activity (ERA) as defined in the area character and amenity anticipated in the Environmental Protection Regulation 2008. locality; the establishment of vehicle servicing or major AO54.3 repairs, spray painting, panel beating or any environmentally relevant activity (ERA). Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke. Note - Nuisance is defined in the Environmental Protection Act 1994. AO55.1 **PO55** On-site display and sales of goods is limited to the Only goods grown, produced or manufactured on-site activities being undertaken from the site and does not are sold from the site. result in: AO55.2 the display and sale of goods being viewed from a. outside of the site; Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure overall development on the site having a and the display of goods is not visible from the boundary predominantly commercial appearance. of the site. **PO56 AO56** Bed and breakfast and farmstays are of a size and scale For bed and breakfast and farmstays: that: short-term accommodation<sup>(77)</sup> is provided in the dwelling house<sup>(22)</sup> of the accommodation operator; a. are consistent with the low intensity, open area character and amenity of the rural residential area; b. maximum 4 bedrooms are provided for a maximum ensures acceptable levels of privacy and amenity of 10 guests; b. for the residents in adjoining or nearby dwellings. C. meals are served to paying guests only; d. rooms do not contain food preparation facilities. Major electricity infrastructure<sup>(43)</sup>, Substation<sup>(80)</sup> and Utility installation<sup>(86)</sup> **PO57** AO57.1

The development does not have an adverse impact on the visual amenity of a locality and is:

- high quality design and construction; a.
- b. visually integrated with the surrounding area;
- C. not visually dominant or intrusive;
- d. located behind the main building line:
- below the level of the predominant tree canopy or e. the level of the surrounding buildings and structures:
- f. camouflaged through the use of colours and materials which blend into the landscape;
- treated to eliminate glare and reflectivity; g.
- h. landscaped:
- otherwise consistent with the amenity and character i. of the zone and surrounding area.

Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:

- a. are enclosed within buildings or structures;
- b. are located behind the main building line;
- have a similar height, bulk and scale to the C. surrounding fabric;
- d. have horizontal and vertical articulation applied to all exterior walls.

## AO57.2

A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.

#### **PO58**

Infrastructure does not have an impact on pedestrian health and safety.

## AO58

Access control arrangements

- a. do not create dead-ends or dark alleyways adjacent to the infrastructure;
- b. minimise the number and width of crossovers and entry points;
- C. provide safe vehicular access to the site;
- do not utilise barbed wire or razor wire.

## **PO59**

All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:

- generates no audible sound at the site boundaries a. where in a residential setting; or
- meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.

## AO59

All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.

# Roadside stall (68)

## **PO60**

A roadside stall (68):

- comprises only one roadside stall (68) per property; a.
- only offers goods grown, produced or manufactured b. on the site:
- is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and surrounding properties;
- is designed and located to ensure safe and accessible access, egress and on-site parking and not negatively impact the road network.

## AO60.1

For a roadside stall<sup>(68)</sup>:

- no more than one roadside stall (68) per property: a.
- goods offered for sale are only goods grown, b. produced or manufactured on the site:
- the maximum area associated with a roadside stall<sup>(68)</sup>, including any larger separate items displayed for sale, does not exceed 20m<sup>2</sup>.

#### AO60.2

Roadside stall<sup>(68)</sup>:

provide car parking for 2 vehicles off the road carriage and located on the property; b. is located no closer than 100m from an intersection. Note - Refer to Overlay map - Road hierarchy for road classification. Rural industry (70) **PO61** No acceptable outcome provided Rural industry<sup>(70)</sup>: adopt construction materials and use of colour for buildings and structures are visually compatible with the rural residential character and amenity; is of a size, scale and design that is not visually dominant, overbearing and inconsistent with the low intensity built form and open area character and amenity of the rural residential environment. Sales office (72) **PO62** AO62 Sales office<sup>(72)</sup> remain temporary in duration and retain Development is carried out for no longer than 2 years. a physical connection to land or building being displayed or sold. Telecommunications facility (81) Editor's note - In accordance with the Federal legislation Telecommunications facilities (81) must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz. **PO63** AO63.1 Telecommunications facilities  $^{(81)}$  are co-located with existing telecommunications facilities  $^{(81)}$ , Utility installation  $^{(86)}$ , Major electricity infrastructure  $^{(43)}$  or Substation  $^{(80)}$  if there is already a facility in the same New telecommunication facilities (81) are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures. coverage area. AO63.2 If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site. **PO64 AO64** 

A new Telecommunications facility (81) is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.

A minimum of 45m<sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.

## **PO65**

Telecommunications facilities (81) do not conflict with lawful existing land uses both on and adjoining the site.

#### **AO65**

The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.

#### **PO66**

The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:

- high quality design and construction; a.
- b. visually integrated with the surrounding area;
- not visually dominant or intrusive; C.
- located behind the main building line; d.
- below the level of the predominant tree canopy or e. the level of the surrounding buildings and structures;
- f. camouflaged through the use of colours and materials which blend into the landscape;
- treated to eliminate glare and reflectivity; g.
- landscaped: h.
- otherwise consistent with the amenity and character of the zone and surrounding area.

#### AO66.1

Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.

#### AO66.2

In all other areas towers do not exceed 35m in height.

## AO66.3

Towers, equipment shelters and associated structures are of a design, colour and material to:

- a. reduce recognition in the landscape;
- reduce glare and reflectivity. b.

## AO66.4

All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.

Where there is no established building line the facility is located at the rear of the site.

#### AO66.5

The facility is enclosed by security fencing or by other means to ensure public access is prohibited.

## A066.6

A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.

Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.

	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.
PO67	AO67
Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.	An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.
PO68	AO68
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.	All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.
Wholesale nursery <sup>(89)</sup>	0,
PO69	No acceptable outcome provided.
Buildings and activities associated with a wholesale nursery (89):	Vel.
<ul> <li>ensures the propagation of plants, whether or not in the open, occur without loss of amenity to adjacent properties;</li> </ul>	SCI
<ul> <li>do not result in any form of environmental degradation, including, but not limited to, soil degradation, pollution of natural water courses and introduction of exotic plant species into the natural on-site or adjoining flora;</li> </ul>	
c. are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;	
d. have vehicle access from a road classified as a arterial or sub-arterial.	
Note - Refer to Overlay map - Road hierarchy for road classification.	
Veterinary services (87)	
PO70	No acceptable outcome provided.
Buildings and activities associated with veterinary services (87):	
<ul> <li>are for veterinary care, surgery and treatment of animals only;</li> </ul>	

- b. are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;
- have vehicle access from a road classified as a arterial or sub-arterial.

Note - Refer to Overlay map - Road hierarchy for road classification.

# Winery (90)

## **PO71**

Buildings and activities associated with winery (90):

- are for a winery<sup>(90)</sup> and ancillary activities only. Uses not affiliated with winery<sup>(90)</sup> activities, or the sale of products produced or manufactured on-site, are avoided:
- b. are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas; and
- have vehicle access from a road classified as a arterial or sub-arterial.

Note - Refer to Overlay map - Road hierarchy for road classification.

No acceptable outcome provided.

## Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this

## Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

## **PO72**

Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:

- is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;
- protects the environmental and ecological values and health of receiving waters;
- protects buildings and infrastructure from the effects of acid sulfate soils.

## **AO72**

Development does not involve:

- excavation or otherwise removing of more than a. 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or
- b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.

# Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a bushfire management plan is prepared by a suitably qualified person. Guidance for the preparation of a bushfire management plan is provided in Planning scheme policy - Bushfire prone areas.

Note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.

#### **PO73**

## Development:

- minimises the number of buildings and people working and living on a site exposed to bushfire
- b. ensures the protection of life during the passage of a fire front;
- is located and designed to increase the chance of C. survival of buildings and structures during a bushfire:
- d. minimises bushfire risk from build up of fuels around buildings and structures:
- ensure safe and effective access for emergency e. services during a bushfire.

#### AO73.1

Buildings and structures are:

- not located on a ridgeline; a.
- b. not located on land with a slope greater than 15% (see Overlay map - Landslide hazard);
- dwellings are located on east to south facing slopes.

## A073.2

Buildings and structures have contained within the site:

- a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures:
- an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and
- an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%:
  - to, and around, each building and other roofed structure: and
  - to each fire fighting water supply extraction ii. point.

Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS 3959

# **PO74**

Development and associated driveways and access ways:

# **AO74**

A length of driveway:

- avoid potential for entrapment during a bushfire; a.
- ensure safe and effective access for emergency b. services during a bushfire;
- enable safe evacuation for occupants of a site C. during a bushfire.
- to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road;
- b. has a maximum gradient no greater than 12.5%;
- have a minimum width of 3.5m; C.
- d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.

#### **PO75**

Development provides an adequate water supply for fire-fighting purposes.

## **AO75**

- a reticulated water supply is provided by a a. distributer retailer for the area or;
- h. where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is located within 10m of buildings and structures.
- Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access is provided to within 3m of that water storage source.
- Where a tank is the nominated on-site fire fighting water storage source, it includes:
  - a hardstand area allowing medium rigid vehicles (15 tonne fire appliance) access within 6m of the tank;
  - fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.

# PO76

Development:

- does not present unacceptable risk to people or environment due to the impact of bushfire on dangerous goods or combustible liquids;
- does not present danger or difficulty to emergency b. services for emergency response or evacuation.

Editor's note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.

#### **AO76**

Development does not involve the manufacture or storage of hazardous chemicals.

# Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note – The following are exempt from the native vegetation clearing provisions of this planning scheme:

- Clearing of native vegetation located within an approved development footprint; a.
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately h required in response to an accident or emergency;

- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure:
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public e. infrastructure or drainage purposes;
- Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping q. land, windbreaks, lawns or created gardens;
- Grazing of native pasture by stock; h.
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

## Vegetation clearing, ecological value and connectivity

# **PO77**

Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:

- the quality and integrity of the biodiversity and a. ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded;
- on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas\*.

No acceptable outcome provided.

\* Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014. **PO78** No acceptable outcome provided. Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by: retaining habitat trees; a. b. providing contiguous patches of habitat; C. provide replacement and rehabilitation planting to improve connectivity; d. avoiding the creation of fragmented and isolated patches of habitat; providing wildlife movement infrastructure. e. Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy – Environmental Vegetation clearing and habitat protection **PO79** No acceptable outcome provided. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. **PO80** No acceptable outcome provided. Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development will: rehabilitate, revegetate, restore and enhance an a. area to ensure it continues to function as a viable and healthy habitat area; provide replacement fauna nesting boxes in the b. event of habitat tree loss in accordance with Planning scheme policy - Environmental areas; C. undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework. **PO81** No acceptable outcome provided. Development ensures safe, unimpeded, convenient and ongoing wildlife movement and habitat connectivity by: providing contiguous patches of habitat; a. b. avoiding the creation of fragmented and isolated patches of habitat;

		Г
c. d.	providing wildlife movement infrastructure; providing replacement and rehabilitation planting to improve connectivity.	
Veg	etation clearing and soil resource stability	
PO8	32	No acceptable outcome provided.
Dev	elopment does not:	
a. b.	result in soil erosion or land degradation; leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.	• 0
Veg	etation clearing and water quality	
PO8	33	No acceptable outcome provided.
grou	elopment maintains or improves the quality of indwater and surface water within, and downstream, site by:	C) leisi
a. b. c.	ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads; avoiding or minimising changes to landforms to maintain hydrological water flows; adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry <sup>(4)</sup> and animal keeping <sup>(5)</sup> activities.	Scheine
PO8	34	No acceptable outcome provided.
	elopment minimises adverse impacts of stormwater off on water quality by:  minimising flow velocity to reduce erosion; minimising hard surface areas; maximising the use of permeable surfaces; incorporating sediment retention devices; minimising channelled flow.	
Veg	etation clearing and access, edge effects and urb	oan heat island effects
in a	elopment retains safe and convenient public access manner that does not result in the adverse edge ets or the loss or degradation of biodiversity values in the environment.	No acceptable outcome provided.
PO8	36	No acceptable outcome provided.
1	elopment minimises potential adverse 'edge effects' ecological values by:	
a.	providing dense planting buffers of native vegetation between a development and environmental areas;	

- retaining patches of native vegetation of greatest possible size where located between a development and environmental areas;
- restoring, rehabilitating and increasing the size of C. existing patches of native vegetation;
- d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors;
- e. landscaping with native plants of local origin.

Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the groundwater and surface water flow.

Development avoids adverse microclimate change and does not result in increased urban heat island effects.

#### **PO87** No acceptable outcome provided

Adverse urban heat island effects are minimised by:

pervious surfaces: a. b. providing deeply planted vegetation buffers and

green linkage opportunities;

- landscaping with local native plant species to C. achieve well-shaded urban places;
- d. increasing the service extent of the urban forest canopy.

## Vegetation clearing and Matters of Local Environmental Significance (MLES) environmental offsets

Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance

with the environmental offset requirements identified in

Planning scheme policy - Environmental areas.

Editor's note - For MSES Koala Offsets, State Planning Regulatory Provision environmental offset provisions apply.

No acceptable outcome provided.

# Extractive resources transport route (refer Overlay map - Extractive resources (transport route and buffer) to determine if the following assessment criteria apply)

## **PO89**

**PO88** 

## Development:

does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route;

## **AO89**

The following uses are not located within the 100m wide transport route buffer:

- Caretaker's accommodation (10), except where a. located in the Extractive industry zone;
- Community residence<sup>(16)</sup>; b.

- b. does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes;
- adopts design and location measures to C. satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to:
  - i. locating the furthest distance possible from the transportation route;
  - ii. habitable rooms being located the furthest from the transportation route;
  - iii. shielding and screening private outdoor recreation space from the transportation routes.

- Dual occupancy<sup>(21)</sup>; C.
- Dwelling house<sup>(22)</sup>: d.
- Dwelling unit<sup>(23)</sup>; e.
- Hospital (36): f.
- Rooming accommodation (69); g.
- Multiple dwelling(49); h.
- Non-resident workforce accommodation (52); i.
- Relocatable home park (62); j.
- Residential care facility (65) k.
- Resort complex<sup>(66)</sup>; Ι.
- Retirement facility (67); m.
- Rural workers' accommodation<sup>(71)</sup>; n.
- Short-term accommodation (77); Ο.
- Tourist park (84) p.

#### **PO90**

### Development:

- a. does not adversely impact upon the efficient and effective transportation of extractive material along a transportation route;
- b. ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility;
- utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.

#### AO90.1

Development does not create a new vehicle access point onto an Extractive resources transport route.

#### A090.2

A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.

# Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy - Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

#### **PO91**

#### Development will:

- not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;
- protect the fabric and setting of the heritage site, h object or building;

# AO91

Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value.

Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with

- be consistent with the form, scale and style of the heritage site, object or building;
- utilise similar materials to those existing, or where d. this is not reasonable or practicable, neutral materials and finishes;
- incorporate complementary elements, detailing and e. ornamentation to those present on the heritage site, object or building;
- f. retain public access where this is currently provided.

Planning scheme policy - Heritage and landscape character. The plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.

## **PO92**

Demolition and removal is only considered where:

- a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or
- demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or
- limited demolition is performed in the course of C. repairs, maintenance or restoration; or
- demolition is performed following a catastrophic event which substantially destroys the building or object.

No acceptable outcome provided.

## **PO93**

Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.

No acceptable outcome provided.

## **PO94**

Development does not adversely impact upon the health and vitality of significant trees. Where development occurs in proximity to a significant tree, construction measures and techniques as detailed in AS 4970-2009 Protection of trees on development sites are adopted to ensure a significant tree's health, wellbeing and vitality.

Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably qualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome.

## **AO94**

Development does:

- a. not result in the removal of a significant tree;
- b. not occur within 20m of a protected tree;
- C. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.

Landslide hazard (refer Overlay map - Landslide hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a site-specific geotechnical assessment report is prepared by a qualified engineer. Guidance for the preparation of a geotechnical assessment report is provided in Planning scheme policy - Landslide hazard.

#### **PO95**

## Development:

- maintains the safety of people and property on a site and neighbouring sites from landslides;
- b. ensures the long-term stability of the site considering the full nature and end use of the development;
- ensures site stability during all phases of C. construction and development:
- minimises disturbance of natural drainage patterns d. of the site and does not result in the redirection or alteration of the existing flow if surface or groundwater
- minimises adverse visual impacts on the amenity of adjoining residents and provides a positive interface with the streetscape.

#### **AO95**

Development does not:

- involve earthworks exceeding 50m3;
- involve cut and fill having a height greater than b. 600mm:
- involve any retaining wall having a height greater C. than 600mm;
- d. redirect or alter the existing flow of surface or groundwater.

### **PO96**

Buildings are designed to respond to sloping topography in the siting, design and form of buildings and structures by:

- minimising overuse of cut and fill to create single a. flat pads and benching;
- avoiding expanses of retaining walls, loss of trees b. and vegetation and interference with natural drainage systems;
- minimising any adverse visual impact on the C. landscape character;
- d. Protect the amenity of adjoining properties.

#### A096

Buildings, excluding domestic outbuildings:

- a. are split-level, multiple-slab, pier or pole construction;
- b. are not single plane slab on ground.

## **PO97**

Development protects the safety of people, property and the environment from the impacts of landslide on hazardous chemicals manufactured, handled or stored by incorporating design measures to ensure:

- the long-term stability of the development site a. considering the full nature and end use of the development;
- site stability during all phases of construction and b. development;
- the development is not adversely affected by C. landslide activity originating on sloping land above the site;
- d. emergency access and access from the site for the public and emergency vehicles is available and is not at risk from landslide.

### **AO97**

Development does not involve the manufacture, handling or storage of hazardous chemicals.

Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

**PO98** AO98.1 Development within a Water supply buffer captures solid or liquid waste from all land use, development and activities is designed, constructed and managed to prevent the release of contaminants to surface water or groundwater bodies.

Run-off and sediment from roadways and impervious surfaces within a Water supply buffer are intercepted and treated on-site to remove oil, grease, chemicals, silt, trace metals and nutrients such as nitrogen and phosphorous.

#### AO98.2

Incineration or burial of waste within a Water supply buffer is not undertaken onsite.

#### AO98.3

Solid waste within a Water supply buffer is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.

#### AO98.4

Holding tanks within a Water supply buffer are used for all liquid waste and provide for the separation of oils/solvents and solids prior to pump-out and collection by a licenced contractor.

#### A098.5

Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.

### **PO99**

On-site sewerage systems within a Water supply buffer are designed and operated to ensure there is no worsening or adverse impacts to health risks, environmental risks and water quality.

Editor's Note - For guidance refer to the Seq water Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.

## **AO99**

Secondary treated wastewater treatment systems within a Water supply buffer include:

- emergency storage capable of holding 3-6 hours a. peak flow of treated effluent in the event of emergencies or overload with provision for de-sludging;
- b. back up pump installation and backup power;
- MEDLI modelling to determine irrigation rates and C. sizing of irrigation areas;
- d. vegetated land application areas are not located in overland flow paths or on areas that perform groundwater recharge or discharge functions; and
- wastewater collection and storage systems have a capacity to accommodate full load at peak times and includes temporary facilities.

## **PO100**

## AO100

Development:

Development within a Bulk water supply infrastructure buffer is located, designed and constructed to:

- protect the integrity of the water supply pipeline; a.
- b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline;
- does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer:
- involving a major hazard facility or environmentally b. relevant activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.

#### PO101

Development is located and designed to maintain required access to Bulk water supply infrastructure.

## AO101

Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):

- buildings or structures; a.
- b. gates and fences;
- storage of equipment or materials; C.
- landscaping or earthworks or stormwater or other infrastructure.

#### PO102

Habitable rooms within an Electricity supply substation buffer are located a sufficient distance from substations (80) to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields.

Note - Habitable room is defined in the Building Code of Australia (Volume 1)

# AO102

Habitable rooms:

- are not located within an Electricity supply a. substation buffer; and
- proposed on a site subject to an Electricity supply supply substation<sup>(80)</sup> are acoustically insulted to b. achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.

Note - Habitable room is defined in the Building Code of Australia (Volume 1)

#### PO103

Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation<sup>(80)</sup> to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment.

Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy - Noise.

Note - Habitable room is defined in the Building Code of Australia (Volume 1)

No acceptable outcome provided.

# PO104

Development within a High voltage electricity line buffer provides adequate buffers to high voltage electricity lines to protect amenity and health by ensuring development:

#### AO104

Development does not involve the construction of any buildings or structures within a High voltage electricity line buffer.

- is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields in accordance with the principle of prudent avoidance;
- is located and designed in a manner that maintains b. a high level of security of supply;
- is located and design so not to impede upon the C. functioning and maintenance of high voltage electrical infrastructure.

#### PO105

Development within a Pumping station buffer is located, designed and constructed to:

- ensure that odour or other air pollutant impacts on the amenity of the development met the air quality of objectives in the Environmental Protection (Air) Policy 2008;
- ensure that noise impacts on the amenity of the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008.

#### AO105

Development does not involve the construction of any buildings or structures within a Pumping station buffer.

# Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)

Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.

#### **PO106**

Development:

- minimises the risk to persons from overland flow;
- does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.

# AO106

No acceptable outcome provided.

# PO107

Development:

- maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;
- does not concentrate, intensify or divert overland b. flow onto an upstream, downstream or surrounding property.

Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.

#### **AO107**

No acceptable outcome provided.

Note - Reporting to be prepared in accordance with Planning scheme policy - Flood hazard, Coastal hazard and Overland flow. **PO108** No acceptable outcome provided. Development does not: directly, indirectly or cumulatively cause any increase in overland flow velocity or level; b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure. Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring. **PO109** AO109 Development ensures that public safety and the risk to Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances. AO110 PO110 Development which is not in a Rural zone ensures that Development which is not in a Rural zone that an overland flow is not conveyed from a road or public open overland flow paths and drainage infrastructure is space onto a private lot. provided to convey overland flow from a road or public open space area away from a private lot. AO111.1 PO111 Development ensures that inter-allotment drainage Development ensures that roof and allotment drainage infrastructure, overland flow paths and open drains infrastructure is provided in accordance with the following through private property cater for overland flows for a relevant level as identified in QUDM: fully developed upstream catchment and are able to be a. Urban area – Level III; easily maintained. b. Rural area – N/A; C. Industrial area – Level V; Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development d. Commercial area - Level V. does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. AO111.2 Development ensures that inter-allotment drainage Note - Reporting to be prepared in accordance with Planning scheme policy - Flood hazard, Coastal hazard and Overland flow infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment. PO112 No acceptable outcome provided.

Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:

- a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;
- an overland flow path where it crosses more than b. one premises;
- inter-allotment drainage infrastructure. C.

Note - Refer to Planning scheme policy - Integrated design for details and examples.

Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.

## AO113

Development for a Park<sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.

# Additional criteria for development for a Park (57)

## PO113

Development for a Park<sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:

- public benefit and enjoyment is maximised; a.
- impacts on the asset life and integrity of park b. structures is minimised;
- maintenance and replacement costs are minimised. C.

# Riparian and wetland setbacks

## PO114

Development provides and maintains a suitable setback from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following matters:

- impact on fauna habitats; a.
- b. impact on wildlife corridors and connectivity;
- C. impact on stream integrity;
- d. impact of opportunities for revegetation and rehabilitation planting;
- edge effects. e.

## AO114

Development does not occur within:

- 50m from top of bank for W1 waterway and a. drainage line
- b. 30m from top of bank for W2 waterway and drainage line
- 20m from top of bank for W3 waterway and drainage line
- d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.

Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

# 6.2.3.2.2 Developed lots

#### 6.2.3.2.2.1 Purpose - Transition precinct, Developed lot

Editor's note -The outcomes in this section are generally the same as General residential zone - Next generation neighbourhood precinct or the urban neighbourhood precinct (where identified in the Morayfield South urban area on 'Figure 6.2.3.2.2.1 Morayfield South urban area') but for developed lots.

- For uses on developed lots that are serviced with all local government networks including water and sewer, the purpose of the Emerging community zone - transition precinct will be achieved through the following overall outcomes:
  - Development only occurs on a developed lot that is serviced by all local government networks including а water and sewer.
  - The Transition precinct will mainly comprise a series of residential neighbourhoods that will each achieve: b.
    - a minimum site density of 45 dwellings per hectare if on land within the Morayfield South urban area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area'; or
    - between 15 and 75 dwellings per hectare for all other areas. ii.
  - Neighbourhoods will have a mix of residential uses, tenure and densities on a variety of lot sizes providing housing choice and affordability for different lifestyle choices and life stages to meet diverse community needs. Land within the Morayfield South urban area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area' will be of a scale and density to facilitate an efficient use of land that supports compact, walkable and sustainable communities that are well connected to adjoining centres, community and social infrastructure.
  - Neighbourhoods are designed to provide well-connected, safe and convenient movement and open space d. networks through interconnected streets and active transport linkages that provide high levels of accessibility between residences, open space areas and places of activity.
  - Medium to high density residential uses (e.g. Multiple dwelling<sup>(49)</sup>, Relocatable home park<sup>(62)</sup>, Residential care facilities<sup>(65)</sup>, Retirement facility<sup>(67)</sup>, Rooming accommodation<sup>(69)</sup>, Short-term accommodation<sup>(77)</sup>) are e. located in proximity to a range of services and public transport stop(s) or station(s).
  - The design, siting and construction of residential uses are to:
    - contribute to an attractive streetscape with priority given to pedestrians;
    - encourage passive surveillance of public spaces;
    - results in privacy and residential amenity consistent with the low to medium density residential character intended for the area;
    - provide a diverse and attractive built form;
    - orientate to integrate with the street and surrounding neighbourhood;
    - vi. incorporate sub-tropical urban design principles that respond to local climatic conditions;
    - vii. incorporate sustainable practices including maximising energy efficiency and water conservation;
    - viii. incorporate natural features and respond to site topography;
    - ix. cater for appropriate car parking and manoeuvring areas on-site;
    - Χ. be of a scale and density consistent with the low to medium density residential character intended for the area:

- χi. provide urban services such as reticulated water, sewerage, sealed roads, parks and other identified infrastructure;
- XII. ensure domestic outbuildings are subordinate in appearance and function to the dwelling.
- Non-residential uses in the Transition precinct on a developed lot take the form of community activities, g. corner stores, neighbourhood hubs and local centres.
- Community activities:
  - i. establish in a location that may be serviced by public transport;
  - ii. do not negatively impact adjoining residents or the streetscape;
  - do not undermine the viability of existing or future centres.
- Corner stores may establish as a standalone use (not part of a neighbourhood hub) where: i.
  - the store is of a scale that remains subordinate to all centres and neighbourhood hubs within the i. region;
  - clear separation from existing neighbourhood hubs and centres within the network are maintained to reduce catchment overlap. The corner store should not be within 1600m of another corner store, neighbourhood hub or centre measured from the centre of the corner store, neighbourhood hub or centre:
  - they are appropriately designed and located to include active frontages. iii.
- j. Retail and commercial activities (forming part of a neighbourhood hub):
  - i. cluster with other non-residential uses (excluding corner stores) forming a neighbourhood hub;
  - ii. are centred around a main street central core fostering opportunities for social and economic exchange;
  - are of a small scale, appropriate for a neighbourhood hub;

Note - Retail and commercial uses that will result in a new or existing neighbourhood hub expanding to a scale and function consistent with a Local centre are to be assessed as if establishing a new Local centre. Refer to the Centre zone code for relevant assessment criteria.

- do not negatively impact adjoining residents or the streetscape;
- V. are subordinate in function and scale to all centres within the region.
- k. The design, siting and construction of non-residential uses:
  - maintains a human scale, through appropriate building heights and form;
  - ii. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces;
  - iii. provides for active and passive surveillance of road frontages, movement corridors and public spaces;
  - promotes active transport options and ensures an oversupply of car parking is not provided; ίV.
  - does not result in large internalised shopping centres (76) (e.g. large blank external walls with tenancies ٧. only accessible from within the building) surrounded by expansive areas of surface car parking.

- New retail and commercial uses within the Morayfield South urban area identified on 'Figure 6.2.3.2.2.1 I. Morayfield South urban area' establish generally at the intersection of Blewers Road and Lindsay Road or as part of a mixed use building.
- Neighbourhood hub expansion (into adjoining lots) or the establishment of a new neighbourhood hub only occurs where:
  - it is of a scale that remains subordinate to all centres within the region;
  - ii. the expansion (into adjoining lots) will strengthen the existing neighbourhood hub as an important neighbourhood activity node;
  - clear separation from existing neighbourhood hubs and centres within the network are maintained to iii. reduce catchment overlap. New neighbourhood hubs are to service a currently unserviced catchment. The centre of a neighbourhood hub should not be located within 1600m of another neighbourhood hub or centre measured from the centre of each hub or centre;
  - ί٧. for a new neighbourhood hub, it is located on a sub-arterial or collector road;
  - they are appropriately designed and located to include active frontages around a main street core. ٧.
- General works associated with the development achieves the following: n.
  - new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity (underground wherever possible), water and sewerage (where available);
  - the development manages stormwater to: ii.
    - ensure the discharge of stormwater does not adversely affect the quality, environmental values A. or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - maintain or improve the structure and condition of drainage lines and riparian areas; C.
    - D. avoid off-site adverse impacts from stormwater.
  - the development does not result in unacceptable impacts on the capacity and safety of the external road network;
  - the development ensures the safety, efficiency and useability of access ways and parking areas;
  - site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, 0. particles or smoke
- Noise generating uses are designed, sited and constructed to minimise the transmission of noise to p. appropriate levels and do not cause environmental harm or nuisance.
- Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels q.
- Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
  - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
  - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
  - when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.

- maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
  - the provision of replacement, restoration, rehabilitation planting and landscaping;
  - the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
  - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
- protecting native species and protecting and enhancing species habitat; V.
- protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
- establishing effective separation distances, buffers and mitigation measures associated with identified vii. infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
- establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
- ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance ix. and safety of identified infrastructure;
- ensuring effective and efficient disaster management response and recovery capabilities; Χ.
- xi. where located in an overland flow path:
  - development siting, built form, layout and access responds to the risk presented by the overland Α. flow and minimises risk to personal safety;
  - development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
  - development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
  - development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- Development in the Transition precinct, on a developed lot includes one or more of the following: S.
  - Child care centre<sup>(13)</sup> Club<sup>(14)</sup> Community care centre (15)

  - Community residence<sup>(16)</sup>
  - Community use<sup>(17)</sup>
  - Dual occupancy<sup>(21)</sup>
  - Dwelling house<sup>(22)</sup>
  - Dwelling unit<sup>(23)</sup>
  - Educational establishment<sup>(24)</sup>
  - Emergency services (25)

- Relocatable home park (62)
- Residential care facility (65)
- Retirement facility (67)
- Rooming accommodation (69) - if within 800m walking distance of a higher order or district centre; or where within the Morayfield South urban area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area'
- Sales office<sup>(72)</sup>
- Shop<sup>(75)</sup> if for a corner store
- Short-term accommodation(77) - if within 800m walking distance of a higher order or district centre or where within the Moravfield South urban area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area'
- Where in a Neighbourhood hub or where within the Morayfield South urban area identified on 'Figure 6.2.3.2.2.1 Morayfield South urban area' and part of a mixed use building:
  - Food and drink outlet<sup>(28)</sup>

•	Health care services <sup>(33)</sup> Home based business <sup>(35)</sup>	- Hardware and trade supplies <sup>(32)</sup>
•	Multiple dwelling <sup>(49)</sup> Place of worship <sup>(60)</sup>	- Health care services <sup>(33)</sup> - Office <sup>(53)</sup> - Service Industry <sup>(73)</sup>
•	Place of worship.	- Shop <sup>(75)</sup> - Veterinary services <sup>(87)</sup>

Note - Refer to Overlay map - Centre walking distances.

t. Development in the Transition precinct, on a developed lot does not include any of the following:

					,	. ()
	•	Adult store <sup>(1)</sup>	•	High impact industry <sup>(34)</sup>	•	Port services <sup>(61)</sup>
	•	Agricultural supplies store <sup>(2)</sup>	•	Hotel <sup>(37)</sup>		Renewable energy facility <sup>(63)</sup>
	•	Air services <sup>(3)</sup>	•	Intensive animal industry <sup>(39)</sup>		
	•	Animal husbandry <sup>(4)</sup>		Intensive horticulture <sup>(40)</sup>	>,	Research and technology industry <sup>(64)</sup>
	•	Animal keeping <sup>(5)</sup>	•	Low impact industry <sup>(42)</sup>	•	Rural industry <sup>(70)</sup>
	•	Aquaculture <sup>(6)</sup>	•)	Marine industry <sup>(45)</sup>	•	Rural workers' accommodation <sup>(71)</sup>
	•	Bar <sup>(7)</sup>	•	Medium impact industry <sup>(47)</sup>		
	•	Brothel <sup>(8)</sup>	•	Motor sport facility <sup>(48)</sup>	•	Service Station <sup>(74)</sup> - if standalone use
	•	Cemetery <sup>(12)</sup>	•	Nature-based tourism <sup>(50)</sup>	•	Showroom <sup>(78)</sup>
	•	Crematorium <sup>(18)</sup>		Nightclub entertainment facility <sup>(51)</sup>	•	Special industry <sup>(79)</sup>
		Cropping <sup>(19)</sup>		,	•	Theatre <sup>(82)</sup>
		Detention facility <sup>(20)</sup>	•	Non-resident workforce accommodation <sup>(52)</sup>	•	Tourist attraction <sup>(83)</sup>
	.>	Extractive industry <sup>(27)</sup>	•	Outdoor sales <sup>(54)</sup>	•	Transport depot <sup>(85)</sup>
	•	Hardware and trade supplies (32) - if more than	•	Permanent plantation <sup>(59)</sup>	•	Warehouse <sup>(88)</sup>
		250m² GFA			•	Wholesale nursery <sup>(89)</sup>
		<b>b</b> ,			•	Winery <sup>(90)</sup>
4		▼				

Development not listed in the tables above may be considered on its merits and where it reflects and supports the outcomes of the zone.

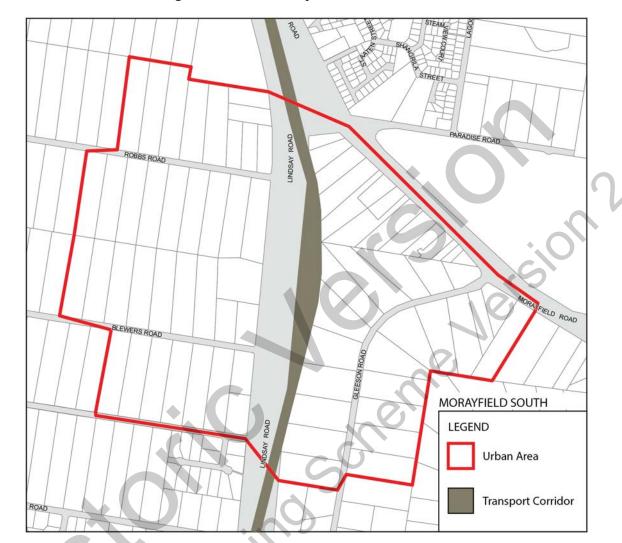


Figure 6.2.3.2.2.1 Morayfield South urban area

# 6.2.3.2.2.2 Criteria for assessment

To determine if development is self-assessable, development must comply with the self-assessable acceptable outcomes set out in Part E, Table 6.2.3.2.2.1. Where development does not meet a self-assessable acceptable outcome (SAO) of the relevant criteria Part E Table 6.2.3.2.2.1, assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a SAO is not met, and is therefore limited to the subject matter of the SAOs that are not complied with. To remove any doubt, for those SAOs that are complied with, there is no need for assessment against the corresponding PO.

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)				
SAO1	PO1				
SAO2	PO4				
SAO3	PO5				
SAO4	PO6				
SAO5	PO6				
SAO6	PO9				
SAO7	PO14				
SAO8	PO17				

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO9	PO19-PO24
SAO10	PO18
SAO11	PO26
SAO12	PO27
SAO13	PO27
SAO14	PO29
SAO15	PO31
SAO16	PO33
SAO17	PO34
SAO18	PO36
SAO19	PO38
SAO20	PO39
SAO21	PO36
SAO22	PO40
SAO23	PO40-PO45
SAO24	PO42
SAO25	PO46
SAO26	PO46
SA027	PO46
SAO28	PO47
SAO29	PO48
SAO30	PO49
SAO31	PO51
SAO32	PO51
SAO33	PO51
SAO34	PO51
SAO35	PO51
SAO36	PO51
SAO37	PO51
SAO38	PO51
SAO39	PO51
SAO40	PO55
SAO41	PO55
SAO42	PO55



Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SAO43	PO55
SAO44	PO55
SAO45	PO55
SAO46	PO55
SAO47	PO57
SAO48	PO58
SAO49	PO59
SAO50	PO59
SAO51	PO59
SAO52	PO59
SAO53	PO61
SAO54	PO66
SAO55	PO70
SAO56	PO70
SAO57	PO72
SAO58	PO73
SAO59	PO75
SAO60	PO76
SAO61	P077
SAO62	PO78
SAO63	PO78
SAO64	PO79
SAO65	PO80
SAO66	PO81
SAO67	PO82-PO93
SAO68	PO82-PO93
SAO69	PO94
SAO70	PO95
SAO71	PO95
SAO72	PO96
SAO73	PO96
SA074	PO99
SAO75	PO99
SAO76	PO99

Self-assessable acceptable outcomes (SAO)	Corresponding performance outcomes (PO)
SA077	PO100
SAO78	PO101
SAO79	PO102
SAO80	PO111
SAO81	PO105
SAO82	PO105
SAO83	PO107
SAO84	PO106
SAO85	PO106
SAO86	PO106
SAO87	PO105
SAO88	PO106
SAO89	PO106
SAO90	PO109-PO110
SAO91	PO113-PO115, PO117-PO119
SAO92	PO113-PO115, PO117-PO119
SAO93	PO113-PO115
SAO94	PO116
SAO95	PO117
SAO96	PO118



Table 6.2.3.2.2.1 Self-assessable development - Transition precinct, developed lot

Self-asses	Self-assessable acceptable outcomes - For developed lots only			
	General criteria			
Servicing				
SAO1	The site is a developed lot.			
Building h	Building height (Residential uses)			
SAO2	<ul> <li>a. that shown on Overlay map - Building heights; or</li> <li>b. for lots identified in the Morayfield South urban area as shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' building height is within a minimum of 8.5m and a maximum of 21m;</li> <li>c. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>			
Building height (Non-residential uses)				

#### SAO<sub>3</sub>

Where involving an extension (building work) building heights for the extension do not to exceed that shown on Overlay map - Building heights.

## Setbacks (Residential uses)

#### **SAO4**

Setbacks (excluding built to boundary walls) comply with the following:

- if in the Morayfield South urban area shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' - Table 6.2.3.2.2.4 'Setbacks (Residential uses) - Morayfield South urban area' - Setbacks (Residential uses) - Morayfield South urban area; or
- all other areas Table 6.2.3.2.2.3 'Setbacks (Residential uses) All other areas' Setback (Residential uses) - All other areas.

Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).

## **SAO5**

Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are:

- of a length and height: a.
  - if in the Morayfield South urban area shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' - Table 6.2.3.2.2.6 'Built to boundary walls (Residential uses) - Morayfield South urban area' Built to boundary walls (Residential uses) - Morayfield South urban area; or
  - all other areas Table 6.2.3.2.2.5 'Built to boundary walls (Residential uses) All other areas' ii. Built to boundary walls (Residential uses) - All other areas
- setback from the side boundary:
  - not more than 20mm; or
  - if a plan of development shows only one built to boundary wall on the boundary, not more than 150mm;
- on the low side of a sloping lot.

Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls an 'easement for maintenance purposes' is recommended.

## Site cover (Residential uses)

# **SA06**

Site cover (excluding eaves, sun shading devices, patios, balconies and other unenclosed structures) does not exceed the specified percentages in the table below:

Building height	Lot Size					
	300m <sup>2</sup> or less	301- 400m²	401- 500m²	501- 1000m²	1001- 2500m²	Greater than 2501m <sup>2</sup>
Less than 8.5m	75%	70%	60%	60%	60%	60%
8.5m - 12.0m	50%	50%	60%	50%	50%	50%
Greater than 12.0m	N/A	N/A	N/A	50%	40%	40%

# Lighting

#### **SA07**

Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.

Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.

## Clearing of habitat trees where not located in the Environmental areas overlay map

#### SAO8

Development does not result in the damaging, destroyed or clearing of a habitat tree. This does not apply to:

- Clearing of a habitat tree located within an approved development footprint; a.
- Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary b. for emergency access or immediately required in response to an accident or emergency;
- Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to C. serious personal injury or damage to infrastructure;
- Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary d. fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within e. a registered easement for public infrastructure or drainage purposes;
- f. Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of a habitat tree associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development. h.

Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridors. Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.

## Works criteria **Utilities SA09** Where available, the development is connected to: a. an existing reticulated electricity supply; telecommunications and broadband; b. C. reticulated sewerage; d. reticulated water; sealed and dedicated road. Where involving an extension (building work) in front of the main building line and where the lot adjoins **SAO10** or is opposite to a park<sup>(57)</sup>, foreshore or Humpybong Reserve, all existing overhead power lines are to be undergrounded for the full frontage of the lot.

Access	
64044	Any new or changes to existing direct vahials assess for residential development data act assess
SAO11	Any new or changes to existing direct vehicle access for residential development does not occur from arterial or sub-arterial roads.
SAO12	Any new or changes to existing site access and driveways are designed and located in accordance with:
	<ul> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul>
SAO13	Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
Stormwate	er
SAO14	Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy – Integrated design.
	Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.
SAO15	Development incorporates a minimum of 2% of the site area constructed as a bioretention system in accordance with Planning scheme policy – Integrated design if the development:
	<ul> <li>a. is for urban purposes only;</li> <li>b. involves a land area greater than 2500m²;</li> <li>c. will result in 6 or more dwellings;</li> <li>OR</li> </ul>
	will result in an impervious area greater than 25% of the net developable area.
Site works	and construction management
SAO16	The site and any existing structures are to be maintained in a tidy and safe condition.
SAO17	Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design.
SAO18	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.
SAO19	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.
SAO20	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
SAO21	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.

# **Earthworks**

#### **SAO22**


The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.

Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures

#### **SAO23**

The total of all cut and fill on-site does not exceed 900mm in height.

Figure - Cut and fill

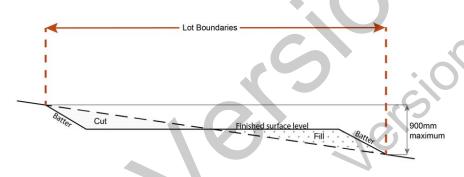

Note - This is site earthworks not building work.

#### **SAO24**

Filling or excavation does not result in:

- a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;
- an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.

Note - Public sector entity is defined in the Sustainable Planning Act 2009.

## Fire services

Note - The provisions under this heading only apply if:

- the development is for, or incorporates:
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park  $\binom{84}{(54)}$  with accommodation in the form of caravans or tents; or ii.
  - iii.
  - material change of use for outdoor sales (54), outdoor processing or outdoor storage where involving combustible materials. iv.

# **AND**

- none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

#### **SAO25**

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations.

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):

- in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks (84) or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
- b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
- in regard to the proximity of hydrants to buildings and other facilities Part 3.2.2.2 (b), (c) and (d), with the exception C.
  - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external i walls of those buildings;
  - for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
  - for outdoor sales  $^{(54)}$ , processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales  $^{(54)}$ , outdoor processing and outdoor storage facilities; and
- d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.

#### **SAO26**

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- an unobstructed width of no less than 3.5m; a.
- an unobstructed height of no less than 4.8m; b.
- constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance; C.
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

## **SAO27**

On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.

## **SAO28**

For development that contains on-site fire hydrants external to buildings:

- those external hydrants can be seen from the vehicular entry point to the site; or a.
- b. a sign identifying the following is provided at the vehicular entry point to the site:
  - the overall layout of the development (to scale);
  - internal road names (where used);
  - ίίί. all communal facilities (where provided);
  - iv. the reception area and on-site manager's office (where provided);
  - external hydrants and hydrant booster points; V.
  - physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.

Note - The sign prescribed above, and the graphics used are to be:

in a form;

	b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.
SAO29	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.
	Use specific criteria
Dual occu	pancies (21)
SAO30	Dual Occupancies <sup>(21)</sup> are located on lots with a total road frontage of 25m or greater.
Home bas	ed business <sup>(35)</sup>
SAO31	Home based business(s) <sup>(35)</sup> are fully enclosed within the existing dwelling or on-site structure.
SAO32	A maximum of 1 employee (not a resident) OR 2 customers OR customers from within 1 small rigid vehicle (SRV)or smaller are permitted on the site at any one time.
SAO33	Service and delivery vehicles do not exceed one Small Rigid Vehicle (SRV) at any one time.
SAO34	Vehicle parking for the Home based business <sup>(35)</sup> on-site is limited to 1 car or Small Rigid Vehicle (SRV).
SAO35	Home based business(s) <sup>(35)</sup> occupy an area of the existing dwelling or on-site structure not greater than 40m <sup>2</sup> gross floor area.
SAO36	Home based business(s) <sup>(35)</sup> do not involve manufacturing.
X	Note - Manufacturing as defined in the Food Act 2006 is permitted.
SAO37	The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.
SAO38	The hours of operation do not exceed 8:00am to 6:00pm, Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday and Anzac Day.
	Note - Office or administrative activities that do not generate non-residents visiting the site, such as book-keeping and computer work, may operate outside the hours of operation.
SAO39	For a bed and breakfast, the use:
	a. is fully contained within the existing dwelling on-site;
	b. occupies a maximum of 2 bedrooms;

C. includes the provision of a minimum of 1 meal per day; d. accommodates a maximum of 6 people at any one time. Note - For a Bed and Breakfast SO31 - SO38 above do not apply. Sales office (72) Car parking spaces are provided in accordance with Table 6.2.3.2.2.7 'Car parking spaces'. **SAO40** Car parking and manoeuvring areas are designed and constructed in accordance with the Australian **SAO41** Standards AS2890.1. Sales office<sup>(72)</sup> has direct vehicular access to a dedicated road constructed in accordance with Planning **SAO42** scheme policy - Integrated design. **SAO43** Fencing adjoining a street (other than a laneway) or public open space does not exceed 1.2 metres in height. **SAO44** 30% of the front façade of the building (excluding the garage and front door) is made up of windows/glazing. The Sales office<sup>(72)</sup> has a clearly identifiable pedestrian entry that is visible and accessible from the **SAO45** primary frontage. The use of the premises for a Sales office<sup>(72)</sup> is for a maximum of 2 years after the commencement of **SAO46** the use. Telecommunications facility (81) Editor's note - In accordance with the Federal legislation Telecommunications facilities (81) must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz **SAO47** A minimum of 45m<sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility. **SAO48** The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval. **SAO49** Equipment shelters and associated structures are located: directly beside the existing equipment shelter and associated structures; behind the main building line; b. further away from the frontage than the existing equipment shelter and associated structures; C. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m. **SAO50** Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality. **SAO51** The facility is enclosed by security fencing or by other means to ensure public access is prohibited. **SAO52** A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.

SAO55  Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction is required for the provision of cycle parking.  SAO56  Where aidditional car parking spaces are provided they are not located between the frontage and the main building line.  SAO56  Where involving an extension (building work) in the front setback a minimum of 50% of the front facade of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied to a glazed facade located at ground level is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.  Figure - Glazing  SAO56  Where additional car parking spaces are provided they are not located between the frontage and the main building line.  SAO57  Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  SAO58  Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  SAO59  Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - *Curfewed hours* are taken to be those hours between 10pm and 7am on the following day.		
All equipment comprising the telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.  Retail, commercial and community uses  SAO54  Where involving an extension (building work) in the front setback a minimum of 50% of the front façade of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any finting, signage or vinyl wrap applied to a glazed facade located at ground level is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.  Figure - Glazing  SAO55  Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction is required for the provision of cycle parking.  SAO56  Where additional can parking spaces are provided they are not located between the frontage and the main building line.  SAO57  Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy — Waste.  SAO58  Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  SAO59  Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curlewed hours" are taken to be those hours between 10pm and 7am on the following day.		Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
SAO55 Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction in sequired for the provision of cycle parking.  SAO56 Where additional car parking spaces are provided they are not located between the frontage and the main building line.  SAO57 Where involving an extension (building work) in the front setback a minimum of 50% of the front facade of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied to a glazed facade located at ground level is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.  Figure - Glazing  SAO55 Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction is required for the provision of cycle parking.  SAO56 Where additional car parking spaces are provided they are not located between the frontage and the main building line.  SAO57 Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  SAO58 Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  SAO59 Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - 'Curfewed hours' are taken to be those hours between 10pm and 7am on the following day.		
Where involving an extension (building work) in the front setback a minimum of 50% of the front facade of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied to a glazed facade located at ground level is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.  Figure - Glazing  Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction is required for the provision of cycle parking.  SAO55  Where additional car parking spaces are provided they are not located between the frontage and the main building line.  SAO56  Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy — Waste.  Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  Artificial lighthing on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	SAO53	sound is housed within a fully enclosed building incorporating sound control measures sufficient to
of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied to a glazed facade located at ground level is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.  Figure - Glazing  SAO55  Development does not result in a reduction in the number or standard of car parking spaces provided on the site except where a reduction is required for the provision of cycle parking.  Where additional car parking spaces are provided they are not located between the frontage and the main building line.  Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  SAO59  Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	Retail, con	nmercial and community uses
on the site except where a reduction is required for the provision of cycle parking.  SAO56 Where additional car parking spaces are provided they are not located between the frontage and the main building line.  SAO57 Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  SAO58 Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  SAO59 Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	SAO54	of the building is made up of windows or glazing between a height of 1m and 2m. The minimum window/glazing is to remain uncovered and free of signage. Any tinting, signage or vinyl wrap applied to a glazed facade located at ground level is to maintain visibility of the internal activity from the street and not obscure surveillance of the street.  Figure - Glazing  Frontage modulated through the use of pillars of fine grain in the street of pillars of fine grain.
Where additional car parking spaces are provided they are not located between the frontage and the main building line.  Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	SAO55	
main building line.  Where involving an extension (building work), bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.		
managed in accordance with Planning scheme policy – Waste.  Where involving an extension (building work) it does not result in a reduction in the amount or standard of established landscaping on-site.  Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	SAO56	
of established landscaping on-site.  Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	SAO57	
maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.	SAO58	
	SAO59	maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.
SAO60 Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.		110.00 Canterior floate and taken to be those floate between 10pm and 7am of the following day.
	SAO60	Hours of operation do not exceed 6:00am to 9:00pm Monday to Sunday.
Values and constraints criteria		Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.


# Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - Planning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid sulfate soils i.e. development involving filling or excavation works below the thresholds of 100m³ and 500m³ respectively.

## **SAO61**

Development does not involve:

- excavation or otherwise removing of more than 100m3 of soil or sediment where below 5m Australian Height Datum AHD, or
- filling of land of more than 500m3 of material with an average depth of 0.5m or greater where b. below the 5m AHD.

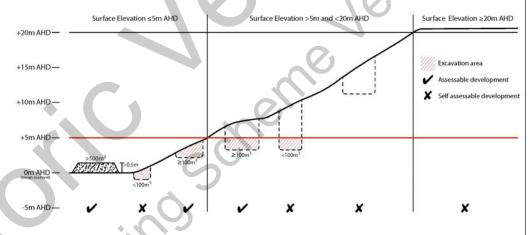


# Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - For the purposes of section 12 of the Building Regulation 2006, land identified as very high potential bushfire intensity, high potential bushfire intensity, medium potential bushfire intensity or potential impact buffer on the Bushfire hazard overlay map is the 'designated bushfire hazard area'. AS 3959-2009 Construction of buildings in bushfire hazard areas applies within these areas.

## **SAO62**

- Building and structures are: a.
  - not located on a ridgeline
    - not located on land with a slope greater than 15% (see Overlay map Landslide hazard)
- Dwellings are located on east to south facing slopes.

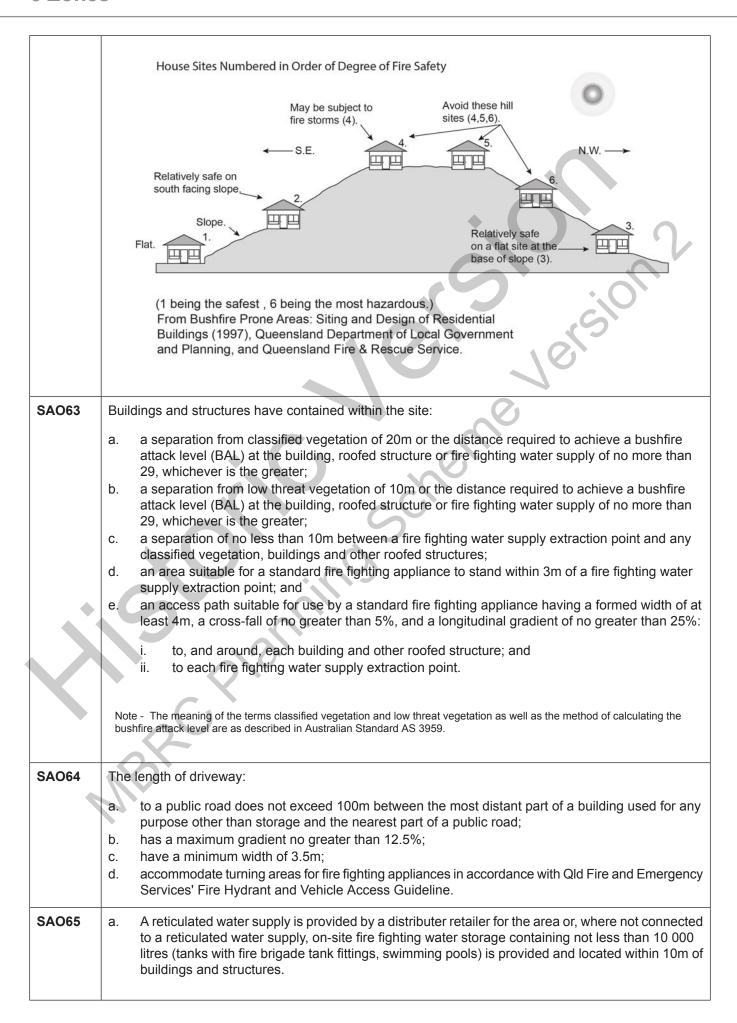

- b. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.
- C. Where a tank is the nominated on-site fire fighting water storage source, it includes:
  - a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank:
  - fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.

#### **SAO66**

Development does not involve the manufacture or storage of hazardous chemicals.

# Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note - The following are exempt from the native clearing provisions of this planning scheme:

- Clearing of native vegetation located within an approved development footprint; a.
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately h required in response to an accident or emergency;
- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage C. to infrastructure;
- Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public e. infrastructure or drainage purposes;
- Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping g. land, windbreaks, lawns or created gardens;
- Grazing of native pasture by stock;
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development.

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Editors' Note - When clearing native vegetation within a MSES area, you may still require approval from the State government.

#### **SAO67**

Where no suitable land cleared of native vegetation exists, clearing of native vegetation in High Value Area or Value Offset Area is for the purpose of a new dwelling house<sup>(22)</sup> and all associated facilities\* or an extension to an existing dwelling house<sup>(22)</sup> only, and comprises an area no greater than 1500m<sup>2</sup>.

Note - \*All associated facilities includes: on-site wastewater treatment, all areas of disturbance, on-site parking, access and manoeuvring areas.

Editor's note - See in heading above for other uses exempt from native vegetation clearing requirements.

Editor's note - Where self-assessable vegetation clearance is being undertaken, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:

- i. co-locating all associated activities, infrastructure and access strips;
- ii be the least valued area of koala habitat on the site;
- iii. minimise the footprint of the development envelope area;
- iv. minimise edge effects to areas external to the development envelope;
- location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy – Environmental areas;
- vi. sufficient area between the development and koala habitat trees to achieve their long-term viability.

Editor's note - Where self-assessable vegetation clearing is being undertaken, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy - Environmental areas.

#### **SAO68**

No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.

This does not apply to the following:

- Clearing of native vegetation located within an approved development footprint; a.
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary b. for emergency access or immediately required in response to an accident or emergency;
- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses C. to serious personal injury or damage to infrastructure;
- Clearing of native vegetation reasonably necessary to construct and maintain a property boundary d. fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining g. existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development.

# Extractive resources transport routes (refer Overlay map - Extractive resources (transport route and buffer) to determine if the following assessment criteria apply)

#### **SAO69**

The following uses are not located within the 100m wide transport route buffer:

- Caretaker's accommodation<sup>(10)</sup>, except where located in the Extractive industry zone;
- Community residence (16); b.
- Dual occupancy<sup>(21)</sup>: C.
- Dwelling house; (22) d.
- Dwelling unit (23); e.
- Hospital (36): f.
- Rooming accommodation (69); g.
- Multiple dwelling<sup>(49)</sup>; h.

Non-resident workforce accommodation (52): i. Relocatable home park (62); j. Residential care facility (65); k. Resort complex<sup>(66)</sup>: I. Retirement facility<sup>(67)</sup>; m. Rural workers' accommodation<sup>(71)</sup>; n. Short-term accommodation<sup>(77)</sup>; Ο. Tourist park (84). p. **SAO70** Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive resources transport route. **SAO71** A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design. Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply) Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character. **SAO72** Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character. Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions **SAO73** A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan. This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character. SA074 Development does not result in the removal of or damage to any significant tree identified on Overlay map - Heritage and landscape character and listed in Appendix 2 of Planning scheme policy - Heritage and landscape character. **SAO75** The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy Heritage and landscape character: construction of any building; a. laying of overhead or underground services; b. C. any sealing, paving, soil compaction; any alteration of more than 75mm to the ground level prior to work commencing. **SAO76** Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.

Landslide hazard (refer Overlay map - Landslide hazard to determine if the following assessment criteria

apply)

SA077	Development does not:
	<ul> <li>a. involve earthworks exceeding 50m³;</li> <li>b. involve cut and fill having a height greater than 600mm;</li> <li>c. involve any retaining wall having a height greater than 600mm;</li> <li>d. redirect or alter the existing flow of surface or groundwater.</li> </ul>
SAO78	Buildings, excluding domestic outbuildings:  a. are split-level, multiple-slab, pier or pole construction;
	b. are not single plane slab on ground.
SAO79	Development does not involve the manufacture, handling or storage of hazardous chemicals.
Infrastruc criteria ap	ture buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment ply)
SAO80	Development does not involve the construction of any buildings or structures containing habitable rooms or sensitive land uses within a High voltage electricity line buffer.
SAO81	Development within a Water supply buffer does not include the incineration or burial of waste and all other waste is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.
SAO82	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.
SAO83	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):  a. buildings or structures;  b. gates and fences;  c. storage of equipment or materials;  d. landscaping or earthworks or stormwater or other infrastructure.
SAO84	On-site sewerage facilities in a Water supply buffer produce a minimum secondary treated effluent (90th percentile) and effluent application to ensure water quality is maintained and protected.
SAO85	On-site sewerage facilities in a Water supply buffer for a dwelling house <sup>(22)</sup> include:  a. emergency storage capacity of 1,000 litres and adequate buffering for shock loading/down time; b. a reserve land application area of 100% of the effluent irrigation design area; c. land application areas that are vegetated; d. the base of the land application field is at least 2 metres above the seasonal high water table/bedrock (whichever is the closest to the base of the application area); e. wastewater collection and storage systems must have capacity to accommodate full load at peak times.
SAO86	On-site sewerage facilities in a Water supply buffer for development other than a dwelling house include emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies/overload with provision for de-sludging.
SAO87	Development involving Permanent plantation <sup>(59)</sup> within a Water supply buffer maintains a minimum of 30% ground cover at all times.

SAO88	Development does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer.			
SAO89	Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.			
SAO90	All habitable rooms located within an Electricity supply substation buffer are:			
	<ul> <li>a. located a minimum of 10m from an electricity supply substation<sup>(80)</sup>; and</li> <li>b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.</li> </ul>			
Overland (	flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria			
SAO91	Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.			
SAO92	Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.			
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.			
	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow			
SAO93	Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.			
SAO94	Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area.			
SAO95	Development for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.			

# following assessment criteria apply)

Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

# **SAO96** No development is to occur within: a. 50m from top of bank for W1 waterway and drainage line b. 30m from top of bank for W2 waterway and drainage line 20m from top of bank for W3 waterway and drainage line C. d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands. Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations.

Note - The minimum setback distance applies to the each side of waterway.

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part F, Table 6.2.3.2.2.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

# Part F - Criteria for assessable development - Transition precinct, developed lot

Table 6.2.3.2.2.2 Assessable development - Transition precinct, developed lot

Performance outcomes	Acceptable outcomes
Genera	I criteria
Servicing	
P01	No acceptable outcome provided.
The site is a developed lot that is serviced with all local government networks including water and sewer.	e la
Neighbourhood hubs	
PO2	AO2.1
The expansion (into adjoining lots) of existing neighbourhood hubs or the establishment of a new neighbourhood hub must:	No acceptable outcome provided.
<ul> <li>a. adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m<sup>2</sup>;</li> </ul>	
b. be located on the corner of an arterial, sub-arterial or collector road;	
c. form a 'Main street' having a maximum length of 200m;	
d. be centrally located within an 800m radial catchment;	
e. be separated from other neighbourhood hubs and centres by 1600m, measured from the centre of each neighbourhood hub or centre.	
Density	
PO3	No acceptable outcome provided.
The Transition precinct achieves the following site densities:	

- a. if in the Morayfield South urban area shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' a minimum of 45 dwellings per hectare; or
- b. for all other areas between 15 and 75 dwellings per

# **Building height (Residential uses)**

#### **PO4**

Buildings and structures have a height that:

- is consistent with the low to medium rise character of the Transition precinct;
- responds to the topographic features of the site, b. including slope and orientation;
- C. is not visually dominant or overbearing with respect to the streetscape;
- responds to the height of development on adjoining land where contained within another precinct or zone

Note - Refer to Planning scheme policy - Residential design for details and examples.

### **AO4**

Building height does not exceed:

- that shown on Overlay map Building heights, or
- for lots identified in the Morayfield South urban area b. as shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' building height is within a minimum of 8.5m and a maximum of 21m;
- for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m

## **Building height (Non-residential uses)**

# **PO5**

The height of non-residential buildings does not adversely affect amenity of the area or of adjoining properties.

# **AO5**

Building heights do not exceed that mapped on Overlay map - Building heights except for architectural features associated with religious expression on Place of worship<sup>(60)</sup> and Educational establishment<sup>(24)</sup> buildings.

# Setbacks (Residential uses)

### **PO6**

Residential buildings and structures are setback to:

- be consistent with the low to medium density a. Transition character intended for the area, where buildings are positioned closer to the footpath to create more active frontages and maximise private open space at the rear;
- result in development not being visually dominant or overbearing with respect to the streetscape and the adjoining sites;
- maintain private open space areas that are of a size and dimension to be usable and functional;

### AO6.1

Setbacks (excluding built to boundary walls) comply with the following:

- if in the Morayfield South urban area shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' -Table 6.2.3.2.2.3 'Setbacks (Residential uses) - All other areas' - Setbacks (Residential uses) -Morayfield South urban area; or
- b. for all other areas - Table 6.2.3.2.2.3 'Setbacks (Residential uses) - All other areas' - Setback (Residential uses) - All other areas.

- d. maintain the privacy of adjoining properties;
- ensure parked vehicles do not restrict pedestrian e. and traffic movement and safety:
- f. limit the length, height and openings of boundary walls to maximise privacy and amenity on adjoining properties;
- provide adequate separation to particular infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure;
- ensure built to boundary walls do not create h. unusable or inaccessible spaces and do not negatively impact the streetscape character, amenity or functionality of adjoining properties.

Note - Refer to Planning scheme policy - Residential design for details and examples.

Note - Greater setbacks may be required if the lot adjoins an environmental corridor or area (Refer to values and constraints for details).

### AO6.2

Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are:

- of a length and height:
  - if in the Morayfield South urban area shown on 'Figure 6.2.3.2.2.1 Morayfield South urban area' - Table 6.2.3.2.2.6 'Built to boundary walls (Residential uses) - Morayfield South urban area' - Built to boundary walls (Residential uses) - Morayfield South urban area; or
  - for all other areas Table 6.2.3.2.2.5 'Built to boundary walls (Residential uses) - All other areas' - Built to boundary walls (Residential uses) - All other areas;
- setback from the side boundary:
  - not more than 20mm; or
  - if a plan of development shows only one built to boundary wall on the boundary, not more than 150mm;
- on the low side of a sloping lot.

Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls and 'easement for maintenance purposes' is recommended.

# Setbacks (Non-residential uses)

### **PO7**

Front setbacks ensure non-residential buildings address and actively interface with streets and public spaces.

# A07.1

For the primary frontage buildings are constructed:

- to the property boundary; or a.
- b. setback a maximum of 3m from the property boundary, where for the purpose of outdoor dining.

# A07.2

For the secondary frontage, setbacks are consistent with adjoining buildings.

### **PO8**

Side and rear setbacks cater for driveway(s), services, utilities and buffers required to protect the amenity of adjoining sensitive land uses.

No acceptable outcome provided.

### Site cover (Residential uses)

#### **PO9**

Residential buildings and structures will ensure that site

- a. does not result in a site density that is inconsistent with the character of the area:
- b. does not result in an over development of the site;
- does not result in other elements of the site being C. compromised (e.g. Setbacks, open space etc);
- d. reflects the low to medium density character intended for the area.

Note - Refer to Planning scheme policy - Residential design for details and examples.

### **AO9**

Site cover (excluding eaves, sun shading devices, patios, balconies and other unenclosed structures) does not exceed the specified percentages in the table below.

Building height	Lot Size					
neight	300m <sup>2</sup> or less	301- 400m²	401- 500m <sup>2</sup>	501- 1000m <sup>2</sup>	1001- 2500m²	Greater than 2501m <sup>2</sup>
8.5m or less	75%	70%	60%	60%	60%	60%
> 8.5m -12.0m	50%	50%	60%	50%	50%	50%
Greater than 12.0m	N/A	N/A	N/A	50%	40%	40%

Note - Refer to Planning scheme policy - Residential design for method of calculation.

### Movement network

### **PO10**

Development is designed to connect to and form part of the surrounding neighbourhood by providing interconnected street, pedestrian and cyclist pathways to adjoining development, nearby centres, neighbourhood hubs, community facilities, public transport nodes and open space.

No acceptable outcome provided.

# **PO11**

Development provides and maintains the connections shown on:

- 'Figure 6.2.3.2.2.2 Morayfield South' Morayfield a. South:
- b. 'Figure 6.2.3.2.2.3 - Narangba East' - Narangba East.

No acceptable outcome provided.

# Water sensitive urban design

### **PO12**

No acceptable outcome provided.

Best practice Water Sensitive Urban Design (SWD) is incorporated within development sites adjoining street frontages to mitigate impacts of stormwater run-off in accordance with Planning scheme policy - Integrated design.

## Sensitive land use separation

### **PO13**

Sensitive land uses within 250m of land in the Industry zone - General industry precinct must mitigate any potential exposure to industrial air, noise or odour emissions that impact on human health, amenity and wellbeing.

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy – Noise.

### **AO13**

Development is designed and operated to ensure that:

- it meets the criteria outlined in the Planning Scheme a. Policy - Noise; and
- b. the air quality objectives in the *Environmental* Protection (Air) Policy 2008, are met.

# **Amenity**

### PO14

The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.

No acceptable outcome provided.

# **Noise**

### **PO15**

Noise generating uses do not adversely affect existing or potential noise sensitive uses.

Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line.

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.

No acceptable outcome provided.

### **PO16**

Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:

contributing to safe and usable public spaces, a. through maintaining high levels of surveillance of parks, streets and roads that serve active transport

### AO16.1

Development is designed to meet the criteria outlined in the Planning Scheme Policy - Noise.

# AO16.2

Noise attenuation structures (e.g. walls, barriers or fences):

- purposes (e.g. existing or future pedestrian paths or cycle lanes etc);
- b. maintaining the amenity of the streetscape.

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.

Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.

- are not visible from an adjoining road or public area unless:
  - i. adjoining a motorway or rail line; or
  - ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.
- do not remove existing or prevent future active b. transport routes or connections to the street network;
- C. are located, constructed and landscaped in accordance with Planning scheme policy -Integrated design.

Note - Refer to Planning scheme policy - Integrated design for details and examples of noise attenuation structures.

Note - Refer to Overlay map - Active transport for future active transport routes.

# Clearing of habitat trees where not located within the Environmental areas overlay map

### **PO17**

- a. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.
- Development does not result in the net loss of fauna b. habitat. Where development does result in the loss of a habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.
- Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner

Note: Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas

No acceptable outcome provided

# Works criteria

### **Utilities**

**PO18** 

No acceptable outcome provided

Where the site adjoins or is opposite to a Park <sup>(57)</sup> , foreshore or Humpybong Reserve all existing overhead power lines are to be undergrounded for the full frontage of the site.	
PO19	AO19
The development is connected to an existing reticulated electricity supply system approved by the relevant energy regulating authority.	Development is connected to underground electricity.
PO20	No acceptable outcome provided
The development has access to telecommunications and broadband services in accordance with current standards.	45° ion
PO21	No acceptable outcome provided
Where available the development is to safely connect to reticulated gas.	10,
PO22	AO22.1
The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk to public health.	Where in a sewered area, the development is connected to a reticulated sewerage network.
*0	AO22.2  Trade waste is pre-treated on-site prior to discharging into the sewerage network.
PO23	AO23
The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.	Where in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is connected to the reticulated water supply system in accordance with the South East Queensland Water Supply and Sewerage Design and Construction Code and the relevant Water Service Association of Australia (WSAA) codes and standards.
PO24	No acceptable outcome provided
The development is provided with constructed and dedicated road access.	
Access	
PO25	No acceptable outcome provided

Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.

### **PO26**

The layout of the development does not compromise:

- a. the development of the road network in the area;
- b. the function or safety of the road network;
- the capacity of the road network. C.

Note - The road hierarchy is mapped on Overlay map - Road hierarchy.

### AO26.1

Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a motorway.

Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway.

Note - The road hierarchy is mapped on Overlay map - Road hierarchy.

### AO26.2

The development provides for the extension of the road network in the area in accordance with Council's road network planning.

### AO26.3

The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.

### AO26.4

The lot layout allows forward access to and from the site.

### **PO27**

Safe access is provided for all vehicles required to access the site.

### AO27.1

Site access and driveways are designed and located in accordance with:

- a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or
- Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.

# AO27.2

Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities - Off street car parking and the relevant standards in Planning scheme policy - Integrated design.

Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction. AO27.3 Access driveways, manoeuvring areas and loading facilities provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements.

### **PO28**

Upgrade works (whether trunk or non-trunk) are provided where necessary to:

- ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;
- b. ensure the orderly and efficient continuation of the active transport network;
- C. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.

Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome refer to Planning scheme policy - Integrated transport assessment for guidance on when an ITA is required. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - The primary and secondary active transport network is mapped on Overlay map - Active transport.

Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:

- Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or
- Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.

Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.

No acceptable outcome provided

### **Stormwater**

**PO29** 

No acceptable outcome provided

Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.

Note - Refer to Planning scheme policy - Integrated design for details.

Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.

Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.

# No acceptable outcome provided

### **PO30**

Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.

Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.

# **PO31**

Stormwater quality management systems are designed and constructed to minimise the environmental impact of stormwater discharge on surface and underground receiving water quality and meet the design objectives in Tables A and B in Appendix 3 of the SPP.

Note - A stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.

No acceptable outcome provided

# **PO32**

Easements for drainage purposes are provided over:

- stormwater pipes located in freehold land if the pipe a. diameter exceeds 300mm;
- b. overland flow paths where they cross more than one property boundary.

Note - Refer to Planning scheme policy - Integrated design for details.

Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.

No acceptable outcome provided

### Site works and construction management

### **PO33**

The site and any existing structures are maintained in a tidy and safe condition.

No acceptable outcome provided

# **PO34**

All works on-site are managed to:

- minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;
- minimise as far as possible, impacts on the natural b. environment:
- ensure stormwater discharge is managed in a C. manner that does not cause nuisance or annoyance to any person or premises;
- avoid adverse impacts on street trees and their d. critical root zone.

### AO34.1

Works incorporate temporary stormwater runoff, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:

- stormwater is not discharged to adjacent properties a. in a manner that differs significantly from pre-existing conditions;
- stormwater discharged to adjoining and downstream properties does not cause scour and
- C. stormwater discharge rates do not exceed pre-existing conditions;
- the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and
- the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins.

# AO34.2

Stormwater runoff, erosion and sediment controls are constructed prior to commencement of any clearing or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.

Note - The measures are adjusted on-site to maximise their effectiveness.

### AO34.3

The completed earthworks area is stabilised using turf. established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.

### AO34.4

Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a qualified arborist which demonstrates and ensures that no permanent damage is caused to the tree.

# **PO35**

# **AO35**

No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.

Dust suppression measures are implemented during soil disturbances and construction works to protect nearby premises from unreasonable dust impacts.

### **PO36**

All works on-site and the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.

Note - Where the amount of imported or exported material is greater than 50m3, a haulage route must be identified and approved by Council.

### AO36.1

Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.

# AO36.2

All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads.

Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).

# AO36.3

Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.

# **PO37**

All disturbed areas are rehabilitated at the completion of construction.

Note - Refer to Planning scheme policy - Integrated design for details.

# **AO37**

At completion of construction all disturbed areas of the site are to be:

- topsoiled with a minimum compacted thickness of a. fifty (50) millimetres;
- b. grassed.

Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these

### **PO38**

The clearing of vegetation on-site:

- is limited to the area of infrastructure works, building a. areas and other necessary areas for the works; and
- includes the removal of declared weeds and other materials which are detrimental to the intended use of the land:
- C. is disposed of in a manner which minimises nuisance and annoyance to existing premises.

Note - No burning of cleared vegetation is permitted.

### AO38.1

All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.

Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.

### AO38.2

Disposal of materials is managed in one or more of the following ways:

- all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or
- all native vegetation with a diameter below 400mm is to be chipped and stored on-site.

Note - The chipped vegetation must be stored in an approved location, preferably a park or public land.

### **PO39**

Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.

No acceptable outcome provided

### **Earthworks**

### **PO40**

On-site earthworks are designed to consider the visual and amenity impact as they relate to:

- the natural topographical features of the site; a.
- b. short and long-term slope stability;
- soft or compressible foundation soils; C.
- d. reactive soils:
- low density or potentially collapsing soils;
- f. existing fill and soil contamination that may exist on-site;
- the stability and maintenance of steep rock slopes g. and batters;
- excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential).

Note - Filling or excavation works are to be completed within six months of the commencement date.

### AO40.1

All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.

# AO40.2

Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.

# AO40.3

Inspection and certification of steep rock slopes and batters is required by a suitably qualified and experienced RPEQ.

### AO40.4

All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.

# AO40.5

All filling or excavation is contained on-site.

### AO40.6

All fill placed on-site is:

- a. limited to that required for the necessary approved use;
- b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).

### AO40.7

The site is prepared and the fill placed on-site in accordance with AS3798.

Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.

### **PO41**

Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area.

### AO41

Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.

# Figure - Embankment



# **PO42**

Filling or excavation is undertaken in a manner that:

- does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;
- does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.

Note - Public sector entity as defined in the Sustainable Planning Act 2009.

# AO42.1

No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity.

Note - Public sector entity as defined in the Sustainable Planning Act 2009.

### AO42.2

Filling or excavation that would result in any of the following is not carried out on-site:

- a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm:
- b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken.

Note - Public sector entity as defined in the Sustainable Planning Act 2009

### **PO43**

Filling or excavation does not result in land instability.

No acceptable outcome provided

Note - Steep rock slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.

### **PO44**

Development does not result in

- adverse impacts on the hydrological and hydraulic a. capacity of the waterway or floodway:
- b. increased flood inundation outside the site;
- any reduction in the flood storage capacity in the C. floodway;
- d. and any clearing of native vegetation.

Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy Integrated design for guidance on infrastructure design and modelling requirements.

No acceptable outcome provided.

# Retaining walls and structures

# **PO45**


All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents.

# AO45


Earth retaining structures:

- are not constructed of boulder rocks or timber; a.
- where height is no greater than 900mm, are b. provided in accordance with Figure - Retaining on a boundary:

Figure - Retaining on boundary

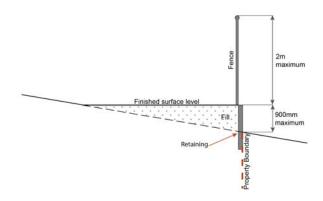

- where height is greater than 900mm but no greater C. than 1.5m, are to be setback at least the equivalent height of the retaining structure from any property boundary;
- d. where height is greater than 1.5m, are to be setback and stepped 1.5m vertical: 1.5m horizontal, terraced, landscaped and drained as shown below.

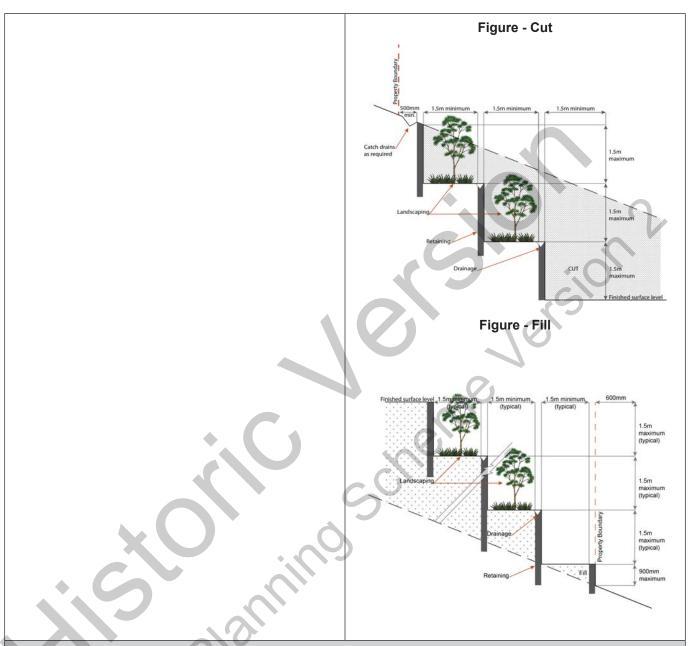

# Fire services

Note - The provisions under this heading only apply if:

- the development is for, or incorporates:
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials.

### AND

- none of the following exceptions apply: h
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

### **PO46**

Development incorporates a fire fighting system that:

- satisfies the reasonable needs of the fire fighting entity for the area;
- b. is appropriate for the size, shape and topography of the development and its surrounds;
- is compatible with the operational equipment C. available to the fire fighting entity for the area;
- considers the fire hazard inherent in the materials d. comprising the development and their proximity to one another:
- considers the fire hazard inherent in the surrounds e. to the development site;
- f. is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

### AO46.1

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations.

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):

- in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks  $^{(84)}$  or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
- in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
- in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
  - for dwellings and their associated outbuildings. hydrant coverage need only extend to the roof and external walls of those buildings;
  - for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
  - for outdoor sales (54), processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales <sup>(54)</sup>, outdoor processing and outdoor storage facilities; and
- in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.

# AO46.2

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- an unobstructed width of no less than 3.5m; a.
- b. an unobstructed height of no less than 4.8m;
- constructed to be readily traversed by a 17 tonne C. HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

### AO46.3

On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) - Routine service of fire protection systems and equipment.

### **PO47**

On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.

### **AO47**

For development that contains on-site fire hydrants external to buildings:

- those external hydrants can be seen from the a. vehicular entry point to the site; or
- a sign identifying the following is provided at the b. vehicular entry point to the site:
  - the overall layout of the development (to scale);
  - internal road names (where used);
  - all communal facilities (where provided);
  - the reception area and on-site manager's office (where provided);
  - external hydrants and hydrant booster points; ٧.
  - physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.

Note - The sign prescribed above, and the graphics used are to be:

- in a form;
- of a size;
- illuminated to a level;

which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.

# **PO48**

Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.

# **AO48**

For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note Fire hydrant indication system produced by the Queensland Department of Transport and Main Roads.

Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads

## Use specific criteria

Dual occupancies (21)

### **PO49**

Dual Occupancies (21):

- are dispersed within the streetscape;
- b. contribute to the diversity of dwelling types and forms:
- C. are not the predominant built form.

Note - Refer to Planning scheme policy - Residential design for dispersal methods and calculation.

### **AO49**

Dual occupancies (21) are dispersed within the streetscape in accordance with one or more of the following:

- no more than 20% of sites within a block contain an existing, approved or properly made application for a dual occupancy (21); or
- a dual occupancy (21) is separated by a minimum of b. 6 lots (running along the street frontage) from another lot containing an existing, approved or properly made application for a dual occupancy<sup>(21)</sup>;
- a dual occupancy (21) is not located within 100m (in all directions) of an existing, approved or properly made application for a dual occupancy (21).

Note - Laneway lots may contain dual occupancies (21) (lofts) on the end two lots within a laneway.

Note - Refer to Planning scheme policy - Residential design for dispersal methods and calculation.

# Rooming accommodation and Short-term accommodation

### **PO50**

Rooming accommodation<sup>(69)</sup> and Short-term accommodation<sup>(77)</sup> are located within 800m walking distance of a higher order, district or local centre.

No acceptable outcome provided.

# Home based business

# PO51

The scale and intensity of the Home Based Business (35):

- is compatible with the physical characteristics of a. the site and the character of the local area;
- b. is able to accommodate anticipated car parking demand and on-site manoeuvring without negatively impacting the streetscape or road safety;
- does not adversely impact on the amenity of the C. adjoining and nearby premises;
- remains ancillary to the residential use of the dwelling house<sup>(22)</sup>; d.
- does not create conditions which cause hazards or e. nuisances to neighbours or other persons not associated with the activity;

No acceptable outcome provided.

- f. ensure employees and visitor to the site do not negatively impact the expected amenity of adjoining properties;
- ensure service and delivery vehicles do not negatively impact the amenity of the area.

# Major electricity infrastructure (43), Substation and Utility installation (86)

### **PO52**

The development does not have an adverse impact on the visual amenity of a locality and is:

- a. high quality design and construction;
- b. visually integrated with the surrounding area;
- C. not visually dominant or intrusive;
- located behind the main building line; d.
- below the level of the predominant tree canopy or e. the level of the surrounding buildings and
- f. camouflaged through the use of colours and materials which blend into the landscape;
- treated to eliminate glare and reflectivity; g.
- h. landscaped:
- otherwise consistent with the amenity and character i. of the zone and surrounding area.

### AO52.1

Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:

- are enclosed within buildings or structures; a.
- b. are located behind the main building line;
- have a similar height, bulk and scale to the surrounding fabric;
- have horizontal and vertical articulation applied to all exterior walls.

### AO52.2

A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.

### **PO53**

Infrastructure does not have an impact on pedestrian health and safety.

### **AO53**

Access control arrangements:

- do not create dead-ends or dark alleyways adjacent to the infrastructure:
- b. minimise the number and width of crossovers and entry points;
- C. provide safe vehicular access to the site;
- d. do not utilise barbed wire or razor wire.

### **PO54**

All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:

- generates no audible sound at the site boundaries a. where in a residential setting; or
- meet the objectives as set out in the Environmental b. Protection (Noise) Policy 2008.

# **AO54**

All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.

# Sales office (72)

# **PO55**

The sales office<sup>(72)</sup> is designed to:

No acceptable outcome provided.

- provide functional and safe access, manoeuvring a. areas and car parking spaces for the number and type of vehicles anticipated to access the site;
- b. complement the streetscape character while maintaining surveillance between buildings and public spaces;
- C. be temporary in nature.

Note - Refer to Planning scheme policy - Integrated design for access and crossover requirements.

# Telecommunications facility (81)

Editor's note - In accordance with the Federal legislation Telecommunications facilities (81) must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz.

### **PO56**

Telecommunications facilities<sup>(81)</sup> are co-located with existing telecommunications facilities<sup>(81)</sup>, Utility installation<sup>(86)</sup>, Major electricity infrastructure<sup>(43)</sup> or Substation<sup>(80)</sup> if there is already a facility in the same coverage area.

### AO56.1

New telecommunication facilities (81) are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.

### AO56.2

If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.

### **PO57**

A new Telecommunications facility (81) is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.

### **AO57**

A minimum of 45m<sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.

# **PO58**

Telecommunications facilities (81) do not conflict with lawful existing land uses both on and adjoining the site.

# **AO58**

The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.

# **PO59**

The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:

- high quality design and construction; a.
- b. visually integrated with the surrounding area;

### AO59.1

Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.

- C. not visually dominant or intrusive;
- d. located behind the main building line;
- below the level of the predominant tree canopy or e. the level of the surrounding buildings and structures:
- f. camouflaged through the use of colours and materials which blend into the landscape;
- treated to eliminate glare and reflectivity; g.
- h. landscaped:
- i. otherwise consistent with the amenity and character of the zone and surrounding area.

### AO59.2

In all other areas towers do not exceed 35m in height.

### AO59.3

Towers, equipment shelters and associated structures are of a design, colour and material to:

- reduce recognition in the landscape; a.
- b. reduce glare and reflectivity.

#### AO59.4

All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.

Where there is no established building line the facility is located at the rear of the site.

### AO59.5

The facility is enclosed by security fencing or by other means to ensure public access is prohibited.

# AO59.6

A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.

Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.

Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.

# **PO60**

Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.

# AO60

An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.

### **PO61**

All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.

### AO61

All equipment comprising the Telecommunications facility<sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.

# Retail, commercial and community uses

### **PO62**

Community activities:

- a. are located to:
  - cluster with other non-residential activities to form a neighbourhood hub (this may include being within or adjacent to an existing neighbourhood hub); or
  - ii. if establishing a new neighbourhood hub (as described in the PO below); be on a main street:
- are located on allotments that have appropriate area and dimensions for the siting of:
  - i. buildings and structures;
  - ii. vehicle servicing, deliveries, parking, manoeuvring and circulation;
  - iii. landscaping and open space including buffering.
- c. are of a small scale, having regard to the surrounding character;
- d. are serviced by public transport;

6.2.1.1 Moreton Bay centres network.

e. do not negatively impact adjoining residents or the streetscape.

Retail and commercial uses within a neighbourhood hub

are of a scale that provide for the convenience needs or

localised services of the immediate neighbourhood and

do not constitute the scale or function of a Local centre.

Note - For the function and scale of a Local centre refer to Table

No acceptable outcome provided.

# AO63

Retail and commercial uses within a neighbourhood hub consist of no more than:

- a. 1 small format supermarket with a maximum GFA of 1200m<sup>2</sup>;
- b. 10 small format retail or commercial tenancies with a maximum GFA of 100m<sup>2</sup> each.

### **PO64**

PO63

The expansion (into adjoining lots) of existing neighbourhood hubs or the establishment of a new neighbourhood hub must:

- adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m<sup>2</sup>;
- b. be located on the corner of an arterial, sub-arterial or collector road;

No acceptable outcome provided.

### 4040

- C. form a 'Main street' having a maximum length of 200m:
- d. be centrally located within an 800m radial catchment:
- be separated from other neighbourhood hubs and centres by 1600m, measured from the centre of each neighbourhood hub or centre.

### **PO65**

Corner stores may establish as standalone uses where:

- having a maximum GFA of 250m<sup>2</sup>; a.
- b. the building adjoins the street frontage and has its main pedestrian entrance from the street frontage;
- C. not within 1600m of another corner store, neighbourhood hub or centre.

No acceptable outcome provided.

# **PO66**

Non-residential uses address and activate streets and public spaces by:

- a. ensuring buildings and individual tenancies address street frontage(s), civic space and other areas of pedestrian movement;
- new buildings adjoin or are within 3m of the primary b. frontage(s), civic space or public open space;
- C. locating car parking areas behind or under buildings to not dominate the street environment;
- establishing and maintaining interaction, pedestrian d. activity and casual surveillance through appropriate land uses and building design (e.g. The use of windows or glazing and avoiding blank walls with the use of sleeving);
- providing visual interest to the façade (e.g. Windows or glazing, variation in colour, materials, finishes, articulation, recesses or projections);
- f. establishing and maintaining human scale.

No acceptable outcome provided.

# **PO67**

All buildings exhibit a high standard of design and construction, which:

- add visual interest to the streetscape (e.g. variation a. in materials, patterns, textures and colours, cantilevered awning);
- b. enable differentiation between buildings;

No acceptable outcome provided.

C.	contribute to a safe environment;	
d.	incorporate architectural features within the building facade at the street level to create human scale (e.g. cantilevered awning);	
e.	include building entrances that are readily identifiable from the road frontage;	
f.	locate and orientate to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites;	• 0
g.	incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;	
h.	facilitate casual surveillance of all public spaces.	
PO6	88	No acceptable outcome provided.
	elopment provides functional and integrated car ing and vehicle access, that:	
a.	prioritises the movement and safety of pedestrians between the street frontage and the entrance to the building;	
b.	provides safety and security of people and property at all times;	
c.	does not impede active transport options;	
d.	does not impact on the safe and efficient movement of traffic external to the site;	
e.	is consolidated and shared with adjoining sites wherever possible.	
PO6	9	No acceptable outcome provided.
prior	safety and efficiency of pedestrian movement is ritised in the design of car parking areas through riding pedestrian paths in car parking areas that are:	
a.	located along the most direct route between building entrances, car parks and adjoining uses;	
b.	protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);	
C.	are of a width to allow safe and efficient access for prams and wheelchairs.	
PO7	0	AO70.1
The	number of car parking spaces is managed to:	Car parking is provided in accordance with Table 6.2.3.2.2.7 'Car parking spaces'.

- a. avoid significant impacts on the safety and efficiency of the road network;
- b. avoid an oversupply of car parking spaces;
- avoid the visual impact of large areas of open car C. parking from road frontages and public areas;
- d. promote active and public transport options;
- promote innovative solutions, including on-street e. parking and shared parking areas.

Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.

Note - The above rates exclude car parking spaces for people with a disability required by Disability Discrimination Act 1992 or the relevant disability discrimination legislation and standards.

### AO70.2

All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1.



- End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:
  - i. adequate bicycle parking and storage facilities; and
  - adequate provision for securing belongings; ii.
  - iii. change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.
- Notwithstanding a. there is no requirement to provide end of trip facilities if it would be unreasonable to provide these facilities having regard to:
  - the projected population growth and forward planning for road upgrading and development of cycle paths; or
  - whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute distances and nature of the terrain; or
  - the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.

Editor's note - The intent of b above is to ensure the requirements for bicycle parking and end of trip facilities are not applied in unreasonable circumstances. For example these requirements should not, and do not apply in the Rural zone or the Rural residential zone etc.

# A071.1

Minimum bicycle parking facilities are provided in accordance with the table below (rounded up to the nearest whole number).

Use	Minimum Bicycle Parking
Residential uses comprised of dwellings	Minimum 1 space per dwelling
All other residential uses	Minimum 1 space per 2 car parking spaces identified in Schedule 7 – car parking
Non-residential uses	Minimum 1 space per 200m2 of GFA

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is a combination of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

# AO71.2

Bicycle parking is:

- provided in accordance with Austroads (2008), a. Guide to Traffic Management - Part 11: Parking;
- b. protected from the weather by its location or a dedicated roof structure;
- located within the building or in a dedicated, secure C. structure for residents and staff;
- adjacent to building entrances or in public areas for customers and visitors.

Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the acceptable outcomes under this heading meet the current performance requirement prescribed in the Queensland Development Code.

Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.

Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### A071.3

For non-residential uses, storage lockers:

- are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);
- have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).

Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### A071.4

For non-residential uses, changing rooms:

- are provided at a rate of 1 per 10 bicycle parking a.
- b. are fitted with a lockable door or otherwise screened from public view;
- are provided with shower(s), sanitary C. compartment(s) and wash basin(s) in accordance with the table below:

Bicycle spaces provided	Male/ Female	Change rooms required	Showers required	Sanitary compartments required	Washbasins required	
1-5	Male 1 unisex 1 and change female room		1	1 closet pan	1	
6-19	Female	1	1	1 closet pan	1	
20 or more	Male	1	1	1 closet pan	1	
more	Female	1	2, plus 1 for every	2 closet pans, plus 1 sanitary	1, plus 1 for every 60	

		Male	1	20 bicycle spaces provided thereafter  2, plus 1 for every 20 bicycle spaces provided thereafter	compartment for every 60 bicycle parking spaces provided thereafter  1 urinal and 1 closet pans, plus 1 sanitary compartment at the rate of 1 closet pan or 1 urinal for every 60 bicycle space provided thereafter	bicycle parking spaces provided thereafter  1, plus 1 for every 60 bicycle parking spaces provided thereafter
	and Star  Note - Al F2.3 (e)  d. are i. iii. iii.  Note - Cl and non- to the bu facilities  Editor's r prescribe planning levels ide outcome facilities	a minus a son basin a horter - The dunder instrume entified ir is an amin the Quint in the Quint	ded with firror location of BCA (" ded with firror location and lapartment cket-out in."  oms may be all activities distributed within 5 de acceptate the Queet in those acceptant de all adjunction and an adjunction and an adjunction in the second and activities in those acceptant the queet in those acceptant and an adjunction and an adjunction in the second and activities in the second acceptant	ated above bench sent; tlet located as when with 0 metres of the delicity coeptable so on of t	onstructed in com	basin; ach shower each wash s, residential the entrance and storage facilities ermit a local n the default teptable or end of trip
PO72 Bins and bin storage area/s are provided, designed and	No acce	ptable	outcom	e provide	ed.	
managed in accordance with Planning scheme policy – Waste.						
PO73	No acce	ptable	outcom	e provide	ed.	
On-site landscaping is provided, that:						
a. is incorporated into the design of the development;						
b. reduces the dominance of car parking and servicing areas from the street frontage;						
c. retains mature trees wherever possible;						

d. does not create safety or security issues by creating potential concealment areas or interfering with sight lines;	
e. maintains the achievement of active frontages and sight lines for casual surveillance.	
Note - All landscaping is to accord with Planning scheme policy - Integrated design.	
PO74	A074
Surveillance and overlooking are maintained between the road frontage and the main building line.	No fencing is provided forward of the building line.
PO75	No acceptable outcome provided.
Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety and minimise adverse impacts on residential and other sensitive land uses.	70,70,
PO76	AO76

# Values and constraints criteria

Monday to Sunday.

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

# Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

### **PO77**

Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:

The hours of operation minimise adverse amenity impacts

on adjoining sensitive land uses.

- is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;
- b. protects the environmental and ecological values and health of receiving waters;
- protects buildings and infrastructure from the effects of acid sulfate soils.

# **AO77**

Development does not involve:

excavation or otherwise removing of more than a. 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or

Hours of operation do not exceed 6:00am to 9:00pm

filling of land of more than 500m<sup>3</sup> of material with b. an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.

# Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a bushfire management plan is prepared by a suitably qualified person. Guidance for the preparation of a bushfire management plan is provided in Planning scheme policy – Bushfire prone areas.

Note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.

### **PO78**

# Development:

- minimises the number of buildings and people working and living on a site exposed to bushfire
- b. ensures the protection of life during the passage of a fire front;
- is located and designed to increase the chance of C. survival of buildings and structures during a bushfire:
- d. minimises bushfire risk from build up of fuels around buildings and structures:
- ensure safe and effective access for emergency e. services during a bushfire.

### AO78.1

Buildings and structures are:

- not located on a ridgeline; a.
- b. not located on land with a slope greater than 15% (see Overlay map - Landslide hazard);
- dwellings are located on east to south facing slopes.

# A078.2

Buildings and structures have contained within the site:

- a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures:
- an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and
- an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%:
  - to, and around, each building and other roofed structure: and
  - to each fire fighting water supply extraction ii. point.

Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS 3959

# **PO79**

Development and associated driveways and access ways:

# **AO79**

A length of driveway:

- avoid potential for entrapment during a bushfire; a.
- ensure safe and effective access for emergency b. services during a bushfire;
- enable safe evacuation for occupants of a site C. during a bushfire.
- to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road;
- b. has a maximum gradient no greater than 12.5%;
- have a minimum width of 3.5m; C.
- d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.

### **PO80**

Development provides an adequate water supply for fire-fighting purposes.

# **A080**

- a reticulated water supply is provided by a a. distributer retailer for the area or;
- h. where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is located within 10m of buildings and structures.
- Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access is provided to within 3m of that water storage source.
- Where a tank is the nominated on-site fire fighting water storage source, it includes:
  - a hardstand area allowing medium rigid vehicles (15 tonne fire appliance) access within 6m of the tank;
  - fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.

### PO81

Development:

- does not present unacceptable risk to people or environment due to the impact of bushfire on dangerous goods or combustible liquids;
- does not present danger or difficulty to emergency b. services for emergency response or evacuation.

Editor's note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.

### **AO81**

Development does not involve the manufacture or storage of hazardous chemicals.

# Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note – The following are exempt from the native vegetation clearing provisions of this planning scheme:

- Clearing of native vegetation located within an approved development footprint; a.
- Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately h required in response to an accident or emergency;

- Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage C. to infrastructure:
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public e. infrastructure or drainage purposes;
- Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping q. land, windbreaks, lawns or created gardens;
- Grazing of native pasture by stock; h.
- Native forest practice where exempt under Part 1, 1.7.7 Exempt development

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

# Vegetation clearing, ecological value and connectivity

# **PO82**

Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:

- the quality and integrity of the biodiversity and a. ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded;
- on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas\*.

No acceptable outcome provided.

\* Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014. **PO83** No acceptable outcome provided. Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by: retaining habitat trees; a. b. providing contiguous patches of habitat; C. provide replacement and rehabilitation planting to improve connectivity; d. avoiding the creation of fragmented and isolated patches of habitat; providing wildlife movement infrastructure. e. Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy – Environmental Vegetation clearing and habitat protection **PO84** No acceptable outcome provided. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. **PO85** No acceptable outcome provided. Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development will: rehabilitate, revegetate, restore and enhance an a. area to ensure it continues to function as a viable and healthy habitat area; provide replacement fauna nesting boxes in the b. event of habitat tree loss in accordance with Planning scheme policy - Environmental areas; C. undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework. **PO86** No acceptable outcome provided. Development ensures safe, unimpeded, convenient and ongoing wildlife movement and habitat connectivity by: providing contiguous patches of habitat; a. b. avoiding the creation of fragmented and isolated patches of habitat;

<ul> <li>c. providing wildlife movement infrastructure;</li> <li>d. providing replacement and rehabilitation planting to improve connectivity.</li> </ul>		
Vegetation clearing and soil resource stability		
PO87	No acceptable outcome provided.	
Development does not:		
<ul> <li>a. result in soil erosion or land degradation;</li> <li>b. leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.</li> </ul>	• 0	
Vegetation clearing and water quality		
PO88	No acceptable outcome provided.	
Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by:	O leisi	
<ul> <li>a. ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads;</li> <li>b. avoiding or minimising changes to landforms to</li> </ul>		
maintain hydrological water flows; c. adopting suitable measures to exclude livestock		
from entering a waterbody where a site is being used for animal husbandry and animal keeping activities.	CCI,	
PO89	No acceptable outcome provided.	
Development minimises adverse impacts of stormwater run-off on water quality by:  a. minimising flow velocity to reduce erosion; b. minimising hard surface areas;		
<ul><li>c. maximising the use of permeable surfaces;</li><li>d. incorporating sediment retention devices;</li><li>e. minimising channelled flow.</li></ul>		
Vegetation clearing and access, edge effects and un	ban heat island effects	
PO90  Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment.	No acceptable outcome provided.	
PO91	No acceptable outcome provided.	
Development minimises potential adverse 'edge effects' on ecological values by:		
providing dense planting buffers of native vegetation between a development and environmental areas;		

- retaining patches of native vegetation of greatest possible size where located between a development and environmental areas;
- restoring, rehabilitating and increasing the size of C. existing patches of native vegetation;
- d. ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors;
- landscaping with native plants of local origin. e.

Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the groundwater and surface water flow.

## No acceptable outcome provided

## **PO92**

Development avoids adverse microclimate change and does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by:

- pervious surfaces: a.
- providing deeply planted vegetation buffers and b. green linkage opportunities;
- landscaping with local native plant species to C. achieve well-shaded urban places;
- increasing the service extent of the urban forest d. canopy.

### Vegetation clearing and Matters of Local Environmental Significance (MLES) environmental offsets

## **PO93**

Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas.

Editor's note - For MSES Koala Offsets, State Planning Regulatory Provision environmental offset provisions apply.

No acceptable outcome provided.

## Extractive resources transport route (refer Overlay map - Extractive resources (transport route and buffer) to determine if the following assessment criteria apply)

#### **PO94**

## Development:

does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route;

## **AO94**

The following uses are not located within the 100m wide transport route buffer:

- Caretaker's accommodation (10), except where a. located in the Extractive industry zone;
- Community residence<sup>(16)</sup>; b.

- b. does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes;
- adopts design and location measures to C. satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to:
  - i. locating the furthest distance possible from the transportation route;
  - ii. habitable rooms being located the furthest from the transportation route;
  - iii. shielding and screening private outdoor recreation space from the transportation routes.

- Dual occupancy<sup>(21)</sup> C.
- Dwelling house<sup>(22)</sup>: d.
- Dwelling unit<sup>(23)</sup>; e.
- Hospital (36): f.
- Rooming accommodation (69); g.
- Multiple dwelling (49); h.
- Non-resident workforce accommodation (52); i.
- Relocatable home park (62); j.
- Residential care facility (65) k.
- Resort complex<sup>(66)</sup>; I.
- Retirement facility (67); m.
- Rural workers' accommodation<sup>(71)</sup>; n.
- Short-term accommodation<sup>(77)</sup>; Ο.
- Tourist park (84) p.

#### **PO95**

#### Development:

- a. does not adversely impact upon the efficient and effective transportation of extractive material along a transportation route;
- ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility;
- utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.

#### AO95.1

Development does not create a new vehicle access point onto an Extractive resources transport route.

#### AO95.2

A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.

## Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy - Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

#### **PO96**

#### Development will:

- not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;
- protect the fabric and setting of the heritage site, b. object or building;

## **AO96**

Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value.

Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with

- be consistent with the form, scale and style of the heritage site, object or building;
- utilise similar materials to those existing, or where d. this is not reasonable or practicable, neutral materials and finishes;
- incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;
- f. retain public access where this is currently provided.

Planning scheme policy - Heritage and landscape character. The plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.

## **PO97**

Demolition and removal is only considered where:

- a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or
- demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or
- limited demolition is performed in the course of C. repairs, maintenance or restoration; or
- d. demolition is performed following a catastrophic event which substantially destroys the building or object.

No acceptable outcome provided.

#### **PO98**

Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.

No acceptable outcome provided.

## **PO99**

Development does not adversely impact upon the health and vitality of significant trees. Where development occurs in proximity to a significant tree, construction measures and techniques as detailed in AS 4970-2009 Protection of trees on development sites are adopted to ensure a significant tree's health, wellbeing and vitality.

Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably qualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome.

## **AO99**

Development does:

- a. not result in the removal of a significant tree;
- b. not occur within 20m of a protected tree;
- C. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees.

Landslide hazard (refer Overlay map - Landslide hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a site-specific geotechnical assessment report is prepared by a qualified engineer. Guidance for the preparation of a geotechnical assessment report is provided in Planning scheme policy - Landslide hazard.

#### **PO100**

## Development:

- maintains the safety of people and property on a site and neighbouring sites from landslides;
- b. ensures the long-term stability of the site considering the full nature and end use of the development;
- ensures site stability during all phases of C. construction and development:
- minimises disturbance of natural drainage patterns d. of the site and does not result in the redirection or alteration of the existing flow if surface or groundwater
- minimises adverse visual impacts on the amenity of adjoining residents and provides a positive interface with the streetscape.

#### AO100

Development does not:

- involve earthworks exceeding 50m3;
- involve cut and fill having a height greater than b. 600mm:
- involve any retaining wall having a height greater C. than 600mm;
- d. redirect or alter the existing flow of surface or groundwater.

#### **PO101**

Buildings are designed to respond to sloping topography in the siting, design and form of buildings and structures by:

- minimising overuse of cut and fill to create single a. flat pads and benching;
- avoiding expanses of retaining walls, loss of trees b. and vegetation and interference with natural drainage systems;
- minimising any adverse visual impact on the C. landscape character;
- d. Protect the amenity of adjoining properties.

#### AO101

Buildings, excluding domestic outbuildings:

- a. are split-level, multiple-slab, pier or pole construction;
- are not single plane slab on ground. b.

## PO102

Development protects the safety of people, property and the environment from the impacts of landslide on hazardous chemicals manufactured, handled or stored by incorporating design measures to ensure:

- the long-term stability of the development site a. considering the full nature and end use of the development;
- site stability during all phases of construction and b. development;
- the development is not adversely affected by C. landslide activity originating on sloping land above the site:
- d. emergency access and access from the site for the public and emergency vehicles is available and is not at risk from landslide.

## AO102

Development does not involve the manufacture, handling or storage of hazardous chemicals.

Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

PO103 AO103.1 Development within a Water supply buffer captures solid or liquid waste from all land use, development and activities is designed, constructed and managed to prevent the release of contaminants to surface water or groundwater bodies.

Run-off and sediment from roadways and impervious surfaces within a Water supply buffer are intercepted and treated on-site to remove oil, grease, chemicals, silt, trace metals and nutrients such as nitrogen and phosphorous.

#### AO103.2

Incineration or burial of waste within a Water supply buffer is not undertaken onsite.

#### AO103.3

Solid waste within a Water supply buffer is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.

#### AO103.4

Holding tanks within a Water supply buffer are used for all liquid waste and provide for the separation of oils/solvents and solids prior to pump-out and collection by a licenced contractor.

## AO103.5

Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.

#### PO104

On-site sewerage systems within a Water supply buffer are designed and operated to ensure there is no worsening or adverse impacts to health risks, environmental risks and water quality.

Editor's Note - For guidance refer to the Seq water Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.

## AO104

Secondary treated wastewater treatment systems within a Water supply buffer include:

- emergency storage capable of holding 3-6 hours a. peak flow of treated effluent in the event of emergencies or overload with provision for de-sludging;
- b. back up pump installation and backup power;
- MEDLI modelling to determine irrigation rates and C. sizing of irrigation areas;
- d. vegetated land application areas are not located in overland flow paths or on areas that perform groundwater recharge or discharge functions; and
- wastewater collection and storage systems have a capacity to accommodate full load at peak times and includes temporary facilities.

## **PO105**

## **AO105**

Development:

Development within a Bulk water supply infrastructure buffer is located, designed and constructed to:

- protect the integrity of the water supply pipeline; a.
- b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline;
- does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer:
- involving a major hazard facility or environmentally b. relevant activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.

#### **PO106**

Development is located and designed to maintain required access to Bulk water supply infrastructure.

#### AO106

Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):

- buildings or structures; a.
- b. gates and fences;
- C. storage of equipment or materials;
- landscaping or earthworks or stormwater or other infrastructure.

#### PO107

Habitable rooms within an Electricity supply substation buffer are located a sufficient distance from substations (80) to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields.

Note - Habitable room is defined in the Building Code of Australia (Volume 1)

## AO107

Habitable rooms:

- are not located within an Electricity supply a. substation buffer; and
- proposed on a site subject to an Electricity supply supply substation (80) are acoustically insulted to b. achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008.

Note - Habitable room is defined in the Building Code of Australia (Volume 1)

#### **PO108**

Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation<sup>(80)</sup> to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment.

Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy - Noise.

Note - Habitable room is defined in the Building Code of Australia (Volume 1)

No acceptable outcome provided.

## PO109

Development within a High voltage electricity line buffer provides adequate buffers to high voltage electricity lines to protect amenity and health by ensuring development:

#### AO109

Development does not involve the construction of any buildings or structures within a High voltage electricity line buffer.

- is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields in accordance with the principle of prudent avoidance;
- is located and designed in a manner that maintains b. a high level of security of supply;
- is located and design so not to impede upon the C. functioning and maintenance of high voltage electrical infrastructure.

#### PO110

Development within a Pumping station buffer is located, designed and constructed to:

- ensure that odour or other air pollutant impacts on the amenity of the development met the air quality of objectives in the Environmental Protection (Air) Policy 2008;
- ensure that noise impacts on the amenity of the development met the indoor noise objectives set out in the Environmental Protection (Noise) Policy 2008.

#### AO110

Development does not involve the construction of any buildings or structures within a Pumping station buffer.

## Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)

Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.

#### PO111

Development:

- minimises the risk to persons from overland flow;
- does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.

No acceptable outcome provided.

#### PO112

Development:

- maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;
- does not concentrate, intensify or divert overland b. flow onto an upstream, downstream or surrounding property.

Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.

No acceptable outcome provided.

Note - Reporting to be prepared in accordance with Planning scheme policy - Flood hazard, Coastal hazard and Overland flow. **PO113** No acceptable outcome provided. Development does not: directly, indirectly or cumulatively cause any increase in overland flow velocity or level; b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure. Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring. PO114 A0114 Development ensures that public safety and the risk to Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances. AO115 PO115 Development which is not in a Rural zone ensures that Development which is not in a Rural zone that an overland flow is not conveyed from a road or public open overland flow paths and drainage infrastructure is space onto a private lot. provided to convey overland flow from a road or public open space area away from a private lot. PO116 AO116.1 Development ensures that inter-allotment drainage Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following infrastructure, overland flow paths and open drains through private property cater for overland flows for a relevant level as identified in QUDM: fully developed upstream catchment and are able to be a. Urban area – Level III; easily maintained. b. Rural area – N/A; C. Industrial area – Level V; Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development d. Commercial area - Level V. does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. AO116.2 Development ensures that inter-allotment drainage Note - Reporting to be prepared in accordance with Planning scheme policy - Flood hazard, Coastal hazard and Overland flow infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment. **PO117** No acceptable outcome provided.

Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:

- a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;
- an overland flow path where it crosses more than b. one premises;
- inter-allotment drainage infrastructure. C.

Note - Refer to Planning scheme policy - Integrated design for details and examples.

Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.

## AO118

Development for a Park<sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.

## Additional criteria for development for a Park (57)

#### **PO118**

Development for a Park<sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:

- public benefit and enjoyment is maximised; a.
- impacts on the asset life and integrity of park b. structures is minimised;
- maintenance and replacement costs are minimised. C.

## Riparian and wetland setbacks

## PO119

Development provides and maintains a suitable setback from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following matters:

- impact on fauna habitats; a.
- b. impact on wildlife corridors and connectivity;
- impact on stream integrity; C.
- d. impact of opportunities for revegetation and rehabilitation planting;
- edge effects. e.

## **AO119**

Development does not occur within:

- 50m from top of bank for W1 waterway and a. drainage line
- b. 30m from top of bank for W2 waterway and drainage line
- 20m from top of bank for W3 waterway and C. drainage line
- d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.

Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and wetland setbacks.

Table 6.2.3.2.2.3 Setbacks (Residential uses) - All other areas

Height to wall	Frontage primary			Frontage secondary to street			Frontage secondary to lane	Side non-built to	Rear To OMP and wall	Canal To OMP and wall
	To wall	То ОМР	To covered car parking space	To wall	To OMP	To covered car parking space	To OMP, wall and covered car parking space	boundary wall To OMP and wall		
Less than 4.5m	Min 3m	Min 2m	Min 5.4m*	Min 2m	Min 1m	Min 5.4m*	Min 0.5m	Min 1.5m	Min 1.5m	Min 4.5m
4.5m to 8.5m	Min 3m	Min 2m	N/A	Min 2m	Min 1m	N/A	Min 0.5m	Min 2m	Min 2m	Min 4.5m
Greater than 8.5m	Min 6m	Min 5m	N/A	Min 3m	Min 2m	N/A	Min 0.5m	Min 2m up to 7.5m in height; plus 0.5m for every 3m in height or part thereof over 7.5m	Min 5m	Min 4.5m
Note - * for Dwelling houses <sup>(22)</sup> and Dual occupancies <sup>(21)</sup> only										

Table 6.2.3.2.2.4 Setbacks (Residential uses) - Morayfield South urban area

Height of wall	Frontage primary		Frontage secondary to street			Frontage secondary to lane	Side non-built to boundary wall	Rear To OMP and wall	Canal To OMP and wall	
S	To wall	То ОМР	To covered car parking space	To wall	То ОМР	To covered car parking space	To OMP, wall and covered car parking space	To OMP and wall		
Less than 4.5m	Min 1m	Min 1m	Min 5.4m*	Min 1m	Min 1m	Min 5.4m*	Min 0.5m	Min 1.5m	Min 1.5m	Min 4.5m
4.5 to 8.5m	Min 1m	Min 1m	N/A	Min 1m	Min 1m	N/A	Min 0.5m	Min 2m	Min 2m	Min 4.5m
Greater than 8.5m	Min 5m	Min 3m	N/A	Min 2m	Min 1m	N/A	Min 0.5m	Min 2m up to 8.5m in height; plus 0.5m for every 3m in height or part thereof over 8.5m	Min 5	Min 4.5m

Note - \* for Dwelling Houses<sup>(22)</sup> and Dual Occupancies<sup>(21)</sup> only

## Table 6.2.3.2.2.5 Built to boundary walls (Residential uses) - All other areas

Lot frontage width	Mandatory / optional	Length and height of built to boundary wall
--------------------	----------------------	---------------------------------------------

		Transition precinct - all other areas
Less than 7.5m	Mandatory - both sides unless a corner lot	Max Length: 80% of the length of the boundary Max Height: 7.5m
7.5m to 12.5m	Mandatory - one side	Max Length: 60% of the length of the boundary Max Height: 7.5m
>12.5m to 18m	Optional:  i. on 1 boundary only;  ii. where the built to boundary wall adjoins a lot with a frontage less than 18m.	Max Length: the lesser of 15m or 60% of the length of the boundary Max Height: 7.5m
Greater than 18m	As per QDC	

## Table 6.2.3.2.2.6 Built to boundary walls (Residential uses) - Morayfield South urban area

Lot frontage width	Mandatory / Optional	Length and height of built to boundary wall		
	10	Transition precinct - Morayfield South urban area		
Less than 7.5m	Mandatory - both sides unless a corner lot	Max Length: 80% of the length of the boundary Max Height: 8.5m		
7.5m to 12.5m	Mandatory - one side	Max Length: 70% of the length of the boundary Max Height: 10.5m		
>12.5m to 18m	Optional:  i. on 1 boundary only;  ii. where the built to boundary wall adjoins a lot with a frontage less than 18m.	Max Length: the lesser of 15m or 60% of the length of the boundary Max Height: 10.5m		
Greater than 18m	As per QDC			

# Table 6.2.3.2.2.7 Car parking spaces

Site proximity	Land use	Maximum number of car spaces to be provided	Minimum number of car spaces to be provided	
Within 800m walkable	Non-residential	1 per 30m² GFA	1 per 50m <sup>2</sup> GFA	
Catchment* of a	Residential – permanent/long term	N/A	1 per dwelling	
entre	Residential – serviced/short term	3 per 4 dwellings + staff spaces	1 per 5 dwellings + staff spaces	
Other (Wider catchment)	Non-residential	1 per 20m² GFA	1 per 30m² GFA	
Catchinenty	Residential – permanent/long term	N/A	1 per dwelling	
_	Residential – serviced/short term	1 per dwelling + staff spaces	1 per 5 dwellings + staff spaces	


Note - Car parking rates are to be rounded up to the nearest whole number.

Note - Allocation of car parking spaces to dwellings is at the discretion of the developer.

Note - Residential - Permanent/long term includes: Multiple dwelling<sup>(49)</sup>, Relocatable home park<sup>(62)</sup>, Residential care facility<sup>(65)</sup>, Retirement facility<sup>(67)</sup>.

Note - Residential - Services/short term includes: Rooming accommodation<sup>(69)</sup> or Short-term accommodation<sup>(77)</sup>.

Figure 6.2.3.2.2.2 - Morayfield South

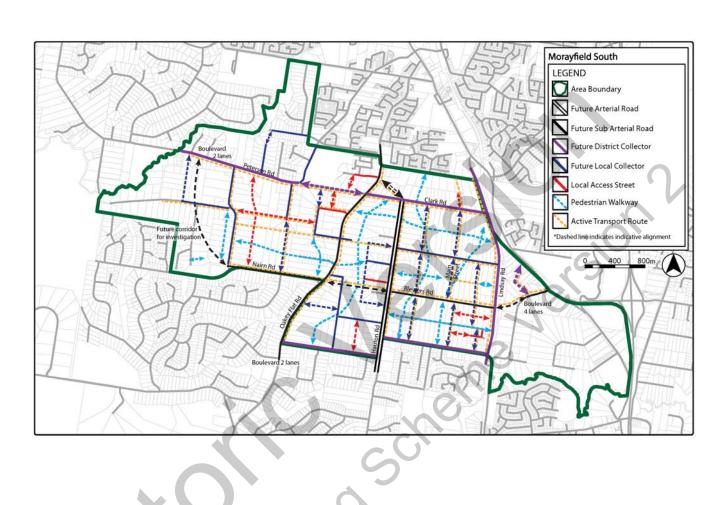

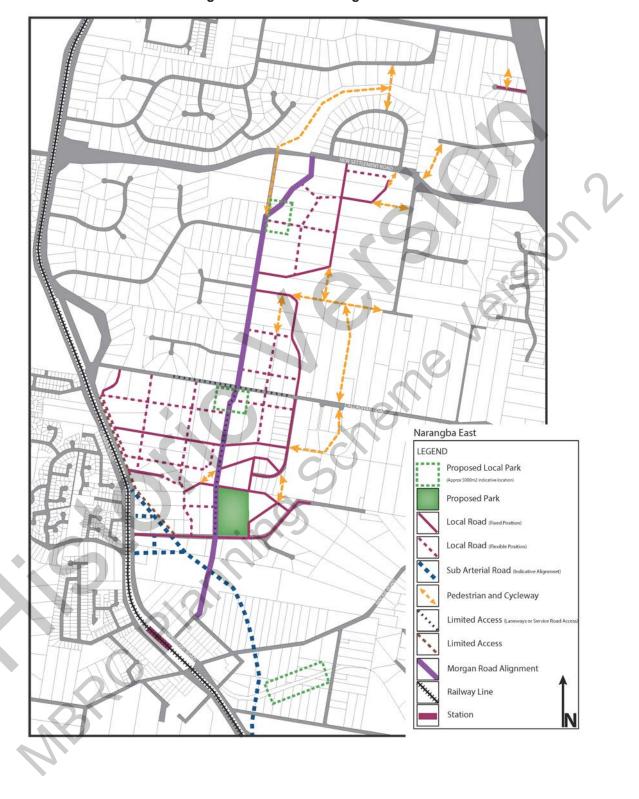


Figure 6.2.3.2.2.3 - Narangba East