### 7.2.3 Caboolture West local plan code

### 7.2.3.1 Application - Caboolture West local plan

This code applies to assessing development in the Caboolture West local plan area shown on LPM-03 contained within Schedule 2, if:

- 1. self-assessable or assessable development where this code is an applicable code identified in the assessment criteria column of a table of assessment (Part 5);
- 2. impact assessable development (Part 5).

When using this code, reference should be made to section 5.3.2 'Process for determining the level of assessment' and, where applicable, section 5.3.3 'Rules for determining the level of assessment'.

For self-assessable or assessable development for this Code:

- 1. Part A of the code applies only to assessable development in the <u>Urban living precinct</u>, 7.2.3.1.1 'Next generation sub-precinct';
- 2. Part B of the code applies only to assessable development in the 7.2.3.1 'Urban living precinct', 7.2.3.1.2 'Local centre sub-precinct';
- 3. Part C of the code applies only to assessable development in the 7.2.3.1 'Urban living precinct', 7.2.3.1.3 'Light industry sub-precinct';
- 4. Part D of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.1 'Centre core sub-precinct';
- 5. Part E of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.2 'Mixed business sub-precinct';
- 6. Part F of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.3 'Teaching and learning sub-precinct';
- 7. Part G of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.4 'Residential north sub-precinct';
- 8. Part H of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.5 'Residential south sub-precinct';
- 9. Part I of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.6 'Open space sub-precinct';
- 10. Part J of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.6 'Open space sub-precinct';
- 11. Part K of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.8 'Light industry sub-precinct';
- 12. Part L of the code applies only to assessable development in the 7.2.3.2 'Town centre precinct', 7.2.3.2.9 'Specialised centre sub-precinct';
- 13. Part M of the code applies only to assessable development in the 7.2.3.3 'Enterprise and employment precinct', 7.2.3.3.1 'General industry sub-precinct';
- 14. Part N of the code applies only to assessable development in the 7.2.3.3 'Enterprise and employment precinct', 7.2.3.3.2 'Light industry sub-precinct';
- 15. Part O of the code applies only to assessable development in the 7.2.3.3 'Enterprise and employment precinct', 7.2.3.3.3 'Specialised centre sub-precinct';

- 16. Part P of the code applies only to self-assessable development in the 7.2.3.4 'Green network precinct';
- 17. Part Q of the code applies only to assessable development in the 7.2.3.4 'Green network precinct';
- 18. Part R of the code applies only to self-assessable development in the 7.2.3.5 'Rural living precinct';
- 19. Part S of the code applies only to assessable development in the 7.2.3.5 'Rural living precinct'.

#### Editor's note - Context

The Caboolture West local plan area forms part of the Caboolture planning area (SF Map 3.13.2) within the Moreton Bay Region. It adjoins the existing urban footprint approximately 5km west of the Caboolture-Morayfield Principal Activity Centre (PAC), and is bounded by the D'Aguilar Highway to the north, Caboolture River Road to the south and low hills to the west of Old North Road. The local plan area has a total land area of approximately 3,480 hectares.

The Caboolture West topography is characterised by the Caboolture River and Wararba Creek alluvial flats, which rise and undulate up to the foothills of the D'Aguilar Range in the west. The existing landscape consists of detached housing set amongst predominately large areas of open rural grazing land and smaller parcels of agricultural cropping<sup>(19)</sup>. Existing rural residential type development is located around the Wamuran Township to the north and Caboolture River Road to the south.

The local plan area features natural areas which are important to the conservation of biodiversity in the region and which provide the basis of a green network precinct which can be consolidated, rehabilitated and enhanced as development occurs. Similarly, views towards the Glass House Mountains to the north and the D'Aguilar Range to the west create a distinct character specific to this part of the Moreton Bay Region consideration of which has been incorporated into the local plan.

The topography of the area has also been found to be capable of and suitable for urban development and this combined with the areas close proximity to the Caboolture-Morayfield PAC reinforce the potential of this area to become a new major long term growth area in Moreton Bay.

#### **Planning Process**

The Caboolture West Local Plan was prepared by Moreton Bay Regional Council in consultation with State Agencies following the Ministerial Declaration of the Caboolture West Master Planned Area in February 2012.

The planning process has been intensive and comprehensive, encompassing a wide range of issues and considerations including the following:

- Environmental and ecological values;
- Agriculture and strategic cropping<sup>(19)</sup> land;
- Housing needs;
- Future employment and business needs;
- Infrastructure requirements (public transport, roads, water, sewerage and stormwater);

Parks, open space and community uses<sup>(17)</sup>

Economic and financial impacts.

Urban design has been an integral part of the planning process from initial scenario development through to detailed master planning. Council's urban design goal has been to design places that work best for people, from the region as a whole to neighbourhoods and precincts and to individual public spaces, streets and buildings. The urban design of Caboolture West will affect its economic vitality, community well-being and environmental sustainability. It will influence how well its community will be able to respond positively to things such as climate change, changing lifestyles, innovative communications technology and an ageing community.

Input has been sought from key stakeholders through the multiple project stages and has assisted in forming the vision and strategies contained in the local plan. During the process, the community has been kept up-to-date through periodic updates on the Caboolture West webpage, public information sessions at halls in the area and Councillor newsletters distributed in the area.

The figures included in this Caboolture West Local Plan illustrate conceptually how Council intends the area will be developed. The Neighbourhood development plans are intended to show in detail the types, scale, timing and location of development and infrastructure prior to development occurring.

#### Key Features of the Caboolture West Local Plan

- Study Area approximately 6,663 ha
- Project time frame 40 + years

- Urban Population 68,700 residents
- Urban Dwellings 26,900
- Urban Employment 17,000 jobs
- Development Value est. 9,500 million
- Local Plan area 3,480 ha
- Local Plan urban area 1787 ha (51%) comprising:
  - Town centre 106 ha (6%)
  - Enterprise and employment 160 ha (9%)
  - Urban living 1,521 ha (85%)
  - 6 local centres
  - 13 neighbourhood hubs
  - TAFE and Private hospital<sup>(36)</sup>
  - 3 high schools
  - 9 primary schools
  - Rapid transit connection to Caboolture Central
- Green network 1070 ha (31%)
- Local Plan rural living area 622 ha (17%)

The local plan consists of 5 precincts and 15 sub-precincts (see Table 7.2.3.1). The location of the 15 sub-precincts is only shown conceptually in the local plan and is required to be planned in more detail in a Neighbourhood development plan.

### 7.2.3.1 Purpose - Caboolture West local plan

- 1. The purpose of the Caboolture West local plan code is to:
  - a. Achieve the strategic outcomes of the Caboolture West growth area as set out in Part 3 Strategic Framework by specifying in detail the overall outcomes for the Caboolture West local plan and the purpose and outcomes for each of the precincts identified in the local plan.
  - b. Provide for an Urban area.
  - c. Guide the orderly, balanced, and sequenced planning and development of land use in the local plan area.
  - d. Guide the staged planning and delivery of infrastructure necessary to service development.
  - e. Require the preparation of neighbourhood development plans prior to development that:
    - i. specify the geographic location of sub-precincts and the specific type, form, location and scale of other land use and development that meet the outcomes of the local plan code;
    - ii. integrate and coordinate the type, form, scale, location and sequence of development with the location, timing and provision of infrastructure;
    - iii. ensure the land requirements required for the provision of community infrastructure to service the population of the area are not compromised by development;

- iv. facilitate the provision of community infrastructure required by the population of the local plan area;
- v. facilitate the planning and implementation of the Green network.
- f. Establish the purpose, overall outcomes and performance outcomes for the preparation of Neighbourhood development plans.
- 2. The Caboolture West local plan includes 5 precincts, which have the following purpose:
  - a. <u>Town centre precinct</u>: The purpose of this precinct is to concentrate the highest order and greatest mix of specialised retail, commercial, civic and cultural activities, education, health and other Community uses<sup>(17)</sup>, and the highest residential densities in a compact, highly accessible location with a high quality pedestrian, oriented public realm.
  - b. <u>Urban living precinct</u>: The Urban living precinct applies to most of the area intended for urban development in the Caboolture West local plan area. The precinct is intended to be developed as a series of next generation neighbourhoods, which are comprised of a mix of residential development types including detached dwellings on a variety of lot sizes, multiple residential dwellings and other residential and live work opportunities. Higher density development is predominately located within walking distance to centres, community facilities and high frequency public transport.

The Urban living precinct is also intended to accommodate a wide range of compatible non-residential activities to cater for the needs of all local residents. These other activities include:

- identifiable and accessible local centres and neighbourhood hubs;
- local employment areas providing locations for small scale, low impact industry<sup>(42)</sup> and business land uses;
- specific facilities and institutions such as Educational establishments<sup>(24)</sup>, Child care centres<sup>(13)</sup> and community facilities;
- other community infrastructure necessary for an urban community to function.
- c. <u>Enterprise and employment precinct</u>: The Enterprise and employment precinct is intended to be developed as the primary location for Low impact industry<sup>(42)</sup> to Medium impact industry<sup>(47)</sup> uses and industry employment within the Caboolture West local plan area, complementing the other industry places throughout the Caboolture city area. The precinct primarily provides high quality, fully serviced, accessible land for a compatible mix of low impact and medium impact industrial uses, a secondary function is to accommodate large format retail uses and indoor sport and recreation<sup>(38)</sup> along the main street boulevard. The primary and secondary functions are supported and complemented by smaller scale business uses providing a local function.
- d. <u>Rural living precinct</u>: The precinct is generally located at the urban-rural fringe of the local plan area, comprising of single detached houses on semi-rural allotments. The purpose of the Rural living precinct is to provide for rural uses to continue, development of lower density rural residential development on large lots where infrastructure and services may not be provided, and retaining strategic environmental corridors around the Caboolture West local plan area.

- e. <u>Green network precinct</u>: The purpose of the Green network precinct code is to provide for the protection and management of land having significant recreation and environmental values within the local plan area. The Green network seeks to consolidate and rehabilitate fragmented land, through development offsetting, and create a strong and connected network of quality environmental landscape areas having significant recreation, conservation, biodiversity and habitat values.
- 3. The development intent and urban design outcomes for each of the five precincts in the Caboolture West local plan area are further described through the sub-precinct provisions. Refer to the list of sub-precincts in Table 7.2.3.1 below. The location of each sub-precinct (shown conceptually in the local plan Figures) is to be determined in a Neighbourhood development plan (NDP) process as described in this local plan.

| Column 1                  | Column 2              |
|---------------------------|-----------------------|
| Precincts                 | Sub-precincts         |
| Town centre               | Centre core           |
|                           | Mixed business        |
|                           | Teaching and learning |
| •                         | Residential north     |
|                           | Residential south     |
|                           | Open space            |
|                           | Civic space           |
| XU                        | Light industry        |
|                           | Specialised centre    |
| Enterprise and employment | General industry      |
|                           | Light industry        |
|                           | Specialised centre    |
| Urban living              | Next generation       |
|                           | Local centre          |
|                           | Light industry        |
| Green network             | Not applicable        |
| Rural living              | Not applicable        |

Table 7.2.3.1 Precincts and Sub-precincts

Note - For further information about Neighbourhood development plans refer to Planning scheme policy - Neighbourhood design.

- 4. The purpose of the Caboolture West local plan code will be achieved through the following overall outcomes:
  - a. Agricultural land and rural industries are protected from the intrusion of incompatible, premature development by ensuring the below urban activity separation distances are maintained between urban development and existing operational rural activities;

### Table 7.2.3.2 Urban activities separation distances

| Use or Activity                                    | Minimum separation distance (metres) | Recommended buffer elements |
|--|--------------------------------------|-----------------------------|
| Agriculture where chemical spray drift is an issue | 300                                  | Vegetation                  |
| Agriculture where odour is an issue                | 500                                  | Not specified               |
| Agriculture where dust, smoke or ash is an issue   | 150                                  | Vegetation                  |
| Agriculture where none of the above are an issue   | 40                                   | Dense vegetation            |

- b. The form, pattern and structure of development delivers the following outcomes:
  - i. development recognises and strengthens the role and function of the Caboolture Morayfield Principal Activity centre;
  - ii. development contributes to increased levels of self-containment of business and industry employment opportunities in the Caboolture City Planning area;
  - iii. development delivers an urban structure that is consistent with the urban structure concept illustrated in Figure 7.2.3.1 Caboolture West structure plan, including a Town centre, Enterprise and employment area, an Urban living area, a Green network, and Rural living area.
  - iv. development delivers a major street network consistent with Figure 7.2.3.2 Movement, major streets;
  - v. development delivers a movement walking and cycling network consistent with Figure 7.2.3.3 -Movement, walking and cycling;
  - vi. development delivers a green network and open space consistent with Figure 7.2.3.4 Green network and open space;
  - vii. development delivers centres, employment and schools consistent with Figure 7.2.3.5 Centres, employment and schools;
  - viii. development protects, frames and incorporates strong views from the hilltops identified in Figure 7.2.3.6 Views;
  - ix. development responds to the site conditions, important features, and slope as identified on Figure 7.2.3.7 Synthesised conditions, important features, and Figure 7.2.3.8 Synthesised conditions, flood hazard and slope;
  - x. development delivers a series of walkable neighbourhoods providing housing and lot choice and diversity across the area, with higher densities and smaller lots focused around a network of local centres and neighbourhood hubs, community facilities and bounded by the green network.
- c. Development delivers a network of centres consistent with the role and function of the centres as identified on the Caboolture West centres network table below (Table 7.2.3.2).

### Table 7.2.3.3 Caboolture West - centres network

|               | Town Centre  | Local Centre  | Neighbourhood hub  | Specialised Centre   |
|---------------|--|---|--|--|
| Role/Function | <ul> <li>Key centre within the<br/>Caboolture West<br/>district.</li> <li>Greatest mix of<br/>residential and<br/>non-residential<br/>activities to cater for the</li> </ul> | - Focus for retail,<br>commercial and<br>community activities,<br>servicing multiple<br>neighbourhoods within<br>the planning area. | - Focus for retail,<br>commercial and<br>community activities<br>within a small<br>neighbourhood<br>catchment. | - Focus for large (bulky<br>goods) showrooms <sup>(78)</sup> . |

| Catchment<br>Transport<br>connectivity | immediate needs of the<br>Caboolture West district<br>catchment.<br>District<br>- Major focal point for<br>high frequency bus<br>networks within the<br>Caboolture West area.<br>- Gateway for public<br>transport into the  | Local<br>Key focal point within<br>the public transport<br>system.  | Neighbourhood<br>Stopping or transfer<br>point for bus or train<br>network.   | Sub-Regional<br>Reliant on direct<br>vehicular access due to<br>the need to load and<br>unload goods.   |
|--|--|---|---|---|
| Retail activities                      | Caboolture city.<br>Includes:<br>- Department stores<br>(including discount<br>department stores)<br>- Showrooms <sup>(78)</sup><br>- Personal services<br>- Full-line supermarkets<br>- Full-line supermarkets<br>- Full range of specialty<br>stores<br>Excludes:<br>N/A   | Includes:<br>- A full-line supermarket<br>- Personal services<br>- Specialty stores<br>- 5000-7000m <sup>2</sup> retail<br>GFA<br>Excludes:<br>N/A  | Includes:<br>- Convenience stores<br>- Personal services<br>- Specialty stores<br>- 1000-2000m <sup>2</sup> GFA<br>Excludes:<br>- Department stores<br>(including discount<br>department stores)<br>- Showrooms <sup>(78)</sup><br>- Full-line supermarkets | Includes:<br>- Bulky goods retailing<br>Excludes:<br>- Department stores<br>(including discount<br>department stores)<br>- Supermarkets<br>- Speciality stores<br>- Personal services |
| Commercial activities                  | Includes:<br>- Key administration<br>centre<br>- State and local<br>government offices(53)<br>- Professional and<br>service businesses<br>Excludes:<br>N/A   | Includes:<br>- Intermediate level<br>offices <sup>(53)</sup><br>- Local professional<br>offices<br>Excludes:<br>N/A   | Includes:<br>- Local professional<br>offices <sup>(53)</sup><br>Excludes:<br>- District level and<br>above professional and<br>government offices <sup>(53)</sup>   | Includes:<br>N/A<br>Excludes:<br>- All professional<br>offices <sup>(53)</sup>  |
| Residential activities                 | <ul> <li>High density,<br/>multi-storey, mixed use</li> <li>Artistic, social or<br/>cultural facilities</li> <li>Child care</li> <li>Education</li> <li>Emergency<br/>services<sup>(25)</sup></li> <li>Health services</li> <li>Religious activities</li> <li>Social interaction or<br/>entertainment</li> <li>Support services</li> </ul> | N/A - Artistic, social or cultural facilities - Child care - Education - Emergency services <sup>(25)</sup> - Health services - Religious activities - Social interaction or entertainment - Support services | N/A - Artistic, social or cultural facilities - Child care - Education - Emergency services <sup>(25)</sup> - Health services - Religious activities - Social interaction or entertainment - Support services   | - No residential activity<br>other than caretakers<br>- No community<br>activities  |

| Other activities | <ul> <li>District focus for<br/>health, education,<br/>cultural and<br/>entertainment facilities</li> <li>District civic park</li> </ul> | - Entertainment<br>facilities<br>- Local civic park | - Local civic park | - No other activities |
|------------------|--|---|--------------------|-----------------------|
|------------------|--|---|--------------------|-----------------------|

- d. Development contributes to and maintains a well-connected and accessible town that:
  - i. is connected by a series of 4 lane boulevards to the D'Aguilar Highway, Caboolture and Morayfield;
  - ii. is connected to the Caboolture Principal Activity centre by a public transport system, including a rapid transit corridor, shown indicatively utilising the main street network, a dedicated right of way alongside the major electricity transmission corridor and other transport corridors;
  - iii. delivers a network of neighbourhoods, a town centre and an enterprise and employment area linked by a network of neighbourhood connector streets based on an 800m grid, a local collector street network based on a 400m grid, and an active transport and local access street network based on a 200m grid;
  - iv. delivers a minimum gross density of 35 people and jobs per hectare across the Caboolture West urban area to support a high quality public transport system;
  - v. delivers a permeable, legible, street and pedestrian/cyclist network providing connectivity, and property access, walkable neighbourhoods, active transport and public transport services;
  - vi. delivers a safe and convenient movement network within the local plan area and to and from the surrounding areas;
  - vii. delivers a safe and attractive pedestrian friendly built environment.

Editor's note - The Caboolture West transport assessment forecasts strong demand for travel between Caboolture West and Caboolture/Morayfield as Caboolture West is developed. As such a range of transport infrastructure and service improvements are required to maintain good accessibility to employment, educational facilities etc. The transport strategy identified the need to provide a strong integrated public transport network to support growth in Caboolture West and the wider Caboolture/Morayfield area in addition to road improvements. A key aspect of the strategy is to provide public transport travel times that are competitive with private vehicles between Caboolture West and the Caboolture town centre. The preliminary transport study did not assess the relative merits of alternative modes for rapid transit, but identified benefits of providing a rapid transit link between Caboolture West and the Caboolture town centre from 2036. Further planning will be undertaken to identify the details of the public transport provision necessary to support the Caboolture West development and the funding mechanisms.

The proposed Caboolture West infrastructure requirements reflect current understanding. Council will work with the Department of Transport and Main Roads (including the TransLink authority) to facilitate further network or corridor studies for an integrated public transport system to serve all neighbourhoods and centres and to provide good access locally, to Caboolture/Morayfield and to other regional centres.

State expenditure for investment in infrastructure will be subject to consideration through normal budgetary processes and will be part of an approved state agency capital works program.

### e. The development of infrastructure is:

- Iocated and designed to maximise efficiency, ease of maintenance, and minimum whole of life cycle cost;
- ii. provided in a timely, orderly, coordinated and integrated manner to support urban uses and works;
- iii. delivered in a manner that does not compromise the planned networks and hierarchies;
- iv. co-located where reasonably practical;
- v. located and designed to minimise impacts on natural environmental values and urban amenity;
- vi. designed to create high quality living and working environments that are safe, convenient, attractive, comfortable and fit for purpose.

- f. Development promotes the ongoing viability, integrity, operation, maintenance and safety of major infrastructure.
- g. Development provides effective separation distances, buffers and mitigation measures to minimise adverse effects on sensitive land uses from noise, dust and other nuisance generating activities.
- h. Development minimises adverse impacts on the amenity of surrounding residential uses by mitigating noise, odour and air quality impacts on residents to a level consistent with the general amenity of the location in which the development is occurring.
- i. Development protects the natural environment and landscape features of the area by ensuring development:
  - i. delivers a total water cycle management solution by:
    - A. satisfying best practice stormwater management targets outlined in State planning policy, Part D, Water Quality by utilising integrated solutions including bio-retention basins, green space areas, and wetlands;
    - B. contributing to riparian revegetation of 3rd and 4th order streams within the Caboolture West local plan area.
  - ii. delivers the green network identified in Figure 7.2.3.4 Green network and open space by the direct contribution of land within the corridor, contribution to koala habitat and regional ecosystem offsets provided by Council, and by direct vegetation rehabilitation of corridors.
  - iii. delivers an urban greenspace network that complements the major green network and integrates consideration of habitat and ecosystem values, stormwater management with the urban design outcomes sought by Council using natural and engineered solutions to achieve sustainable, safe, functional, and comfortable urban living environments.
  - iv. protects, frames and makes a positive contribution to the strong views from key hill tops identified in the local plan in Figure 7.2.3.6. Views and Figure 7.2.3.2.4 Town centre, retained views.
- j. Development occurs in accordance with an approved Neighbourhood development plan.
- k. A Neighbourhood development Plan (NDP) specifies:
  - the location of sub-precinct boundaries and the type, scale and location of land uses consistent with the sub-precinct provisions of the Local plan code;
  - ii. the type, scale and location of other consistent and compatible land uses and development within the relevant precincts;
  - iii. building height limitations;

i.

V.

- iv. minimum site densities for the Residential north sub-precinct and Residential south sub-precinct;
  - view corridors to be maintained;
- vi. street layout, width and alignment;
- vii. the main street, collector street and local access street network (shown conceptually on Figure 7.2.3.1 Caboolture West structure plan and Figure 7.2.3.2.1 Urban design framework);
- viii. the public transport network;
- ix. the active transport network;
- x. the location of open space;
- xi. the green infrastructure network;

- xii. location of community facilities e.g. school site boundaries;
- xiii. major electricity infrastructure<sup>(43)</sup>;
- xiv. the type, scale, location and timing of water, sewer and stormwater infrastructure;
- xv. integration with the surrounding area;
- xvi. Where possible and practicable, koala bushland and habitat trees, outside of the Green network precinct, to be retained and incorporated in the overall design as, but not limited to, parks and open space areas, street trees and urban landscaping.

Note - Neighbourhood development plans:

- i. Will be approved by Council and included in the Local plan;
- ii. Are required to be prepared before development other than transitional and interim development is approved;
- iii. Will not vary the level of assessment;
- iv. Are prepared in accordance with Planning scheme policy Neighbourhood design. The Planning scheme policy contains diagram showing indicative boundaries of the Neighbourhood development plans and intended phasing of these plans;
- Will explore development opportunities and constraints in greater detail, refine precinct boundaries, allocate sub-precinct boundaries (including residential density mix), and provide clarity on delivery of infrastructure and required infrastructure funding and delivery arrangements. Further consultation with development interests will be needed as part of the process leading up to adopting each NDP;
- May refine the boundary of a precinct and determine the configuration of sub-precincts consistent with the urban structure concept illustrated on Figure 7.2.3.1 - Caboolture West structure plan, Figure 7.2.3.2.1 - Town centre urban design framework and Figure 7.2.3.3.1
   Enterprise and employment urban design framework;
- vii. Demonstrate how the relevant Local plan outcomes will be achieved

Refer to Planning scheme policy - Neighbourhood design for additional information and details.

Editor's note - Development of Caboolture West is expected to take 40+ years. The local plan is split into 8 smaller areas, for which a Neighbourhood Development Plan (NDP) is required. A NDP might easily contain 3,000 or more dwellings – they are serious planning and design exercises in themselves.


During preparation of the local plan an illustrative masterplan was designed and drawn at 1:5000.


There are two important reasons for this output at this scale:

- i. 'Proof of concept'. The illustrative masterplan tested the broader scale local plan for viability.
- ii. Illustration of preferred urban design outcomes at the neighbourhood scale, to guide future planners and developers. As such this output of work is included in the supporting reports but not in the statutory local plan.


While useful for an illustrative purpose, the illustrative masterplan is not resolved to a level that would enable it to be used as an 'acceptable outcome'. Caboolture West Illustrative masterplan indicates a detailed urban design intent for each area, for refinement and resolution at NDP stage.

The NDP is the level of planning between local plan and a development application (e.g. reconfiguration of lots for housing). The NDP will detail local street networks, land uses (through the allocation of sub-precincts), open spaces, school site boundaries, sewer and water and other infrastructure. The NDP will show how the various sub-precincts, or the desired places within the sub-precincts are designed to form part of an integrated overall urban structure within the local plan area.




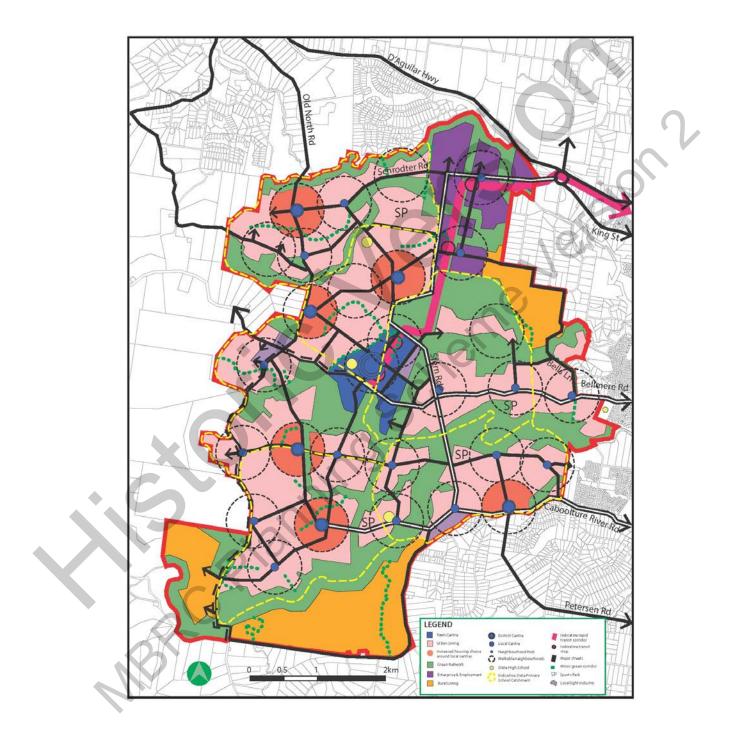




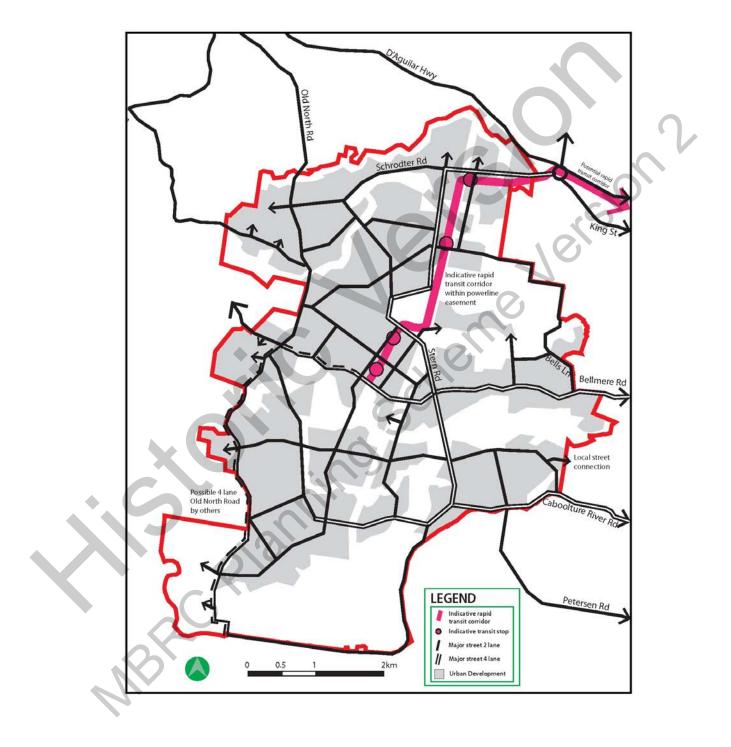




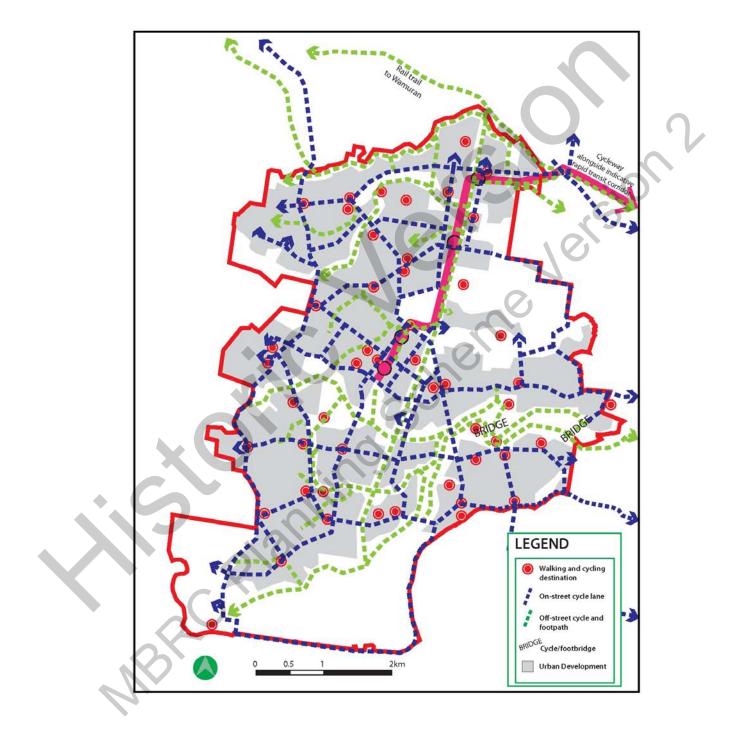



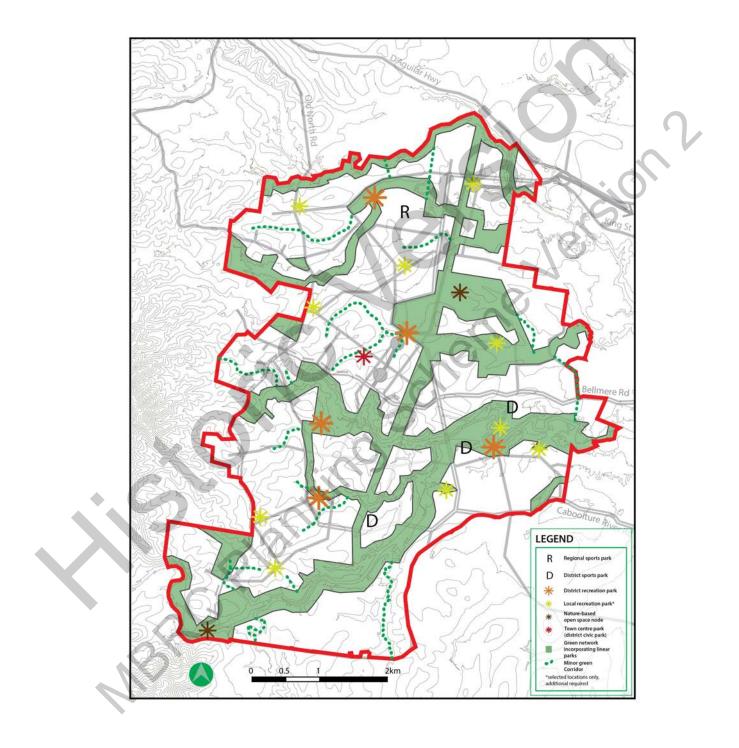



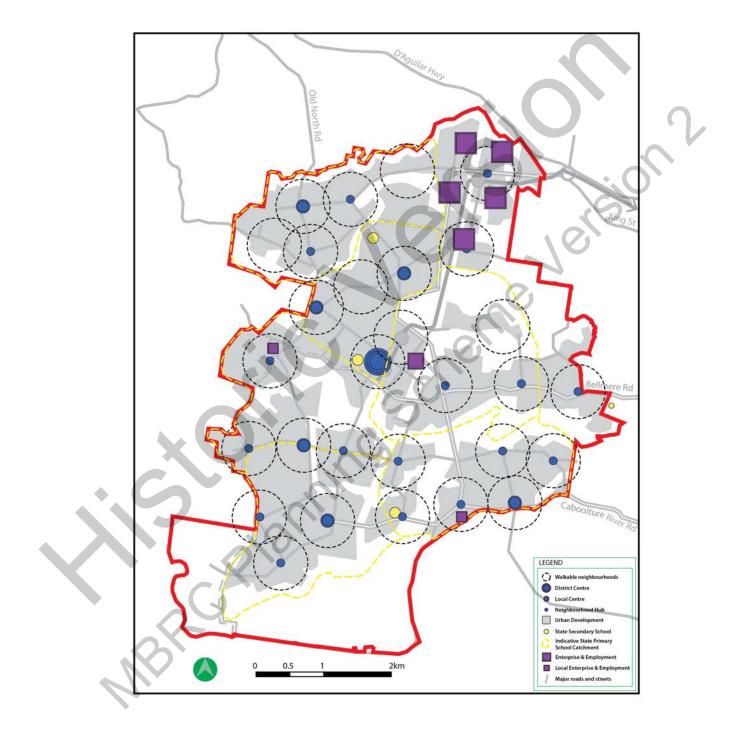
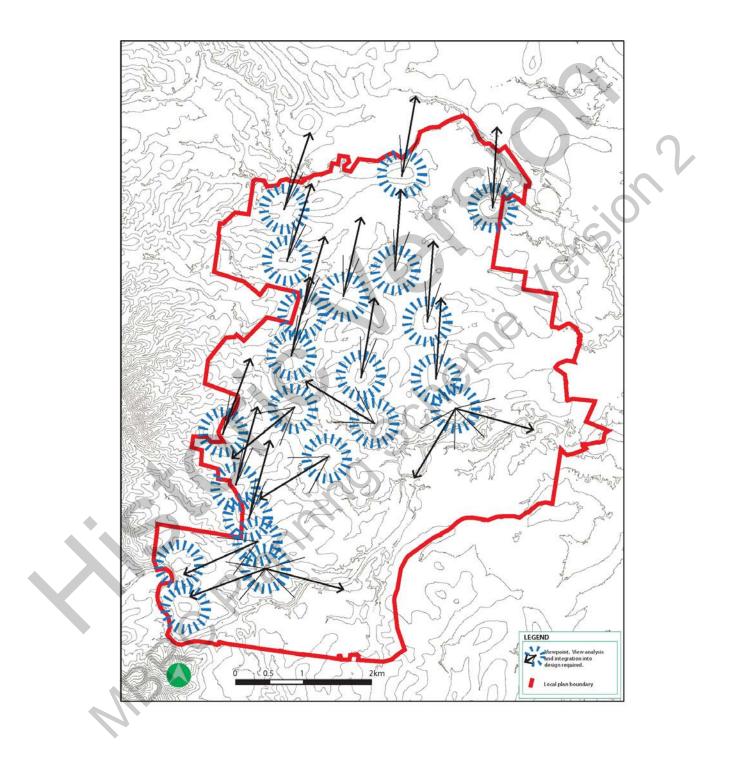


Figure 7.2.3.6 - Views



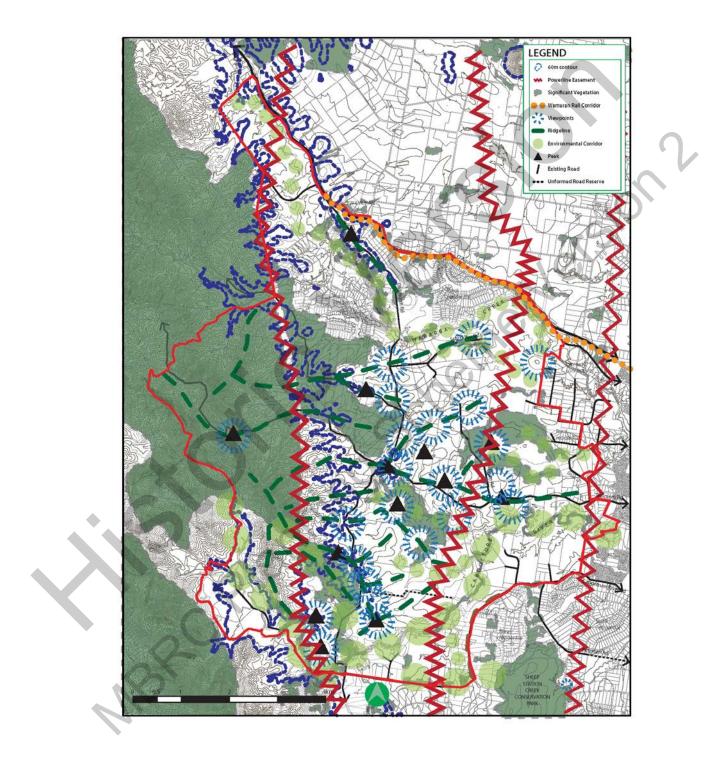


Figure 7.2.3.7 - Synthesised conditions, important features

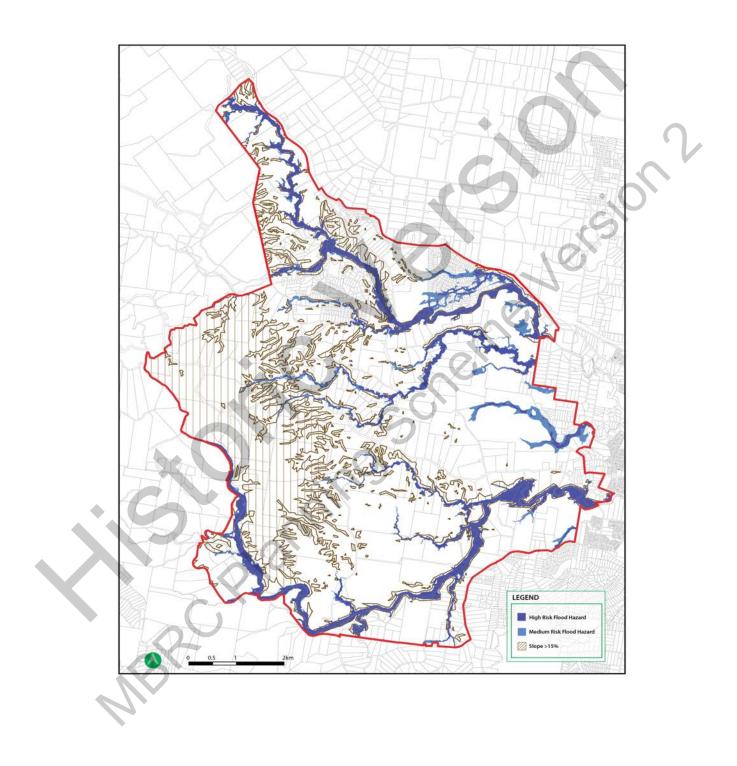


Figure 7.2.3.8 - Synthesised conditions, flood hazard and slope

## 7.2.3.1 Urban living precinct

### 7.2.3.1.1 Purpose - Urban living precinct

- 1. The Urban living precinct applies to most of the area intended for urban development in the Caboolture West local plan area. The precinct is to be developed as a series next generation neighbourhoods, that are comprised of a mix of residential development types including detached dwellings on a variety of lot sizes, multiple residential dwellings and other residential and live work opportunities. Higher density development is predominately located within walking distance to centres, community facilities and high frequency public transport.
- 2. The Urban living precinct has an overall net density of 22 dwellings per hectare (representing the combined mix of all development within the precinct) to support a diverse range of services, facilities and high frequency public transport.

Note - Net density refers to the density of development of an area which includes land for local streets, local Parks<sup>(57)</sup> and developable land (i.e. Before development occurs). Council's density calculations for the Caboolture West Local Plan assume that 70% of an area is developable and that 30% of the area is taken up by local streets and parks<sup>(57)</sup>.

Note - Refer to Planning scheme policy - Neighbourhood design, for average density calculation.

- 3. The Urban living precinct also accommodates a wide range of other non-residential activities to cater for the needs of all local residents. These other activities include:
  - a. identifiable and accessible local centres and neighbourhood hubs;
  - b. local employment areas providing locations for small scale, low impact and service industry land uses;
  - c. specific facilities and institutions such as Educational establishments<sup>(24)</sup>, Child care centres<sup>(13)</sup> and community facilities;
  - d. community open space and recreation areas;
  - e. other community infrastructure necessary for an urban community to function.
- 4. The Urban living precinct comprises a mix of the following sub-precincts, as identified on a Neighbourhood development plan (conceptually shown on Figure 7.2.3.1 Caboolture West structure plan). Each sub-precinct contributes a different primary function and focus as described below:
  - a. Next generation sub-precinct is the predominate form of development within the Urban living precinct consisting of mainly next generation residential activities supported by a mix of convenience retail, commercial, community, education, sporting, recreation and open space activities;
  - b. Local centre sub-precinct several local centres are required within the local plan area and are primary locations for a mix of convenience retail, commercial and community activities that service multiple next generation neighbourhood catchments. A local centre will typically contain one full-line supermarket, a wide range of speciality retail shops and commercial tenancies, health services and community facilities;
  - c. Light industry sub-precinct are primary locations for local low impact and service industry activities that are compatible with and complementary to adjacent uses in the Urban living precinct. The operation and viability of industrial activities in a Light industry sub-precinct are to be protected from the intrusion of incompatible uses, with the exception of caretaker's accommodation<sup>(10)</sup>.

## 7.2.3.1.1 Next generation sub-precinct

### 7.2.3.1.1.1 Purpose - Next generation sub-precinct

Editor's note - Next generation neighbourhoods are a concept first canvassed in the Next Generation Planning handbook. They are a typology bringing together a range of planning and urban design objectives for residential areas for the South East Queensland context. The planning for Caboolture West is based on a series of walkable neighbourhoods. Each neighbourhood has a neighbourhood centre or 'hub' typically where major streets cross, or could centre on a local Park<sup>677</sup>, and are based on a 400m or 5 minute walking catchment. Neighbourhood hubs are mixed use and 'mixed housing' typically containing convenience retail, commercial, community and residential activities. Three or four neighbourhoods are clustered around a local centre forming about a 1km catchment. Local centres are large enough for a full-line supermarket. They are strongly mixed use. Buildings and public life is oriented to the street (not car parks). They are walkable, comfortable, pleasant and safe. A local centre provides a focus for medium density residential development. A net residential density of 20 dwellings per hectare is targeted for next generation neighbourhoods, and the network of neighbourhood centres and local centre, provides opportunity to locate medium clensity residential development thereby increasing the overall density of a suburb scaled unit to 22 dwellings per hectare. Home offices<sup>(53)</sup> and home businesses are also encouraged in next generation neighbourhoods. Such uses are particularly appropriate along the major streets, still residential but offering some exposure useful for live/work situations. Neighbourhood serving shops and services are located at the heart of the neighbourhood, where major streets cross. A ttached houses and live/work buildings cluster around the centre/hub, and along the major through streets. Rear lanes are used to provide parking access. A local Park<sup>(57)</sup> and school are on the edge of the neighbourhood, still within easy walk. Alternatively a local Park<sup>(57)</sup> could provide a focus. Buses ply

- 1. The purpose of the Next generation sub-precinct will be achieved through the following overall outcomes:
  - a. The Next generation sub-precinct is developed as a series of neighbourhoods consisting of a mix of residential, convenience retail, commercial, community, education, recreation and open space activities.
  - b. Next generation residential development is the predominate form of development within each neighbourhood.
  - c. The scale and density of development facilitates an efficient land use pattern that supports compact, walkable and sustainable communities that are well connected to local centres, neighbourhood hubs, schools, Community uses<sup>(17)</sup>, Parks<sup>(57)</sup> and open space.
  - d. The Next generation sub-precinct contains a mix of residential dwellings, tenure and densities providing housing and lot choice and affordability for different lifestyle choices and life stages to meet diverse community needs.
  - e. Neighbourhoods have a safe and convenient movement network consisting of interconnected streets and active transport linkages that provide high levels of accessibility between residences, centres, open space areas, schools and places of activity.
  - f. Development provides sufficient and appropriately located land for local centres, neighbourhood hubs, schools and open space activities.
  - g. Residential dwelling mix in a Next generation sub-precinct is aimed at achieving a minimum net density of 20 dwellings per hectare.

Note - Notwithstanding the target net residential density for the Next generation sub-precinct, it is acknowledged that early years of the development (i.e. 1st five years) of the Caboolture West local plan area are likely to commence with a predominance of detached lots in the 15 to 20 dwellings per hectare density range.

Note - Net residential density refers to the density of development of an area which includes land for local streets, local Parks<sup>(57)(53)</sup> and developable land i.e. Before development occurs. Council's density calculations for the Caboolture West Local Plan assume that 70% of an area is developable and that 30% of the area is taken up by local streets and Parks<sup>(57)</sup>.

Note - Refer to Planning scheme policy - Neighbourhood design for density calculation.

- h. Development within 400m walking distance of a local centre sub-precinct must include a mix of low rise apartments, row houses and plexes to achieve a minimum net density of 30 dwellings per hectare.
- i. Development protects and preserves the cultural heritage significance of the Upper Caboolture Uniting Church and adjacent cemetery<sup>(12)</sup>.

- j. The design, siting and construction of residential activities:
  - i. contributes to a safe, attractive, pedestrian friendly streetscape;
  - ii. encourages passive surveillance of public spaces;
  - iii. results in separation of public and private spaces, privacy and residential amenity consistent with the density and residential character of the area;
  - iv. orientates to integrate with the street and surrounding neighbourhood;
  - v. provides a diverse and attractive built form where buildings are located closer to the street and encourage active frontages;
  - vi. incorporates sub-tropical urban design principles that respond to local climatic conditions;
  - vii. incorporates sustainable practices including maximising energy efficiency and water conservation;
  - viii. incorporates natural features and responds to site topography;
  - ix. locates car parking so as not to dominate the street;
  - x. caters for appropriate car parking and manoeuvring areas on site;
  - xi. provides urban services such as reticulated water, sewerage, sealed roads, Parks<sup>(57)</sup> and other identified infrastructure;
  - xii. ensures domestic outbuildings are subordinate in appearance and function to the dwelling.
- k. Community activities must:
  - i. be integrated into next generation neighbourhoods;
  - ii. form part of a local centre or neighbourhood hub or in a specific location in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.5 Centres, employment and schools;
  - iii. be in a location serviced by public transport;
  - iv. not negatively impact adjoining residents or the streetscape;
  - v. not undermine the viability of existing or future centres.
- I. Corner stores may establish as a standalone use (not part of a neighbourhood hub) where:
  - i. the store is of a scale that remains subordinate to all centres and neighbourhood hubs within the local plan area;
    - Clear separation from existing neighbourhoods hubs and centres within the network are maintained to reduce catchment overlap. The corner store should not be within 1600m of another corner store, neighbourhood hub or centre measured from the centre of the corner store, neighbourhood hub or centre;
  - iii. they are appropriately designed and located to include active frontages.
- m. Educational establishments<sup>(24)</sup> are located:
  - i. in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.5 Centres, employment and schools; or

- ii. on connecting streets between neighbourhoods (not on cul-de-sacs), to maximise an equal catchment distribution among two or three neighbourhoods;
- iii. along green network corridors to maximise the use of open space for sport and recreation purposes and to promote active travel as a means of transport to and from school.

Editor's note - State primary and high school locations have been identified in the Caboolture West local plan. School site boundaries and sizes are to be determined at Neighbourhood development plan stage in consultation with the Department of Education Training and Employment. The locational and design criteria proposed seeks to integrate schools into the design of the town. Non-government school locations are not identified and must adopt the same locational and design criteria as government schools.

- n. Educational establishments<sup>(24)</sup> are designed:
  - i. to ensure the efficient use of land (e.g. compact built form where in proximity to a centre, share recreation space, buildings and sports fields with the community, council and other schools etc);
  - ii. to be pedestrian oriented and complement walkable and cycleable neighbourhoods by providing multiple access points;
  - iii. to maintain the safety of users accessing the Educational establishment<sup>(24)</sup>.
- o. Regional and district sports facilities:
  - i. are provided in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.4 Green network and open space.
  - ii. are developed to:
    - A. maintain the ongoing viability and relevancy of existing and new indoor and outdoor sports and recreation facilities to meet community sport and recreation needs;
    - B. where applicable, be in accordance with a Council Master Plan approved under Council policy or Management Plan under the Land Act 1994;
    - C. only include activities other than sports and recreation activities that have a nexus with or are ancillary to, sports and recreation activities where:
      - I. activities do not compete with similar uses in centres;
      - II. activities do not detract from the primary sports and recreation activity occurring on a site;
      - III. activities do not have adverse impacts on the character and amenity of the surrounding receiving environment, including noise, traffic generation, lighting, rubbish and waste disposal.
      - adopt a high standard of design and achieve quality buildings, and structures, including adopting the principles of Crime Prevention Through Environment Design (CPTED);
    - E. be compatible with the existing and intended scale and character of the streetscape and surrounding area and does not appear visually dominant or overbearing;
    - F. adopt sensitive design and siting considerations when adjoining residential areas. Design measures such as landscaping, screening and separation are adopted to minimise the visual impact of buildings and hard surfaces and nuisance effects associated with lighting, noise, dust and rubbish disposal;
    - G. mitigate potential traffic impacts by:
      - I. locating on roads of a standard and capacity to accommodate traffic demand;

- II. providing safe and accessible vehicle access points, on-site manoeuvring and parking areas;
- III. providing for active transport opportunities.

Editor's note - Regional and district sports parks have been designed at the town scale and their locations and sizes identified in the Structure plan. A town centre Park<sup>(57)</sup> is also noted. District and some local recreation park locations are also identified, but detailed planning through the Neighbourhood Development Planning process is required to confirm the location, size and design of parks<sup>(57)</sup>.

- p. Retail and commercial activities must:
  - i. cluster with other non-residential uses (excluding corner stores and activities associated with a regional or district sports facility) forming a neighbourhood hub;
  - ii. be centred around a main street central core, fostering opportunities for social and economic exchange;
  - iii. be of a small scale;

Note - Retail and commercial uses that will result in a new or existing hub expanding to a scale that exceeds what is appropriate for a neighbourhood hub are therefore more comparable to a local centre. Accordingly, development of this nature are to be assessed as if establishing a new local centre. Refer to the Centre zone code for relevant assessment criteria.

- iv. not negatively impact adjoining residents or the streetscape;
- v. be subordinate in function and scale to all centres within the local plan area;
- vi. not undermine the viability of existing or future centres or neighbourhood hubs.
- q. The design, siting and construction of non-residential uses (excluding Educational establishments<sup>(24)</sup>):
  - i. contributes to a safe, attractive, pedestrian friendly streetscape;
  - ii. provides low rise development;
  - iii. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces;
  - iv. results in separation of public and private spaces, privacy and residential amenity consistent with the density and residential character of the area, and accessibility for business customers;
  - v. provides for active and passive surveillance of road frontages, movement corridors and public spaces;
  - vi. promotes active transport options and ensures an oversupply of car parking is not provided;
  - vii. locates car parking so as not to dominate the street;
  - viii. caters for appropriate car parking and manoeuvring areas on site;
  - ix. does not result in large internalised Shopping centres<sup>(76)</sup> (e.g. large blank external walls with tenancies only accessible from within the building) surrounded by expansive areas of surface car parking.
- r. Neighbourhood hubs are established where:
  - i. it will service the immediate convenience needs of the local neighbourhood, providing an important activity node and is consistent with the centres network within the local plan area;

- ii. it is of a scale that remains subordinate to all other centres within the local plan area;
- iii. the function and scale of uses and activities will not have a negative impact on the community;
- iv. they are appropriately designed to include active frontages around a main street core, and are staged where relevant to retain key (highly accessible) sites for long-term development.
- s. Neighbourhood hubs are located:
  - i. in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.5 Centres, employment and schools;
  - ii. generally within a 400m walk of most residents;
  - iii. at the junction of main streets and public transport routes in accessible and visible locations;
  - iv. generally to the side of the intersection creating pedestrian focused main streets;
  - v. with clear separation from existing neighbourhood hubs and centres within the network to reduce catchment overlap.
- t. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. Maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- u. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- v. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- w. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- x. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- y. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- z. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- aa. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- ab. Development constraints:

- i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
  - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
  - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
  - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
  - D. ensuring effective and efficient disaster management response and recovery capabilities;
  - E. for overland flow path;
    - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
    - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
    - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
    - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- ac. Development in the Next generation sub-precinct is for one or more of the uses identified below:

| <br> |   |    |   |   |             |   |
|------|---|----|---|---|-------------|---|
| •    | Caretaker's accommodation <sup>(10)</sup> | •  | Residential care facility <sup>(65)</sup><br>- if within 800m walking | • | Whe<br>hub: | re in a neighbourhood                                 |
| •    | Child care centre <sup>(13)</sup>         |    | distance of the Town centre precinct                                  |   | •           | Food and drink<br>outlet <sup>(28)</sup>              |
| •    | Club <sup>(14)</sup>                      | :. | Retirement facility <sup>(67)</sup> - if                              |   |             | outer   |
| •    | Community care centre <sup>(15)</sup>     |    | within 800m walking<br>distance of the Town centre<br>precinct        |   | •           | Hardware and trade supplies <sup>(32)</sup>           |
| •    | Community residence <sup>(15)</sup>       |    | produtor  |   | _           | Lloolth core  |
| •    | Community use <sup>(15)</sup>             | •  | Rooming<br>accommodation <sup>(69)</sup> - if                         |   | •           | Health care<br>services <sup>(33)</sup>               |
| •    | Dual occupancy <sup>(21)</sup>            |    | within 800m walking distance of the Town centre                       |   | •           | Office <sup>(53)</sup>                                |
| •    | Dwelling house <sup>(22)</sup>            |    | precinct  |   | •           | Service industry <sup>(73)</sup>                      |
| •    | Dwelling unit <sup>(23)</sup>             | •  | Sales office <sup>(72)</sup>  |   | •           | Shop <sup>(75)</sup>                                  |
| 2    | Educational establishment <sup>(24)</sup> | •  | Shop <sup>(75)</sup> - if for a corner store                          |   | •           | Veterinary services <sup>(87)</sup>                   |
| •    | Emergency services <sup>(25)</sup>        | •  | Short-term<br>accommodation <sup>(77)</sup> - if                      | • |             | re in a regional or<br>ct sports facility:            |
| •    | Health care services <sup>(32)</sup>      |    | within 800m walking distance of the Town centre                       |   | •           | Food and drink  |
| •    | Home based business <sup>(35)</sup>       |    | precinct  |   |             | outlet <sup>(28)</sup> (where ancillary to sports and |
| •    | Multiple dwelling <sup>(49)</sup>         |    |   |   |             | recreation activities)                                |
|      |   |    |   |   |             |   |

| • | Place of worship <sup>(60)</sup>   | ٠ | Indoor sport and recreation <sup>(38)</sup>  |
|---|--|---|--|
| • | Relocatable home park <sup>(62)</sup><br>- if within 800m walking<br>distance of the Town centre | ٠ | Market <sup>(46)</sup>                       |
|   | precinct   | ٠ | Outdoor sport and recreation <sup>(55)</sup> |
|   |  |   |  |

ad. Development in the Next generation sub-precinct does not include one or more of the following uses:

| Г |     | (4)  |   |  |        |  |
|---|-----|--|---|--|--------|--|
|   | •   | Adult store <sup>(1)</sup>                                 | • | Hotel <sup>(37)</sup>                                | $\sim$ | Research and technology industry <sup>(64)</sup> |
|   | •   | Agricultural supplies store <sup>(2)</sup>                 | • | Intensive animal industry <sup>(39)</sup>            |        | Resort complex <sup>(66)</sup>                   |
|   | •   | Air services <sup>(3)</sup>                                | • | Intensive horticulture <sup>(40)</sup>               |        |  |
|   | •   | Animal husbandry <sup>(4)</sup>                            | • | Landing <sup>(41)</sup>                              | •      | Rural industry <sup>(70)</sup>                   |
|   | •   | Animal keeping <sup>(5)</sup>                              | • | Low impact industry <sup>(42)</sup>                  | 1      | Rural workers' accommodation <sup>(71)</sup>     |
|   | •   | Aquaculture <sup>(6)</sup>                                 |   | Marine industry <sup>(45)</sup>                      | 2      | Showroom <sup>(78)</sup>                         |
|   | •   | Bar <sup>(7)</sup>   | • | Medium impact industry <sup>(47)</sup>               |        | Special industry <sup>(79)</sup>                 |
|   | •   | Brothel <sup>(8)</sup>                                     | • | Motor sport facility <sup>(48)</sup>                 | •      | Theatre <sup>(82)</sup>                          |
|   | •   | Bulk landscape supplies <sup>(9)</sup>                     | • | Nature-based tourism <sup>(50)</sup>                 | •      | Tourist attraction <sup>(83)</sup>               |
|   | •   | Cemetery <sup>(12)</sup>                                   | • | Nightclub entertainment                              | •      | Tourist park <sup>(84)</sup>                     |
|   | •   | Crematorium <sup>(18)</sup>                                |   | facility <sup>(51)</sup>                             | •      | Transport depot <sup>(85)</sup>                  |
|   | •   | Cropping <sup>(19)</sup>                                   |   | Non-resident workforce accommodation <sup>(52)</sup> | •      | Warehouse <sup>(88)</sup>                        |
|   | • ( | Detention facility <sup>(20)</sup>                         |   | Outdoor sales <sup>(54)</sup>                        | •      | Wholesale nursery <sup>(89)</sup>                |
|   | •   | Extractive industry <sup>(27)</sup>                        | • | Permanent plantation <sup>(59)</sup>                 | •      | Winery <sup>(90)</sup>                           |
|   | •   | Hardware and trade supplies <sup>(32)</sup> - if more than | • | Port services <sup>(61)</sup>                        |        |  |
|   |     | 250m <sup>2</sup> GFA                                      | • | Renewable energy                                     |        |  |
|   | •   | High impact industry <sup>(34)</sup>                       |   | facility <sup>(63)</sup>                             |        |  |
|   |     | 2  |   |  |        |  |

ae. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone test.

### Criteria for assessable development - Next generation sub-precinct

### Part A - Criteria for assessable development - Next generation sub-precinct

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part A, Table 7.2.3.1.1.1.Where development is impact assessable, the assessment criteria become the whole of the planning scheme.

| Performance outcomes  |   | Acceptable outcomes   |
|---|---|---|
|   | General                                   | criteria  |
|   | Neighbourho                               | od structure  |
| PO1   |   | No acceptable outcome provided.   |
| Development within the Next generation s<br>in accordance with a Neighbourhood dev<br>that reflects the urban structure concept s<br>indicatively on Figure 7.2.3.1 - Caboolture<br>plan, and includes:                 | elopment plan<br>shown                    | 2   |
| <ul> <li>a series of compact and walkable ne<br/>that have a mix of residential uses,<br/>densities on a variety of lot sizes;</li> </ul>   |   | Silon'  |
| <ul> <li>medium density neighbourhoods loo<br/>400m walking distance of local cent</li> </ul>   |   | C Jel   |
| c. neighbourhoods that are well connec<br>Community uses <sup>(17)</sup> and social infra   | cted to centres,<br>structure;            | e e   |
| <ul> <li>appropriately located non-residentia<br/>contribute to the creation and ongoin<br/>a sustainable urban community;</li> </ul>   |   | ner .   |
| e. where possible and practicable, koa<br>and habitat trees to be retained and<br>into the design of a neighbourhood<br>plan as, but not limited to, park and<br>areas, street trees and urban landso                   | incorporated<br>development<br>open space | SCI   |
| Density   |   |   |
| PO2   |   | No acceptable outcome provided.   |
| Development in the Next generation sub-<br>low to medium residential density in accor<br>minimum indicated on a Neighbourhood of<br>plan.<br>Note - Refer to Planning scheme policy - Neighbour<br>density calculation. | dance with the development                |   |
| Residential uses  |   |   |
| PO3   |   | AO3.1   |
| Residential uses are appropriately located sub-precinct having regard to:   | d within the                              | Residential uses are located in accordance with a Neighbourhood development plan. |
| <ul> <li>a. the housing diversity and mix sough<br/>sub-precinct;</li> </ul>  | nt within the                             |   |
| b. the proximity to existing centres, nei hubs, public open space and public tra  |   |   |

## Table 7.2.3.1.1.1 Assessable development - Next generation sub-precinct

|  | Acceptable outcomes  |
|--|--|
| c. the lot frontage;   |  |
| d. the order of road and street type.  |  |
| Note - Refer to Planning scheme policy - Residential design for details and examples.  |  |
| Building height (Residential uses)   |  |
| PO4  | A04  |
| Buildings and structures have a height that:   | Building height does not exceed:   |
| <ul><li>a. is consistent with the low to medium rise character of the Next generation sub-precinct;</li><li>b. responds to the topographic features of the site, including slope and orientation;</li></ul>  | <ul> <li>a. that mapped on Overlay map – Building heights; or</li> <li>b. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>   |
| c. is not visually dominant or overbearing with respect to the streetscape;  | e e  |
| d. responds to the height of development on adjoining land where contained within another precinct or zone.  | cherry.  |
|  |  |
| Note - Refer to Planning scheme policy - Residential design for details and examples.  | 50   |
|  | 50   |
| details and examples.  | A05  |
| details and examples. Building height (Non-residential uses)   | AO5<br>Building heights do not exceed that mapped on a<br>Neighbourhood development plan.  |
| details and examples.  Building height (Non-residential uses)  PO5 The height of buildings reflect the intended character of   | Building heights do not exceed that mapped on a  |
| details and examples.  Building height (Non-residential uses)  PO5  The height of buildings reflect the intended character of the area.  | Building heights do not exceed that mapped on a  |
| details and examples.  Building height (Non-residential uses)  PO5 The height of buildings reflect the intended character of the area.  Setbacks (Residential uses)  PO6 Residential buildings and structures are setback to: a. be consistent with the low to medium character  | Building heights do not exceed that mapped on a Neighbourhood development plan.  |
| details and examples.  Building height (Non-residential uses)  PO5 The height of buildings reflect the intended character of the area.  Setbacks (Residential uses)  PO6 Residential buildings and structures are setback to:  | Building heights do not exceed that mapped on a<br>Neighbourhood development plan.<br>AO6.1<br>Setbacks (excluding built to boundary walls) comply with  |
| details and examples.  Building height (Non-residential uses)  PO5 The height of buildings reflect the intended character of the area.  Setbacks (Residential uses)  PO6 Residential buildings and structures are setback to: a. be consistent with the low to medium character intended for the area, where buildings are positioned closer to the footpath to create more active frontages and maximise private open space | Building heights do not exceed that mapped on a Neighbourhood development plan.         AO6.1         Setbacks (excluding built to boundary walls) comply with Table 7.2.3.1.1.2 - Setback (Residential uses).         AO6.2         Buildings (excluding class 10 buildings and structures) |

| <ul> <li>d. maintain the privacy of adjoining properties;</li> <li>e. ensure parked vehicles do not restrict pedestrian and traffic movement and safety;</li> <li>i. not more than 20mm; or</li> <li>ii. if a plan of development to boundary wall on the than 150mm;</li> <li>f. limit the length, height and openings of boundary walls to maximise privacy and amenity on adjoining properties;</li> <li>g. provide adequate separation to particular infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure;</li> <li>h. ensure built to boundary walls do not create</li> <li>i. not more than 20mm; or</li> <li>ii. if a plan of development to boundary wall on the than 150mm;</li> <li>c. on the low side of a sloping low include an appropriate easement to facilita any wall within 600mm of a boundary. For boundary walls on adjacent lots a 'High Deteasement' is recommended; or for all othe and 'easement for maintenance purposes'</li> </ul>   | shows only one built<br>boundary, not more<br>ot.                          |
|--|--|
| <ul> <li>and traffic movement and safety;</li> <li>f. limit the length, height and openings of boundary walls to maximise privacy and amenity on adjoining properties;</li> <li>g. provide adequate separation to particular infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure;</li> <li>h. ensure built to boundary walls do not create</li> </ul>   | boundary, not more   |
| <ul> <li>f. limit the length, height and openings of boundary walls to maximise privacy and amenity on adjoining properties;</li> <li>g. provide adequate separation to particular infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure;</li> <li>h. ensure built to boundary walls do not create</li> <li>c. on the low side of a sloping low content of a sloping low c</li></ul> |  |
| <ul> <li>infrastructure and waterbodies to minimise adverse impacts on people, property, water quality and infrastructure;</li> <li>h. ensure built to boundary walls do not create</li> <li>Editor's note - Lots containing built to boun include an appropriate easement to facilita any wall within 600mm of a boundary. For boundary walls on adjacent lots a 'High De Easement' is recommended; or for all othe and 'easement for maintenance purposes'</li> </ul>  |  |
| h. ensure built to boundary walls do not create and 'easement for maintenance purposes'  | ate the maintenance of<br>r boundaries with built to<br>ensity Development |
| unusable or inaccessible spaces and do not<br>negatively impact the streetscape character,<br>amenity or functionality of adjoining properties.  |  |
| Note - Refer to Planning scheme policy - Residential design for details and examples.  |  |
| Setbacks (Non-residential uses)  |  |
| PO7       A07.1         Front setbacks ensure buildings address and actively interface with streets and public spaces.       For the primary frontage buildings at a. to the property boundary; or b. setback a maximum of 3m fro boundary, where for the purport  | om the property  |
| AO7.2<br>For the secondary frontage, setback<br>an adjoining building.   | ks are consistent with   |
| P08 A08  |  |
| Side and rear setbacks cater for driveway(s), services, utilities and buffers required to protect the amenity of adjoining sensitive land uses.  |  |
| Site cover (Residential uses)  |  |
| PO9 AO9  |  |
| Residential buildings and structures will ensure that site cover:<br>Site cover (excluding eaves, sun sha balconies and other unenclosed structures that is inconsistent in a site density that is inconsistent in a site density that is inconsistent in the specified percentages in   | ructures) does not   |
| a. does not result in a site density that is inconsistent<br>with the intended low to medium character of the  |  |

| Performance outcomes   | Acceptal                     | ble out                         | comes                     |                           |                            |                             |                                       |
|--|------------------------------|---------------------------------|---------------------------|---------------------------|----------------------------|-----------------------------|---------------------------------------|
| <ul><li>does not result in an over development of the site;</li><li>does not result in other elements of the site being</li></ul>  |                              | 300m <sup>2</sup><br>or<br>less | 301-<br>400m <sup>2</sup> | 401-<br>500m <sup>2</sup> | 501-<br>1000m <sup>2</sup> | 1001-<br>2500m <sup>2</sup> | Greater<br>than<br>2501m <sup>2</sup> |
| compromised (e.g. setbacks, open space etc).   | Less than<br>8.5m            | 75%                             | 70%                       | 60%                       | 60%                        | 60%                         | 60%                                   |
| Note - Refer to Planning scheme policy - Residential design for details and examples.  | 8.5m<br>-12.0m               | 50%                             | 50%                       | 60%                       | 50%                        | 50%                         | 50%                                   |
|  | Greater<br>than<br>12.0m     | N/A                             | N/A                       | N/A                       | 50%                        | 40%                         | 40%                                   |
|  | Note - Ref<br>method of      |                                 |                           | eme poli                  | icy - Resid                | ential desi                 | ign for                               |
| Movement network   |                              |                                 |                           |                           | 5                          |                             |                                       |
| PO10   | No accep                     | table o                         | utcome                    | provid                    | ed.                        |                             |                                       |
| the surrounding neighbourhood by providing<br>interconnected street, pedestrian and cyclist pathways<br>to adjoining development, nearby centres, neighbourhood<br>hubs, community facilities, public transport nodes and<br>open space in accordance with a Neighbourhood<br>development plan that reflects the urban structure<br>concept shown indicatively on Figure 7.2.3.2 - Movement,   |                              | 6                               | 00                        | )                         |                            |                             |                                       |
| major streets and Figure 7.2.3.3 - Movement, walking and cycling.  | S                            | •<br>                           |                           |                           |                            |                             |                                       |
| major streets and Figure 7.2.3.3 - Movement, walking<br>and cycling.<br>Water sensitive urban design   |                              |                                 | utcome                    | provid                    | ed                         |                             |                                       |
| major streets and Figure 7.2.3.3 - Movement, walking and cycling.  | No accep                     | otable o                        | utcome                    | provid                    | ed.                        |                             |                                       |
| <ul> <li>major streets and Figure 7.2.3.3 - Movement, walking and cycling.</li> <li>Water sensitive urban design</li> <li>PO11</li> <li>Best practice Water Sensitive Urban Design (WSUD) is incorporated within development sites adjoining street frontages to mitigate impacts of stormwater run-off in accordance with Planning scheme policy - Integrated</li> </ul>  | No accep                     | otable o                        | utcome                    | provid                    | ed.                        |                             |                                       |
| <ul> <li>major streets and Figure 7.2.3.3 - Movement, walking and cycling.</li> <li>Water sensitive urban design</li> <li>PO11</li> <li>Best practice Water Sensitive Urban Design (WSUD) is incorporated within development sites adjoining street frontages to mitigate impacts of stormwater run-off in accordance with Planning scheme policy - Integrated design.</li> </ul>  | No accep                     | otable o                        | utcome                    | provid                    | ed.                        |                             |                                       |
| major streets and Figure 7.2.3.3 - Movement, walking<br>and cycling.<br>Water sensitive urban design<br>PO11<br>Best practice Water Sensitive Urban Design (WSUD) is<br>incorporated within development sites adjoining street<br>frontages to mitigate impacts of stormwater run-off in<br>accordance with Planning scheme policy - Integrated<br>design.<br>Sensitive land use separation<br>PO12<br>Sensitive land uses within 250m of land in the general<br>industry sub-precinct must mitigate any potential | AO12<br>Developn             | nent is                         | designe                   | ed and (                  | operated                   |                             |                                       |
| major streets and Figure 7.2.3.3 - Movement, walking<br>and cycling.<br>Water sensitive urban design<br>PO11<br>Best practice Water Sensitive Urban Design (WSUD) is<br>incorporated within development sites adjoining street<br>frontages to mitigate impacts of stormwater run-off in<br>accordance with Planning scheme policy - Integrated<br>design.<br>Sensitive land use separation<br>PO12<br>Sensitive land uses within 250m of land in the general  | AO12<br>Developm<br>a. it me | nent is                         | designe                   | ed and outline            | _                          |                             |                                       |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| PO13<br>The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, noise,<br>light, chemicals and other environmental nuisances  | No acceptable outcome provided.  |
| Cultural Heritage  |  |
| P014   | A014   |
| Development on Lot 48 S31711 (containing the Upper Caboolture Uniting Church and adjacent cemetery <sup>(12)</sup> ) will:   | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value. |
| <ul> <li>not diminish or cause irreversible damage to the<br/>cultural heritage values present on the site, and<br/>associated with a heritage site, object or building;</li> </ul>  | C SI   |
| <ul> <li>protect the fabric and setting of the heritage site,<br/>object or building;</li> </ul>   |  |
| c. be consistent with the form, scale and style of the heritage site, object or building;  |  |
| d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;  | cher   |
| e. incorporate complementary elements, detailing and ornamentation on the heritage site, object or building;   | 50   |
| f. retain public access where this is currently provided.  |  |
| Noise  |  |
| PO15<br>Noise generating uses do not adversely affect existing<br>or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise. | No acceptable outcome provided.  |
| PO16   | AO16.1   |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:   | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.   |
| a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of   | AO16.2   |

| Performance outcomes   | Acceptable outcomes  |  |
|--|--|--|
| parks, streets and roads that serve active transport<br>purposes (e.g. existing or future pedestrian paths<br>or cycle lanes etc);   | Noise attenuation structures (e.g. walls, barriers or fences):   |  |
| b. maintaining the amenity of the streetscape.   | a. are not visible from an adjoining road or public area unless:   |  |
| Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise.<br>Note - Refer to Planning Scheme Policy – Integrated design for<br>details and examples of noise attenuation structures. | <ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not<br/>serve an existing or future active transport<br/>purpose (e.g. pedestrian paths or cycle lanes)<br/>or where attenuation through building location<br/>and materials is not possible.</li> </ul>  |  |
|  | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul> |  |
| Warks  |  |  |
| Works criteria   |  |  |
| Utilities  |  |  |
| P017   | A017   |  |
| The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant<br>energy regulating authority) and the infrastructure does<br>not negatively impact the streetscape.   | The development is connected to underground electricity.   |  |
| PO18   | No acceptable outcome provided.  |  |
| The development has access to telecommunications and broadband services in accordance with current standards.  |  |  |
| PO19   | No acceptable outcome provided.  |  |
| Where available the development is to safely connect to reticulated gas.   |  |  |
| PO20   | AO20.1   |  |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.   | Where in a sewered area, the development is connected to a reticulated sewerage system.  |  |
|  | AO20.2   |  |
|  |  |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | Where not in a sewered area, the development is<br>serviced by an appropriate on-site sewerage facility.<br>Note - A site and soil evaluation report is generally required to<br>demonstrate compliance with this outcome. Reports are to be<br>prepared in accordance with The Plumbing and Drainage Act 2002.   |
| PO21   | A021.1  |
| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards. |
|  | AO21.2  |
|  | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development.  |
| P022   | No acceptable outcome provided.   |
| The development is provided with dedicated and constructed road access.  |   |
| Access   |   |
| <ul> <li>PO23</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> </ul> | No acceptable outcome provided.   |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| PO24  | No acceptable outcome provided.  |
| Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design. |  |
| PO25  | A025.1   |
| The layout of the development does not compromise:  | Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a  |
| a. the development of the road network in the area;   | motorway.  |
| b. the function or safety of the road network;  |  |
| <ul> <li>c. the capacity of the road network.</li> <li>Note - The road hierarchy is in accordance with a Neighbourhood</li> </ul>   | Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.   |
| development plan (conceptually shown on Figure 7.2.3.2 -<br>Movement, Major streets).   | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |
|   |  |
|   | AO25.2   |
|   | The development provides for the extension of the road   |
|   | network in the area in accordance with Council's road  |
|   | network planning.  |
|   |  |
|   | AO25.3   |
|   | The development does not compromise future road  |
|   | widening of frontage roads in accordance with the relevant standard and Council's road planning.   |
|   | AO25.4   |
|   | The lot layout allows forward access to and from the site.   |
| P026  | AO26.1   |
| Safe access is provided for all vehicles required to access the site.   | Site access and driveways are designed and located in accordance with:   |
|   | a. Where for a Council-controlled road, AS/NZS2890.1   |
|   | <ul> <li>section 3; or</li> <li>b. Where for a State-Controlled road, the Safe<br/>Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard<br/>drawings, or a copy of a Transport Infrastructure<br/>Act 1994, section 62 approval.</li> </ul> |
|   | AO26.2   |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| PO27<br>Upgrade works (whether trunk or non-trunk) are provided<br>where necessary to:<br>a. ensure the type or volume of traffic generated by<br>the development does not have a negative impact<br>on the external road network;<br>b. ensure the orderly and efficient continuation of the<br>active transport network;<br>c. ensure the site frontage is constructed to a suitable<br>urban standard generally in accordance with<br>Planning scheme policy - Integrated design. | Acceptable outcomes Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.  AO26.3 Access driveways, manoeuvring areas and loading facilities provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements.  No acceptable outcome provided. |
| ensure the orderly and efficient continuation of the<br>active transport network;<br>ensure the site frontage is constructed to a suitable<br>urban standard generally in accordance with  | Sch   |
| Note - The road hierarchy is in accordance with a Neighbourhood<br>development plan (conceptually shown on Figure 7.2.3.2 -<br>Movement, Major streets).<br>Note - To demonstrate compliance with c. of this performance<br>outcome, site frontage works where in existing road reserve<br>(non-trunk) are to be designed and constructed as follows:  |   |
| <ul> <li>i. Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or</li> <li>ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.</li> </ul>  |   |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.   |   |

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| PO28   | No acceptable outcome provided. |
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.   |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.  |                                 |
| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. | C Jersion                       |
| PO29   | No acceptable outcome provided. |
| Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.   | schen                           |
| PO30   | No acceptable outcome provided. |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by a<br>suitably qualified professional will be required in accordance with<br>Planning scheme policy - Stormwater management.            |                                 |
|  |                                 |
| PO31   | No acceptable outcome provided. |
| Easements for drainage purposes are provided over:   |                                 |
| <ul><li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li><li>b. overland flow paths where they cross more than one property boundary.</li></ul>  |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   |  |
| Site works and construction management  |  |
| PO32  | No acceptable outcome provided.  |
| The site and any existing structures are maintained in a tidy and safe condition.   |  |
| <ul> <li>PO33</li> <li>All works on-site are managed to: <ul> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> </li> </ul> | <ul> <li>AO33.1</li> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins.</li> </ul> |
| MBRCPION  | Stormwater run-off, erosion and sediment controls are<br>constructed prior to commencement of any clearing work<br>or earthworks and are maintained and adjusted as<br>necessary at all times to ensure their ongoing<br>effectiveness.<br>Note - The measures are adjusted on-site to maximise their<br>effectiveness.<br><b>AO33.3</b><br>The completed earthworks (fill or excavation) area is<br>stabilised using turf, established grass seeding, mulch<br>or sprayed stabilisation techniques to control erosion and<br>sediment and dust from leaving the property.   |
|   | AO33.4   |


| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | Where works are proposed in proximity to an existing<br>street tree, an inspection and a root management plan<br>is undertaken by a qualified arborist which demonstrates<br>and ensures that no permanent damage is caused to the<br>tree.   |
| PO34   | A034  |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.   | No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.   |
| PO35   | A035.1  |
| All works on-site and the transportation of material to and<br>from the site are managed to not negatively impact the<br>existing road network, the amenity of the surrounding<br>area or the streetscape. | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic<br>movements to and from the site are safe.  |
| Note - Where the amount of imported material is greater than 50m <sup>3</sup> , a haulage route must be identified and approved by Council.  | AO35.2  |
|  | All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.<br>Note - A Traffic Management Plan may be required for the site in<br>accordance with the Manual of Uniform Traffic Control Devices<br>(MUTCD). |
| Plan   | AO35.3<br>Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.  |
| PO36   | AO36  |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | <ul> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. grassed.</li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.</li> </ul>  |
| P037   | AO37.1  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| <ul> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> </ul>   | 5 1  |
| <b>PO38</b><br>Any alteration or relocation in connection with or arising from the development to any service, installation, plant,   |  |
| equipment or other item belonging to or under the contro<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.   | CCI  |
| equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development  | CCI  |
| equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.  | CCI  |
| equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.<br><b>Earthworks</b><br>PO39<br>On-site earthworks are designed to consider the visual<br>and amenity impact as they relate to:<br>a. the natural topographical features of the site;<br>b. short and long-term slope stability;   | Sch  |
| equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.<br><b>Earthworks</b><br>PO39<br>On-site earthworks are designed to consider the visual<br>and amenity impact as they relate to:<br>a. the natural topographical features of the site;<br>b. short and long-term slope stability;<br>c. soft or compressible foundation soils;  | AO39.1<br>All cut and fill batters are provided with appropriate scour<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drain   |
| equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.<br><b>Earthworks</b><br><b>PO39</b><br>On-site earthworks are designed to consider the visual<br>and amenity impact as they relate to:<br>a. the natural topographical features of the site;<br>b. short and long-term slope stability;<br>c. soft or compressible foundation soils;<br>d. reactive soils;<br>e. low density or potentially collapsing soils;<br>f. existing fills and soil contamination that may exist<br>on-site;<br>g. the stability and maintenance of steep rock slopes  | AO39.1<br>All cut and fill batters are provided with appropriate scour<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drain<br>as necessary.<br>AO39.2<br>Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steer<br>rock slopes and batters.  |
| equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.<br><b>Earthworks</b><br><b>PO39</b><br>On-site earthworks are designed to consider the visual<br>and amenity impact as they relate to:<br>a. the natural topographical features of the site;<br>b. short and long-term slope stability;<br>c. soft or compressible foundation soils;<br>d. reactive soils;<br>e. low density or potentially collapsing soils;<br>f. existing fills and soil contamination that may exist<br>on-site;<br>g. the stability and maintenance of steep rock slopes<br>and batters;<br>h. excavation (cut) and fill and impacts on the amenity   | AO39.1<br>All cut and fill batters are provided with appropriate scour<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains<br>as necessary.<br>AO39.2<br>Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.   |
| <ul> <li>equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.</li> <li>Earthworks</li> <li>PO39</li> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to: <ul> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes and batters;</li> <li>h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)</li> </ul> </li> </ul> | AO39.1<br>All cut and fill batters are provided with appropriate scou<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drain<br>as necessary.<br>AO39.2<br>Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of stee<br>rock slopes and batters.  |
| <ul> <li>equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.</li> <li>Earthworks</li> <li>PO39</li> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to: <ul> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes and batters;</li> <li>h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)</li> </ul> </li> </ul> | AO39.1         All cut and fill batters are provided with appropriate scou<br>erosion protection and run-off control measures includin<br>catch drains at the top of batters and lined batter drain<br>as necessary.         AO39.2         Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of stee<br>rock slopes and batters.         AO39.3         All fill batters steeper than 1 (V) in 6 (H) on residential |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | AO39.5  |
|   | All fill placed on-site is:   |
|   | <ul> <li>a. limited to that required for the necessary approved use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).</li> </ul>   |
|   | AO39.6<br>The site is prepared and the fill placed on-site in<br>accordance with AS3798.<br>Note - The fill is to be inspected and tested in accordance with<br>Planning scheme policy - Operational works inspection, maintenance<br>and bonding procedures. |
|   | AO39.7  |
| • ()  | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.   |
| PO40  | AO40  |
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |
| Plannine.   | Figure - Embankment   |
| P041  | AO41.1  |
| <ul> <li>On-site earthworks are undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on a diacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on a diacent to the land;</li> </ul> | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.<br>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .  |
| or public sector entity maintained infrastructure or<br>any drainage feature on, or adjacent to the land for<br>monitoring, maintenance or replacement purposes.<br>Note - Public sector entity as defined in the <i>Sustainable Planning</i><br><i>Act 2009</i> .  | AO41.2<br>Earthworks that would result in any of the following are<br>not carried out on-site:  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | <ul> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> </ul> |
| PO42  | No acceptable outcome provided.   |
| Filling or excavation does not result in land instability.<br>Note - A slope stability report prepared by an RPEQ may be required.  | ersilo.   |
| PO43  | No acceptable outcome provided.   |
| <ul> <li>Filling or excavation does not result in</li> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements | scheme  |
| Retaining walls and structures  |   |
| PO44<br>All earth retaining structures provide a positive interface<br>with the streetscape and minimise impacts on the amenity<br>of adjoining residents.  | <ul><li>AO44</li><li>Earth retaining structures:</li><li>a. are not constructed of boulder rocks or timber;</li><li>b. where height is no greater than 900mm, are</li></ul>   |

 where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;

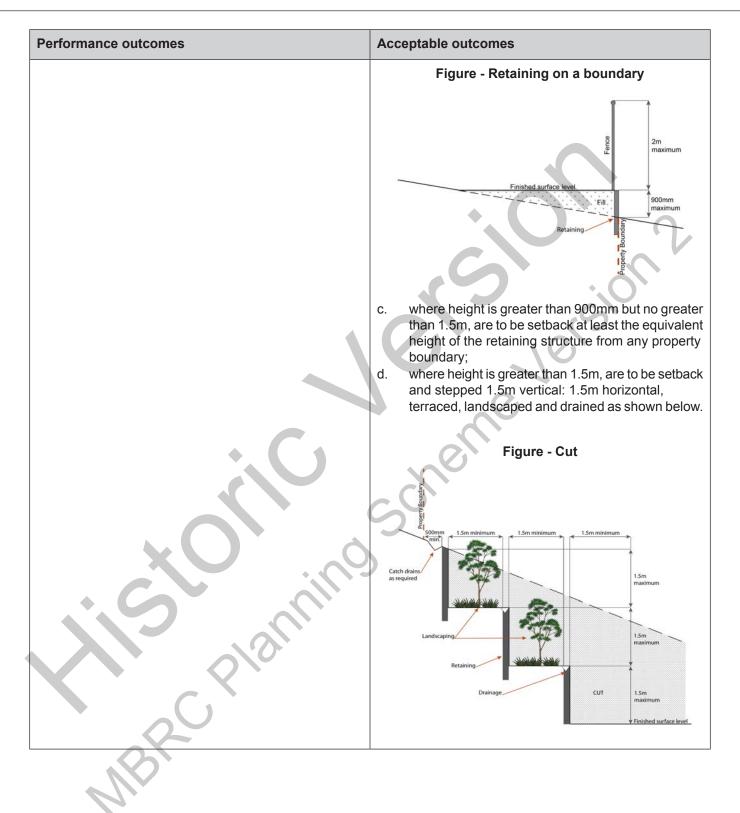

й.

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | Figure - Fill   |
|   | Finished surface level 1 5m minimum 15m minimum 600mm<br>(typical) 15m maximum<br>(typical) 15 |
| Fire Services   |   |
| Note - The provisions under this heading only apply if:a.the development is for, or incorporates:   |   |
| <ul> <li>reconfiguring a lot for a community title scheme creatine material change of use for 2 or more sole occupancy utili material change of use for a Tourist park<sup>(84)</sup> with acconditive material change of use for outdoor sales<sup>(54)</sup>, outdoor participated of use for outdoor sales<sup>(54)</sup>, outdoor participated of use for outdoor sales<sup>(54)</sup></li> </ul> | ng 1 or more vacant lots; or<br>inits on the same lot, or within the same community titles scheme; or<br>mmodation in the form of caravans or tents; or<br>processing or outdoor storage where involving combustible materials.   |
| AND<br>b. none of the following exceptions apply:   |   |

the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or

every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| PO45   | AO45.1   |
|--|--|
| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul> | <ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i>.</li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants</li> </ul> |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | <ul> <li>iv. the reception area and on-site manager's office (where provided);</li> </ul>   |
|   | v. external hydrants and hydrant booster points;  |
|   | vi. physical constraints within the internal<br>roadway system which would restrict access<br>by fire fighting appliances to external hydrants<br>and hydrant booster points.   |
|   | Note - The sign prescribed above, and the graphics used are to be:  |
|   | a. in a form;   |
|   | <ul><li>b. of a size;</li><li>c. illuminated to a level;</li></ul>  |
|   | which allows the information on the sign to be readily understood,<br>at all times, by a person in a fire fighting appliance up to 4.5m from<br>the sign.   |
| P047  | A047  |
| Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site. | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads.<br>Note - Technical note Fire hydrant indication system is available on<br>the website of the Queensland Department of Transport and Main<br>Roads. |
| Use speci   | fic criteria  |
| Dual occupancies <sup>(21)</sup>  |   |
| PO48  | AO48  |
| Dual occupancies <sup>(21)</sup> :<br>a. are dispersed within the streetscape;  | Dual occupancies <sup>(21)</sup> are dispersed within the streetscape in accordance with one or more of the following:  |
| <ul><li>a. are dispersed within the streetscape;</li><li>b. contribute to the diversity of dwelling types and forms;</li></ul>  | a. no more than 20% of sites within a block contain an existing or approved Dual occupancy <sup>(21)</sup> ; or   |
| c. are not the predominant built form.  | <ul> <li>a Dual occupancy<sup>(21)</sup> is separated by a minimum of 6 lots (running along the street frontage) from another lot containing an existing or approved dual occupancy<sup>(21)</sup>; or</li> </ul>   |
| Note - Refer to Planning scheme policy - Residential design for<br>dispersal methods and calculation.   | <ul> <li>a Dual occupancy<sup>(21)</sup> is not located within 100m (in all directions) of an existing or approved Dual occupancy<sup>(21)</sup>.</li> </ul>  |

| Perf | formance outcomes   | Acceptable outcomes  |
|------|---|--|
|      |   | Note - Laneway lots may contain Dual occupancies <sup>(21)</sup> (lofts) on the end two lots within a laneway. |
|      |   | Note - Refer to Planning scheme policy - Residential design for dispersal methods and calculation.             |
| Edu  | cational establishments <sup>(24)</sup>   |  |
| PO4  | 9   | No acceptable outcome provided.  |
| Edu  | cational establishments <sup>(24)</sup> are located:  |  |
| a.   | in accordance with a Neighbourhood development<br>plan that reflects the urban structure concept shown<br>indicatively on Figure 7.2.3.5 - Centres, employment<br>and schools;<br>or  | Charston erston  |
| b.   | generally between neighbourhoods;   |  |
| C.   | on highly accessible sites along neighbourhood connecting streets;  |  |
| d.   | with close access to highly frequent public transport;  |  |
| e.   | generally along green network corridors to<br>maximise the use of open space for sport and<br>recreation purposes and to promote active travel<br>as a means of transport to and from school;   | Sche   |
| f.   | if a high school or major private school - on major connecting streets.   |  |
|      | e - The urban design rationale for Caboolture West further ines locational criteria for schools.  |  |
| PO5  | i0  | No acceptable outcome provided.  |
| Edu  | cational establishments <sup>(24)</sup> are designed to:  |  |
| a.   | if adjacent to a local centre, promote development<br>of a compact pedestrian oriented local centre,<br>including an urban format that is (multi-storey<br>buildings, not a suburban campus format) and<br>physically designed to have a pedestrian orientation<br>to the street; |  |
| b.   | enable shared recreation space and buildings with community out of hours;   |  |
| C.   | share sports fields with council and other schools where possible to reduce land requirements;  |  |

| Perf | ormance outcomes  | Acceptable outcomes             |
|------|---|---------------------------------|
| d.   | provide adequate parking (including on and off street parking);   |                                 |
| e.   | provide access via slow speed environments to promote walking and cycling.  |                                 |
| Foo  | d and drink outlet <sup>(28)</sup> (where in a regional or distr  | ict sports facility)            |
| PO5  | 1   | No acceptable outcome provided. |
| Foo  | d and drink outlets <sup>(28)</sup> :   |                                 |
| a.   | remain secondary and ancillary to an open space, sport or recreation use;   |                                 |
| b.   | do not restrict or inhibit the ability for a recreation<br>and open space area to be used for its primary sport<br>and recreation purpose;  | C ersi                          |
| C.   | do not appear, act or function as a separate and<br>stand-alone commercial activity, and have a clearly<br>expressed relationship with an open space, sport<br>or recreation use; |                                 |
| d.   | do not generate nuisance effects such as noise,<br>dust and odour on the character and amenity of the<br>recreation and open space areas or on adjoining<br>properties.           | Scher                           |
| Hon  | ne based business <sup>(35)</sup>   |                                 |
| PO5  | 2   | No acceptable outcome provided. |
| The  | scale and intensity of the Home based business $^{(35)}$ :  |                                 |
| a.   | is compatible with the physical characteristics of the site and the character of the local area;  |                                 |
| b.   | is able to accommodate anticipated car parking<br>demand and on-site manoeuvring without negatively<br>impacting the streetscape or road safety;                                  |                                 |
| C.   | does not adversely impact on the amenity of the adjoining and nearby premises;  |                                 |
| d.   | remains ancillary to the residential use of the Dwelling house <sup>(22)</sup> ;  |                                 |
| e.   | does not create conditions which cause hazards or<br>nuisances to neighbours or other persons not<br>associated with the activity;  |                                 |
| f.   | ensures employees and visitors to the site do not<br>negatively impact the expected amenity of adjoining<br>properties;   |                                 |
| g.   | ensures service and delivery vehicles do not negatively impact the amenity of the area.   |                                 |

| Performance outcomes   | Acceptable outcomes  |  |  |
|--|--|--|--|
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and Utility installation <sup>(86)</sup>   |  |  |  |
| PO53   | AO53.1   |  |  |
| <ul> <li>The development does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | <ul> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> AO53.2 A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries. |  |  |
| PO54<br>Infrastructure does not have an impact on pedestrian<br>health and safety.   | <ul> <li>AO54</li> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>  |  |  |
| <ul> <li>PO55</li> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>  | AO55<br>All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the<br>Environmental Protection (Noise) Policy 2008.   |  |  |
| Market <sup>(46)</sup>   |  |  |  |
| PO56   | AO56.1   |  |  |
| Markets <sup>(46)</sup> :<br>a. are temporary or periodic in nature;   | The Market <sup>(46)</sup> does not impact on the ability to undertake activities associated with the primary recreation and open space purpose of the site.   |  |  |
| <li>remain limited in size, scale and intensity to avoid<br/>adverse detrimental impacts on the character and<br/>amenity of an adjoining area, including vehicle<br/>access, traffic generation, on and off site car parking<br/>and pedestrian safety;</li>  | AO56.2<br>Market <sup>(46)</sup> operates as follows:<br>a. no more than 2 days in any week;   |  |  |

| Performance outcomes |   | Acceptable outcomes  |  |  |
|----------------------|---|--|--|--|
| C.                   | do not restrict or inhibit the ability for a recreation<br>and open space area to be used for its primary sport<br>and recreation purpose;  | <ul> <li>b. no more than 50 individual stalls;</li> <li>c. all activities, including set-up and pack-up, occur within the hours of 7 00cm and 2 00cm;</li> </ul>   |  |  |
| d.                   | have minimal economic impact on established<br>businesses on commercially zoned land in the<br>immediate vicinity;  | <ul><li>within the hours of 7.00am and 3.00pm;</li><li>d. no use of amplified music, public address systems and noise generating plant and equipment;</li></ul>  |  |  |
| e.                   | do not generate nuisance effects such as noise,<br>dust, odour, hours and frequency of operation, on<br>the character and amenity of the recreation and<br>open space areas or on adjoining properties;   | e. waste containers are provided at a rate of 1 per food stall and 1 per 4 non-food stalls.  |  |  |
| f.                   | do not adversely impact on the safe and efficient operation of the external road network.   |  |  |  |
| Sale                 | es office <sup>(72)</sup>   |  |  |  |
| PO                   | 57  | No acceptable outcome provided.  |  |  |
| The                  | Sales office <sup>(72)</sup> is designed to:  | 0  |  |  |
| a.                   | provide functional and safe access, manoeuvring<br>areas and car parking spaces for the number and<br>type of vehicles anticipated to access the site;  | enne   |  |  |
| b.                   | complement the streetscape character while maintaining surveillance between buildings and public spaces;  | SCI  |  |  |
|                      | be temporary in nature.<br>e - Refer to Planning scheme policy - Integrated design for access<br>a crossover requirements.  |  |  |  |
|                      | (94)  |  |  |  |
| Edit<br>that<br>Rac  | t will not cause human exposure to electromagnetic radiation beyo   | nications facilities <sup>(81)</sup> must be constructed and operated in a manner<br>and the limits outlined in the Radiocommunications (Electromagnetic<br>andard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz |  |  |
| POS                  | 58  | AO58.1   |  |  |
| exis<br>insta<br>Sub | ecommunications facilities <sup>(81)</sup> are co-located with<br>ting telecommunications facilities <sup>(81)</sup> , Utility<br>allation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or<br>station <sup>(80)</sup> if there is already a facility in the same<br>erage area. | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.                           |  |  |
|                      |   | AO58.2   |  |  |
|                      |   | If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.   |  |  |

| Performance outcomes  | Acceptable outcomes   |  |  |
|---|---|--|--|
| PO59  | AO59  |  |  |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.  | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.   |  |  |
| PO60  | AO60  |  |  |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.  | The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval.   |  |  |
| PO61  | A061.1  |  |  |
| <ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.<br>AO61.2<br>In all other areas towers do not exceed 35m in height.<br>AO61.3<br>Towers, equipment shelters and associated structures<br>are of a design, colour and material to:<br>a. reduce recognition in the landscape;<br>b. reduce glare and reflectivity.<br>AO61.4<br>All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m.<br>Where there is no established building line the facility is<br>located at the rear of the site.<br>AO61.5<br>The facility is enclosed by security fencing or by other<br>means to ensure public access is prohibited.<br>AO61.6<br>A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fanced area, between the<br>facility and street frontage and adjoining uses. |  |  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |
|  | Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design.   |
| PO62   | AO62   |
| Lawful access is maintained to the site at all times that<br>does not alter the amenity of the landscape or<br>surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |
| PO63   | A063   |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.   | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |
| Regional and district sports facilities  |  |
| PO64   | No acceptable outcome provided.  |
| Regional and district sports facilities are located in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.4 - Green network and open space.   |  |
| PO65   | No acceptable outcome provided.  |
| <ul> <li>The development of Regional and district sports facilities is to:</li> <li>a. ensure that buildings and structures are not overbearing, visually dominant or out of character with the surrounding built environment nor detract from the amenity of adjoining land;</li> </ul> |  |
| b. ensure buildings and structures do not result in overlooking of private areas when adjoining residential areas, or block or impinge upon the receipt of natural sunlight and outlook;   |  |
| <ul> <li>be designed in accordance with the principles of<br/>Crime Prevention Through Environment Design<br/>(CPTED) to achieve a high level of safety,</li> </ul>  |  |

| Performance outcomes |  | Acceptable outcomes  |
|----------------------|--|--|
| d.                   | incorporate appropriate design responses, relative<br>to the size and function of buildings, that<br>acknowledge and reflect the region's sub-tropical<br>climate; |  |
| e.                   | maintain the open space character as a visual contrast to urban development;   |  |
|                      | or<br>where a higher density of built form is anticipated,<br>the visual appearance of building bulk is reduced<br>through:  |  |
|                      | <ul> <li>design measures such as the provision of<br/>meaningful recesses and projections through<br/>the horizontal and vertical plane;</li> </ul>                |  |
|                      | ii. use of a variety of building materials and colours;  | 0  |
|                      | iii. use of landscaping and screening.   |  |
| f.                   | achieve the design principles outlined in Planning scheme policy - Integrated design.  |  |
| Reta                 | il, commercial and community uses  |  |
| PO6                  |  | No acceptable outcome provided.  |
|                      | munity activities:   |  |
| a.                   | are located on allotments that have appropriate area and dimensions for the siting of:   |  |
|                      | <ul><li>i. buildings and structures;</li><li>ii. vehicle servicing, deliveries, parking,<br/>manoeuvring and circulation;</li></ul>                                |  |
|                      | iii. landscaping and open space including buffering.   |  |
| b.                   | are of a small scale, having regard to the surrounding character;  |  |
| C.                   | are serviced by public transport;  |  |
| d.                   | do not negatively impact adjoining residents or the streetscape;   |  |
| e.                   | do not undermine the viability of existing or future centres or other neighbourhood hubs.  |  |
| PO6                  | 7  | A067   |
|                      |  | Retail and commercial uses within a neighbourhood hub consist of no more than: |

| Per   | formance outcomes   | Acceptable outcomes  |
|---|---|--|
| Retail and commercial uses within a neighbourhood hub<br>are of a scale that provide for the convenience needs or<br>localised services of the immediate neighbourhood and<br>do not constitute the scale or function of a Local centre.<br>Note - Retail and commercial uses exceeding the thresholds above<br>should be part of a local centre. |   | <ul> <li>a. 1 small format supermarket with a maximum GFA of 1200m<sup>2</sup>;</li> <li>b. 10 small format retail or commercial tenancies with a maximum GFA of 100m<sup>2</sup> each.</li> </ul> |
| POe   | 68  | No acceptable outcome provided.  |
| The   | establishment of a new neighbourhood hub must:  |  |
| a.  | be located in accordance with a Neighbourhood<br>development plan that reflects the urban structure<br>concept shown indicatively on Figure 7.2.3.5 -<br>Centres, employment and schools; | S S ION  |
| b.  | adjoin or address a park, public open space or include privately owned civic or forecourt space having a minimum area of 400m <sup>2</sup> ;  |  |
| C.  | be located on the corner of neighbourhood connecting streets;   |  |
| d.  | form a 'Main street' having a maximum length of 200m;   |  |
| e.  | be centrally located within an 800m radial catchment.   | S  |
|   | te - Refer to Table 7.2.3.3 - Caboolture West centre network, for cific role and function criteria associated with a neighbourhood b.   |  |
| POe   | 69  | No acceptable outcome provided.  |
| Cor   | ner stores may establish as standalone uses where:  |  |
| a.  | having a maximum GFA of 250m <sup>2</sup> ;   |  |
| b.  | the building adjoins the street frontage and has its main pedestrian entrance from the street frontage;   |  |
| C.  | not within 1600m of another corner store, neighbourhood hub or centre.  |  |
| PO  | 70  | No acceptable outcome provided.  |
|   | residential uses address and activate streets and lic spaces by:  |  |
| a.  | ensuring buildings and individual tenancies address<br>street frontage(s), civic space and other areas of<br>pedestrian movement;   |  |

| Perf | ormance outcomes  | Acceptable outcomes             |
|------|---|---------------------------------|
| b.   | new buildings adjoin or are within 3m of the primary frontage(s), civic space or public open space;   |                                 |
| C.   | locating car parking areas behind or under buildings to not dominate the street environment;  |                                 |
| d.   | establishing and maintaining interaction, pedestrian<br>activity and casual surveillance through appropriate<br>land uses and building design (e.g. the use of<br>windows or glazing and avoiding blank walls with<br>the use of sleeving); |                                 |
| e.   | providing visual interest to the façade (e.g. windows<br>or glazing, variation in colour, materials, finishes,<br>articulation, recesses or projections);   |                                 |
| f.   | establishing and maintaining human scale.   | 0                               |
| Non  | -residential activities   |                                 |
| P07  | 1   | No acceptable outcome provided. |
|      | uildings exhibit a high standard of design and struction, which:  |                                 |
| a.   | adds visual interest to the streetscape (e.g. variation<br>in materials, patterns, textures and colours,<br>cantilevered awning);   | sche                            |
| b.   | enables differentiation between buildings;  |                                 |
| C.   | contributes to a safe environment;  |                                 |
| d.   | incorporates architectural features within the<br>building facade at the street level to create human<br>scale (e.g. cantilevered awning);  |                                 |
| e.   | includes building entrances that are readily identifiable from the road frontage;   |                                 |
| f.   | locate and orientate to favour active and public<br>transport usage by connecting to pedestrian<br>footpaths on the street frontage and adjoining sites;  |                                 |
| g.   | incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;   |                                 |
| h.   | facilitate casual surveillance of all public spaces.  |                                 |
| PO7  | 2   | No acceptable outcome provided. |
|      | elopment provides functional and integrated car ing and vehicle access, that:   |                                 |
| a.   | prioritises the movement and safety of pedestrians<br>between the street frontage and the entrance to the<br>building;  |                                 |

| Performance outcomes   |   | Acceptable outcomes  |
|------------------------|---|--|
| b.                     | provides safety and security of people and property at all times;   |  |
| C.                     | does not impede active transport options;   |  |
| d.                     | does not impact on the safe and efficient movement of traffic external to the site;   |  |
| e.                     | is consolidated and shared with adjoining sites wherever possible.  |  |
| PO7                    | 3   | No acceptable outcome provided.  |
| prior                  | safety and efficiency of pedestrian movement is<br>itised in the design of car parking areas through<br>iding pedestrian paths in car parking areas that are:<br>located along the most direct route between building<br>entrances, car parks and adjoining uses;   | Jersiloi   |
| b.                     | protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);   | Re   |
| C.                     | are of a width to allow safe and efficient access for prams and wheelchairs.  | cher.  |
| PO7                    | 4   | A074   |
| a.<br>b.<br>c.<br>Note | number of car parking spaces is managed to:<br>provide for the parking of visitors and employees<br>that is appropriate to the use and the site's proximity<br>to public and active transport options;<br>avoid an oversupply of car parking spaces;<br>promote active and public transport options.<br>e - Refer to Planning scheme policy - Integrated transport<br>essment for guidance on how to achieve compliance with this<br>ome. | Car parking is provided in accordance with Table<br>7.2.3.1.1.4.<br>Note - The above rates exclude car parking spaces for people with<br>a disability required by Disability Discrimination Act 1992 or the<br>relevant disability discrimination legislation and standards. |
|                        | 5<br>parking is designed to avoid the visual impact of<br>a areas of surface car parking.   | No acceptable outcome provided.  |
| PO7                    | 6   | No acceptable outcome provided.  |
|                        | parking design includes innovative solutions,<br>ding on-street parking and shared parking areas.   |  |
| <b>PO</b> 7            | 7   | A077.1   |

| Performance outcomes  |   | Acceptable outcomes   |   |  |  |  |   |  |  |  |  |
|---|---|---|---|--|--|--|---|--|--|--|--|
| 000   | d of trip facilities are provided for employees or<br>upants, in the building or on-site within a<br>sonable walking distance, and include:   | Minimum bicycle parking facilities are provided in accordance with the table below (rounded up to the nearest whole number).  |   |  |  |  |   |  |  |  |  |
| i.  | adequate bicycle parking and storage facilities; and  | Use   | Minimum Bicycle Parking   |  |  |  |   |  |  |  |  |
| ii.   | adequate provision for securing belongings;   | Residential uses comprised of dwellings   | Minimum 1 space per dwelling  |  |  |  |   |  |  |  |  |
|   | and   | All other residential uses  | Minimum 1 space per 2 car parking spaces identified in Schedule 7 – |  |  |  |   |  |  |  |  |
| iii.  | change rooms that include adequate showers,<br>sanitary compartments, wash basins and<br>mirrors.   | Non-residential uses  | car parking<br>Minimum 1 space per 200m2 of                         |  |  |  |   |  |  |  |  |
|   | minors.   |   | GFA   |  |  |  |   |  |  |  |  |
| pro<br>unr  | withstanding a. there is no requirement to<br>vide end of trip facilities if it would be<br>easonable to provide these facilities having<br>ard to:   | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is a combination of the default levels set for end of trip  |   |  |  |  |   |  |  |  |  |
| i.  | the projected population growth and forward<br>planning for road upgrading and development<br>of cycle paths; or  | facilities in the Queensland Development Code and the additional facilities required by Council.  |   |  |  |  |   |  |  |  |  |
| <ul> <li>Whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute distances and nature of the terrain; or</li> <li>iii. the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.</li> </ul> |   | AO77.2<br>Bicycle parking is:   |   |  |  |  |   |  |  |  |  |
|   |   | <ul> <li>a. provided in accordance with Austroads (2008),<br/>Guide to Traffic Management - Part 11: Parking;</li> <li>b. protected from the weather by its location or a<br/>dedicated roof structure;</li> <li>c. located within the building or in a dedicated, secure<br/>structure for residents and staff;</li> </ul>   |   |  |  |  |   |  |  |  |  |
|   |   |   |   |  |  | for bicycle<br>unreason  | e parking and end of trip facilities are not applied in<br>able circumstances. For example these requirements<br>t, and do not apply in the Rural zone or the Rural residential | d. adjacent to building entrances or in public areas for customers and visitors.                 |  |  |  |
|   |   |   |   |  |  | Editor's note - This performance outcome is the same as the<br>Performance Requirement prescribed for end of trip facilities under<br>the Queensland Development Code. For development incorporating |   | Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3. |  |  |  |
| building v<br>requireme<br>has been<br>assessme   | ork, that Queensland Development Code performance<br>ent cannot be altered by a local planning instrument and<br>reproduced here solely for information purposes. Council's<br>ent in its building work concurrence agency role for end of<br>es will be against the performance requirement in the | Note - Bicycle parking and end of trip facilities provided for residential<br>and non-residential activities may be pooled, provided they are within<br>100 metres of the entrance to the building.   |   |  |  |  |   |  |  |  |  |
| Queensla<br>time, app<br>ensure th<br>outcomes  | nd Development Code. As it is subject to change at any<br>icants for development incorporating building work should<br>at proposals that do not comply with the acceptable<br>under this heading meet the current performance<br>ent prescribed in the Queensland Development Code.                 | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |   |  |  |  |   |  |  |  |  |
|   |   | A077.3  |   |  |  |  |   |  |  |  |  |
|   |   | For non-residential uses, storage lockers:  |   |  |  |  |   |  |  |  |  |

| outcomes | Acceptable outcomes   |  |                             |  |   |   |
|----------|---|--|-----------------------------|--|---|---|
|          | a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);   |  |                             |  |   |   |
|          |   |  |                             | mension:<br>450mm (  | s of 900mm (l<br>(depth).   | neight) x   |
|          | Note - 9  | orage lo   | ckere may                   | he nooled  | across multiple   | sites and   |
|          | activities  | when wi  | thin 100 m                  | etres of the   | e entrance to the d storage facilitie   | building and  |
|          | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |  |                             |  |   |   |
|          |   |  |                             | 19   | 5   |   |
|          | A077.4  |  |                             |  |   |   |
|          |   |  |                             |  | ing rooms:  | oporteine   |
|          | <ul> <li>a. are provided at a rate of 1 per 10 bicycle parking spaces;</li> <li>b. are fitted with a lockable door or otherwise screene from public view;</li> <li>c. are provided with shower(s), sanitary</li> </ul>  |  |                             |  |   |   |
|          |   |  |                             |  |   |   |
|          |   | compartment(s) and wash basin(s) in accordance with the table below: |                             |  |   |   |
|          | Bicycle<br>spaces<br>provided   | Male/<br>Female  | Change<br>rooms<br>required | Showers required   | Sanitary<br>compartments<br>required  | Washbasin<br>required   |
|          | 1-5   | Male<br>and<br>female  | 1 unisex<br>change<br>room  | 1  | 1 closet pan  | 1   |
|          | 6-19  | Female   | 1                           | 1  | 1 closet pan  | 1   |
|          | 20 or<br>more   | Male   | 1                           | 1  | 1 closet pan  | 1   |
|          |   | Female   | 1                           | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 2 closet pans,<br>plus 1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided<br>thereafter  | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|          |   | Male   | 1                           | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 1 urinal and 1<br>closet pans, plus<br>1 sanitary<br>compartment at<br>the rate of 1<br>closet pan or 1<br>urinal for every 60<br>bicycle space<br>provided<br>thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|          | and Star<br>Note - Al   | idards (V<br>I sanitary  | VELS) rati<br>compartn      | ng shower  | tar Water Efficier<br>head.<br>onstructed in com  | , ,   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | d. are provided with:   |
|   | <ul> <li>a mirror located above each wash basin;</li> <li>a hook and bench seating within each shower compartment;</li> <li>a socket-outlet located adjacent to each wash basin.</li> </ul>   |
|   | Note - Change rooms may be pooled across multiple sites, residential<br>and non-residential activities when within 100 metres of the entrance<br>to the building and within 50 metres of bicycle parking and storage<br>facilities<br>Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |
| P078  | A078  |
| Bins and bin storage areas are designed, located and managed to prevent amenity impacts on the locality.              | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  |
| P079  | No acceptable outcome provided.   |
| On-site landscaping is provided, that:  |   |
| a. is incorporated into the design of the development;  |   |
| b. reduces the dominance of car parking and servicing areas from the street frontage;                                 |   |
| c. retains mature trees wherever possible;  |   |
| d. does not create safety or security issues by creating potential concealment areas or interfering with sight lines; |   |
| e. maintains the achievement of active frontages and sight lines for casual surveillance.                             |   |
| Note - All landscaping is to accord with Planning scheme policy -<br>Integrated design.                               |   |
| PO80  | AO80  |
| Surveillance and overlooking are maintained between the road frontage and the main building line.                     | No fencing is provided forward of the building line.  |
| PO81  | No acceptable outcome provided.   |

| Performance outcomes   | Acceptable outcomes   |  |  |  |
|--|---|--|--|--|
| Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety and minimise adverse impacts on residential and other sensitive land uses.  |   |  |  |  |
| PO82   | A082  |  |  |  |
| The hours of operation minimise adverse amenity impacts on adjoining sensitive land uses.  | Hours of operation do not exceed 6:00am to 9:00pm<br>Monday to Sunday.  |  |  |  |
| Values and con   | straints criteria   |  |  |  |
| Reconfiguring a lot or Material change of use or Operational work, whether the second se | e the development is consistent with a current Development permit for<br>here that approval has considered and addressed (e.g. through a<br>) or conditions of approval) the identified value or constraint under this  |  |  |  |
| Acid sulfate soils - (refer Overlay map - Acid sulfate s   | soils to determine if the following assessment criteria   |  |  |  |
| apply)   |   |  |  |  |
| Note - To demonstrate achievement of the performance outcome, an<br>is prepared by a qualified engineer. Guidance for the preparation an<br>Planning scheme policy - Acid sulfate soils.   | Acid sulfate soils (ASS) investigation report and soil management plan<br>ASS investigation report and soil management plan is provided in  |  |  |  |
| P083   | A083  |  |  |  |
| <ul> <li>Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:</li> <li>a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;</li> <li>b. protects the environmental and ecological values and health of receiving waters;</li> <li>c. protects buildings and infrastructure from the effects of acid sulfate soils.</li> </ul>  | <ul> <li>Development does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.</li> </ul> |  |  |  |
| Heritage and landscape character (refer Overlay map<br>the following assessment criteria apply)  | - Heritage and landscape character to determine if  |  |  |  |
| <ul> <li>Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.</li> <li>Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.</li> <li>Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.</li> </ul>   |   |  |  |  |
| PO84   | AO84  |  |  |  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| <ul> <li>Development will:</li> <li>a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;</li> <li>b. protect the fabric and setting of the heritage site, object or building;</li> <li>c. be consistent with the form, scale and style of the heritage site, object or building;</li> <li>d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;</li> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul> | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value.<br>Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object<br>or building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The<br>plan is sent to, and approved by Council prior to the commencement<br>of any preservation, maintenance, repair and restoration works. |
|  |  |
| <ul> <li>PO85</li> <li>Demolition and removal is only considered where: <ul> <li>a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or</li> <li>b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or</li> <li>c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic event which substantially destroys the building or object.</li> </ul> </li> </ul>  | No acceptable outcome provided   |
| Where development is occurring on land adjoining a site<br>of cultural heritage value, the development is to be<br>sympathetic to and consistent with the cultural heritage<br>values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view.   | No acceptable outcome provided.  |
| P087   | A087   |
| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> </ul>  | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer.   |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| <ul> <li>b. is located and designed in a manner that maintains<br/>a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the<br/>functioning and maintenance of high voltage<br/>electrical infrastructure.</li> </ul>   |   |
| PO88   | A088  |
| <ul> <li>Development within a bulk water supply infrastructure buffer is located, designed and constructed to:</li> <li>a. protect the integrity of the bulk water supply infrastructure;</li> <li>b. Maintains adequate access for any required maintenance or upgrading work to the bulk water supply infrastructure.</li> </ul>   | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a bulk<br>water supply infrastructure buffer. |
| Overland flow path (refer Overlay map - Overland flow apply)   | path to determine if the following assessment criteria  |
| Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council.  |   |
| P089   | No acceptable outcome provided.   |
| <ul> <li>Development:</li> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>   | SCI   |
| <ul> <li>PO90</li> <li>Development:</li> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.</li> </ul> | No acceptable outcome provided.   |
|  | No accontable outcome provided  |
| PO91   | No acceptable outcome provided.   |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| <ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> </ul>  |  |
| <b>PO92</b><br>Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.  | AO92<br>Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994<br>and the relevant building assessment provisions under the Building<br>Act 1975 for requirements related to the manufacture and storage<br>of hazardous substances.   |
| PO93<br>Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.  | AO93<br>Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.   |
| PO94<br>Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for a<br>fully developed upstream catchment and are able to be<br>easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme<br>policy – Flood hazard, Coastal hazard and Overland flow | <ul> <li>AO94.1</li> <li>Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:</li> <li>a. Urban area – Level III;</li> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul> AO94.2 Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment. |
| <ul> <li>PO95</li> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> </ul>  | No acceptable outcome provided.  |

| Performance outcomes  | Acceptable outcomes  |  |  |  |  |
|---|--|--|--|--|--|
| b. an overland flow path where it crosses more than one premises;   |  |  |  |  |  |
| c. inter-allotment drainage infrastructure.   |  |  |  |  |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |  |  |  |  |  |
| Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   | 2  |  |  |  |  |
| Additional criteria for development for a Park <sup>(57)</sup>  |  |  |  |  |  |
| PO96  | A096   |  |  |  |  |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design. |  |  |  |  |
| a. public benefit and enjoyment is maximised;   | S C  |  |  |  |  |
| <ul> <li>b. impacts on the asset life and integrity of park<br/>structures is minimised;</li> </ul>   |  |  |  |  |  |
| c. maintenance and replacement costs are minimised.   |  |  |  |  |  |
| able 7.2.3.1.1.2 Setbacks   |  |  |  |  |  |

### Table 7.2.3.1.1.2 Setbacks

|                         | Residential uses |        |  |         |        |  |                                     |  |                             |          |
|-------------------------|------------------|--------|--|---------|--------|--|-------------------------------------|--|-----------------------------|----------|
| Height Frontage primary |                  |        | Frontage s                               | second  |        | Frontage<br>secondary<br>to lane         | Side<br>non-built<br>to<br>boundary | Rear To<br>OMP and<br>wall   | Canal To<br>OMP and<br>wall |          |
| $\mathbf{\mathbf{R}}$   | To wall          | To OMP | To<br>covered<br>car<br>parking<br>space | To wall | To OMP | To<br>covered<br>car<br>parking<br>space | To OMP<br>and wall                  | wall To<br>OMP and<br>wall   |                             |          |
| Less than<br>4.5m       | Min 3m           | Min 2m | Min 5.4m*                                | Min 2m  | Min 1m | Min 5.4m*                                | Min 0.5m                            | Min 1.5m   | Min 1.5m                    | Min 4.5m |
| 4.5m to<br>8.5m         | Min 3m           | Min 2m | N/A                                      | Min 2m  | Min 1m | N/A                                      | Min 0.5m                            | Min 2m   | Min 2m                      | Min 4.5m |
| Greater<br>than 8.5m    | Min 6m           | Min 5m | N/A                                      | Min 3m  | Min 2m | N/A                                      | Min 0.5m                            | Min 2m up<br>to 8.5m in<br>height;<br>plus 0.5m<br>for every<br>3m in<br>height or<br>part<br>thereof<br>over 8.5m | Min 5m                      | Min 4.5m |

Note - \* for Dwelling Houses  $^{(22)}$  and Dual Occupancies  $^{(21)}$  only.

#### Table 7.2.3.1.1.3 Built to boundary walls (Residential uses)

| Lot frontage width                   | Mandatory / optional  | Length and height of built to boundary wall   |  |  |  |  |
|--------------------------------------|---|---|--|--|--|--|
|                                      |   | Next generation neighbourhood   |  |  |  |  |
| Less than 7.5m                       | Mandatory - both sides unless a corner lot  | Max Length: 80% of the length of the boundary<br>Max Height: 7.5m                         |  |  |  |  |
| 7.5m to 12.5m                        | Mandatory - one side  | Max Length: 60% of the length of the boundary<br>Max Height: 7.5m                         |  |  |  |  |
| >12.5m to 18m                        | Optional:<br>i. on 1 boundary only;<br>ii. where the built to boundary wall adjoins<br>a lot with a frontage less than 18m. | Max Length: the lesser of 15m or 60% of the<br>length of the boundary<br>Max Height: 7.5m |  |  |  |  |
| Greater than 18m                     | As per QDC  | S   |  |  |  |  |
| Table 7.2.3.1.1.4 Car parking spaces |   |   |  |  |  |  |

#### Table 7.2.3.1.1.4 Car parking spaces

| Land use                          | Maximum number of car spaces to be provided   | Minimum number of car spaces to be provided  |
|-----------------------------------|---|--|
| Non-residential                   | 1 per 30m <sup>2</sup> GFA  | 1 per 50m <sup>2</sup> GFA   |
| Residential – permanent/long term | 1.5 per dwelling  | 0.5 per dwelling   |
| Residential – serviced/short term | 1 per 2 dwellings + staff spaces  | 1 per 5 dwelling + staff spaces  |
| Non-residential                   | 1 per 20m <sup>2</sup> GFA  | 1 per 30m <sup>2</sup> GFA   |
| Residential – permanent/long term | 2.0 per dwelling  | 0.75 per dwelling unit   |
| Residential – serviced/short term | 1 per dwelling + staff spaces   | 1 per 5 dwellings + staff spaces   |
|                                   | Non-residential         Residential – permanent/long term         Residential – serviced/short term         Non-residential         Residential – permanent/long term | be provided       Non-residential     1 per 30m <sup>2</sup> GFA       Residential – permanent/long term     1.5 per dwelling       Residential – serviced/short term     1 per 2 dwellings + staff spaces       Non-residential     1 per 20m <sup>2</sup> GFA       Residential – permanent/long term     2.0 per dwelling |

Note - Car parking rates are to be rounded up to the nearest whole number.

Note - Allocation of car parking spaces to dwellings is at the discretion of the developer.

Note - Residential - Permanent/long term includes: Multiple dwelling<sup>(49)</sup>, Relocatable home park<sup>(62)</sup>, Residential care facility<sup>(65)</sup>, Retirement facility<sup>(67)</sup>.

Note - Residential - Services/short term includes: Rooming accommodation<sup>(69)</sup> or Short-term accommodation<sup>(77)</sup>.

### 7.2.3.1.2 Local centre sub-precinct

#### 7.2.3.1.2.1 Purpose - Local centre sub-precinct

Note - The location of local centres has been a key structural element in the development of the Caboolture West Local Plan. The establishment of local centres is important to delivering the overall vision for the Caboolture West Local Plan. Local centres:

- i. are located at the intersection of neighbourhood connector streets;
- ii. provide a focus for medium density residential neighbourhoods which are important to delivering the vision of housing choice and types distributed across the Urban living precinct;
- iii. are centrally located to provide a range of convenience goods and services to 3 or 4 neighbourhoods and underpin the development of walkable neighbourhoods.

Where a local centre is shown conceptually at a hill top location in Figure 7.2.3.1 - Caboolture West structure plan, planning for the local centre in a Neighbourhood development plan is required to take account of the strong views identified in Figure 7.2.3.6 - Views.

- 1. The purpose of the Local centre sub-precinct will be achieved through the following overall outcomes:
  - a. The Local centre sub-precinct is the primary location for local convenience retail, commercial and community activities that service multiple neighbourhood catchments and will typically contain one full-line supermarket, a wide range of speciality retail shops, commercial tenancies, suburban offices, and a range of health services and community facilities.
  - b. Local centres are located:
    - i. in accordance with a Neighbourhood development plan that reflects the urban structure concept show indicatively on Figure 7.2.3.5 Centres, employment and schools.
    - ii. generally within a 1000m walking distance of most residents;
    - iii. at the junction of main streets and public transport routes in accessible and visible locations;
    - iv. generally to the side of the intersection creating pedestrian focused main streets.
  - c. Local centres are established where:
    - consistent in function and scale with the local centre provisions of Table 7.2.3.3 Caboolture West centre network;
    - ii. it is of an appropriate scale to service the surrounding local catchment providing an important local activity node;
    - iii. clear separation from existing local centres within the network is maintained to reduce catchment overlap;

iv. the function and scale of uses and activities will not have a negative impact on the community.

- d. Local centres contain a mix of uses that:
  - i. are clustered with other compatible non-residential uses (excluding corner stores) forming a local centre having a compact urban form;
  - ii. are of sufficient intensity and variety to support public transport, active transport, improve land efficiency and collectively support the viability of the local centre;
  - iii. are centred around a main street central core fostering opportunities for social and economic exchange;

- iv. are designed to encourage social activity through the provision of high quality civic and forecourt spaces;
- v. ensure the safety and efficiency of pedestrian movement is prioritised in the design of car parking areas and the size, frequency and location of vehicle crossovers;
- vi. ensure the amount of on-site car parking encourages the use of public and active transport, increases land use efficiency and does not negatively impact the streetscape;
- vii. provide facilities, infrastructure and public realm improvements to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations;
- viii. provide pedestrian connections to integrate the development with the street, public spaces and the surrounding area.
- e. The design, siting and construction of local centre uses:
  - i. contributes to a high quality centre consistent with the desired character of the centre and surrounding area;
  - ii. does not negatively impact adjoining residents or the streetscape;
  - iii. ensures adverse impacts on the amenity of surrounding residential uses are minimised by mitigating noise, odour and air quality impacts on residents to a level consistent with the location within or adjoining a local centre;
  - iv. maintains a human scale, through appropriate building heights and form;
  - v. provides attractive, active frontages that maximise pedestrian activity along road frontages and public spaces;
  - vi. provides for active and passive surveillance of the public spaces, road frontages and movement corridors;
  - vii. promotes active transport options and ensures an oversupply of car parking is not provided;
  - viii. does not result in large internalised Shopping centres<sup>(76)</sup> with large external blank walls with tenancies only accessible from within the building;
    - ix. locates tenancies at the street with car parking at the rear;
    - x. ensures expansive areas of surface car parking do not dominate road frontages or public spaces;
    - xi. ensures parking, manoeuvring and servicing areas are designed, located and aesthetically treated to not be visually dominant features from the streetscape and public spaces.
- f. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;

- C. maintain or improve the structure and condition of drainage lines and riparian areas;
- D. avoid off-site adverse impacts from stormwater.
- iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- g. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- h. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- i. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- j. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- k. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- I. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- m. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- n. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- o. Development in the Local centre sub-precinct is for one or more of the uses identified below:

| <ul> <li>Caretaker's<br/>accommodation<sup>(10)</sup></li> </ul> | <ul> <li>Food and drink outlet<sup>(28)</sup></li> </ul> | • | Place of worship <sup>(60)</sup> |
|--|--|---|----------------------------------|
|  |  |   |                                  |

| • | Child care centre <sup>(13)</sup>     | • | Hardware and trade supplies <sup>(32)</sup> - if 250m <sup>2</sup> GFA | • | Service industry <sup>(73)</sup>                |
|---|---------------------------------------|---|--|---|---|
| • | Club <sup>(14)</sup>                  |   | or less  | • | Shop <sup>(75)</sup>                            |
| • | Community care centre <sup>(15)</sup> | • | Health care services <sup>(33)</sup>                                   | • | Showroom <sup>(78)</sup> - if 250m <sup>2</sup> |
| • | Community use <sup>(17)</sup>         | • | Home based business <sup>(35)</sup>                                    |   | GFA or less                                     |
| • | Dwelling unit <sup>(23)</sup>         | • | Low impact industry <sup>(42)</sup> - if                               |   |   |
| • | Emergency services <sup>(25)</sup>    |   | not located adjoining a main street                                    |   |   |
|   |                                       | • | Market <sup>(46)</sup>   |   |   |
|   |                                       | • | Office <sup>(53)</sup>   |   |   |
|   |                                       |   |  |   |   |

p. Development in the Local centre sub-precinct does not include one or more of the following uses:

| , |   |   |   |  |   |   |
|---|---|---|---|--|---|---|
|   | • | Air services <sup>(3)</sup>                                   | • | Landing <sup>(41)</sup>  | • | Research and technology industry <sup>(63)</sup>              |
|   | ٠ | Animal husbandry <sup>(4)</sup>                               |   | Major sport, recreation and entertainment facility <sup>(44)</sup> |   | Resort complex <sup>(66)</sup>                                |
|   | • | Animal keeping <sup>(5)</sup>                                 | • | Marine industry <sup>(45)</sup>                                    | 9 | Rooming   |
|   | • | Aquaculture <sup>(6)</sup>                                    |   | Medium impact industry <sup>(47)</sup>                             |   | accommodation <sup>(69)</sup>                                 |
|   | • | Brothel <sup>(8)</sup>  |   | Motor sport facility <sup>(48)</sup>                               | • | Rural industry <sup>(70)</sup>                                |
|   | • | Bulk landscape supplies <sup>(9)</sup>                        | • | Multiple dwelling <sup>(49)</sup> (where                           | • | Rural workers'<br>accommodation <sup>(71)</sup>               |
|   | • | Cemetery <sup>(12)</sup>                                      |   | not part of a mixed use building)                                  | • | Short-term  |
|   | • | Crematorium <sup>(18)</sup>                                   |   | Nightclub entertainment  |   | accommodation <sup>(77)</sup>                                 |
| • | • | Cropping <sup>(19)</sup>                                      |   | facility <sup>(51)</sup>   | • | Showroom <sup>(78)</sup> - if more than 250m <sup>2</sup> GFA |
|   |   | Detention facility <sup>(20)</sup>                            | • | Outdoor sales <sup>(54)</sup>                                      |   | Special industry <sup>(79)</sup>                              |
|   |   | Environment facility <sup>(26)</sup>                          | • | Outdoor sport and recreation <sup>(55)</sup>                       | • | Tourist park <sup>(84)</sup>                                  |
|   | • | Extractive industry <sup>(27)</sup>                           | • | Parking station <sup>(58)</sup>                                    | • | Transport depot <sup>(85)</sup>                               |
|   | • | Hardware and trade<br>supplies <sup>(32)</sup> - if more than | • | Permanent plantation <sup>(59)</sup>                               | • | Winery <sup>(90)</sup>  |
|   |   | 250m <sup>2</sup> GFA   | • | Port services <sup>(61)</sup>                                      |   |   |
|   |   | High impact industry <sup>(34)</sup>                          | • | Relocatable home park <sup>(62)</sup>                              |   |   |
|   | • | Hotel <sup>(37)</sup>   | • | Renewable energy   |   |   |
|   | • | Intensive animal industry <sup>(39)</sup>                     |   | facility <sup>(63)</sup>   |   |   |
|   | • | Intensive horticulture <sup>(40)</sup>                        |   |  |   |   |
| l |   |   |   |  |   |   |

q. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

#### 7.2.3.1.2.2 Criteria for assessment

#### Part B - Criteria for assessable development - Local centre sub-precinct

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part B, Table 7.2.3.1.2.1.

Where development is impact assessable, the assessment criteria become the whole of the planning scheme.

#### Table 7.2.3.1.2.1 Assessable development - Local centre sub-precinct

| Performance outcomes   | Acceptable outcomes                      |
|--|--|
| Genera   | l criteria                               |
| Local centre locations   |  |
| P01  | No acceptable outcome provided.          |
| The location of a local centre is:   | 6  |
| a. in accordance with a Neighbourhood development<br>plan that reflects the urban structure concept shown<br>indicatively on Figure 7.2.3.5 - Centres, employment<br>and schools;  |  |
| <ul> <li>on highly accessible sites along neighbourhood connecting streets;</li> </ul>   |  |
| c. at the junction of through streets and public transport routes in accessible and visible locations;   | const                                    |
| d. generally to the side of the intersection creating pedestrian focused main streets.   |  |
| Centre network and function  |  |
| PO2 Development in the Local centre sub-precinct:  | No acceptable outcome provided.          |
| a. is of a size, scale, range of services and location commensurate with the role and function of this sub-precinct within the centres network (e.g. A maximum of 1 full-line supermarket is located in each Local centre sub-precinct); |  |
| <ul> <li>b. is clustered with other local centre compatible uses<br/>forming a compact urban form.</li> <li>Note - Refer to Table 7.2.3.3 - Caboolture West centre network.</li> </ul>   |  |
|  |  |
| Active frontage  | 1  |
| PO3  | AO3.1                                    |
| Development addresses and activates streets and public spaces by:  | Development address the street frontage. |
|  | AO3.2                                    |

| <ul> <li>establishing and maintaining interaction, pedestrian<br/>activity and casual surveillance through appropriate<br/>land uses and building design (e.g. the use of<br/>windows or glazing and avoiding blank walls with</li> </ul> |  | alignment.  |  |  |
|---|--|---|--|--|
|   | the use of sleeving);  | AO3.3   |  |  |
| b.  | ensuring buildings and individual tenancies address street frontages and other areas of pedestrian movement;   | At-grade car parking:<br>a. does not adjoin a main street or a corner;  |  |  |
| C.  | new buildings adjoin or are within 3m of a primary street frontage, civic space or public open space;  | <ul> <li>where at-grade car parking areas adjoins a street<br/>(other than a main street) or civic space does not<br/>not take up more than 40% of the length of the</li> </ul> |  |  |
| d.  | locating car parking areas behind or under buildings to not dominate the street environment;   | street frontage.  |  |  |
| e.  | providing visual interest to the façade (e.g. windows<br>or glazing, variation in colours, materials, finishes,<br>articulation, recesses or projections); | Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.  |  |  |
| f.  | establishing or maintaining human scale.   | A03.4   |  |  |
|   |  | Development on corner lots:   |  |  |
|   |  | a. addresses both street frontages;   |  |  |
|   | •. ()  | b. express strong visual elements, including feature building entries.  |  |  |
|   |  | AO3.5   |  |  |
|   |  |   |  |  |
|   | XO   | Development incorporates active uses adjacent to a street frontage, civic spaces, public open space or pedestrian thoroughfare.   |  |  |
|   |  | AO3.6   |  |  |
|   |  | The front facade of the building:   |  |  |
|   |  | a. is made up of a minimum of 50% windows or glazing between a height of 1m and 2m;   |  |  |
|   |  | b. the minimum area of window or glazing is to remain uncovered and free of signage.  |  |  |
|   | NB   | Note - This does not apply to Adult stores <sup>(1)</sup> .   |  |  |
|   |  |   |  |  |


|  | Figure - Glazing  |
|--|---|
|  | 2m<br>1m<br>Minmum of<br>Stik gazing<br>Hontage modulated<br>through the use of<br>plans or fine grain<br>every 10m<br>every 10m  |
|  | AO3.7<br>Individual tenancies do not exceed a frontage length of 20m.   |
|  | AO3.8<br>Large format retail uses (e.g. Showroom <sup>(78)</sup> , supermarket<br>or discount department store) are sleeved by smaller<br>tenancies (e.g. retail and similar uses). |
|  | Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.  |
| Setbacks   |   |
| PO4<br>Side and rear setbacks are of a dimension to:<br>a. cater for required openings, the location of loading  | No acceptable outcome provided.   |
| <ul><li>docks and landscaped buffers etc.;</li><li>b. protect the amenity of adjoining sensitive land uses.</li></ul>  |   |
| Site area  |   |
| PO5<br>The development has sufficient area and dimensions to<br>accommodate required buildings and structures, vehicular<br>access, manoeuvring and parking and landscaping. | No acceptable outcome provided.   |
| Building height  |   |
| PO6  | A06   |
| The height of buildings reflect the intended low to medium character of the area.  | Building heights do not exceed that mapped on a Neighbourhood development plan.   |
| Public realm   |   |

| P07   |   | No acceptable outcome provided.                        |
|---|---|--|
|   | elopments incorporating a gross leasable area ater than 3,000m <sup>2</sup> include a public plaza on-site that:                        |  |
| a.  | is integrated with adjacent development, in relation to built form, streetscape, landscaping and the street and pedestrian network;     |  |
| b.  | is directly accessible from adjacent development<br>or tenancies and is easily and conveniently<br>accessible to the public;            |  |
| C.  | is of a sufficient size and dimensions to cater for passive recreation activities (e.g. alfresco dining and temporary activities etc);  |  |
| d.  | includes greening (e.g. landscaping, planter boxes, street trees etc) that contributes to the identity of the centre;                   | C, SIS   |
| e.  | is lit and has adequate signage for way finding,<br>ensuring adjoining and near by residential uses are<br>not impacted by 'overspill'; |  |
| f.  | is designed to achieve CPTED principles e.g. visible at all times.  | en   |
| Note - For details and examples of civic space requirements refer<br>to Planning scheme policy - Centre and neighbourhood hub design.   |   | SCI  |
|   | e - Refer to Planning scheme policy - Centre and neighbourhood design for details and examples.   |  |
| Streetscape   |   |  |
| PO  |   | No acceptable outcome provided.                        |
| Development contributes to an attractive and walkable<br>street environment through the provision of streetscape<br>features (e.g. footpaths, lighting, bins, furniture,<br>landscaping, pedestrian crossings etc), as outlined in<br>Planning scheme policy - Integrated design.<br>Editor's note - Additional approvals may be required where works<br>are required within road reserves. |   |  |
| Built form  |   |  |
| POS   |   | AO9  |
|   | und floor spaces are designed to enable the flexible se of floor area for commercial and retail activities.                             | The ground floor has a minimum ceiling height of 4.2m. |
| PO1   | 0   | AO10   |
|   |   | Buildings incorporate an awning that:                  |


Awnings are provided at the ground level fronting pedestrian footpaths. Awnings:

- a. provide adequate protection for pedestrians from solar exposure and inclement weather;
- b. are integrated with the design of the building and the form and function of the street;
- c. do not compromise the provision of street trees and signage;
- d. ensure the safety of pedestrians and vehicles (e.g. no support poles).

- a. is cantilevered
- b. extends from the face of the building;
- c. has a minimum height of 3.2m and a maximum height of 4.2m above pavement level;
- d. does not extend past a vertical plane of 1.5m inside the kerb line to allow for street trees and regulatory signage;
- e. aligns with adjoining buildings to provide continuous shelter where possible.

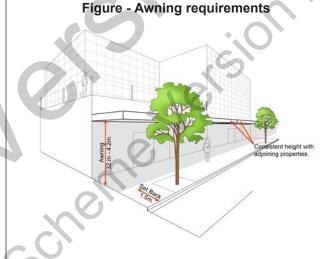

| PO1 | 1  | No acceptable outcome provided. |
|-----|--|---------------------------------|
|     | uildings exhibit a high standard of design and of the standard of design and other struction, which:   |                                 |
| a.  | adds visual interest to the streetscape (e.g. variation<br>in materials, patterns, textures and colours,<br>cantilevered awning);  |                                 |
| b.  | enables differentiation between buildings;   |                                 |
| c.  | contributes to a safe environment;   |                                 |
| d.  | incorporates architectural features within the<br>building facade at the street level to create human<br>scale;  |                                 |
| e.  | treat or break up blank walls that are visible from public areas;  |                                 |
| f.  | includes building entrances that are readily<br>identifiable from the road frontage, located and<br>oriented to favour active and public transport usage<br>by connecting to pedestrian footpaths on the street<br>frontage and adjoining sites; |                                 |
| g.  | facilitate casual surveillance of all public spaces.   |                                 |
| PO1 | 2  | No acceptable outcome provided. |

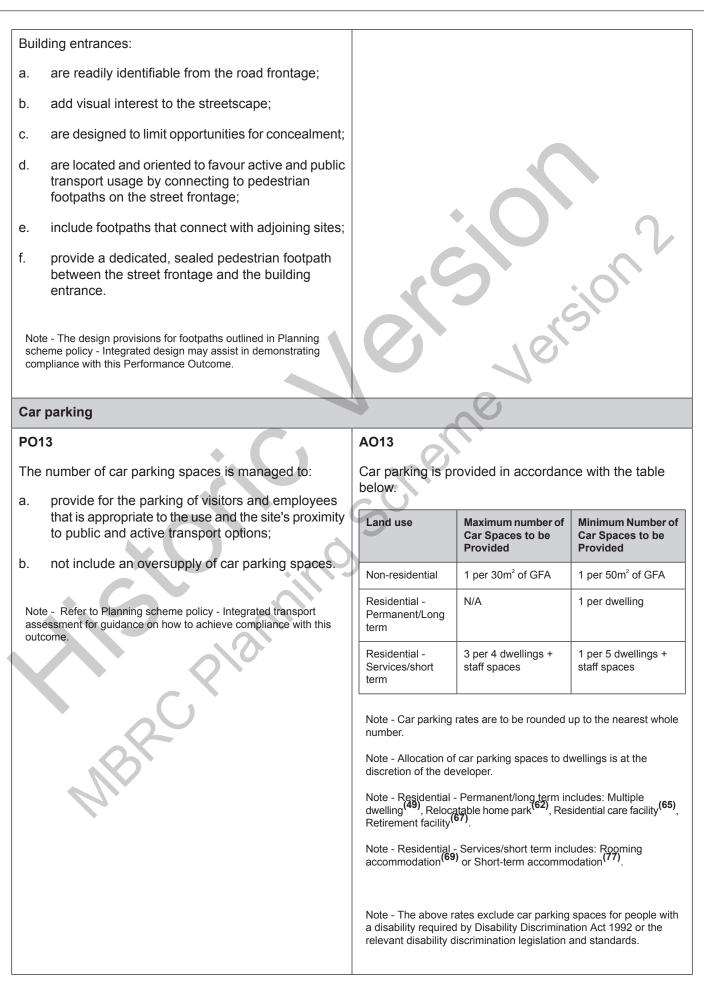

| P014   | <ul> <li>No acceptable outcome provided.</li> </ul>  |  |
|--|--|--|
| Car parking is designed to avoid the visual impact of large areas of surface car parking on the streetscape.   |  |  |
| PO15   | No acceptable outcome provided.  |  |
| Car parking design includes innovative solutions,<br>including on-street parking and shared parking areas.<br>Note - Refer to Planning scheme policy - Integrated design for details<br>and examples of on-street parking. |  |  |
| PO16   | A016   |  |
| <ul><li>The design of car parking areas:</li><li>a. does not impact on the safety of the external road network;</li></ul>  | All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1.                          |  |
| b. ensures the safe movement of vehicles within the site.  |  |  |
| P017   | No acceptable outcome provided.  |  |
| The safety and efficiency of pedestrian movement is<br>prioritised in the design of car parking areas through<br>providing pedestrian paths in car parking areas that are:   | SCI  |  |
| a. located along the most direct pedestrian routes between building entrances, car parks and adjoining uses;   |  |  |
| <ul> <li>protected from vehicle intrusion through the use of<br/>physical and visual separation (e.g. wheel stops,<br/>trees etc);</li> </ul>  |  |  |
| c. of a width to allow safe and efficient access for prams and wheelchairs.  |  |  |
| Bicycle parking and end of trip facilities   |  |  |
| Note - Building work to which this code applies constitutes Major Development for purposes of development requirements for facilities prescribed in the Queensland Development Code MP 4.1.                                |  |  |
| PO18   | AO18.1   |  |
| a. End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:   | Minimum bicycle parking facilities are provided in accordance with the table below (rounded up to the nearest whole number). |  |
| <ul> <li>adequate bicycle parking and storage<br/>facilities; and</li> </ul>   | Use Minimum Bicycle Parking  |  |
|  | Residential uses comprised<br>of dwellings         Minimum 1 space per dwelling  |  |

- ii. adequate provision for securing belongings; and
- change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.
- b. Notwithstanding a. there is no requirement to provide end of trip facilities if it would be unreasonable to provide these facilities having regard to:
  - i. the projected population growth and forward planning for road upgrading and development of cycle paths; or
  - ii. whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute distances and nature of the terrain; or
  - the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.

Editor's note - The intent of b above is to ensure the requirements for bicycle parking and end of trip facilities are not applied in unreasonable circumstances. For example these requirements should not, and do not apply in the Rural zone or the Rural residential zone etc.

Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the acceptable outcomes under this heading meet the current performance requirement prescribed in the Queensland Development Code.

| All other residential uses | Minimum 1 space per 2 car parking spaces identified in Schedule 7 – car parking |
|----------------------------|---|
| Non-residential uses       | Minimum 1 space per 200m2 of GFA  |

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is a combination of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

## AO18.2

Bicycle parking is:

- a. provided in accordance with Austroads (2008), Guide to Traffic Management - Part 11: Parking;
- b. protected from the weather by its location or a dedicated roof structure;
- c. located within the building or in a dedicated, secure structure for residents and staff;
- d. adjacent to building entrances or in public areas for customers and visitors.

Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.

Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

## AO18.3

For non-residential uses, storage lockers:

- a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);
- b. have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).

Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.

|   | prescribe<br>planning<br>levels ide<br>outcome<br>facilities | ed under<br>instrume<br>entified ir<br>is an am<br>in the Qu | the Queer<br>ent to preson<br>those ac<br>nalgamatic | nsland Deve<br>cribe facility<br>ceptable so<br>on of the de<br>Developm | ns for end of trip t<br>elopment Code p<br>levels higher tha<br>olutions. This acc<br>efault levels set for<br>ent Code and the   | ermit a local<br>n the default<br>ceptable<br>or end of trip                        |
|---|--|--|--|--|---|---|
|   | AO18.4   |  |  |  |   |   |
|   | For non-   | -reside  | ntial use  | s chang  | ing rooms:  |   |
|   | a. are<br>spa  | e provio<br>aces;<br>e fitted v                              | ded at a   | rate of 1  | per 10 bicycl<br>or or otherwis   |   |
|   |  |  |  |  | s), sanitary<br>i basin(s) in a   | ccordance   |
|   |  |  | able belo  |  |   |   |
|   | Bicycle<br>spaces<br>provided                                | Male/<br>Female  | Change<br>rooms<br>required                          | Showers required   | Sanitary<br>compartments<br>required  | Washbasins<br>required  |
|   | 1-5  | Male<br>and<br>female  | 1 unisex<br>change<br>room                           | 1  | 1 closet pan  | 1   |
|   | 6-19   | Female   | 1  | 1  | 1 closet pan  | 1   |
|   | 20 or<br>more  | Male   | 1  | 1  | 1 closet pan  | 1   |
| 5 | Ũ  | Female   | 1  | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 2 closet pans,<br>plus 1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided<br>thereafter  | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|   |  | Male   | 1  | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 1 urinal and 1<br>closet pans, plus<br>1 sanitary<br>compartment at<br>the rate of 1<br>closet pan or 1<br>urinal for every 60<br>bicycle space<br>provided<br>thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|   | and Star<br>Note - Al  | ndards (V<br>I sanitary                                      | VELS) rati   | ng shower  | atar Water Efficier<br>head.<br>onstructed in com   | , ,   |
|   | d. are   | e provic   | ded with   | :  |   |   |
|   | i.<br>ii.<br>iii.  | a ho<br>com  | ook and b<br>partmer<br>cket-out                     | pench sea<br>ht;   | ve each wash<br>ating within ea<br>ed adjacent to   | ach showe   |
|   |  | nange roo  | oms may b  |  | cross multiple site<br>iin 100 metres of  |   |


|     |  | to the building and within 50 metres of bicycle parking and storage facilities  |
|-----|--|---|
|     |  | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |
| Loa | ding and servicing   | · O 9.  |
| PO1 | 9  | No acceptable outcome provided.   |
| Loa | ding and servicing areas:  |   |
| a.  | are not visible from any street frontage;  |   |
| b.  | are integrated into the design of the building;  |   |
| C.  | include screening and buffers to reduce negative impacts on adjoining sensitive land uses;         |   |
| d.  | are consolidated and shared with adjoining sites where possible.                                   |   |
|     |  |   |
|     | e - Refer to Planning scheme policy - Centre and neighbourhood design.                             |   |
|     |  | <b>S</b>  |
| Was | ste  |   |
| PO2 | 20   | AO20  |
|     | and bin storage areas are provided, designed and haged to prevent amenity impacts on the locality. | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  |
|     |  |   |
|     | dscaping and fencing   |   |
| PO2 |  | No acceptable outcome provided.   |
| On- | site landscaping:  |   |
| a.  | is incorporated into the design of the development;  |   |
| b.  | reduces the dominance of car parking and servicing areas from the street frontage;                 |   |
| c.  | incorporates shade trees in car parking areas;   |   |
| d.  | retains mature trees wherever possible;  |   |
| e.  | contributes to quality public spaces and the micro climate by providing shelter and shade;         |   |
| f.  | maintains the achievement of active frontages and sightlines for casual surveillance.              |   |
| 1   |  |   |

| Note - All landscaping is to accord with Planning scheme policy -<br>Integrated design.  |  |
|--|--|
| P022   | No acceptable outcome provided.  |
| Surveillance and overlooking are maintained between the road frontage and the main building line.  |  |
| Lighting   |  |
| PO23   | No acceptable solution provided.   |
| Lighting is designed to provide adequate levels of<br>illumination to public and communal spaces to maximise<br>safety while minimising adverse impacts on residential<br>and other sensitive land uses.   | S sion   |
| Amenity  | V) (0)   |
| PO24   | No acceptable solution provided.   |
| The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, noise,<br>light, chemicals and other environmental nuisances.   | ene  |
| Noise  |  |
| P025   | No acceptable outcome provided.  |
| Noise generating uses do not adversely affect existing<br>or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise. |  |
| PO26   | AO26.1   |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:   | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.   |
| a. contributing to safe and usable public spaces,<br>through maintaining high levels of surveillance of<br>parks, streets and roads that serve active transport<br>purposes (e.g. existing or future pedestrian paths<br>or cycle lanes etc);  | AO26.2<br>Noise attenuation structures (e.g. walls, barriers or<br>fences):<br>a. are not visible from an adjoining road or public area                          |
| <ul> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> </ul>  | <ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not serve an existing or future active transport</li> </ul> |

| Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.   | purpose (e.g. pedestrian paths or cycle lanes)<br>or where attenuation through building location<br>and materials is not possible.  |
|--|---|
|  | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in</li> </ul>          |
|  | accordance with Planning scheme policy -<br>Integrated design.  |
|  | Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.  |
|  | Note - Refer to Overlay map – Active transport for future active transport routes.  |
| Works  | criteria  |
| Utilities  |   |
| P027   | A027  |
| The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant<br>energy regulating authority) and the infrastructure does<br>not negatively impact the streetscape. | The development is connected to underground electricity.  |
| PO28   | No acceptable outcome provided.   |
| The development has access to telecommunications and broadband services in accordance with current standards.  |   |
| PO29   | No acceptable outcome provided.   |
| Where available the development is to safely connect to reticulated gas.   |   |
| PO30   | AO30.1  |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.                                       | Where in a sewered area, the development is connected to a reticulated sewerage system.   |
|  | AO30.2  |
|  | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.   |
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002. |
| PO31   | AO31.1  |

| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards.<br><b>AO31.2</b><br>Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development. |
|--|--|
| PO32   | No acceptable outcome provided.  |
| The development is provided with dedicated and constructed road access.  |  |
| Access   |  |
| <ul> <li>PO33</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> | No acceptable outcome provided.  |
| PO34<br>Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design.  | No acceptable outcome provided.  |
| PO35   | AO35.1   |


| The layout of the development does not compromise: a. the development of the road network in the area; b. the function or safety of the road network; c. the capacity of the road network. Movement, Major streets).  Movement, Major streets and streets and streets and streets and streets and s |   |   |
|--|---|---|
| <ul> <li>a. the development of the road network in the area;</li> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network;</li> <li>c. the capacity of the road network;</li> <li>b. the function or safety of the road network;</li> <li>b. the capacity of the road network;</li> <li>c. the capacity of the road network;</li> <li>c. the capacity of the road network;</li> <li>d. the capacity of the road network in the area in accordance with Council's road network in the area in accordance with council's road network in the area in accordance with council's road network in the area and council's road planning.</li> <li>d. A035.1</li> <li>The development does not compromise future road wideleng of frontage roads in accordance with the relevant standard and Council's road network in the accordance with the relevant standard and forways are designed and located in accordance with:</li> <li>a. Where for a State-Controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, AS/NZS2890.1 section 52 approval.</li> <li>A036.2</li> <li>Internal driveways and access wa</li></ul>   | The layout of the development does not compromise:  |   |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).       Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).         Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).       Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).         A035.2       The development provides for the extension of the road network in the area in accordance with Council's road network in the area in accordance with Council's road network in the area in accordance with Council's road network planning.         A035.4       The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.         A035.4       The lot layout allows forward access to and from the site.         Safe access facilities are provided for all vehicles required to access and driveways are designed and located in accordance with:       a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or         D.       Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPW-ROA standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.         A036.2       Internal driveways and access ways are designed and construction.         Note - This includes queue lengths (refer to Schedule 8 Bervice whick requirements),   |   |   |
| AO36.3   | <ul> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> <li>Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).</li> <li>PO36</li> <li>Safe access facilities are provided for all vehicles required</li> </ul> | <ul> <li>motorway.</li> <li>Editor's note - Residential developments should consider<br/>amalgamation with the lot to the rear and gaining access via a<br/>laneway.</li> <li>Note - The road hierarchy is in accordance with a Neighbourhood<br/>development plan (conceptually shown on Figure 7.2.3.2 -<br/>Movement, Major streets).</li> <li>AO35.2</li> <li>The development provides for the extension of the road<br/>network in the area in accordance with Council's road<br/>network planning.</li> <li>AO35.3</li> <li>The development does not compromise future road<br/>widening of frontage roads in accordance with the<br/>relevant standard and Council's road planning.</li> <li>AO35.4</li> <li>The lot layout allows forward access to and from the site.</li> <li>AO36.1</li> <li>Site access and driveways are designed and located in<br/>accordance with:</li> <li>a. Where for a Council-controlled road, AS/NZS2890.1<br/>section 3; or</li> <li>Where for a State-Controlled road, the Safe<br/>Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard<br/>drawings, or a copy of a Transport Infrastructure<br/>Act 1994, section 62 approval.</li> <li>AO36.2</li> <li>Internal driveways and access ways are designed and<br/>constructed in accordance with AS/NZS2890.1 Parking<br/>Facilities – Off street car parking and the relevant<br/>standards in Planning scheme policy - Integrated design.</li> <li>Note - This includes queue lengths (refer to Schedule 8 Service</li> </ul> |
|  |   | AO36.3  |

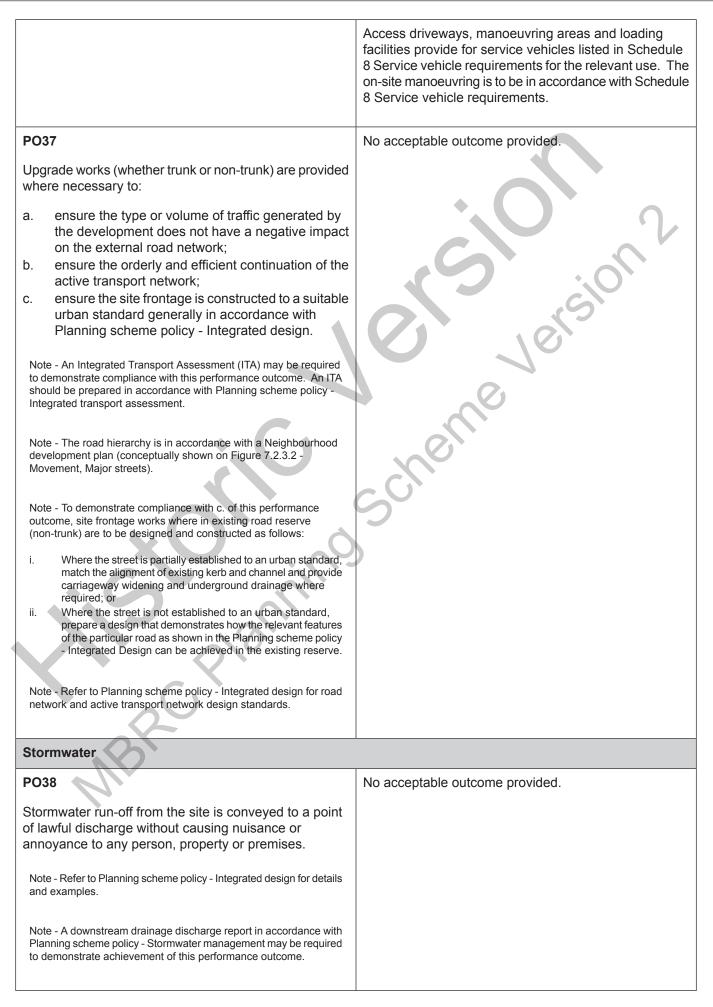


| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. |   |
|--|---|
| PO39   | No acceptable outcome provided.   |
| Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.   | 2   |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate compliance with this performance outcome.   | Sion  |
| PO40   | No acceptable outcome provided.   |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.  | ne  |
| Note - A site-based stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.   | conor   |
| P041   | No acceptable outcome provided.   |
| Easements for drainage purposes are provided over:   |   |
| <ul><li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li><li>b. overland flow paths where they cross more than one property boundary.</li></ul>  |   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |   |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.  |   |
| Site works and construction management   |   |
| PO42   | No acceptable outcome provided.   |
| The site and any existing structures are maintained in a tidy and safe condition.  |   |
| PO43   | AO43.1  |
| All works on-site are managed to:  | Works incorporate temporary stormwater run-off, erosion<br>and sediment controls and trash traps designed in<br>accordance with the Urban Stormwater Quality Planning |


| a. minimise as far as practicable, impacts on adjoining<br>or adjacent premises and the streetscape in regard<br>to erosion and sedimentation, dust, noise, safety<br>and light:                           | Guidelines, Planning scheme policy - Stormwater<br>management and Planning scheme policy - Integrated<br>design, including but not limited to the following:  |
|--|---|
| <ul> <li>and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a</li> </ul>  | a. stormwater is not discharged to adjacent properties<br>in a manner that differs significantly from<br>pre-existing conditions;   |
| <ul><li>manner that does not cause nuisance or annoyance<br/>to any person or premises;</li><li>avoid adverse impacts on street streets and their<br/>critical root zone.</li></ul>                        | <ul> <li>b. stormwater discharged to adjoining and<br/>downstream properties does not cause scour and<br/>erosion;</li> <li>c. stormwater discharge rates do not exceed</li> </ul>  |
|  | <ul> <li>pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design</li> </ul>  |
|  | Storm for all silt barriers and sedimentation basins.<br><b>AO43.2</b><br>Stormwater run-off, erosion and sediment controls are<br>constructed prior to commencement of any clearing work<br>or earthworks and are maintained and adjusted as<br>necessary at all times to ensure their ongoing<br>effectiveness. |
|  | Note - The measures are adjusted on-site to maximise their effectiveness.   |
|  | The completed earthworks (fill or excavation) area is<br>stabilised using turf, established grass seeding, mulch<br>or sprayed stabilisation techniques to control erosion and<br>sediment and dust from leaving the property.  |
|  | AO43.4  |
| 2 Plai   | Where works are proposed in proximity to an existing<br>street tree, an inspection and a root management plan<br>is undertaken by a qualified arborist which demonstrates<br>and ensures that no permanent damage is caused to the<br>tree.   |
| PO44   | AO44  |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.   | No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.   |
| PO45   | AO45.1  |
| All works on-site and the transportation of material to and<br>from the site are managed to not negatively impact the<br>existing road network, the amenity of the surrounding<br>area or the streetscape. | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic<br>movements to and from the site are safe.                                    |

| Note - Where the amount of imported material is greater than 50m <sup>3</sup> ,<br>a haulage route must be identified and approved by Council.<br>PO46<br>All disturbed areas are rehabilitated at the completion of<br>construction.   | <ul> <li>AO45.2</li> <li>All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors' vehicles are generally not to be parked in existing roads.</li> <li>Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).</li> <li>AO45.3</li> <li>Any material dropped, deposited or spilled on the roads as a result of construction processes associated with the site are to be cleaned at all times.</li> <li>AO46</li> <li>At completion of construction all disturbed areas of the site are to be:</li> </ul> |
|---|---|
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  | <ul> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. grassed.</li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.</li> </ul>  |
| <ul> <li>PO47</li> <li>The clearing of vegetation on-site: <ul> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> </ul> </li> <li>Note - No burning of cleared vegetation is permitted.</li> </ul> | <ul> <li>AO47.1</li> <li>All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.</li> <li>Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.</li> <li>AO47.2</li> <li>Disposal of materials is managed in one or more of the following ways: <ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> </ul> </li> </ul>                                |
| PO48  | No acceptable outcome provided.   |

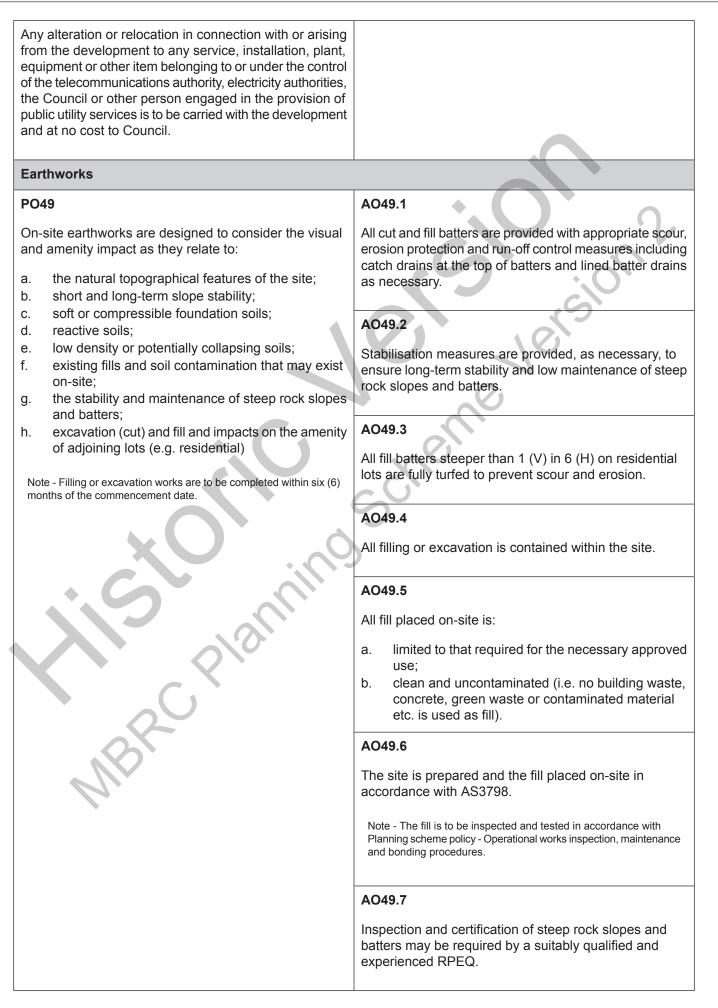

| PO50  | AO50  |
|---|---|
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |
|   | Figure - Embankment   |
|   | 500mm<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>mm<br>15m<br>15   |
| PO51  | A051.1  |
| <ul> <li>On-site earthworks are undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity as defined in the Sustainable Planning Act 2009.</li> </ul> | <ul> <li>No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> <li>AO51.2</li> <li>Earthworks that would result in any of the following are not carried out on-site: <ul> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> </ul> </li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> </ul> |
| P052  | No acceptable outcome provided.   |
| Filling or excavation does not result in land instability.  |   |
| Note - A slope stability report prepared by an RPEQ may be required.  |   |
| PO53  | No acceptable outcome provided.   |
| Filling or excavation does not result in  |   |
| <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul>   |   |

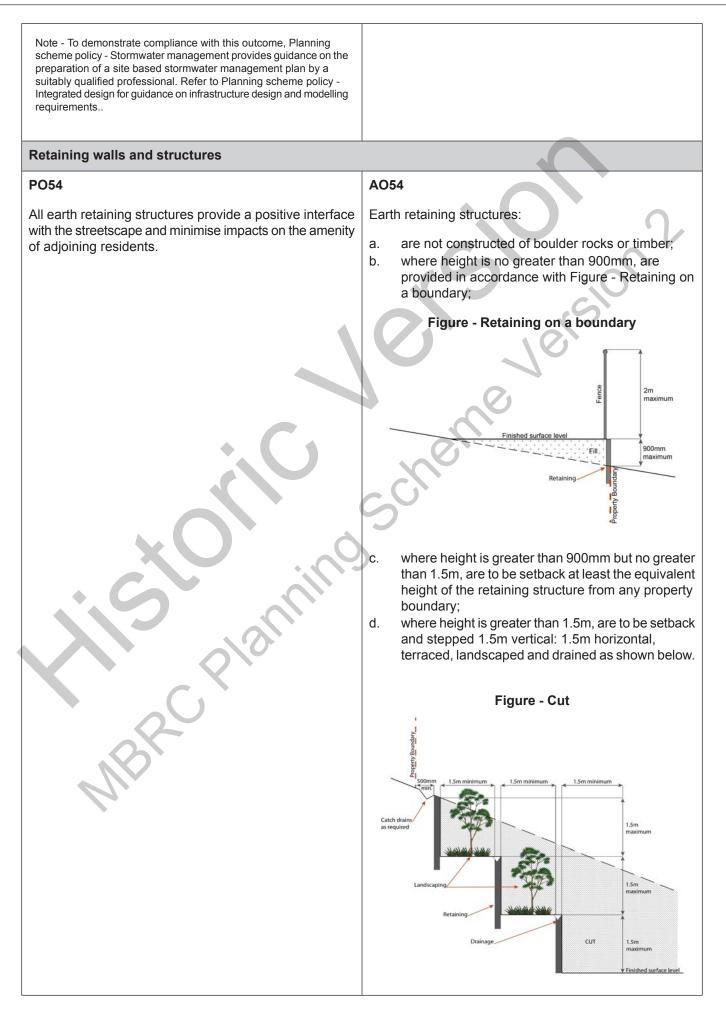

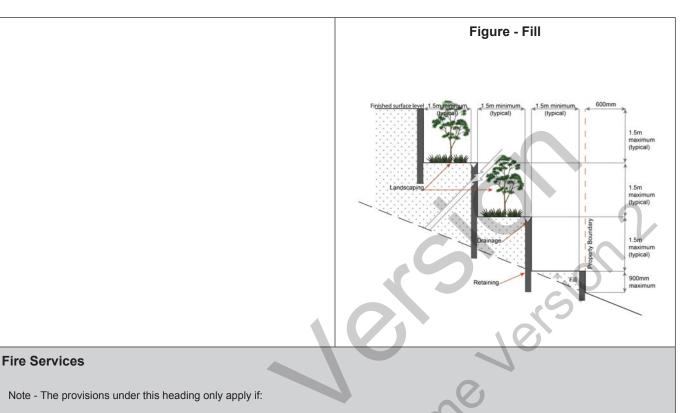

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.
  - iv

#### AND

b. none of the following exceptions apply:

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| P055   | AO55.1   |
|--|--|
| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul> | <ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i>.</li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul> |

| <ul> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> <li>Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.</li> </ul> | <ul> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: <ol> <li>i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;</li> <li>iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> </ol> </li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul> |
|--|--|
|  | <ul> <li>AO55.2</li> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:</li> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> </ul>   |
|  | <ul> <li>c. constructed to be readily traversed by a 17 tonne<br/>HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to<br/>stand within 20m of each fire hydrant and 8m of<br/>each hydrant booster point.</li> </ul>   |
|  | AO55.3<br>On-site fire hydrant facilities are maintained in effective<br>operating order in a manner prescribed in <i>Australian</i><br><i>Standard AS1851 (2012) – Routine service of fire</i><br><i>protection systems and equipment.</i>  |
| P056   | AO56   |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes  | For development that contains on-site fire hydrants external to buildings:   |
| to those hydrants, can be readily identified at all times<br>from, or at, the vehicular entry point to the development<br>site.  | a. those external hydrants can be seen from the vehicular entry point to the site; or  |
|  | b. a sign identifying the following is provided at the vehicular entry point to the site:  |
|  | <ul> <li>the overall layout of the development (to scale);</li> </ul>  |
|  | ii. internal road names (where used);  |
|  | iii. all communal facilities (where provided);   |
|  | <ul> <li>iv. the reception area and on-site manager's office (where provided);</li> </ul>  |
|  |  |

|  | v. external hydrants and hydrant booster points;  |
|--|---|
|  | vi. physical constraints within the internal<br>roadway system which would restrict access<br>by fire fighting appliances to external hydrants<br>and hydrant booster points.   |
|  | Note - The sign prescribed above, and the graphics used are to be:  |
|  | a. in a form;   |
|  | b. of a size;   |
|  | <ul> <li>c. illuminated to a level;</li> <li>which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.</li> </ul>   |
|  |   |
| P057   | A057  |
| Each on-site fire hydrant that is external to a building is<br>signposted in a way that enables it to be readily identified<br>at all times by the occupants of any firefighting appliance<br>traversing the development site. | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads. |
|  | Note - Technical note Fire hydrant indication system is available on<br>the website of the Queensland Department of Transport and Main<br>Roads.  |
| Use speci  | fic criteria  |
| Home based business <sup>(35)</sup>  |   |
| P058   | AO58.1  |
| The scale and intensity of the Home based business <sup>(35)</sup> :   | A maximum of 1 employee (not a resident) OR 2 customers OR customers from within 1 Small rigid vehicle  |
| a. is compatible with the physical characteristics of the site and the character of the local area;  | (SRV) or smaller are permitted on the site at any one time.   |
| <ul> <li>b. is able to accommodate anticipated car parking<br/>demand without negatively impacting the<br/>streetscape or road safety;</li> </ul>  | AO58.2<br>The Home based business <sup>(35)</sup> occupies an area of the   |
| c. does not adversely impact on the amenity of the adjoining and nearby premises;  | existing dwelling or on-site structure not greater than 40m <sup>2</sup> gross floor area.  |
| d. remains ancillary to the residential use of the Dwelling house <sup>(22)</sup> ;  |   |
|  |   |

| <ul> <li>e. does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;</li> <li>f. ensures employees and visitors to the site do not negatively impact the expected amenity of adjoining properties.</li> </ul>  |  |
|--|--|
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and  | Utility installation <sup>(86)</sup>   |
| PO59   | A059.1   |
| <ul> <li>The development does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | <ul> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> AO59.2 A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries. |
| PO60   | AO60   |
| Infrastructure does not have an impact on pedestrian health and safety.  | <ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>  |
| PO61   | AO61   |
| <ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>  | All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the<br>Environmental Protection (Noise) Policy 2008.   |
| Residential uses   |  |
| PO62   | AO62   |
| Caretaker's accommodation <sup>(10)</sup> and Dwelling units <sup>(23)</sup> are provided with adequate functional and attractive private open space that is:  | A dwelling has a clearly defined, private outdoor living space that is:  |

| a. directly accessible from the dwelling and is located   |   |
|---|---|
| so that residents and neighbouring uses experience a suitable level of amenity;   |   |
| b. designed and constructed to achieve adequate   | Use Minimum Area Minimum Dimension<br>in all directions   |
| privacy for occupants from other Dwelling units <sup>(23)</sup> and centre uses;  | Ground level dwellings  |
| c. accessible and readily identifiable for residents,   | All dwelling types 16m <sup>2</sup> 4m  |
| visitors and emergency services;  | Above ground level dwellings  |
| d. located to not compromise active frontages.  | 1 bedroom or studio 8m <sup>2</sup> 2.5m  |
|   | 2 or more 12m <sup>2</sup> 3.0m   |
|   | b. accessed from a living area;   |
|   | c. sufficiently screened or elevated for privacy;   |
|   | d. ground level open space is located behind the main<br>building line and not within the primary or secondary<br>frontage setbacks;  |
|   | e. balconies orientate to the street;   |
|   | f. clear of any non-recreational structure (including<br>but not limited to air-conditioning units, water tanks,<br>clothes drying facilities, storage structures, retaining<br>structures and refuse storage areas).     |
|   | S   |
|   | Note - Areas for clothes drying are not visible from street frontages<br>or public areas (e.g. separate clothes drying areas are provided that<br>are oriented to the side or rear of the site or screening is provided). |
| PO63  | AO63  |
| Caretaker's accommodation <sup>(10)</sup> and Dwelling units <sup>(23)</sup> are provided with a reasonable level of access,                | The dwelling:   |
| identification and privacy from adjoining residential and<br>non-residential uses.<br>Note - Refer to State Government standards for CPTED. | <ul> <li>a. includes screening to a maximum external<br/>transparency of 50% for all habitable room windows<br/>that are visible from other dwellings and<br/>non-residential uses;</li> </ul>                            |
| Note - Refer to Planning scheme policy - Residential design for details and examples.   | b. clearly displays the street number at the entrance<br>to the dwelling and at the front of the site to enable<br>identification by emergency services;  |
|   | c. is provided with a separate entrance to that of any non-residential use on the site;   |
|   | d. where located on a site with a non-residential use the dwelling is located behind or above the non-residential use.  |
|   | Note - External fixed or movable screening, opaque glass and window tinting are considered acceptable forms of screening.   |

# Telecommunications facility <sup>(81)</sup>

Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup>must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz.

| PO64   | AO64.1  |
|--|---|
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.  |
|  | AO64.2<br>If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.  |
| PO65   | AO65  |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.   | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.   |
| PO66   | A066  |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.   | The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval. |
| P067   | AO67.1  |
| The Telecommunications facility <sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:<br>a. high quality design and construction;<br>b. visually integrated with the surrounding area;   | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |
| <ul><li>c. not visually dominant or intrusive;</li><li>d. located behind the main building line;</li></ul>   | AO67.2  |
| e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;  | In all other areas towers do not exceed 35m in height.  |
| f. camouflaged through the use of colours and  | AO67.3  |
| <ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li><li>h. landscaped;</li><li>i. otherwise consistent with the amenity and character</li></ul>  | Towers, equipment shelters and associated structures<br>are of a design, colour and material to:<br>a. reduce recognition in the landscape;   |
| of the zone and surrounding area.  | <ul> <li>b. reduce glare and reflectivity.</li> </ul>   |
| of the zone and carrounding area.  | D. Teudee glate and tellectivity.   |

# Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

| PO70  | A070  |
|---|---|
| <ul> <li>Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:</li> <li>a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;</li> <li>b. protects the environmental and ecological values and health of receiving waters;</li> <li>c. protects buildings and infrastructure from the effects of acid sulfate soils.</li> </ul> | <ul> <li>Development does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.</li> </ul> |

the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

| PO                                      | 71   | A071   |
|---|--|--|
| Dev<br>a.<br>b.<br>c.<br>d.<br>e.<br>f. | velopment will:<br>not diminish or cause irreversible damage to the<br>cultural heritage values present on the site, and<br>associated with a heritage site, object or building;<br>protect the fabric and setting of the heritage site,<br>object or building;<br>be consistent with the form, scale and style of the<br>heritage site, object or building;<br>utilise similar materials to those existing, or where<br>this is not reasonable or practicable, neutral<br>materials and finishes;<br>incorporate complementary elements, detailing and<br>ornamentation to those present on the heritage site,<br>object or building;<br>retain public access where this is currently provided. | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value.<br>Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object<br>or building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The<br>plan is sent to, and approved by Council prior to the commencement<br>of any preservation, maintenance, repair and restoration works. |
| PO<br>Der<br>a.                         | 72<br>nolition and removal is only considered where:<br>a report prepared by a suitably qualified<br>conservation architect or conservation engineer<br>demonstrates that the building is structurally<br>unsound and is not reasonably capable of economic<br>repair; or  | No acceptable outcome provided.  |

| <ul> <li>b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or</li> <li>c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic event which substantially destroys the building or object.</li> </ul>   |   |
|---|---|
| P073  | No acceptable outcome provided.   |
| Where development is occurring on land adjoining a site<br>of cultural heritage value, the development is to be<br>sympathetic to and consistent with the cultural heritage<br>values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view.  | i Cion?   |
| Infrastructure buffers (refer Overlay map - Infrastruc criteria apply)  | ture buffers to determine if the following assessment   |
| PO74  | A074  |
| <ul> <li>Development within a Bulk water supply infrastructure buffer is located, designed and constructed to:</li> <li>a. protect the integrity of the water supply pipeline;</li> <li>b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline;</li> </ul>   | <ul> <li>Development:</li> <li>a. does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer;</li> <li>b. involving a major hazard facility or environmentally relevant activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.</li> </ul>                                 |
| P075  | A075  |
| Development is located and designed to maintain required access to Bulk water supply infrastructure.  | <ul> <li>Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):</li> <li>a. buildings or structures;</li> <li>b. gates and fences;</li> <li>c. storage of equipment or materials;</li> <li>d. landscaping or earthworks or stormwater or other infrastructure.</li> </ul> |
| P076  | A076  |
| Development within a High voltage electricity line buffer<br>provides adequate buffers to high voltage electricity lines<br>to protect amenity and health by ensuring development:  | Development does not involve the construction of any<br>buildings or structures within a High voltage electricity<br>line buffer.   |
| <ul> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields in accordance with the principle of prudent avoidance;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and design so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> </ul> |   |

| Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)  |   |  |
|--|---|--|
| Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.   |   |  |
| P077   | No acceptable outcome provided.   |  |
| Development:   |   |  |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>   |   |  |
| P078   | A078  |  |
| Development:   | No acceptable outcome provided.   |  |
| <ul> <li>a. maintains the conveyance of overland flow<br/>predominantly unimpeded through the premises for<br/>any event up to and including the 1% AEP for the<br/>fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland<br/>flow onto an upstream, downstream or surrounding<br/>property.</li> <li>Note - A report from a suitably qualified Registered Professional<br/>Engineer Queensland is required certifying that the development<br/>does not increase the potential for significant adverse impacts on<br/>an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme<br/>policy – Flood hazard, Coastal hazard and Overland flow.</li> </ul> | scheme  |  |
| P079   | No acceptable outcome provided.   |  |
| <ul> <li>Development does not:</li> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> </ul>  |   |  |
| PO80   | AO80  |  |
| Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.   | Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. |  |

|  | Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.   |
|--|--|
| <b>PO81</b><br>Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.  | AO81<br>Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.   |
| <ul> <li>PO82</li> <li>Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow</li> <li>PO83</li> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over: <ul> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> </ul> </li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul> | AO82.1<br>Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – Level III;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>AO82.2<br>Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment.<br>No acceptable outcome provided. |
| Additional criteria for development for a Park <sup>(57)</sup>   |  |
| P084   | A084   |

| layo | elopment for a Park <sup>(57)</sup> ensures that the design and<br>ut responds to the nature of the overland flow<br>cting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design. |
|------|--|--|
| a.   | public benefit and enjoyment is maximised;   |  |
| b.   | impacts on the asset life and integrity of park structures is minimised;   |  |
| C.   | maintenance and replacement costs are minimised.   |  |
|      |  | Scheme sign  |

## 7.2.3.1.3 Light industry sub-precinct

### 7.2.3.1.3.1 Purpose - Light industry sub-precinct

Editor's note - Two small scale light industry areas (containing low impact<sup>(42)</sup> and service industry<sup>(73)</sup> activities) are located close to surrounding residential areas for convenience, but are designed to minimise amenity effects to nearby residents. The use of this land must be low impact and serving a local customer base. These areas include:

- 1. A location in the west of the Local Plan area that utilises an existing quarry and hardstand property, which is intended to be converted to local light industry over time.
- 2. A location in the southern part of the Local Plan area that utilises land adjoining Caboolture River Road and is located on the edge of the residential neighbourhoods, which is intended to serve the southern portion of the local plan area.

Figure 7.2.3.1 - Caboolture West structure plan, conceptually shows the locations of the two light industry areas, however a Neighbourhood development plan will explore development opportunities and constraints in greater detail and further allocate Light industry sub-precinct boundaries.

- 1. The purpose of the Light industry sub-precinct will be achieved through the following overall outcomes:
  - a. Low impact<sup>(42)</sup> and service industry<sup>(73)</sup> activities are located on lots identified for Light industry purposes on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.1 Caboolture West structure plan.
  - b. Development for a use that is ancillary to a low impact industry<sup>(42)</sup> activity on the same site which directly supports industry and workers may be accommodated.
  - c. The operation and viability of industry activities is protected from the intrusion of incompatible uses.
  - d. Medium impact industry<sup>(47)</sup> purposes and Specialised centre uses are not established in the Light industry sub-precinct.
  - e. Development provides a range of lot sizes to cater for industrial and employment needs and user requirements as indicated on a neighbourhood development plan.
  - f. Activities within the Light industry sub-precinct are located, design and managed to:
    - i. maintain the health and safety of people;
    - ii. avoid significant adverse effects on the natural environment;
    - iii. minimise the possibility of adverse impacts on surrounding non-industrial uses.
  - g. Development incorporates a range of building materials, vertically and horizontally articulated facades, landscaping, promotion of customer entry points, and safe and legible pedestrian access.
  - h. Development encourages public transport patronage and active transport choices through the increased provision of appropriate end of trip facilities.
  - i. Low impact<sup>(42)</sup> and service industry<sup>(73)</sup> activities which involve a high level of contact with the general public are located along a main street and provide a high quality built form and landscaped environment to the street.
  - j. Development protects and preserves the cultural heritage significance of the Upper Caboolture Uniting Church and adjacent cemetery<sup>(12)</sup>.
  - k. General works associated with the development achieves the following:
    - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);

- ii. the development manages stormwater to:
  - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
  - B. prevent stormwater contamination and the release of pollutants;
  - C. maintain or improve the structure and condition of drainage lines and riparian areas;
  - D. avoid off-site adverse impacts from stormwater.
- iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- I. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- m. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- n. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- o. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- p. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- q. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- r. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- s. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.

t. Development in the Light industry sub-precinct is for one or more of the uses identified below:

| • | Bulk landscape supplies <sup>(9)</sup>                                | • | Indoor sport and recreation <sup>(38)</sup>      | • | Telecommunication facility <sup>(81)</sup> |
|---|---|---|--|---|--|
| • | Caretaker's<br>accommodation <sup>(10)</sup>                          |   | Low impact industry <sup>(42)</sup>              | • | Transport depot <sup>(85)</sup>            |
|   |   |   |  | • | Utility installation <sup>(86)</sup>       |
| • | Child care centre <sup>(13)</sup>                                     | • | Research and technology industry <sup>(64)</sup> | • | Warehouse <sup>(88)</sup>                  |
| • | Emergency services <sup>(25)</sup>                                    |   | Service industry <sup>(73)</sup>                 |   |  |
| • | Food and drink  |   |  |   |  |
|   | outlet <sup>(28)</sup> (where not<br>exceeding 100m <sup>2</sup> GFA) | • | Service station <sup>(74)</sup>                  |   |  |
|   | - ,   | • | Substation <sup>(80)</sup>                       |   |  |
|   |   |   |  |   |  |

u. Development in the Light industry sub-precinct does not include one or more of the following uses:

|   | • | Adult store <sup>(1)</sup>                       | • | Garden centre <sup>(31)</sup>                             | • | Permanent plantation <sup>(59)</sup>   |
|---|---|--|---|---|---|--|
|   | • | Agricultural supplies<br>store <sup>(2)</sup>    |   | Hardware and trade supplies <sup>(32)</sup>               |   | Port services <sup>(61)</sup>  |
|   | • | Air services <sup>(3)</sup>                      | • | Health care services <sup>(33)</sup>                      | • | Relocatable home park <sup>(62)</sup><br>Renewable energy facility <sup>(63)</sup> |
|   | • | Animal husbandry <sup>(4)</sup>                  | • | High impact industry <sup>(34)</sup>                      | • | Residential care facility <sup>(65)</sup>  |
|   | • | Animal keeping <sup>(5)</sup>                    | • | Home based business <sup>(35)</sup>                       | • | Resort complex <sup>(66)</sup>   |
|   | • | Aquaculture <sup>(6)</sup><br>Bar <sup>(7)</sup> | • | Hospital <sup>(36)</sup><br>Hotel <sup>(37)</sup>         | • | Retirement facility <sup>(67)</sup>  |
|   | • | Brothel <sup>(8)</sup>                           |   | Intensive animal  | • | Roadside stall <sup>(68)</sup>   |
| • |   | Cemetery <sup>(12)</sup>                         |   | industry <sup>(39)</sup>                                  | • | Rural industry <sup>(70)</sup>   |
|   |   | Club <sup>(14)</sup>                             | • | Intensive horticulture <sup>(40)</sup>                    | • | Rural workers' accommodation <sup>(71)</sup>                                       |
|   |   | Community care centre <sup>(15)</sup>            | • | Landing <sup>(41)</sup>                                   | • | Sales office <sup>(72)</sup>   |
|   | • | Community residence <sup>(16)</sup>              | • | Major sport, recreation<br>and entertainment              | • | Shop <sup>(75)</sup>   |
|   | • | Community use <sup>(17)</sup>                    |   | facility <sup>(44)</sup>                                  | • | Shopping centre <sup>(76)</sup>  |
|   | • | Crematorium <sup>(18)</sup>                      | • | Marine industry <sup>(45)</sup><br>Market <sup>(46)</sup> | • | Short-term accommodation <sup>(77)</sup>   |
|   |   | Cropping <sup>(19)</sup>                         | • | Medium impact industry <sup>(47)</sup>                    | • | Special industry <sup>(79)</sup>   |
|   | • | Detention facility <sup>(20)</sup>               | • | Multiple dwelling <sup>(49)</sup>                         | • | Theatre <sup>(82)</sup>  |
|   | • | Dual occupancy <sup>(21)</sup>                   | • | Nature-based tourism <sup>(50)</sup>                      | • | Tourist park <sup>(84)</sup>   |
|   | • | Dwelling house <sup>(22)</sup>                   |   |   | • | Veterinary services <sup>(87)</sup>  |
|   |   |  | • | Nightclub entertainment<br>facility <sup>(51)</sup>       |   |  |
|   |   |  |   |   |   |  |

| • | Dwelling unit <sup>(23)</sup>   | • | Non-resident workforce accommodation <sup>(52)</sup> | Wholesale nursery <sup>(89)</sup>         |
|---|---|---|--|---|
| • | Educational<br>establishment <sup>(24)</sup>  | • | Outdoor sales <sup>(54)</sup>                        | <ul> <li>Winery<sup>(90)</sup></li> </ul> |
| • | Environment facility <sup>(26)</sup>  | • | Outdoor sport and recreation <sup>(55)</sup>         |   |
| • | Extractive industry <sup>(27)</sup>   |   |  |   |
| • | Food and drink outlet <sup>(28)</sup><br>(where exceeding 100m <sup>2</sup><br>GFA) | • | Parking station <sup>(58)</sup>                      |   |
| • | Function facility <sup>(29)</sup>   |   |  |   |
| • | Funeral parlour <sup>(30)</sup>   |   | SC.  |   |

v. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

## 7.2.3.1.3.2 Criteria for assessment

## Part C - Criteria for assessable development - Light industry sub-precinct

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part C, Table 7.2.3.1.3.1.

Where development is impact assessable, the assessment criteria become the whole of the planning scheme.

### Table 7.2.3.1.3.1 Assessable development - Light industry sub-precinct

| Performance outcome   | Acceptable outcome              |
|---|---------------------------------|
| General   | criteria                        |
| Light industry location   |                                 |
| P01<br>The Light industry sub-precinct is located in accordance<br>with a Neighbourhood development plan that reflects the<br>urban structure concept shown indicatively on Figure<br>7.2.3.1 - Caboolture West structure plan. | No acceptable outcome provided. |
| Site cover  |                                 |
| P02   | No acceptable outcome provided. |
| Building site cover allows for adequate on-site provision of:   |                                 |
| a. car parking;   |                                 |
| b. vehicle access and manoeuvring;  |                                 |
| c. setbacks to boundaries;  |                                 |
| d. landscaped areas.  |                                 |

| Performance outcome   | Acceptable outcome   |  |  |
|---|--|--|--|
| Building height   |  |  |  |
| PO3   | A03  |  |  |
| The height of buildings reflect the individual character of the sub-precinct.   | Building height do not to exceed that mapped on Neighbourhood development plan.  |  |  |
| Setbacks  |  |  |  |
| PO4   | A04  |  |  |
| Street boundary setbacks:   | Buildings maintain a minimum setback of :  |  |  |
| a. minimise building bulk and visual dominance from the street;   | a. 6m to the street frontage;  |  |  |
| b. provide areas for landscaping at the front of the site;  | <ul><li>b. 3m to the secondary street frontage;</li><li>c. 5m to land not included Light industry precinct.</li></ul>  |  |  |
| c. allow for customer parking to be located at the front of the building.   |  |  |  |
| Note - The following diagram illustrates an acceptable design response to this outcome.   | Scheme   |  |  |
| PO5   | AO5  |  |  |
| Side and rear boundary setbacks maintain views, privacy, access to natural light and the visual amenity of adjoining sensitive land uses. | Where a development adjoins the Urban living precinct,<br>the building is setback a minimum of 3m from the property<br>boundary and includes landscaping along the boundary<br>appropriate for screening with a mature height of at least<br>3m. |  |  |
|   | Note - Refer to Planning scheme policy - Integrated design for<br>determining acceptable levels of landscaping for screening purposes.   |  |  |

| Performance outcome  | Acceptable outcome  |
|--|---|
| Building appearance and design   |   |
| P06  | AO6   |
| <text><text><image/><section-header><section-header></section-header></section-header></text></text> | Where fronting a main street, or visible from a Park <sup>(57)</sup><br>or Neighbourhood hub lot, buildings provide a high level<br>of architectural design, by incorporating:<br>a. a range of building materials, colours and features;<br>b. facade articulation along street frontages;<br>c. design features to promote customer entry points;<br>d. materials that are not highly reflective. |

| Performance outcome   | Acceptable outcome  |
|---|---|
|   |   |
| Staff recreation area   |   |
| PO8   | No acceptable outcome provided.   |
| Development provides an on-site recreation area for staff that:   |   |
| a. includes seating, tables and rubbish bins;   |   |
| b. is adequately protected from the weather;  | C C I   |
| c. is safely accessible to all staff;   | 5   |
| d. is separate and private from public areas;   |   |
| e. is located away from a noisy or odorous activity.  |   |
| Landscaping   |   |
| PO9   | A09   |
| Landscaping is provided on the site to:   | Landscaping is provided and maintained in accordance                                    |
| a. visually soften the built form, areas of hardstand, storage areas and mechanical plant associated with the on-site activities; | with Planning scheme policy - Integrated design.  |
| b. complement the existing or desired streetscape;  |   |
| c. minimise the impact of industrial development on adjoining lots not zoned for industrial purposes.                             |   |
| Fencing   |   |
| PO10  | AO10  |
| The provision of fencing on street frontages does not dominate the streetscape or create safety issues.                           | Where fencing is provided on the street frontage, it has a minimum transparency of 70%. |

| Performance outcome   | Acceptable outcome   |
|---|--|
| Performance outcome         Note - The following example illustrates an acceptable design response to this outcome.         Image: State of the | Acceptable outcome Acceptable Acceptab |
| Note - The following diagram illustrates an acceptable design response to this outcome.   | AO11.2<br>The public access is separated from industrial service areas.  |
| Car parking   | ·  |
| PO12  | A012   |
| Car parking is provided on-site to meet the anticipated demand of employees and visitors and avoid adverse impacts on the external road network.  | Car parking is provided in accordance with the table below:  |

| Performance outcome   | Acceptable outcome   |   |  |  |
|---|--|---|--|--|
| Note - Refer to Planning scheme policy - Int<br>assessment for guidance on how to achieve<br>outcome.   |  | Location  | Maximum number<br>of car spaces to be<br>provided  | Minimum number<br>of car spaces to be<br>provided  |
|   |  | Where within 400m of<br>a Local centre<br>sub-precinct or<br>Neighbourhood hub  | 1 per 30m <sup>2</sup> of GFA  | 1 per 50m <sup>2</sup> of GFA  |
|   |  | All other areas   | Refer to Schedule 7 -  | Car parking.   |
| PO13  |  | A013  |  |  |
| <ul> <li>The design of car parking areas:</li> <li>a. does not impact on the safety of network;</li> <li>b. ensures the safety of pedestria</li> <li>c. ensures the safe movement of site.</li> </ul>   | of the external road   | All car parking area<br>accordance with Au  |  |  |
| Bicycle parking and end of trip factors<br>Note - Building work to which this code apple<br>facilities prescribed in the Queensland Dever   | ies constitutes Major Develo   | opment for purposes of  | development requirem   | ents for end of trip   |
| Note - Building work to which this code appl<br>facilities prescribed in the Queensland Deve<br>PO14  | ies constitutes Major Develo<br>elopment Code MP 4.1.  | A014.1  |  |  |
|   | ed for employees or<br>n-site within a   | 301   | arking facilities are<br>space for every 3   | provided at a rat<br>vehicles parking  |
| Note - Building work to which this code appl<br>facilities prescribed in the Queensland Deve<br>PO14<br>a. End of trip facilities are provide<br>occupants, in the building or or   | elopment Code MP 4.1.  | A014.1<br>Minimum bicycle pa<br>of 1 bicycle parking  | arking facilities are<br>space for every 3<br>Schedule 7 – Car<br>eptable solutions for er<br>ueensland Developmen<br>prescribe facility levels h<br>e acceptable solutions<br>ion of the default levels<br>land Development Coc | provided at a rat<br>vehicles parking<br>parking.<br>nd of trip facilities<br>nt Code permit a loca<br>nigher than the defaul<br>. This acceptable<br>s set for end of trip                          |
| Note - Building work to which this code appl<br>facilities prescribed in the Queensland Deve<br>PO14<br>a. End of trip facilities are provide<br>occupants, in the building or or<br>reasonable walking distance, a<br>i. adequate bicycle parking<br>facilities; and<br>ii. adequate provision for se<br>and<br>iii. change rooms that include<br>sanitary compartments, w<br>mirrors.   | ed for employees or<br>n-site within a<br>and storage<br>ecuring belongings;<br>e adequate showers,<br>vash basins and | AO14.1<br>Minimum bicycle par<br>of 1 bicycle parking<br>spaces required by<br>Editor's note - The acc<br>prescribed under the Q<br>planning instrument to p<br>levels identified in thos<br>outcome is a combinat<br>facilities in the Queens  | arking facilities are<br>space for every 3<br>Schedule 7 – Car<br>eptable solutions for er<br>ueensland Developmen<br>prescribe facility levels h<br>e acceptable solutions<br>ion of the default levels<br>land Development Coc | provided at a rat<br>vehicles parking<br>parking.<br>nd of trip facilities<br>nt Code permit a loca<br>nigher than the default<br>. This acceptable<br>s set for end of trip                         |
| <ul> <li>Note - Building work to which this code appl<br/>facilities prescribed in the Queensland Development<br/>PO14</li> <li>a. End of trip facilities are provide<br/>occupants, in the building or or<br/>reasonable walking distance, a</li> <li>i. adequate bicycle parking<br/>facilities; and</li> <li>ii. adequate provision for se<br/>and</li> <li>iii. change rooms that include<br/>sanitary compartments, w</li> </ul> | ies constitutes Major Development Code MP 4.1.   | AO14.1<br>Minimum bicycle par<br>of 1 bicycle parking<br>spaces required by<br>Editor's note - The acc<br>prescribed under the Q<br>planning instrument to p<br>levels identified in thos<br>outcome is a combinat<br>facilities in the Queens<br>facilities required by Co<br>AO14.2<br>Bicycle parking is:<br>a. provided in ac | arking facilities are<br>space for every 3<br>Schedule 7 – Car<br>eptable solutions for er<br>ueensland Developmen<br>prescribe facility levels h<br>e acceptable solutions<br>ion of the default levels<br>land Development Coc | provided at a rai<br>vehicles parking<br>parking.<br>nd of trip facilities<br>nt Code permit a loca<br>nigher than the defaul<br>. This acceptable<br>s set for end of trip<br>le and the additional |

| Performance outcome   | Acceptable outcome   |
|---|--|
| ii. whether it would be practical to commute to<br>and from the building on a bicycle, having<br>regard to the likely commute distances and<br>nature of the terrain; or  | <ul> <li>c. located within the building or in a dedicated, secure structure for residents and staff;</li> <li>d. adjacent to building entrances or in public areas for customers and visitors.</li> </ul>  |
| <li>iii. the condition of the road and the nature and<br/>amount of traffic potentially affecting the safety<br/>of commuters.</li>   | Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.   |
| Editor's note - The intent of b above is to ensure the requirements<br>for bicycle parking and end of trip facilities are not applied in<br>unreasonable circumstances. For example these requirements<br>should not, and do not apply in the Rural zone or the Rural residential<br>zone etc.<br>Editor's note - This performance outcome is the same as the   | <ul> <li>Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.</li> <li>Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable</li> </ul> |
| Performance Requirement prescribed for end of trip facilities under<br>the Queensland Development Code. For development incorporating<br>building work, that Queensland Development Code performance<br>requirement cannot be altered by a local planning instrument and<br>has been reproduced here solely for information purposes. Council's<br>assessment in its building work concurrence agency role for end of<br>trip facilities will be against the performance requirement in the<br>Queensland Development Code. As it is subject to change at any | outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council.  |
| time, applicants for development code. As it is subject to change at any<br>ensure that proposals that do not comply with the acceptable<br>outcomes under this heading meet the current performance<br>requirement prescribed in the Queensland Development Code.  | <ul> <li>For non-residential uses, storage lockers:</li> <li>a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number)</li> <li>b. have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).</li> </ul>  |
| is anim   | Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.   |
| RCPION  | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council.                                    |
|   | A014.4   |
|   | For non-residential uses, changing rooms:  |
|   | <ul> <li>a. are provided at a rate of 1 per 10 bicycle parking spaces;</li> <li>b. are fitted with a lockable door or otherwise screened from public view;</li> <li>c. are provided with shower(s), sanitary</li> </ul>  |
|   | compartment(s) and wash basin(s) in accordance with the table below:   |

| Performance outcome   | Accepta  | able ou   | itcome   |  |   |   |
|---|--|---|--|--|---|---|
|   | Bicycle<br>spaces<br>provided                                | Male/<br>Female   | Change<br>rooms<br>required                        | Showers required   | Sanitary<br>compartments<br>required  | Washbasins<br>required  |
|   | 1-5  | Male<br>and<br>female   | 1 unisex<br>change<br>room                         | 1  | 1 closet pan  | 1   |
|   | 6-19   | Female  | 1  | 1  | 1 closet pan  | 1   |
|   | 20 or  | Male  | 1  | 1  | 1 closet pan  | 1   |
|   | more   | Female  | 1  | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 2 closet pans,<br>plus 1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided<br>thereafter  | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|   | C  | Male  |  | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 1 urinal and 1<br>closet pans, plus<br>1 sanitary<br>compartment at<br>the rate of 1<br>closet pan or 1<br>urinal for every 60<br>bicycle space<br>provided<br>thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|   |  |   | 0  |  |   |   |
|   |  |   |  | inimum 3-s<br>ng shower  | tar Water Efficien<br>head.   | cy Labelling  |
|   | Note - Al  | sanitary  | compartm   | -  | onstructed in com   | pliance with  |
|   |  |   | ,  |  |   |   |
|   | d. are   | e provic  | led with   | :  |   |   |
|   | i.<br>ii.<br>iii.  | a ho<br>com   | ok and b<br>partmer<br>cket-out                    | pench sea<br>ht;   | ve each wash<br>ating within ea<br>d adjacent to  | ach showe   |
|   | and non-   | residenti   | al activities                                      | s when with  | ross multiple site:<br>in 100 metres of t<br>bicycle parking  | he entrance   |
| BF  | prescribe<br>planning<br>levels ide<br>outcome<br>facilities | ed under<br>instrume<br>entified ir<br>is an arr<br>in the Qu | the Queer<br>nt to preso<br>those ac<br>nalgamatic | nsland Deve<br>cribe facility<br>ceptable so<br>on of the de<br>Developm | is for end of trip f<br>elopment Code p<br>levels higher tha<br>olutions. This acc<br>fault levels set fo<br>ent Code and the   | ermit a local<br>n the default<br>eptable<br>or end of trip                         |
| ng and servicing  |  |   |  |  |   |   |
|   | No acce  | ptable  | outcome  | e provide  | d.  |   |
| s including loading/unloading facilities, plant<br>tdoor storage areas are screened from the<br>om public areas and non-Light industry<br>land. |  |   |  |  |   |   |

| Performance outcome  | Acceptable outcome  |
|--|---|
| Note - If landscaping is proposed for screening purposes, refer to<br>Planning scheme policy - Integrated design for determining<br>acceptable levels.   |   |
| Waste  |   |
| PO16   | AO16  |
| Bins and bins storage areas are provided, designed and managed to prevent amenity impacts on the locality.   | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  |
| Environmental impacts  | .0,   |
| P017   | A017  |
| Where a use is not an environmentally relevant activity<br>under the Environmental Protection Act, the release of<br>any containment that may cause environmental harm is<br>mitigated to an acceptable level.   | Development achieves the standard listed in Schedule<br>1 Air Quality Objectives, Environmental Protection (Air)<br>Policy 2008.  |
|  |   |
| Lighting   |   |
| PO18<br>Lighting is directed and shielded to not cause<br>unreasonable disturbance to any person on adjoining<br>land.   | AO18<br>Artificial lighting on-site is directed and shielded in such<br>a manner as not to exceed the recommended maximum<br>values of light technical parameters for the control of<br>obtrusive light given in Table 2.1 of Australian Standard<br>AS 4282 (1997) Control of Obtrusive Effects of Outdoor<br>Lighting.<br>Note - 'Curfewed hours' are taken to be those hours between 10pm<br>and 7am on the following day. |
| Hazardous Chemicals  |   |
| Note - To assist in demonstrating compliance with the following perform<br>be prepared and submitted by a suitably qualified person in accordance<br>involving hazardous chemicals'.<br>Terms used in this section are defined in 'State Planning Policy Guide | ce with 'State Planning Policy Guideline - Guidance on development  |
| PO19   | AO19.1  |
| Off sites risks from foreseeable hazard scenarios<br>involving hazardous chemicals are commensurate with<br>the sensitivity of the surrounding land use zones.   | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land uses as described below:   |
|  | Dangerous Dose  |
|  | a. For any hazard scenario involving the release of   |

gases or vapours:

| Performance outcome | Acceptable outcome  |
|---------------------|---|
|                     | i. AEGL2 (60minutes) or if not available ERPG2;   |
|                     | ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.   |
|                     | b. For any hazard scenario involving fire or explosion:   |
|                     | i. 7kPa overpressure;   |
|                     | ii. 4.7kW/m2 heat radiation.  |
|                     | If criteria AO20.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of $0.5 \times 10^{-6}$ /year.      |
|                     | A019.2  |
|                     | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below: |
| * ( )               | Dangerous Dose  |
|                     | a. For any hazard scenario involving the release of gases or vapours:   |
|                     | i. AEGL2 (60minutes) or if not available ERPG2;   |
|                     | ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.   |
|                     | b. For any hazard scenario involving fire or explosion:   |
|                     | i. 7kPa overpressure;   |
|                     | ii. 4.7kW/m2 heat radiation.  |
| NBR                 | If criteria AO20.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.                   |
|                     | AO19.3  |
|                     | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below:                      |
|                     | Dangerous Dose  |
|                     | <ul> <li>For any hazard scenario involving the release of<br/>gases or vapours:</li> </ul>  |

| Performance outcome   | Acceptable outcome   |
|---|--|
|   | <ul> <li>i. AEGL2 (60minutes) or if not available ERPG2;</li> <li>ii. An oxygen content in air &lt;19.5% or &gt;23.5% at normal atmospheric pressure.</li> <li>b. For any hazard scenario involving fire or explosion: <ol> <li>i. 14kPa overpressure;</li> <li>ii. 12.6kW/m2 heat radiation.</li> </ol> </li> </ul>   |
|   | If criteria AO20.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.   |
| <b>PO20</b><br>Buildings and package stores containing fire-risk<br>hazardous chemicals are designed to detect the early<br>stages of a fire situation and notify a designated person.  | AO20<br>Buildings and package stores containing fire-risk<br>hazardous chemicals are provided with 24 hour monitored<br>fire detection system for early detection of a fire event.   |
| PO21<br>Common storage areas containing packages of<br>flammable and toxic hazardous chemicals are designed<br>with spill containment system(s) that are adequate to<br>contain releases, including fire fighting media.  | AO21<br>Storage areas containing packages of flammable and<br>toxic hazardous chemicals are designed with spill<br>containment system(s) capable of containing a minimum<br>of the total aggregate capacity of all packages plus the<br>maximum operating capacity of any fire protection system<br>for the storage area(s) over a minimum of 60 minutes.  |
| PO22<br>Storage and handling areas, including manufacturing<br>areas, containing hazardous chemicals in quantities<br>greater than 2,500L or kg within a Local Government<br>"flood hazard area" are located and designed in a manner<br>to minimise the likelihood of inundation of flood waters<br>from creeks, rivers, lakes or estuaries. | <ul> <li>AO22.1</li> <li>The base of any tank with a WC &gt;2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively:</li> <li>a. bulk tanks are anchored so they cannot float if submerged or inundated by water; and</li> <li>b. tank openings not provided with a liquid tight seal, i.e. an atmospheric vent, are extended above the relevant flood height level.</li> </ul> |
|   | AO22.2<br>The lowest point of any storage area for packages<br>>2,500L or kg is higher than any relevant flood height<br>level identified in an area's flood hazard area.<br>Alternatively, package stores are provided with<br>impervious bund walls or racking systems higher than<br>the relevant flood height level.   |
| Noise   |  |

| Acceptable outcome   |
|--|
| No acceptable outcome provided.  |
|  |
|  |
|  |
| A024.1   |
| Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.   |
| <ul> <li>AO24.2</li> <li>Noise attenuation structures (e.g. walls, barriers or fences): <ul> <li>a. are not visible from an adjoining road or public area unless:</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> </ul> </li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul> |
| criteria   |
|  |
| AO25   |
| The development is connected to underground electricity.   |
|  |

| Performance outcome  | Acceptable outcome  |
|--|---|
| PO26   | No acceptable outcome provided.   |
| The development has access to telecommunications and broadband services in accordance with current standards.  |   |
| PO27   | No acceptable outcome provided.   |
| Where available the development is to safely connect to reticulated gas.   |   |
| PO28   | A028.1  |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health. | Where in a sewered area, the development is connected to a reticulated sewerage system.   |
|  | AO28.2<br>Where not in a sewered area, the development is<br>serviced by an appropriate on-site sewerage facility.  |
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.   |
| PO29   | AO29.1  |
| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.                  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards. |
|  | AO29.2  |
| NBRC   | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development.  |
| PO30   | No acceptable outcome provided.   |
| The development is provided with dedicated and constructed road access.  |   |
| Access   |   |
| PO31   | No acceptable outcome provided.   |
|  |   |

| Performance outcome   | Acceptable outcome  |
|---|---|
| <ul> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> </ul> Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples. |   |
| <ul> <li>PO32</li> <li>Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.</li> <li>PO33</li> <li>The layout of the development does not compromise: <ul> <li>a. the development of the road network in the area;</li> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> </ul> </li> <li>Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).</li> </ul>  | No acceptable outcome provided.<br>A033.1<br>Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a<br>motorway.<br>Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.<br>Note - The road hierarchy is in accordance with a Neighbourhood<br>douglament plan (conservatively obsure on Sinue 7.2.2.2) |
| MBRO  | development plan (conceptually shown on Figure 7.2.3.2 -         Movement, Major streets).         AO33.2         The development provides for the extension of the road network in the area in accordance with Council's road network planning.         AO33.3         The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.         AO33.4         |

| Performance outcome  | Acceptable outcome  |
|--|---|
|  | The lot layout allows forward access to and from the site.  |
| PO34   | AO34.1  |
| Safe access facilities are provided for all vehicles required to access the site.  | <ul> <li>Site access and driveways are designed and located in accordance with:</li> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul>   |
|  | <ul> <li>AO34.2</li> <li>Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.</li> <li>Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.</li> <li>AO34.3</li> <li>Access driveways, manoeuvring areas and loading facilities provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements.</li> </ul> |
| PO35   | AO35  |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:  | No acceptable outcome provided.   |
| <ul> <li>a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;</li> <li>b. ensure the orderly and efficient continuation of the active transport network;</li> <li>c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.</li> <li>Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.</li> <li>Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).</li> </ul> |   |

| Performance outcome  | Acceptable outcome              |
|--|---------------------------------|
| Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:  |                                 |
| <ul> <li>Where the street is partially established to an urban standard,<br/>match the alignment of existing kerb and channel and provide<br/>carriageway widening and underground drainage where<br/>required; or</li> <li>Where the street is not established to an urban standard,<br/>prepare a design that demonstrates how the relevant features<br/>of the particular road as shown in the Planning scheme policy<br/>- Integrated Design can be achieved in the existing reserve.</li> </ul>   |                                 |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.   | Sion '                          |
| Stormwater   | 0                               |
| PO36   | No acceptable outcome provided. |
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.<br>Note - Refer to Planning scheme policy - Integrated design for details<br>and examples.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate achievement of this performance outcome.<br>Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No | scheme                          |
| worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.  |                                 |
| D027   | No accontable outcome provided  |
| PO37<br>Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.   | No acceptable outcome provided. |
| PO38   | No acceptable outcome provided. |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.  |                                 |

| Performance outcome  | Acceptable outcome  |
|--|---|
| Note - A site-based stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.   |   |
| <ul> <li>PO39</li> <li>Easements for drainage purposes are provided over:</li> <li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li> <li>b. overland flow paths where they cross more than one property boundary.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul>  | No acceptable outcome provided.   |
| Site works and construction management   |   |
| <ul> <li>PO40</li> <li>The site and any existing structures are maintained in a tidy and safe condition.</li> <li>PO41</li> <li>All works on-site are managed to: <ul> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> </li> </ul> | <ul> <li>No acceptable outcome provided.</li> <li>AO41.1</li> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following: <ul> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharge to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins.</li> </ul> </li> <li>AO41.2</li> <li>Stormwater run-off, erosion and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.</li> </ul> |

| Performance outcome   | Acceptable outcome   |
|---|--|
|   | Note - The measures are adjusted on-site to maximise their effectiveness.  |
|   | AO41.3   |
|   | The completed earthworks (fill or excavation) area is<br>stabilised using turf, established grass seeding, mulch<br>or sprayed stabilisation techniques to control erosion and<br>sediment and dust from leaving the property.   |
|   | AO41.4   |
|   | Where works are proposed in proximity to an existing<br>street tree, an inspection and a root management plan<br>is undertaken by a qualified arborist which demonstrates<br>and ensures that no permanent damage is caused to the<br>tree.                                    |
| PO42  | AO42   |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.  | No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.  |
| PO43  | AO43.1   |
| All works on-site and the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape. | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic<br>movements to and from the site are safe. |
| a haulage route must be identified and approved by Council.   | AO43.2   |
|   | All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors' vehicles are generally not to be parked in existing roads.                                     |
| MB  | Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).  |
|   | AO43.3   |
|   | Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.   |
| PO44  | AO44   |

| Performance outcome  | Acceptable outcome  |
|--|---|
| <ul> <li>Performance outcome</li> <li>All disturbed areas are rehabilitated at the completion of construction.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>PO45</li> <li>The clearing of vegetation on-site: <ul> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> </ul> </li> <li>Note - No burning of cleared vegetation is permitted.</li> </ul> | Acceptable outcome         At completion of construction all disturbed areas of the site are to be:         a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;         b. grassed.         Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.         AO45.1         All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.         Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.         AO45.2         Disposal of materials is managed in one or more of the following ways:         a.       all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or         b.       all native vegetation with a diameter below 400mm is to be chipped and stored on-site. |
| PO46<br>Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.  | No acceptable outcome provided.   |
|  | 0.047.4   |
| <ul> <li>PO47</li> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to:</li> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>a. and the natural topographical features and the site;</li> </ul>   | AO47.1<br>All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains<br>as necessary.   |
| <ul><li>c. soft or compressible foundation soils;</li><li>d. reactive soils;</li><li>e. low density or potentially collapsing soils;</li></ul>   | AO47.2  |

| Performance outcome   | Acceptable outcome  |
|---|---|
| Performance outcome         f.       existing fills and soil contamination that may exist on-site;         g.       the stability and maintenance of steep rock slopes and batters;         h.       excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)         Note - Filling or excavation works are to be completed within six (6) months of the commencement date. | Acceptable outcome         Stabilisation measures are provided, as necessary, to         ensure long-term stability and low maintenance of steep         rock slopes and batters.         AO47.3         All filling or excavation is contained within the site.         AO47.4         All fill placed on-site is:         a.       limited to that required for the necessary approved use;         b.       clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).         AO47.5 |
|   | The site is prepared and the fill placed on-site in accordance with AS3798.<br>Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.<br>AO47.6<br>Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and   |
| P048  | experienced RPEQ.   |
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |
| NBR   | Figure - Embankment   |
| PO49  | AO49.1  |
| On-site earthworks are undertaken in a manner that:   | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.  |

| Performance outcome  | Acceptable outcome   |
|--|--|
| a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;   | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .   |
| <ul> <li>b. does not preclude reasonable access to a Council<br/>or public sector entity maintained infrastructure or<br/>any drainage feature on, or adjacent to the land for<br/>monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning</i><br/><i>Act 2009</i>.</li> </ul>   | <ul> <li>AO49.2</li> <li>Earthworks that would result in any of the following are not carried out on-site:</li> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009.</i></li> </ul> |
| PO50   | No acceptable outcome provided.  |
| Filling or excavation does not result in land instability.<br>Note - A slope stability report prepared by an RPEQ may be required.   | her.   |
|  | C)   |
| <ul> <li>PO51</li> <li>Filling or excavation does not result in <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> </li> <li>Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements</li> </ul> | No acceptable outcome provided.  |
| Retaining walls and structures   |  |
| <b>PO52</b><br>All earth retaining structures provide a positive interface<br>with the streetscape and minimise impacts on the amenity<br>of adjoining residents.  | <ul> <li>AO52</li> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> </ul>   |



| Performance outcome   | Acceptable outcome  |
|---|---|
|   | Figure - Fill   |
|   | Finished surface level 15m minimum 15m minimum 600mm<br>(typical) 15m minimum (typical) 15m minimum (typical) 15m minimum (typical) 15m maximum (typical) 15m |
| Fire Services   |   |
| Note - The provisions under this heading only apply if.   |   |
| a. the development is for, or incorporates:   |   |
| <ul> <li>reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or</li> <li>material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or</li> <li>material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or</li> <li>material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials.</li> </ul> |   |
| AND   |   |
| b. none of the following exceptions apply:  |   |

the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or

every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| P053   | AO53.1   |
|--|--|
| <ul><li>Development incorporates a fire fighting system that:</li><li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li></ul>  | External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.</i>   |
| <ul> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul> | <ul> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants</li> </ul> |

| <ul> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> <li>Mote - The Oueenstand Fire and Emergency Services is the entry corrently providing the fire fighting function for the urban areas of the Moreon Bay Region.</li> <li>e. In regard to the general Locational requirements for fire hydrants. Fart 3.2.2 (a), (b) (c) (d) (d) with the exception that:</li> <li>a. The outer state of the provide the state of the provided the preprint provided the provided the provided the provided the pr</li></ul> |
|--|
| <ul><li>ii. internal road names (where used);</li><li>iii. all communal facilities (where provided);</li></ul>   |

| Performance outcome   | Acceptable outcome  |
|---|---|
|   | iv. the reception area and on-site manager's office (where provided);   |
|   | v. external hydrants and hydrant booster points;  |
|   | vi. physical constraints within the internal<br>roadway system which would restrict access<br>by fire fighting appliances to external hydrants<br>and hydrant booster points.   |
|   | Note - The sign prescribed above, and the graphics used are to be:  |
|   | a. in a form;   |
|   | <ul><li>b. of a size;</li><li>c. illuminated to a level;</li></ul>  |
|   | which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.   |
|   |   |
| P055  | A055  |
| Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.   | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads.<br>Note - Technical note Fire hydrant indication system is available on<br>the website of the Queensland Department of Transport and Main |
|   | Roads.  |
| Use spec  | ific criteria   |
| Industrial land uses  |   |
| PO56  | AO56  |
| Ancillary Office <sup>(53)</sup> , administration functions, retail sales<br>and customer service components do not compromise<br>the primary use of the site for industrial purposes or<br>compromise the viability, role or function of the<br>Caboolture West's centres network. | The combined area of ancillary non-industrial activities, including but not limited to Offices <sup>(53)</sup> , administration functions, display and retail sale of commodities, articles or goods resulting from the industrial processes on-site, does not exceed 30% of the GFA or $500m^2$ , whichever is the lesser.   |
| PO57  | No acceptable outcome provided.   |
|   |   |

| Performance outcome   | Acceptable outcome              |
|---|---------------------------------|
| a. are compatible with the character of the adjoining area;   |                                 |
| b. minimise overlooking and overshadowing;  |                                 |
| c. maintain privacy;  |                                 |
| <ul> <li>do not cause significant loss of amenity to<br/>neighbouring residents by way of noise, vibration,<br/>odour, lighting, traffic generation and hours of<br/>operation.</li> </ul>  | 2                               |
| <b>PO58</b><br>Non-industrial components of buildings (including Offices <sup>(53)</sup> and retail areas) are designed as high quality architectural features and incorporate entry area elements such as forecourts, awnings and the architectural  | No acceptable outcome provided. |
| treatment of roof lines and fascias.  |                                 |
| Non-industrial land uses  |                                 |
| <b>PO59</b><br>With the exception of Caretaker's accommodation <sup>(10)</sup> , residential and other sensitive land uses do not establish within the sub-precinct.  | No acceptable outcome provided. |
| <ul> <li>PO60</li> <li>Non-industrial uses:</li> <li>a. are consolidated with existing non-industrial uses in the sub-precinct;</li> <li>b. do not compromise the viability, role or function of Caboolture West's centres network;</li> <li>c. are not subject to adverse amenity impacts or risk to health from industrial activities;</li> <li>d. do not constrain the function or viability of future industrial activities in Light industry sub-precinct.</li> <li>Note - The submission of a Economic Impact Report or Hazard and Nuisance Mitigation Plan may be required to justify compliance with this outcome.</li> </ul> | No acceptable outcome provided. |
| <b>PO61</b><br>Traffic generated by non-industrial uses does not<br>detrimentally impact the operation and functionality of<br>the external road network.   | No acceptable outcome provided. |

| Performance outcome   | Acceptable outcome   |
|---|--|
| PO62  | No acceptable outcome provided.  |
| Where located on a local street, non-industrial uses<br>provide only direct convenience retail or services to the<br>industrial workforce.  |  |
| PO63  | No acceptable outcome provided.  |
| The design of non-industrial buildings in the sub-precinct:   |  |
| a. adds visual interest to the streetscape (e.g. variation<br>in materials, patterns, textures and colours, a<br>consistent building line, blank walls that are visible<br>from public places are treated to not negatively<br>impact the surrounding amenity); | S don't  |
| <li>contributes to a safe environment (e.g. through the<br/>use of lighting and not resulting in concealed<br/>recesses or potential entrapment areas);</li>  | C Jers   |
| c. incorporates architectural features within the building facade at the street level to create human scale (e.g. awnings).   | ne   |
| P064  | AO64.1   |
| Building entrances:   | The main entrance to the building is clearly visible from<br>and addresses the primary street frontage.  |
| a. are readily identifiable from the road frontage;   | <u> </u>   |
| b. add visual interest to the streetscape;  | AO64.2   |
| <ul> <li>c. are designed to limit opportunities for concealment;</li> <li>d. are located and oriented to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites.</li> </ul>                  | Where the building does not adjoin the street frontage<br>a dedicated and sealed pedestrian footpath is provided<br>between the street frontage and the building entrance. |
| Note - The design provisions for footpaths outlined in Planning<br>scheme policy - Integrated design may assist in demonstrating<br>compliance with this outcome.   |  |
| PO65  | AO65   |
| Development of Caretaker's accommodation <sup>(10)</sup> :  | Caretaker's accommodation <sup>(10)</sup> :  |
| <ul> <li>does not compromise the productivity of the use<br/>occurring on-site and in the surrounding area;</li> </ul>  | a. has a maximum GFA is 80m <sup>2</sup> ;   |
| b. is domestic in scale;  | <li>b. does not gain access from a separate driveway t<br/>that of the industrial use;</li>  |

| Performance outcome  | Acceptable outcome   |
|--|--|
| c. provides adequate car parking provisions exclusive on the primary use of the site;  | c. provides a minimum 16m <sup>2</sup> of private open space directly accessible from a habitable room;  |
| d. is safe for the residents;  | <ul> <li>provides car parking in accordance with the car<br/>parking rates table.</li> </ul>   |
| e. has regard to the open space and recreation needs of the residents.   | parking rates table.   |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and  | Utility installation <sup>(86)</sup>   |
| <ul> <li>PO66</li> <li>The development does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | <ul> <li>AO66.1</li> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment: <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> </li> <li>AO66.2 <ul> <li>A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.</li> </ul> </li> </ul> |
| <ul> <li>PO67</li> <li>Infrastructure does not have an impact on pedestrian health and safety.</li> <li>PO68</li> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental</li> </ul>   | <ul> <li>AO67</li> <li>Access control arrangements: <ul> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul> </li> <li>AO68</li> <li>All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>                                    |
| Protection (Noise) Policy 2008. Telecommunications facility <sup>(81)</sup>  |  |
| Telecommunications facility  |  |

| Performance outcome  | Acceptable outcome  |
|--|---|
| Editor's note - In accordance with the Federal legislation Telecommur<br>that will not cause human exposure to electromagnetic radiation beyo<br>Radiation - Human Exposure) Standard 2003 and Radio Protection Sta<br>to 300Ghz.  | nications facilities <sup>(81)</sup> must be constructed and operated in a manner<br>ond the limits outlined in the Radiocommunications (Electromagnetic<br>andard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz                  |
| PO69   | AO69.1  |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | New telecommunication facilities <sup>(81)</sup> are co-located on<br>existing towers with new equipment shelter and<br>associated structures positioned adjacent to the existing<br>shelters and structures.                                   |
|  | AO69.2  |
|  | If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.  |
|  |   |
| P070   | A070  |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.   | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.   |
| P071   | A071  |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.   | The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval. |
| P072   | A072.1  |
| <ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>  | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |
| <ul><li>c. not visually dominant or intrusive;</li><li>d. located behind the main building line;</li></ul>   | A072.2  |
| <ul> <li>e. below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and<br/>structures;</li> </ul>  | In all other areas towers do not exceed 35m in height.  |
| f. camouflaged through the use of colours and  | A072.3  |
| <ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li><li>h. landscaped;</li></ul>   | Towers, equipment shelters and associated structures are of a design, colour and material to:   |
| i. otherwise consistent with the amenity and character of the zone and surrounding area.   | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>   |
|  |   |

| Performance outcome  | Acceptable outcome   |
|--|--|
|  | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m.  |
|  | Where there is no established building line the facility is located at the rear of the site.   |
|  | A072.5   |
|  | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |
|  | A072.6   |
|  | A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the<br>facility and street frontage and adjoining uses.  |
|  | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |
|  | Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design.   |
| P073   | A073   |
| Lawful access is maintained to the site at all times that<br>does not alter the amenity of the landscape or<br>surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |
| P074   | A074   |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.   | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |
| Values and constraints criteria  |  |
| Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme. |  |

Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

| Performance outcome   | Acceptable outcome   |
|---|--|
| Note - To demonstrate achievement of the performance outcome, an <i>A</i> is prepared by a qualified engineer. Guidance for the preparation an <i>A</i> Planning scheme policy - Acid sulfate soils.  |  |
| PO75  | A075   |
| <ul> <li>Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:</li> <li>a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;</li> <li>b. protects the environmental and ecological values and health of receiving waters;</li> <li>c. protects buildings and infrastructure from the effects of acid sulfate soils.</li> </ul>   | <ul> <li>Development does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.</li> </ul>        |
| Note - To assist in demonstrating achievement of heritage performance<br>by a suitably qualified person verifying the proposed development is in<br>Note - To assist in demonstrating achievement of this performance ou<br>accordance with Planning scheme policy – Heritage and landscape ch<br>adopted in accordance with AS 4970-2009 Protection of trees on development<br>Note - Places, including sites, objects and buildings having local cultur<br>landscape character and listed in Schedule 1 of Planning scheme pol<br>heritage significance at a State level and being entered in the Queens<br>scheme policy - Heritage and landscape character. | n accordance with The Australia ICOMOS Burra Charter.<br>tcome, a Tree assessment report is prepared by a qualified arborist in<br>haracter. The Tree assessment report will also detail the measures<br>elopment sites.<br>ral heritage significance, are identified on Overlay map - Heritage and<br>icy - Heritage and landscape character. Places also having cultural |
|   |  |
| P076  | A076   |
| Development will:<br>a. not diminish or cause irreversible damage to the<br>cultural heritage values present on the site, and<br>associated with a heritage site, object or building;   | Development is for the preservation, maintenance, repa<br>and restoration of a site, object or building of cultural<br>heritage value.<br>Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object   |
| <li>b. protect the fabric and setting of the heritage site,</li>  | or building of cultural heritage value is prepared in accordance with  |

- materials and finishes;
  e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;
- f. retain public access where this is currently provided.

| P077   | No acceptable outcome provided. |
|--|---------------------------------|
| Demolition and removal is only considered where: |                                 |

| Performance outcome   | Acceptable outcome  |
|---|---|
| <ul> <li>a. a report prepared by a suitably qualified<br/>conservation architect or conservation engineer<br/>demonstrates that the building is structurally<br/>unsound and is not reasonably capable of economic<br/>repair; or</li> <li>b. demolition is confined to the removal of<br/>outbuildings, extensions and alterations that are<br/>not part of the original structure; or</li> <li>c. limited demolition is performed in the course of<br/>repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic<br/>event which substantially destroys the building or<br/>object.</li> </ul> |   |
| P078  | No acceptable outcome provided.   |
| Where development is occurring on land adjoining a site<br>of cultural heritage value, the development is to be<br>sympathetic to and consistent with the cultural heritage<br>values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view.  | C Jers.   |
| Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment criteria apply)  |   |
| P079  | A079  |
| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> </ul>   | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer.                |
| PO80  | AO80  |
| <ul> <li>Development within a bulk water supply infrastructure buffer is located, designed and constructed to:</li> <li>a. protect the integrity of the bulk water supply infrastructure;</li> <li>b. Maintains adequate access for any required maintenance or upgrading work to the bulk water supply infrastructure.</li> </ul>  | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a bulk<br>water supply infrastructure buffer.             |
| PO81  | AO81  |
| Development is located and designed to maintain required access to Bulk water supply infrastructure.  | <ul><li>Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):</li><li>a. buildings or structures;</li><li>b. gates and fences;</li></ul> |

| Performance outcome   | Acceptable outcome  |
|---|---|
|   | <ul><li>c. storage of equipment or materials;</li><li>d. landscaping or earthworks or stormwater or other infrastructure.</li></ul> |
|   | path to determine if the following assessment criteria  |
| apply)  |   |
| Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council. | with defined flood event (DFE) within the inundation area can be  |
| PO82  | No acceptable outcome provided.   |
| Development:  |   |
|   |   |
| <ul><li>a. minimises the risk to persons from overland flow;</li><li>b. does not increase the potential for damage from</li></ul>         |   |
| overland flow either on the premises or other premises, public land, watercourses, roads or   |   |
| infrastructure.   |   |
| P083  | A083  |
| Development:  | No acceptable outcome provided.   |
| a. maintains the conveyance of overland flow  |   |
| predominantly unimpeded through the premises for<br>any event up to and including the 1% AEP for the                                      |   |
| fully developed upstream catchment;   | S   |
| <ul> <li>b. does not concentrate, intensify or divert overland<br/>flow onto an upstream, downstream or surrounding</li> </ul>            |   |
| property.   |   |
| Note - A report from a suitably qualified Registered Professional   |   |
| Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on        |   |
| an upstream, downstream or surrounding premises.  |   |
| Note - Reporting to be prepared in accordance with Planning scheme  |   |
| policy – Flood hazard, Coastal hazard and Overland flow.  |   |
| P084  | No acceptable outcome provided.   |
| Development does not:   |   |
| a. directly, indirectly or cumulatively cause any   |   |
| increase in overland flow velocity or level;  |   |
| b. increase the potential for flood damage from<br>overland flow either on the premises or other  |   |
| premises, public lands, watercourses, roads or infrastructure.  |   |
|   |   |
| Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may             |   |
| increase scouring.  |   |
| P085  | AO85  |
|   |   |

| Performance outcome   | Acceptable outcome   |
|---|--|
| Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.  | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994<br>and the relevant building assessment provisions under the Building<br>Act 1975 for requirements related to the manufacture and storage<br>of hazardous substances. |
| PO86  | A086   |
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.  | Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.   |
| P087  | A087.1   |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for a<br>fully developed upstream catchment and are able to be<br>easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.  | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>AO87.2<br>Development ensures that inter-allotment drainage  |
| policy – Flood hazard, Coastal hazard and Overland flow   | infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment.   |
| P088  | No acceptable outcome provided.  |
| <ul> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul> |  |

| Performance outcome   | Acceptable outcome   |
|---|--|
| PO89  | A089   |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design. |
| a. public benefit and enjoyment is maximised;   |  |
| b. impacts on the asset life and integrity of park structures is minimised;   |  |
| c. maintenance and replacement costs are minimised.   |  |
|   |  |
|   |  |
|   |  |
|   |  |
|   |  |
|   | 5  |
|   |  |
|   |  |
|   |  |
|   |  |
|   |  |
| NBRORINI  |  |

#### 7.2.3.2 Town centre precinct

#### 7.2.3.2.1 Purpose - Town centre precinct

- 1. The Town centre precinct is centrally located within the Caboolture West local plan area.
- 2. The purpose of this precinct is to concentrate the highest order and greatest mix of specialised retail, commercial, civic and cultural activities, education, health and other community uses<sup>(17)</sup>, and the highest residential densities in a compact, highly accessible location with a high quality pedestrian oriented public realm.
- 3. The precinct is located on a grid of main streets and major streets with the two highest order parallel main streets on ridgelines; being a western main street (which directly connects the retail core to a high density residential area through the civic centre) and an eastern main street (which provides a direct link between a bulky goods retail area, a mixed use area and a service industry<sup>(73)</sup> area) and two significant transit stops forming part of the public transport system. The highest order main streets, the two transit stops and the secondary major streets running perpendicular to the highest order main streets tie the precinct together and are key structural elements of the Town centre. The two transit stops, one central to the southern part of the precinct and one central to the northern part, provide two focal-points one business and one residential along a central public transport spine providing two-way public transport access into and out of the centre.
- 4. The precinct is bordered by multi functional green space, consisting of linear parks, open space and the Green network precinct. This green space forms an edge to the precinct that differentiates the town centre from adjoining precincts and acts as a buffer to different land uses.
- 5. Development within the Town centre precinct has multiple clusters of compatible land uses arranged to form sub-precincts which perform complementary roles within the centre. They are designed to work as an integrated whole offering in one place, a diverse range of facilities and services required by the residential and business communities of the local plan area.
- 6. The Town centre precinct comprises the following sub-precincts as identified on the Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.2.1 Urban design framework. Each sub-precinct has a different primary function/desired place outcome and focus as described below:
  - a. Centre core sub-precinct is the primary location of the highest order and broadest range of specialised retail and business activities in the local plan area and these are located centrally to the centre's main street boulevard (western main street), adjoining the Civic space sub-precinct and incorporating the southern transit stop. Retail activities are to be located on the ground floor and lower levels of multi storey buildings, mixed with office and residential uses above to promote activity, enable casual surveillance and economic exchange. The distribution of retail activities at different scales is vital, with key retail uses forming 'anchor stores', strategically located to facilitate pedestrian flow paths and movement economies to support smaller tenancies and speciality shops located in between 'anchor stores'.
  - b. Mixed business sub-precinct is the primary location for mixed use buildings accommodating small scale specialised commercial and convenience retail services as ground level with residential uses above and a mix of uses arranged to form a continuous active street frontage along the main street. The sub-precinct runs generally in a north-south direction along main street boulevard (eastern main street), adjacent to the Light industry sub-precinct to the east forming a mixed business and light industry spine.
  - c. Teaching and learning sub-precinct is the primary location of secondary and tertiary educational activities. This sub-precinct is located on the fringe of the Town centre core, with high levels of access to the major street network, the Centre core, the Civic space and through the Open space to surrounding residential areas. Educational activities may co-locate with other complementary, supporting uses and facilities to promote a compact, knowledge-based environment. The development within the sub-precinct is intended to provide active frontages to the major streets rather than a traditional campus style development and to maximise the use of surrounding open space to provide for any required sport and recreation functions.
  - d. Residential north sub-precinct is the primary location of high density residential activities that will achieve a minimum site density of 60 dwellings per ha, supporting the retail and commercial activities within the town centre precinct. Central to this sub-precinct is a transit stop near the intersection of main street (west) and a major east-west street which provides a focal point for the movement system and non-residential

uses in the sub-precinct. Small scale convenience and speciality retail and commercial uses in mixed use developments may be located within this sub-precinct at street level with active frontages to the main street which connects this sub-precinct to the Civic sub-precinct and the Town centre core;

- e. Residential south sub-precinct is the primary location of medium high density residential activities that will achieve a site density between 30 to 60 dwellings per hectare, supporting the activities with in the Town centre. The sub-precinct may be supported by a corner store that is centrally located within the sub-precinct to cater only for the convenience needs of the neighbourhood.
- f. Open space sub-precinct is the primary location for for green space and outdoor recreational activities. This sub-precinct is a mix of individual green spaces including; signature tree lined streets and boulevards, landscaped areas with visual impact, recreation facilities, pathways and statement pieces; and ecologically significant areas remaining in their natural state.
- g. Civic sub-precinct is the primary location for civic, government, cultural and entertainment activities.
- h. Light industry sub-precinct is the the primary location of low impact<sup>(42)</sup> and service industry<sup>(73)</sup> activities that are compatible with and complementary to adjacent uses in the town centre. The operation and viability of industrial activities in this area is to be protected from the intrusion of incompatible uses, with the exception of caretaker's accommodation<sup>(10)</sup>.
- i. Specialised centre sub-precinct This sub-precinct is situated next to the mixed business precinct to the north, the main street boulevard (eastern main street) to the west and Bellmere road to the south providing a high level of exposure and access to quality transport infrastructure. This is the primary location for large footprint bulky goods retail, hardware and trade supplies<sup>(32)</sup> activities in the Caboolture West growth area which due to their size, location or servicing requirements, are not located within the Centre core sub-precinct within the Town centre. This sub-precinct balances the need to diversify the retail offering available within the Town centre without compromising the planning intent of creating a compact highly accessible Town centre core with a high quality public realm
- 7. The form, pattern and structure of development within the Town centre delivers the following outcomes:
  - a. development recognises and strengthens the role and function of the Caboolture Morayfield Principal Activity centre;
  - b. development contributes to increased levels of self-containment of business and industry employment opportunities in the Local plan area;
  - c. development delivers a Town centre urban structure consistent with Figure 7.2.3.2.1 Town centre urban design framework;
  - d. development delivers a major street network consistent with Figure 7.2.3.2.2 Town centre indicative street network and Figure 7.2.3.2.5 Town centre driveway crossover restrictions;
  - e. development delivers a movement walking and cycling network consistent with Figure 7.2.3.2.3 Town centre movement, key streets and connections;
  - f. development delivers an open space network consistent with Figure 7.2.3.2.1 Town centre urban design framework;
  - g. development protects, frames and incorporates strong views from the hilltops identified in Figure 7.2.3.2.4
     Town centre retained views;
  - h. development responds to the site conditions as identified on Figure 7.2.3.2.6 Synthesised conditions, important features (Town centre existing conditions).

Editor's note - An urban design framework has been prepared for the Town centre to define the sub-precincts of the Town centre that are to be provided through development. These sub-precincts are shown conceptually on the Town centre figures contained in this Local Plan and are to be read collectively rather than in isolation as they describe an integrated set of considerations that are necessary to achieve the outcomes envisaged for the Town centre. These sub-precincts will be further refined through the development of a Neighbourhood development plan.

Caboolture West town centre will be:

- i. A place of mixed uses and mixed ownerships. A variety of sub-precincts will emerge within the town centre;
- ii. A place of good access from all directions, provided by an integrated public transport system;
- iii. A place with a focus on a civic heart (buildings and open space) and two high amenity main streets;
- iv. A place for local jobs and services, reducing travel requirements on the community;
- v. A walking place, with comfortable and safe streets and a fine grain gridded block structure;
- vi. A place with a green edge, and feature strong views to the Glasshouse Mountains and the D'Aguilar Range.

The Town centre Neighbourhood development plan, once developed, will provide the specific location for sub-precincts that are desired places within and forming part of the town centre. The Neighbourhood development plan will be in accordance with the Local Plan and developed in accordance with Planning scheme policy - Neighbourhood design.

- 8. The purpose of the precinct will be achieved through the following overall outcomes:
  - a. Development occurs in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.2.1 Town centre urban design framework;
  - b. Development does not adversely affect the role, function or viability of other centres in the Moreton Bay network particularly the Caboolture and Morayfield higher order centres;
  - c. Development is consistent with the role and function of the Town centre, as identified on the Caboolture West centre network Table 7.2.3.1.
  - d. The town centre is configured into a block structure with a nominal 200m grid pattern of two main streets and intersecting major streets. Blocks are to be of a length and include breaks that respond to the intended use of the precinct. (e.g. the Centre core sub-precinct should consist of longer blocks to be more pedestrian friendly while blocks in the Residential north sub-precinct should be of a finer grain (e.g. shorter with more frequent breaks) to provide better accessibility and connectivity).
  - e. Development in the Town centre precinct is to be serviced by a public transport system, including two transit stops. The integrated public transport system is to provide high frequency public transport connections to the Town centre as well as the Caboolture city and the wider region.
  - f. The public transport right of way is to be designed and located to:
    - i. reduce conflicts with the street network and pedestrian environment (e.g by locating the corridor below ground level in a tunnel or channel);
    - ii. be separated from streets, boulevards and places of activity;
    - iii. not include active frontages.

Note - Refer to Figure 7.2.3.2.1 - Town centre urban design framework for indicative location for the public transport right of way, or for specific location, alignment and width refer to the Town centre Neighbourhood development plan for the location of the public transport right of way.

g. The development of transit stops within the precinct must:

- i. be centrally located to the 2 catchment areas (north and south) they service. The northern transit stop is to primarily service residential activities and commuter travel to the rest of the region. The southern transit stop will primarily service the town centres working population and activities occurring within the Teaching and learning sub-precinct
- ii. consist of prominent, high quality buildings and structures that include a high level of visual amenity and provide convenient and safe access to the street network
- iii. provide an aesthetically pleasing, safe and comfortable environment for users
- iv. not include park and ride facilities.

Editors note - Refer to a Neighbourhood development plan for the location of transit stops (indicatively shown on Figure 7.2.3.2.1 – Town centre urban design framework).

Editor's note - Much of the town centre is elevated and north facing. The site features two broad ridges which descend gently towards Stern Road, South Wararba Creek and surrounding forest. In the centre of the town centre, long distance views north to the Glasshouse Mountains and west to the range are to be incorporated into the design of the town centre, its streets, buildings and landscape. Shorter, local views within and through the town centre - along streets and to local open spaces, for example – are designed to be a feature of this place.

Editor's note - Town Centre Neighbourhood development plan.

Development of the town centre will come at a later stage of development, and further detailed planning (e.g. building heights, active frontages, mixed uses, public realm) in the form of a neighbourhood development plan will be required at that time (the town centre is a Neighbourhood Development Area). An urban design framework has been prepared to inform and direct future planning. The urban design framework also forms part of the structure plan and statutory local plan.

The large mixed use town centre lies at the heart of Caboolture West local plan. It is intended to be a vibrant, prosperous, interesting and pleasant place, that supports the broader vision and sustainability objectives of Caboolture West.

Key design considerations built into the town centre concept are:

1. Creating:

d

е


- a. a focus of community and business life;
- b. a street-based centre;
  - a pleasant, regional, modern, outside, public ownership, leafy, arty, local, interesting. well designed place;
    - a mixed up place shopping, community services, businesses, service trades, big boxes, TAFE, school(s);
  - diversity of development and business opportunities;
- f. variety of urban precincts residential and business opportunities within town centre;
- g. opportunities for mixed use ownership.
- 2. Incorporating:
  - a. town centre core of 4-6 blocks, scaled for supermarket or department (discount or otherwise) store and sleeved by mixed use. These blocks are to be scaled for walking (i.e. blocks 100-120m, 180-200m grid);
  - b. attractive leafy main streets boulevards with active frontages linking residential areas to the retail core and business and industry areas;
  - c. a civic space and main street;
  - d. quality buildings, streets, and spaces;
  - e. strong views to the Glasshouse Mountains and the D'Aguilar Range into the design of the centre;
  - f. local green space.


#### 3. Providing:


- a. direct connections north/south/east/west;
- b. 400m grid major streets;
- c. main street(s) parallel or perpendicular to major routes;
- d. design for walking, cycling and public transport;
- e. a rapid transit corridor as part of city-wide public transport network;
- f. consolidated parking;
- g. local jobs and services as an alternative to long trips to access more remote jobs and services

Refer to the illustrative masterplan of the proposed Caboolture West Town centre contained in Planning scheme policy - Neighbourhood design. The illustrative masterplan shows indicative building footprints as well as land uses, streets, space and prominent features. It was prepared to illustrate the intent of the Town centre design.



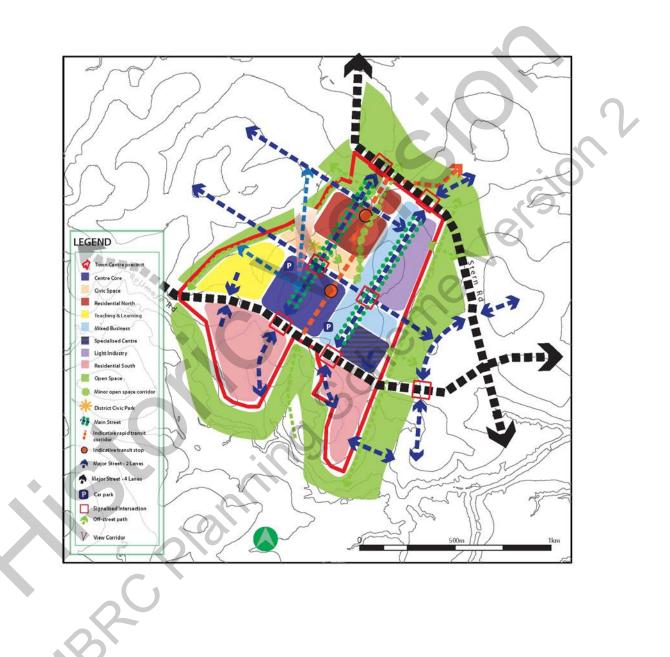



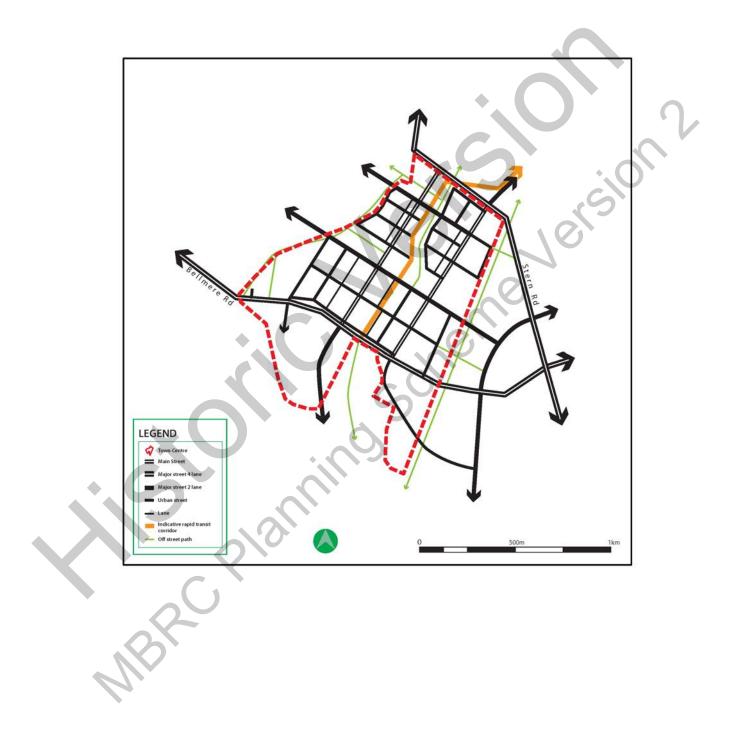

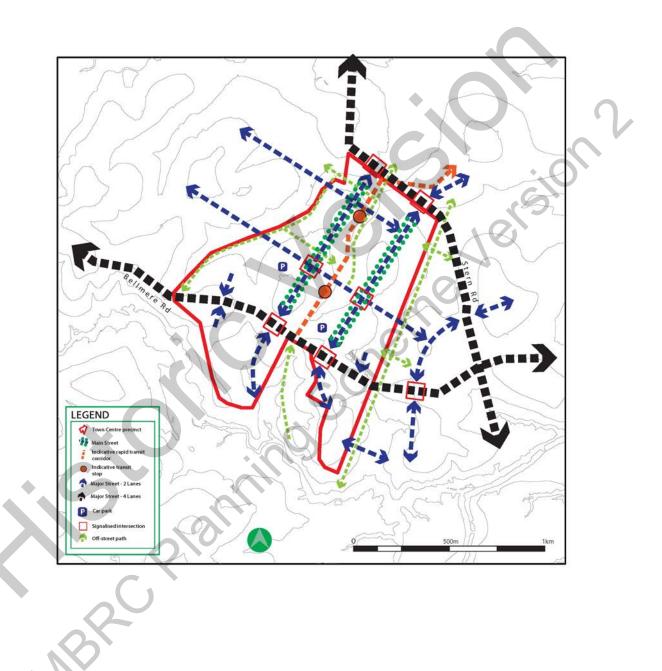

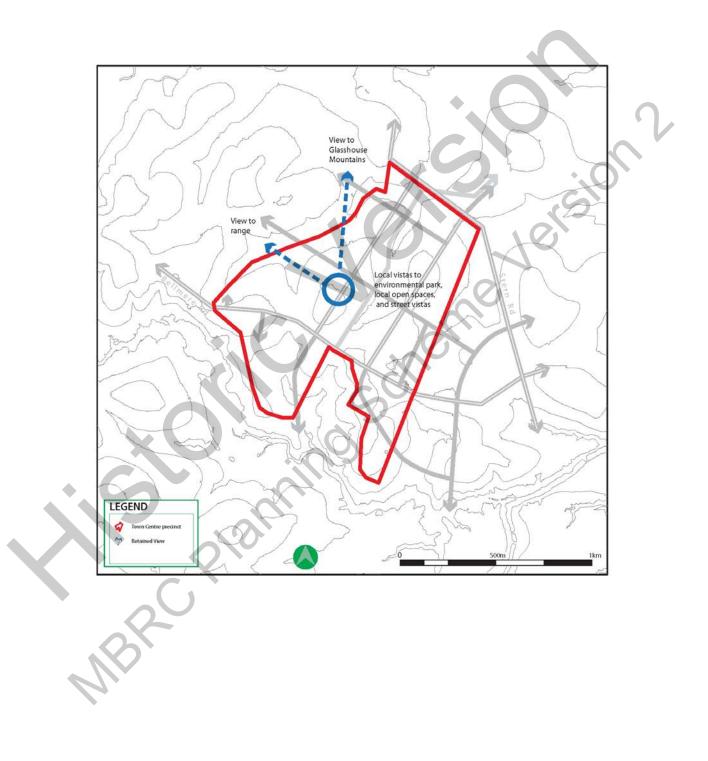



Figure 7.2.3.2.3 - Movement, key streets and connections








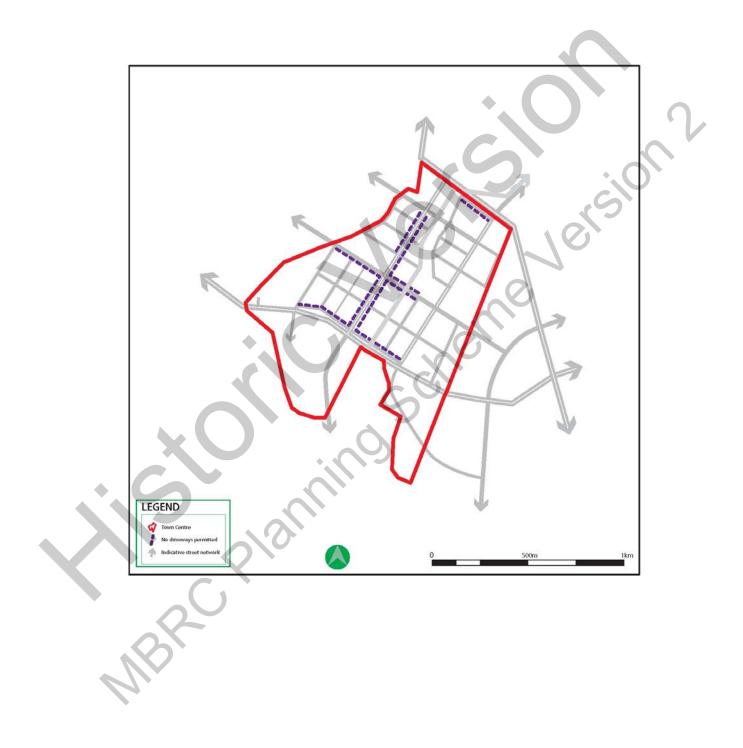


Figure 7.2.3.2.6 - Synthesised conditions, important features (Town centre existing conditions)

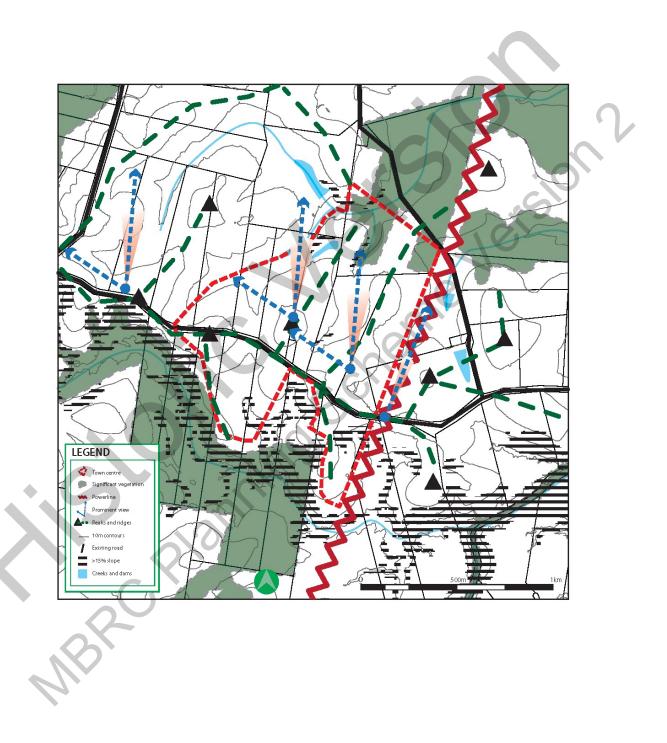

### 7.2.3.2.1 Centre core sub-precinct

#### 7.2.3.2.1.1 Purpose - Centre core sub-precinct

- 1. The purpose of the Centre core sub-precinct will be achieved through the following overall outcomes:
  - a. Development reinforces the Centre core sub-precinct as the main location for higher order and the broadest range of speciality retail and commercial tenancies and functions within the town centre.
  - Development creates a main street based town centre with active frontages to the main street identified a neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.2.1 - Town centre urban design framework.
  - c. Development is of sufficient intensity and land use mix to support high frequency public transport, improve land efficiency and support centre facilities.
  - d. Retail and commercial activities must:
    - i. be centrally located within the precinct around the centre's main street boulevard adjacent to the civic space as shown on a neighbourhood development plan (conceptually shown on Figure 7.2.3.2.1 Town centre urban design framework);
    - ii. co-locate to create a centre, not just a shopping centre<sup>(76)</sup> through horizontal and vertical mixing of uses, concentrated in a compact urban form;
    - iii. be located on the ground floor and lower levels of multi storey buildings, whether or not mixed with residential uses above to promote activity, enable casual surveillance and economic exchange;
    - iv. be integrated with the transit stop;
    - v. where for a key retail use (e.g. major grocery shopping, discount department stores etc), they act as 'anchor stores' within the town centre core and are strategically located to support pedestrian flow paths and smaller speciality shops and are designed and oriented to have a clear opening onto the main street boulevard between 'anchor stores'.
    - vi. be designed, sited and constructed to:
      - contribute to a high quality centre consistent with the desired character of the centre and surrounding area;
      - B. maintain a human scale, through appropriate building heights and form;
      - C. be centred around a main street;

E.

- D. provide attractive, active frontages that maximise pedestrian activity along road frontages and public spaces;
  - provide for active and passive surveillance of the public spaces, road frontages and movement corridors;
- F. locate tenancies at the street frontage with car parking located at the rear, behind active uses or below ground level;
- G. not result in internalised shopping centres<sup>(76)</sup> with large external blank walls and tenancies only accessible from within the building;
- H. ensure expansive areas of surface car parking do not dominate road frontages or public spaces;
- I. ensure parking, manoeuvring and servicing areas are designed, located and aesthetically treated to not be visually dominant features from the streetscape and public spaces;

- J. include buffers or other treatments or measures to respond to the interface with residential zoned land;
- K. incorporate CPTED principles to ensure the safety and security of people and property;
- L. place an emphasis on ground floor activation to support adaptability, economic change and amenity over time.
- M. frame and makes a positive contribution to the strong views to the Glass House Mountains and the D'Aguilar Range identified in the local plan in Figure Town centre retained views.
- e. Residential activities must:
  - i. achieve a minimum site density of 60 dwellings/ha;
  - ii. form part of a mixed use multi-storey building, with active retail or commercial uses at the ground level;
  - iii. be designed, sited and constructed to:
    - A. contribute to an attractive streetscape with priority given to pedestrians;
    - B. encourage passive surveillance of public spaces;
    - C. provide a diverse and attractive built form where buildings are located closer to the street and encourage active frontages;
    - D. incorporate sub-tropical urban design principles that respond to local climatic conditions;
    - E. incorporate sustainable practices including maximising energy efficiency and water conservation.
- f. The centre is developed predominantly as a pedestrian environment.
- g. The safety and efficiency of pedestrian movement is prioritised in the design of car parking areas and the size, frequency and location of vehicle crossovers.
- h. Vehicle crossovers are limited as shown a neighbourhood development plan (shown conceptually on Figure 7.2.3.2.5 Driveway crossover restrictions.

The amount of on-site car parking:

i.

- i. encourages the use of public and active transport and on-street parking;
- ii. increases land use efficiency through the use of shared parking arrangements and parking stations<sup>(58)</sup> that are centrally located either side of the Centre core to support the adjoining teaching and learning and mixed business sub-precincts as shown on a neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.2.1 Town centre urban design framework;
- iii. does not negatively impact the streetscape.

Note - Refer to Figure 7.2.3.2.1 – Town centre urban design framework for indicative parking station<sup>(58)</sup> locations.

- j. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- k. Pedestrian connections are provided to integrate the development with the street, public spaces and the surrounding area.

- I. Development protects, frames and makes a positive contribution to view corridors to strong scenic views of the Glasshouse Mountains and the D'Aguilar Range, as indicated on a neighbourhood development plan (shown indicatively on Figure 7.2.3.2.4 Retained views).
- m. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- n. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- o. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- p. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- q. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- r. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- s. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- t. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- u. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;

- II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
- III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
- IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- v. Development in the Centre core sub-precinct is for one or more of the uses identified below:

| • | Bar <sup>(7)</sup>  | • | Health care services <sup>(33)</sup>           | • | Rooming<br>accommodation <sup>(69)</sup> - where           |
|---|---|---|--|---|--|
| • | Caretaker's<br>accommodation <sup>(10)</sup>                              | • | Home based business <sup>(35)</sup>            |   | in a mixed use building                                    |
|   | Child care centre <sup>(13)</sup>   | • | Hotel <sup>(37)</sup>                          | • | Sales office <sup>(72)</sup>                               |
| • |   | • | Market <sup>(46)</sup>                         | • | Service industry <sup>(73)</sup>                           |
| • | Club <sup>(14)</sup>  | • | Multiple dwelling <sup>(49)</sup> - if in a    | • | Shop <sup>(75)</sup>                                       |
| • | Community care centre <sup>(15)</sup>                                     |   | mixed use building                             | • | Short term   |
| • | Community use <sup>(17)</sup>   |   | Office <sup>(53)</sup> - if above ground level |   | accommodation <sup>(77)</sup> - if in a mixed use building |
| • | Dwelling unit <sup>(23)</sup>   | • | Place of worship <sup>(60)</sup>               |   | Showroom <sup>(78)</sup> - if 250m <sup>2</sup>            |
| • | Emergency services <sup>(25)</sup>  |   | 0  |   | GFA or less  |
| • | Food and drink outlet <sup>(28)</sup>                                     |   |  |   |  |
| • | Hardware and trade<br>supplies <sup>(32)</sup> - if 250m <sup>2</sup> GFA |   | CO.  |   |  |
|   | or less   |   |  |   |  |
|   | XV  |   | $\Theta$ $\sim$                                |   |  |

w. Development in the Centre core sub-precinct does not include one or more of the following uses:

|   | Air services <sup>(3)</sup>        | • | High impact industry <sup>(34)</sup>         | • | Relocatable home park <sup>(62)</sup>                   |
|---|------------------------------------|---|--|---|---|
|   | Animal husbandry <sup>(4)</sup>    | • | Intensive animal industry <sup>(39)</sup>    | • | Rural industry <sup>(70)</sup>                          |
| • | Animal keeping <sup>(5)</sup>      | • | Intensive horticulture <sup>(40)</sup>       | • | Rural workers'<br>accommodation <sup>(71)</sup>         |
|   | Aquaculture <sup>(6)</sup>         | • | Marine industry <sup>(45)</sup>              |   | accommodation   |
| • | Cemetery <sup>(12)</sup>           | • | Medium impact industry <sup>(47)</sup>       | • | Showroom <sup>(78)</sup> - if greater<br>than 250m² GFA |
| • | Crematorium <sup>(18)</sup>        | • | Motor sport facility <sup>(48)</sup>         | • | Special industry <sup>(79)</sup>                        |
|   | Cropping <sup>(19)</sup>           | • | Outdoor sport and recreation <sup>(55)</sup> | • | Tourist park <sup>(84)</sup>                            |
| • | Detention facility <sup>(20)</sup> |   | recreation                                   | • | Transport depot <sup>(85)</sup>                         |
|   |                                    |   |  |   |   |

|   | • | Extractive industry <sup>(27)</sup>   | • | Permanent plantation <sup>(59)</sup> | • | Winery <sup>(90)</sup> |
|---|---|---|---|--------------------------------------|---|------------------------|
| • | • | Food and drink outlet <sup>(28)</sup> - if including a drive through                      | ٠ | Port services <sup>(61)</sup>        |   |                        |
|   | • | Hardware and trade<br>supplies <sup>(32)</sup> - if greater than<br>250m <sup>2</sup> GFA |   |                                      |   | $\mathbf{\wedge}$      |

x. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

#### 7.2.3.2.1.2 Criteria for assessment

#### Part D — Criteria for assessable development - Centre core sub-precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part D, Table 7.2.3.2.1.1.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| General o   | riteria  |
| Centre network and function   | <u>, ()</u>  |
| PO1<br>Development in the Centre core sub-precinct is of a size,<br>scale, range of services and location commensurate with<br>the role and function of this sub-precinct in the centres<br>network.<br>Note - Refer to Table 7.2.3.3 Caboolture West - centres network.  | No acceptable outcome provided.  |
| Active frontage   |  |
| P02   | A02.1  |
| Development addresses and activates streets and public spaces by:   | Development address the street frontage.   |
| <ul> <li>a. establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. the use of windows or glazing and avoiding blank walls with the use of sleeving);</li> <li>b. ensuring buildings and individual tenancies address street frontages and other areas of pedestrian</li> </ul> | AO2.2<br>New buildings and extensions are built to the street<br>alignment.<br>AO2.3 |
| movement;   | At-grade car parking:  |

- c. new buildings adjoin or are within 3m of a primary street frontage, civic space or public open space;
- d. locating car parking areas behind or under buildings to not dominate the street environment;
- e. providing visual interest to the façade (e.g. windows or glazing, variation in colours, materials, finishes, articulation, recesses or projections);
- f. establishing or maintaining human scale.

**Setbacks** 

PO3

- a. does not adjoin a main street or a corner;
- b. where at-grade car parking adjoins a street (other than a main street) or civic space it does not take up more than 40% of the length of the street frontage.

Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.

#### AO2.4

Development on corner lots:

- a. addresses both street frontages;
- expresses strong visual elements, including feature building entries.

### AO2.5

Development incorporates active uses adjacent to a street frontage, civic spaces, public open space or pedestrian thoroughfare.

### AO2.6

The front facade of the building:

- a. is made up of a minimum of 50% windows or glazing between a height of 1m and 2m;
- b. the minimum area of window or glazing is to remain uncovered and free of signage.

Note - This does not apply to Adult stores<sup>(1)</sup>.

### AO2.7

Individual tenancies do not exceed a frontage length of 20m.

#### AO2.8


Large format retail uses (e.g. Showroom<sup>(78)</sup>, supermarket or discount department store) are sleeved by smaller tenancies (e.g. retail and similar uses).

Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.

No acceptable outcome provided.

| <ul> <li>Side and rear setbacks are of a dimension to:</li> <li>a. cater for required openings, the location of loading docks and landscaped buffers etc;</li> <li>b. protect the amenity of adjoining sensitive land uses.</li> </ul>   |   |
|--|---|
| Site area  |   |
| PO4<br>The development has sufficient area and dimensions to<br>accommodate required buildings and structures, vehicular<br>access, manoeuvring and parking and landscaping.<br>Building height  | No acceptable outcome provided.   |
|  |   |
| PO5<br>The height of buildings reflect the individual character of<br>the centre.  | AO5<br>Building heights are in accordance with the minimums<br>and maximums mapped on Neighbourhood<br>development plan map - Building heights.   |
| Streetscape  |   |
| PO6<br>Development contributes to an attractive and walkable<br>street environment in the centre through the provision of<br>streetscape features (e.g. footpaths, lighting, bins, furniture,<br>landscaping, pedestrian crossings etc), as outlined in<br>Planning scheme policy - Integrated design.<br>Editor's note - Additional approvals may be required where works are<br>required within road reserves. | No acceptable outcome provided.   |
| Built form   |   |
| P07  | A07   |
| Ground floor spaces are designed to enable the flexible<br>re-use of floor area for commercial and retail activities.  | The ground floor has a minimum ceiling height of 4.2m   |
| P08  | A08   |
| <ul> <li>Awnings are provided at the ground level fronting pedestrian footpaths and public spaces. Awnings:</li> <li>a. provide adequate protection for pedestrians from solar exposure and inclement weather;</li> <li>b. are integrated with the design of the building and the form and function of the street;</li> </ul>  | <ul> <li>Buildings incorporate an that:</li> <li>a. is cantilevered</li> <li>b. extends from the face of the building;</li> <li>c. has a minimum height of 3.2m and a maximum height of 4.2m above pavement level;</li> </ul> |

| C.    | do not compromise the provision of street trees and signage;   | <ul> <li>does not extend past a vertical plane of 1.5m<br/>inside the kerb line to allow for street trees and<br/>regulatory signage;</li> </ul> |
|-------|--|--|
| d.    | ensure the safety of pedestrians and vehicles (e.g. No support poles).   | e. aligns with adjoining buildings to provide continuous shelter where possible.   |
|       |  |  |
|       |  | Figure - Awning requirements   |
| PO9   |  | No acceptable outcome provided.  |
|       | uildings exhibit a high standard of design and struction, which:   | COL  |
| a.    | adds visual interest to the streetscape (e.g. variation<br>in materials, patterns, textures and colours,<br>cantilevered awning);  |  |
| b.    | enables differentiation between buildings;   |  |
| C.    | contributes to a safe environment;   |  |
| d.    | incorporates architectural features within the building facade at the street level to create human scale;  |  |
| e.    | treat or break up blank walls that are visible from public areas;  |  |
| f.    | includes building entrances that are readily<br>identifiable from the road frontage, located and<br>oriented to favour active and public transport usage<br>by connecting to pedestrian footpaths on the street<br>frontage and adjoining sites; |  |
| g.    | facilitate casual surveillance of all public spaces.   |  |
| P01   | 0  | No acceptable outcome provided.  |
| Build | ding entrances:  |  |
| a.    | are readily identifiable from the road frontage;   |  |
|       | add vieual interact to the streategaps:  |  |
| b.    | add visual interest to the streetscape;  |  |

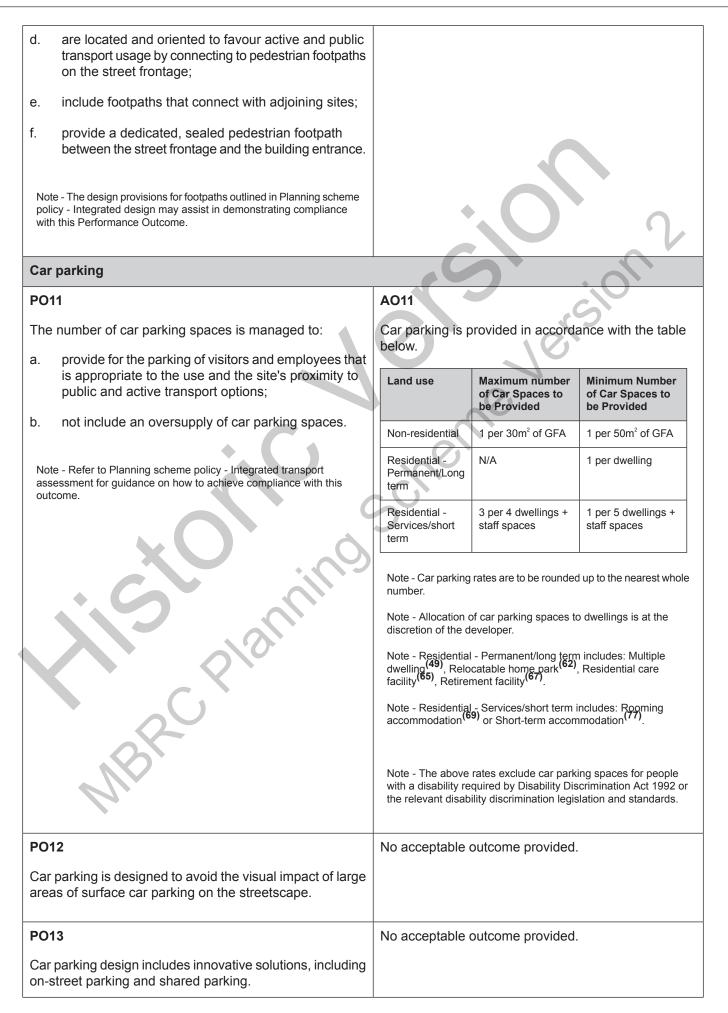

|  | e - Refer to Planning scheme policy - Integrated design for details examples of on-street parking.  |  |  |
|--|---|--|--|
| PO1  | 4   | AO14   |  |
| The  | design of car parking areas:  | All car parking areas are designed and constructed in  |  |
| a.   | does not impact on the safety of the external road network;   | accordance with Australia  | an Standard AS2890.1.  |
| b.   | ensures the safe movement of vehicles within the site.  |  | ) v  |
| PO1  | 5   | No acceptable outcome  | provided.  |
| The safety and efficiency of pedestrian movement is prioritised in the design of car parking areas through providing pedestrian paths in car parking areas that are:<br>a. located along the most direct pedestrian routes |   | C .  | ersil  |
|  | between building entrances, car parks and adjoining uses;   | 0  | ~  |
| <ul> <li>protected from vehicle intrusion through the use of<br/>physical and visual separation (e.g. wheel stops,<br/>trees etc);</li> </ul>  |   | enne   |  |
| c. of a width to allow safe and efficient access for prams and wheelchairs.  |   |  |  |
| Not  | cle parking and end of trip facilities<br>e - Building work to which this code applies constitutes Major Develo<br>lities prescribed in the Queensland Development Code MP 4.1. | opment for purposes of developm  | nent requirements for end of trip  |
| PO1  | 6   | AO16.1   |  |
| a.   | End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:                                   | Minimum bicycle parking facilities are provided in accordance with the table below (rounded up to the nearest whole number). |  |
|  | i. adequate bicycle parking and storage facilities; and   | Use  | Minimum Bicycle Parking  |
|  | ii. adequate provision for securing belongings;   | Residential uses comprised of dwellings  | Minimum 1 space per dwelling   |
|  | <ul> <li>iii. change rooms that include adequate showers, sanitary compartments, wash basins and</li> </ul>   | All other residential uses   | Minimum 1 space per 2 car<br>parking spaces identified in<br>Schedule 7 – car parking  |
|  | mirrors.  | Non-residential uses   | Minimum 1 space per 200m2 of GFA   |
| b.   | Notwithstanding a. there is no requirement to provide<br>end of trip facilities if it would be unreasonable to<br>provide these facilities having regard to:                    | prescribed under the Queens<br>local planning instrument to p  | e solutions for end of trip facilities<br>land Development Code permit a<br>rescribe facility levels higher than<br>those acceptable solutions. This |

- i. the projected population growth and forward planning for road upgrading and development of cycle paths; or
- ii. whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute distances and nature of the terrain; or
- the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.

Editor's note - The intent of b above is to ensure the requirements for bicycle parking and end of trip facilities are not applied in unreasonable circumstances. For example these requirements should not, and do not apply in the Rural zone or the Rural residential zone etc.

Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the acceptable outcomes under this heading meet the current performance requirement prescribed in the Queensland Development Code. acceptable outcome is a combination of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

#### AO16.2

Bicycle parking is:

- a. provided in accordance with Austroads (2008), Guide to Traffic Management - Part 11: Parking;
- b. protected from the weather by its location or a dedicated roof structure;
- c. located within the building or in a dedicated, secure structure for residents and staff;
- d. adjacent to building entrances or in public areas for customers and visitors.

Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.

Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### AO16.3

For non-residential uses, storage lockers:

- a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);
- b. have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).

Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

#### AO16.4

For non-residential uses, changing rooms:

- a. are provided at a rate of 1 per 10 bicycle parking spaces;
- b. are fitted with a lockable door or otherwise screened from public view;
- c. are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:

| Bicycle<br>spaces<br>provided | Male/<br>Female       | Change<br>rooms<br>required | Showers required   | Sanitary<br>compartments<br>required  | Washbasins<br>required  |
|-------------------------------|-----------------------|-----------------------------|--|---|---|
| 1-5                           | Male<br>and<br>female | 1 unisex<br>change<br>room  | 1  | 1 closet pan  | 1   |
| 6-19                          | Female                | 1                           | 1  | 1 closet pan  | 1   |
| 20 or<br>more                 | Male                  | 1                           | 1  | 1 closet pan  | 1   |
|                               | Female                |                             | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 2 closet pans,<br>plus 1 sanitary<br>compartment<br>for every 60<br>bicycle parking<br>spaces<br>provided<br>thereafter   | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
| S                             | Male                  | 1                           | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 1 urinal and 1<br>closet pans,<br>plus 1 sanitary<br>compartment at<br>the rate of 1<br>closet pan or 1<br>urinal for every<br>60 bicycle<br>space provided<br>thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |

Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.

Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).

- d. are provided with:
  - i. a mirror located above each wash basin;
  - ii. a hook and bench seating within each shower compartment;
  - iii. a socket-outlet located adjacent to each wash basin.

Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set

|  | for end of trip facilities in the Queensland Development Code and the additional facilities required by Council. |
|--|--|
| Loading and servicing  |  |
| P017   | No acceptable outcome provided.  |
| Loading and servicing areas:   |  |
| a. are not visible from any street frontage;   |  |
| b. are integrated into the design of the building;   |  |
| c. include screening and buffers to reduce negative impacts on adjoining sensitive land uses;            |  |
| d. are consolidated and shared with adjoining sites where possible.                                      | C, ersi  |
| Note - Refer to Planning scheme policy - Centre and neighbourhood hub design.                            |  |
| Waste  |  |
| PO18   | A018   |
| Bins and bin storage areas are designed, located and managed to prevent amenity impacts on the locality. | Bins and bin storage areas are designed, located and managed in accordance with Planning scheme policy - Waste.  |
| Landscaping and fencing  |  |
| PO19   | No acceptable outcome provided.  |
| On-site landscaping:   |  |
| a. is incorporated into the design of the development;   |  |
| b. reduces the dominance of car parking and servicing areas from the street frontage;                    |  |
| c. incorporates shade trees in car parking areas;  |  |
| d. retains mature trees wherever possible;   |  |
| e. contributes to quality public spaces and the micorclimate by providing shelter and shade;             |  |
| f. maintains the achievement of active frontages and sightlines for casual surveillance.                 |  |
| Note - All landscaping is to accord with Planning scheme policy -<br>Integrated design.                  |  |
| PO20   | No acceptable outcome provided.  |

| Lighting   |   |
|--|---|
| PO21   | No acceptable solution provided.  |
| Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety while minimising adverse impacts on residential and other sensitive land uses.  |   |
| Amenity  |   |
| PO22   | No acceptable solution provided.  |
| The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, chemicals<br>and other nuisance.  | Clerste   |
| Noise  | 0.  |
| PO23   | No acceptable outcome provided.   |
| potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be prepared<br>in accordance with Planning scheme policy - Noise.  | Scho  |
| PO24   | AO24.1  |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:   | Development is designed to meet the criteria outline<br>in the Planning Scheme Policy – Noise.  |
| <ul> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> </ul> | <ul> <li>AO24.2</li> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public area unless: <ul> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or public)</li> </ul> </li> </ul> |

|  | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul> |
|--|--|
| Works c  | riteria  |
| Utilities  |  |
| P025   | A025   |
| The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant energy<br>regulating authority) and the infrastructure does not<br>negatively impact the streetscape. | The development is connected to underground electricity.   |
| PO26   | No acceptable outcome provided.  |
| The development has access to telecommunications and broadband services in accordance with current standards.  | S  |
| PO27<br>Where available the development is to safely connect to<br>reticulated gas.  | No acceptable outcome provided.  |
| PO28<br>The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.                               | AO28.1<br>Where in a sewered area, the development is<br>connected to a reticulated sewerage system.   |
|  | AO28.2   |
| MBA  | Where not in a sewered area, the development is<br>serviced by an appropriate on-site sewerage facility.<br>Note - A site and soil evaluation report is generally required to<br>demonstrate compliance with this outcome. Reports are to be<br>prepared in accordance with The Plumbing and Drainage Act<br>2002.   |
| PO29   | AO29.1   |
| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to<br>the reticulated water supply system in accordance with<br>the South East Queensland Water Supply and   |

|   | Sewerage Design and Construction Code and the relevant Water Service Association of Australia (WSAA) codes and standards.  |
|---|--|
|   | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with<br>an adequate water supply of at least 45,000 litres by<br>way of on-site storage which provides equivalent water<br>quality and reliability to support the use requirements<br>of the development. |
| PO30  | No acceptable outcome provided.  |
| The development is provided with dedicated and constructed road access.   | C CS   |
| Access  |  |
| P031  | No acceptable outcome provided.  |
| <ul> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> </ul> Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples. | Schell   |
| <b>PO32</b><br>Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.  | No acceptable outcome provided.  |
| PO33  | AO33.1   |
| The layout of the development does not compromise:<br>a. the development of the road network in the area;   | Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a<br>motorway.  |

| b. the function or safety of the road network;   |  |
|--|--|
| c. the capacity of the road network.   | Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway.   |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |
|  | A022.2   |
|  | A033.2   |
|  | The development provides for the extension of the road<br>network in the area in accordance with Council's road<br>network planning.   |
|  | A033.3   |
|  | The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.   |
|  | A033.4   |
|  | The lot layout allows forward access to and from the   |
| + C1   | site.  |
| PO34   | A034.1   |
| Safe access facilities are provided for all vehicles required  | Site access and driveways are designed and located   |
| to access the site.  | in accordance with:  |
|  | A Whore for a Council controlled read  |
|  | a. Where for a Council-controlled road,<br>AS/NZS2890.1 section 3; or  |
|  | <ul><li>AS/NZS2890.1 section 3; or</li><li>b. Where for a State-Controlled road, the Safe</li></ul>  |
|  | AS/NZS2890.1 section 3; or   |
| Plannin's  | <ul> <li>AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe<br/>Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard<br/>drawings, or a copy of a Transport Infrastructure</li> </ul>   |
| Rec Plannins   | <ul> <li>AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe<br/>Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard<br/>drawings, or a copy of a Transport Infrastructure<br/>Act 1994, section 62 approval.</li> </ul>  |
| NBR Planning   | <ul> <li>AS/NZS2890.1 section 3; or</li> <li>Where for a State-Controlled road, the Safe<br/>Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard<br/>drawings, or a copy of a Transport Infrastructure<br/>Act 1994, section 62 approval.</li> <li>AO34.2</li> <li>Internal driveways and access ways are designed and<br/>constructed in accordance with AS/NZS2890.1 Parking<br/>Facilities – Off street car parking and the relevant<br/>standards in Planning scheme policy - Integrated</li> </ul>  |
| NIBR CPIONIN   | <ul> <li>AS/NZS2890.1 section 3; or</li> <li>Where for a State-Controlled road, the Safe<br/>Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard<br/>drawings, or a copy of a Transport Infrastructure<br/>Act 1994, section 62 approval.</li> <li>AO34.2</li> <li>Internal driveways and access ways are designed and<br/>constructed in accordance with AS/NZS2890.1 Parking<br/>Facilities – Off street car parking and the relevant<br/>standards in Planning scheme policy - Integrated<br/>design.</li> <li>Note - This includes queue lengths (refer to Schedule 8 Service</li> </ul>   |
| NIP CPLannin   | <ul> <li>AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe<br/>Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard<br/>drawings, or a copy of a Transport Infrastructure<br/>Act 1994, section 62 approval.</li> <li>AO34.2</li> <li>Internal driveways and access ways are designed and<br/>constructed in accordance with AS/NZS2890.1 Parking<br/>Facilities – Off street car parking and the relevant<br/>standards in Planning scheme policy - Integrated<br/>design.</li> <li>Note - This includes queue lengths (refer to Schedule 8 Service<br/>vehicle requirements), pavement widths and construction.</li> </ul> |

|   | AO34.4  |
|---|---|
|   | The driveway construction across the verge conforms<br>to the relevant standard drawing for the classification<br>of the road in accordance with Planning scheme policy<br>- Integrated design. |
| PO35  | A035  |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:   | No acceptable outcome provided.   |
| a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;  |   |
| b. ensure the orderly and efficient continuation of the active transport network;   |   |
| c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.  | C lets  |
| Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.   | ne  |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  | - Cher  |
| Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:   |   |
| <ul> <li>i. Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or</li> <li>ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.</li> </ul> |   |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.  |   |
| Stormwater  |   |
| PO36  | No acceptable outcome provided.   |
| Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.  |   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |   |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.   |   |

| All works on-site are managed to:  | Works incorporate temporary stormwater run-off,<br>erosion and sediment controls and trash traps designed<br>in accordance with the Urban Stormwater Quality |
|--|--|
| PO41   | AO41.1   |
| <b>PO40</b><br>The site and any existing structures are maintained in a tidy and safe condition.   | No acceptable outcome provided.  |
| Site works and construction management   |  |
| Site works and construction management   | l  |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.  |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |  |
| b. overland flow paths where they cross more than one property boundary.   |  |
| a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;   |  |
| Easements for drainage purposes are provided over:   |  |
| PO39   | No acceptable outcome provided.  |
| suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.  | S.   |
| Note - A site-based stormwater management plan prepared by a   | C.   |
| stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives in<br>Tables A and B in Appendix 3 of the SPP.   |  |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact of  |  |
| PO38   | No acceptable outcome provided.  |
| Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.   | Silon'   |
| compromise the capacity of existing stormwater infrastructure downstream of the site.  |  |
| Stormwater generated from the development does not   | No acceptable outcome provided.  |
| P037   | No acceptable outcome provided.  |
| as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a catchment<br>that includes State Transport Infrastructure. |  |
| Note - A watercourse as defined in the Water Act may be accepted   |  |

- a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;
- b. minimise as far as possible, impacts on the natural environment;
- ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;
- d. avoid adverse impacts on street streets and their critical root zone.

Planning Guidelines, Planning scheme policy -Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:

- a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;
- stormwater discharged to adjoining and downstream properties does not cause scour and erosion;
- c. stormwater discharge rates do not exceed pre-existing conditions;
- d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and
- e. the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins.

### AO41.2

Stormwater run-off, erosion and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.

Note - The measures are adjusted on-site to maximise their effectiveness.

## AO41.3

The completed earthworks (fill or excavation) area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.

No acceptable outcome provided

### PO42

Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.

### PO43

All works on-site and the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.

Note - Where the amount of imported material is greater than  $50m^3$ , a haulage route must be identified and approved by Council.

### AO43.1

Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.

### AO43.2

All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors' vehicles are generally not to be parked in existing roads.

|   | Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).  |
|---|--|
|   | AO43.3   |
|   | Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with<br>the site are to be cleaned at all times.   |
| PO44  | A044   |
| All disturbed areas are rehabilitated at the completion of construction.  | At completion of construction all disturbed areas of the site are to be:   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  | <ul> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. grassed.</li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.</li> </ul> |
| PO45  | AO45.1   |
| <ul><li>The clearing of vegetation on-site:</li><li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li></ul>   | All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.   |
| b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;  | Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.  |
| c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.  | AO45.2   |
| Note - No burning of cleared vegetation is permitted,   | Disposal of materials is managed in one or more of the following ways:   |
|   | a. all cleared vegetation, declared weeds, stumps,<br>rubbish, car bodies, scrap metal and the like are<br>removed and disposed of in a Council land fill<br>facility; or  |
| Br  | <ul> <li>all native vegetation with a diameter below</li> <li>400mm is to be chipped and stored on-site.</li> </ul>  |
| PO46  | No acceptable outcome provided.  |
| Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council. |  |
| Earthworks  |  |

### AO47.1

On-site earthworks are designed to consider the visual and amenity impact as they relate to:

- a. the natural topographical features of the site;
- b. short and long-term slope stability;
- c. soft or compressible foundation soils;
- d. reactive soils;

**PO47** 

**PO48** 

- e. low density or potentially collapsing soils;
- f. existing fills and soil contamination that may exist on-site;
- g. the stability and maintenance of steep rock slopes and batters;
- h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)

Note - Filling or excavation works are to be completed within six (6) months of the commencement date.

All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.

#### AO47.2

Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.

### AO47.3

All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.

### AO47.4

All filling or excavation is contained within the site.

### AO47.5

All fill placed on-site is:

- a. limited to that required for the necessary approved use;
- clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).

#### AO47.6

The site is prepared and the fill placed on-site in accordance with AS3798.

Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.

#### AO47.7


Materials used for structural fill are in accordance with AS3798.


#### AO47.8


Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.

#### AO48

Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.

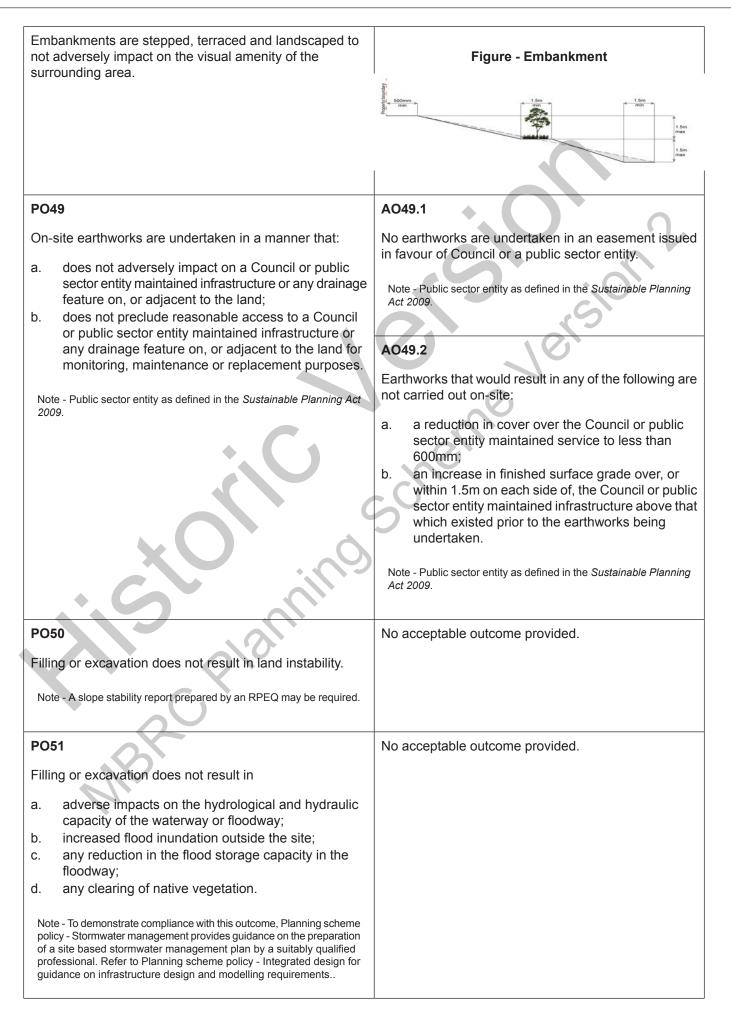

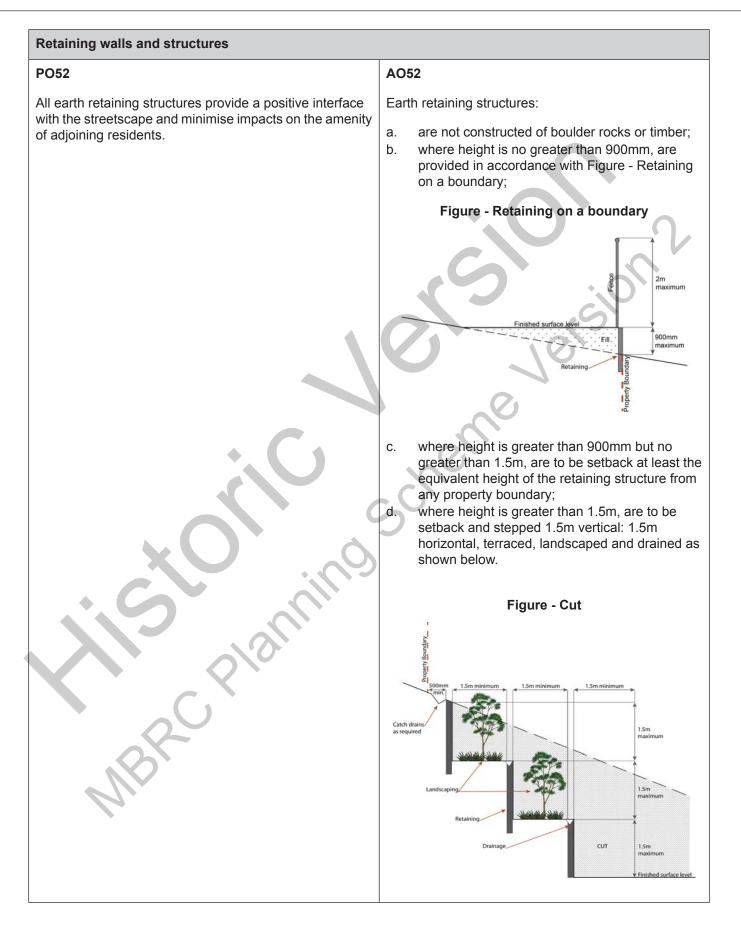

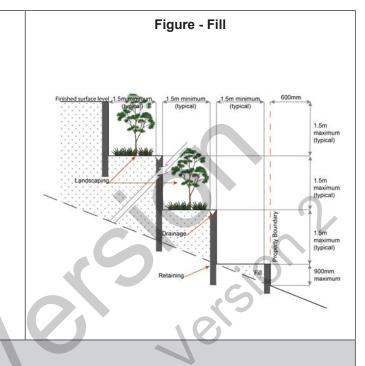

#### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - ii.
  - iii.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. iv.

#### AND

b. none of the following exceptions apply:

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| PO53   | AO53.1   |
|--|--|
| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul> | <ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i>.</li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul> |

- e. considers the fire hazard inherent in the surrounds h to the development site; f. is maintained in effective operating order. c. Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region. d. AO53.2 a. b. C. d. **PO54** AO54 On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, a. or at, the vehicular entry point to the development site.
  - in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
  - in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
    - i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
    - ii for caravans and tents, hydrant coverage need only
    - extend to the roof of those tents and caravans; for outdoor sales <sup>(54)</sup>, processing or storage facilities, iii. hydrant coverage is required across the entire area of the outdoor sales <sup>(54)</sup>, outdoor processing and outdoor storage facilities;
  - in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- an unobstructed width of no less than 3.5m;
- an unobstructed height of no less than 4.8m;
- constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

### AO53.3

On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.

For development that contains on-site fire hydrants external to buildings:

- those external hydrants can be seen from the vehicular entry point to the site; or
- a sign identifying the following is provided at the b. vehicular entry point to the site:
  - i. the overall layout of the development (to scale);
  - ii. internal road names (where used);
  - iii. all communal facilities (where provided);
  - iv. the reception area and on-site manager's office (where provided);

|   | <ul> <li>v. external hydrants and hydrant booster<br/>points;</li> </ul>  |
|---|---|
|   | vi. physical constraints within the internal<br>roadway system which would restrict access<br>by fire fighting appliances to external<br>hydrants and hydrant booster points.   |
|   | Note - The sign prescribed above, and the graphics used are to be:  |
|   | <ul> <li>a. in a form;</li> <li>b. of a size;</li> <li>c. illuminated to a level;</li> </ul>  |
|   | which allows the information on the sign to be readily understood,<br>at all times, by a person in a fire fighting appliance up to 4.5m<br>from the sign.   |
| P055  | A055  |
| Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site. | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads.<br>Note - Technical note Fire hydrant indication system is available<br>on the website of the Queensland Department of Transport and<br>Main Roads. |
| Use specifi   | c criteria  |
| Home based business <sup>(35)</sup>   |   |
| PO56  | AO56.1  |
| The scale and intensity of the Home based business <sup>(35)</sup> :  | A maximum of 1 employee (not a resident) OR 2 customers OR customers from within 1 Small rigid  |
| a. is compatible with the physical characteristics of the site and the character of the local area;   | vehicle (SRV) or smaller are permitted on the site at<br>any one time.  |
| b. is able to accommodate anticipated car parking demand without negatively impacting the streetscape or road safety;   | A056.2  |
| c. does not adversely impact on the amenity of the adjoining and nearby premises;   | The Home based business <sup>(35)</sup> occupies an area of the existing dwelling or on-site structure not greater than 40m <sup>2</sup> gross floor area.  |
| d. remains ancillary to the residential use of the dwelling house <sup>(22)</sup> ;   |   |
|   | 1   |

| <ul> <li>e. does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;</li> <li>f. ensures employees and visitors to the site do not negatively impact the expected amenity of adjoining properties.</li> </ul>  |   |
|--|---|
|  |   |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and U  | tility installation <sup>(86)</sup>   |
| <b>PO57</b><br>The development does not have an adverse impact on the visual amenity of a locality and is:   | AO57.1<br>Development is designed to minimise surrounding land<br>use conflicts by ensuring infrastructure, buildings,  |
| <ul> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> </ul> | <ul> <li>structures and other equipment:</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> |
| <ul> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>  | AO57.2<br>A minimum 3m wide strip of dense planting is provided<br>around the outside of the fenced area, between the<br>development and street frontage, side and rear<br>boundaries.  |
| P058   | A058  |
| Infrastructure does not have an impact on pedestrian health<br>and safety.   | <ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>         |
| P059   | AO59  |
| <ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>  | All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to<br>ensure noise emissions meet the objectives as set out<br>in the Environmental Protection (Noise) Policy 2008.  |
| Residential uses   |   |
|  |   |
| <b>PO60</b><br>Development contributes to greater housing choice and affordability by:   | No acceptable outcome provided.   |

| a.          | contributing to the range of dwelling types and sizes in the area;   |  |
|-------------|--|--|
| b.          | providing greater housing density within the Town centre precinct;   |  |
| C.          | forming part of mixed-use buildings with residential uses above ground floors and podiums.   |  |
| PO          | 51   | AO61   |
|             | ellings are provided with adequate functional and active private open space that is:   | A dwelling has a clearly defined, private outdoor living space that is:  |
| a.          | directly accessible from the dwelling and is located<br>so that residents and neighbouring uses experience<br>a suitable level of amenity;   | a. as per the table below;   |
| b.          | designed and constructed to achieve adequate   | Use Minimum Area Minimum Dimension   |
| 0.          | privacy for occupants from other dwelling units <sup>(23)</sup>  | Ground level dwellings   |
|             | and centre uses;   | All dwelling types 16m <sup>2</sup> 4m   |
| C.          | accessible and readily identifiable for residents, visitors and emergency services;  | Above ground level dwellings   |
| d           |  | 1 bedroom or studio, 8m <sup>2</sup> 2.5m  |
| d.          | located to not compromise active frontages.  | 2 or more bedrooms 12m <sup>2</sup> 3.0m   |
|             |  | b. accessed from a living area;  |
|             |  | c. sufficiently screened or elevated for privacy;  |
|             |  | d. ground level open space is located behind the main building line and not within the primary or secondary frontage setbacks;   |
|             |  | e. balconies orientate to the street;  |
|             |  | f. clear of any non-recreational structure (including<br>but not limited to air-conditioning units, water<br>tanks, clothes drying facilities, storage structures,   |
|             |  | retaining structures and refuse storage areas).  |
|             | NBK  | Note - Areas for clothes drying are not visible from street frontages<br>or public areas (e.g. Separate clothes drying areas are provided<br>that are oriented to the side or rear of the site or screening is<br>provided). |
| PO          | 62   | AO62   |
| ider<br>non | ellings are provided with a reasonable level of access,<br>tification and privacy from adjoining residential and<br>-residential uses.<br>e - Refer to State Government standards for CPTED. | The dwelling:<br>a. includes screening to a maximum external<br>transparency of 50% for all habitable room<br>windows that are visible from other dwellings and  |
|             | e - Refer to Planning scheme policy - Residential design for details<br>examples.  | non-residential uses;  |

|  | <ul> <li>b. clearly displays the street number at the entrance to the dwelling and at the front of the site to enable identification by emergency services;</li> <li>c. is provided with a separate entrance to that of any non-residential use on the site;</li> <li>d. where located on a site with a non-residential use the dwelling is located behind or above the non-residential use.</li> <li>Note - External fixed or movable screening, opaque glass and window tinting are considered acceptable forms of screening.</li> </ul> |
|--|--|
| Retail and commercial uses   |  |
| <b>PO63</b><br>The Centre core sub-precinct remains the primary location<br>for significant retail activity in the Town centre precinct and<br>the Caboolture west local plan area.  | AO63<br>Development on-sites with a frontage to a main street<br>boulevard, incorporates retail uses on the ground floor<br>directly accessible from the boulevard.  |
| PO64<br>The Caboolture centre precinct retains a strong retail and<br>commercial focus, with residential activities provided only<br>where part of a mixed use building and not located at the<br>ground level or within a podium.   | No acceptable outcome provided.  |
| Telecommunications facility <sup>(81)</sup><br>Editor's note - In accordance with the Federal legislation Telecommunic<br>that will not cause human exposure to electromagnetic radiation beyon<br>Radiation - Human Exposure) Standard 2003 and Radio Protection Star<br>to 300Ghz.                       | d the limits outlined in the Radiocommunications (Electromagnetic  |
| P065   | AO65.1   |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.   |
|  | AO65.2   |
|  | If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully<br>exhausted within a 2km radius of the site.   |
| PO66   | AO66   |
|  | 1  |

| PO67  | A067  |  |
|---|---|--|
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.  |   |  |
| <ul> <li>PO68</li> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | existing development approval.<br>AO68.1<br>Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.<br>AO68.2<br>In all other areas towers do not exceed 35m in height.<br>AO68.3<br>Towers, equipment shelters and associated structures<br>are of a design, colour and material to:<br>a. reduce recognition in the landscape;<br>b. reduce glare and reflectivity.<br>AO68.4<br>All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m.<br>Where there is no established building line the facility<br>is located at the rear of the site.<br>AO68.5<br>The facility is enclosed by security fencing or by other<br>means to ensure public access is prohibited.<br>AO68.6<br>A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the<br>facility and street frontage and adjoining uses.<br>Note - Landscaping is provided in accordance with Planning<br>scheme policy - Integrated design. |  |

| PO69  | AO69   |  |  |
|---|--|--|--|
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.  | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |  |  |
| PO70  | A070   |  |  |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.  | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |  |  |
| Values and cons   | traints criteria   |  |  |
| Note - The relevant values and constraints criteria do not apply where the Reconfiguring a lot or Material change of use or Operational work, when development footprint plan (or similar in the case of Landslide hazard) or planning scheme.  | ne development is consistent with a current Development permit for<br>re that approval has considered and addressed (e.g. through a  |  |  |
|   |  |  |  |
| by a suitably qualified person verifying the proposed development is in a<br>Note - To assist in demonstrating achievement of this performance outc<br>accordance with Planning scheme policy – Heritage and landscape cha<br>adopted in accordance with AS 4970-2009 Protection of trees on develo | ome, a Tree assessment report is prepared by a qualified arborist in   |  |  |
| Note - Places, including sites, objects and buildings having local cultura landscape character and listed in Schedule 1 of Planning scheme policy heritage significance at a State level and being entered in the Queensla scheme policy - Heritage and landscape character.                        | ppment sites.<br>I heritage significance, are identified on Overlay map - Heritage and<br>y - Heritage and landscape character. Places also having cultural  |  |  |
| Note - Places, including sites, objects and buildings having local cultura<br>landscape character and listed in Schedule 1 of Planning scheme policy<br>heritage significance at a State level and being entered in the Queensla  | ppment sites.<br>I heritage significance, are identified on Overlay map - Heritage and<br>y - Heritage and landscape character. Places also having cultural  |  |  |
| Note - Places, including sites, objects and buildings having local cultura<br>landscape character and listed in Schedule 1 of Planning scheme policy<br>heritage significance at a State level and being entered in the Queensla  | ppment sites.<br>I heritage significance, are identified on Overlay map - Heritage and<br>y - Heritage and landscape character. Places also having cultural  |  |  |
| Note - Places, including sites, objects and buildings having local cultura<br>landscape character and listed in Schedule 1 of Planning scheme policy<br>heritage significance at a State level and being entered in the Queensla<br>scheme policy - Heritage and landscape character.               | ppment sites.<br>I heritage significance, are identified on Overlay map - Heritage and<br>y - Heritage and landscape character. Places also having cultural<br>and Heritage Register, are also identified in Schedule 1 of Planning  |  |  |

| P072   | No acceptable outcome provided.                                  |
|--|--|
| <ul> <li>PO72</li> <li>Demolition and removal is only considered where: <ul> <li>a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or</li> <li>b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or</li> <li>c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic event which substantially destroys the building or object.</li> </ul> </li> <li>PO73</li> <li>Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.</li> </ul> | No acceptable outcome provided.                                  |
| Overland flow path (refer Overlay map - Overland flow p<br>apply)<br>Note - The applicable river and creek flood planning levels associated w<br>obtained by requesting a flood check property report from Council.  | with defined flood event (DFE) within the inundation area can be |
| <ul> <li>PO74</li> <li>Development:</li> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>   | No acceptable outcome provided.                                  |
| <ul> <li>PO75</li> <li>Development: <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> </ul> </li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> </ul>  | AO75<br>No acceptable outcome provided.                          |

| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.  |   |
|--|---|
| P076   | No acceptable outcome provided.   |
| Development does not:  |   |
| <ul> <li>a. directly, indirectly or cumulatively cause any increase<br/>in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland<br/>flow either on the premises or other premises, public<br/>lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an</li> </ul>  |   |
| acceptable outcome, nor are any other design options that may increase scouring.   | Si <sup>O</sup>   |
| P077   | A077  |
| Development ensures that public safety and the risk to the<br>environment are not adversely affected by a detrimental<br>impact of overland flow on a hazardous chemical located<br>or stored on the premises.   | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and<br>associated Regulation and Guidelines, the Environmental<br>Protection Act 1994 and the relevant building assessment<br>provisions under the Building Act 1975 for requirements related |
|  | to the manufacture and storage of hazardous substances.   |
| P078   | A078  |
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.   | Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.  |
| P079   | A079.1  |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains through<br>private property cater for overland flows for a fully<br>developed upstream catchment and are able to be easily<br>maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development does<br>not increase the potential for significant adverse impacts on an<br>upstream, downstream or surrounding premises. | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the<br>following relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>A079.2  |
|  |   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   | Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event<br>up to and including the 1% AEP for the fully developed<br>upstream catchment.   |
| PO80   | No acceptable outcome provided.   |
|  |   |

Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over: a. a stormwater pipe if the nominal pipe diameter exceeds 300mm; an overland flow path where it crosses more than b. one premises; inter-allotment drainage infrastructure. C. Note - Refer to Planning scheme policy - Integrated design for details and examples. Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM. Additional criteria for development for a Park<sup>(57)</sup> **PO81** AO81 Development for a Park<sup>(57)</sup> ensures that the design and Development for a Park<sup>(57)</sup> ensures works are provided layout responds to the nature of the overland flow affecting in accordance with the requirements set out in Appendix the premises such that: B of the Planning scheme policy - Integrated design. a. public benefit and enjoyment is maximised; impacts on the asset life and integrity of park b. structures is minimised; maintenance and replacement costs are minimised. c. Infrastructure buffer areas (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply) DU83 .....

| ł | P082  | A082   |
|---|---|--|
|   | <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical</li> </ul> | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer. |
|   | infrastructure.   |  |

#### 7.2.3.2.2 Mixed business sub-precinct

#### 7.2.3.2.2.1 Purpose - Mixed business sub-precinct

- 1. The purpose of the Mixed business sub-precinct will be achieved through the following overall outcomes:
  - a. Development reinforces the Mixed business sub-precinct as the main sub-precinct for specialised commercial and convenience retail services at ground and lower levels with office<sup>(53)</sup> and residential uses above.
  - b. Development forms an active street frontage along the main street as shown on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.2.1 Urban design framework, Figure 7.2.3.2.2 Indicative street network, and Figure 7.2.3.2.3 Movement, key street and connections.
  - c. Commercial activities must:
    - i. be centrally located along the Town centre's eastern main street boulevard and provide active frontages;
    - ii. cluster with other business and administrative activities;
    - iii. be designed, sited and constructed to:
      - A. maintain a human scale, through appropriate building heights and form;
      - B. provide attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces;
      - C. are centred around a main street;
      - D. provide for active and passive surveillance of road frontages, movement corridors and public spaces;
      - E. promote active transport options and ensures an oversupply of car parking is not provided;
      - F. not result in large internalised shopping centres<sup>(76)</sup> (e.g. large blank external walls with tenancies only accessible from within the building) surrounded by expansive areas of surface car parking.
  - d. Residential activities must:

i.

- achieve a minimum net density of 60 dwellings/ha;
- ii. form part of a mixed use multi-storey building, with active retail or commercial uses at the ground and lower level;
- iii. be designed, sited and constructed to:

contribute to an attractive streetscape with priority given to pedestrians;

- B. encourage passive surveillance of public spaces;
- C. provide a diverse and attractive built form where buildings are located closer to the street and encourage active frontages;
- D. incorporate sub-tropical urban design principles that respond to local climatic conditions;
- E. incorporate sustainable practices including maximising energy efficiency and water conservation.
- e. Retail activities must:

А

- i. be located at the ground floor adjoining the main street boulevard, fostering opportunities for social and economic exchange;
- ii. be of a small scale, ancillary to the business function of the sub-precinct;
- iii. not negatively impact the streetscape;
- iv. not undermine the role or viability of Centre core sub-precinct as the main retail sub-precinct in the Town centre precinct; or existing or future centres or neighbourhood hubs;
- v. be designed, sited and constructed to:
  - A. maintain a human scale, through appropriate building heights and form;
  - B. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces;
  - C. provides for active and passive surveillance of road frontages, movement corridors and public spaces;
  - D. promotes active transport options and ensures an oversupply of car parking is not provided;
  - E. not result in large internalised shopping centres<sup>(76)</sup> (e.g. large blank external walls with tenancies only accessible from within the building) surrounded by expansive areas of surface car parking.
- f. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - ii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- g. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- h. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- i. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- j. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- k. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- I. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.

- m. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- n. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- o. Development in the Mixed business sub-precinct is for one or more of the uses identified below:

| •       | Health care services <sup>(33)</sup>                      | • Sales office <sup>(72)</sup> | • | Service industry <sup>(73)</sup> |
|---------|---|--------------------------------|---|----------------------------------|
|         | Multiple dwelling <sup>(49)</sup> - if above ground level |                                |   |                                  |
| $\cdot$ | Office <sup>(53)</sup>                                    |                                |   |                                  |

Development in the Mixed business sub-precinct does not include one or more of the following uses:

| • | Air services <sup>(3)</sup>     | • | High impact industry <sup>(34)</sup>                               | • | Residential care facility <sup>(65)</sup> |
|---|---------------------------------|---|--|---|---|
| • | Animal husbandry <sup>(4)</sup> | • | Hospital <sup>(36)</sup>   | • | Resort complex <sup>(66)</sup>            |
|   | Animal keeping <sup>(5)</sup>   | • | Hotel <sup>(37)</sup>  | • | Retirement facility <sup>(67)</sup>       |
| • | Aquaculture <sup>(6)</sup>      | • | Intensive animal industry <sup>(39)</sup>                          | • | Roadside stall <sup>(68)</sup>            |
| • | Brothel <sup>(8)</sup>          | • | Intensive horticulture <sup>(40)</sup>                             | • | Rural industry <sup>(70)</sup>            |
| • | Car wash <sup>(11)</sup>        | • | Low impact industry <sup>(42)</sup>                                | • | Rural workers'                            |
| • | Cemetery <sup>(12)</sup>        | • | Major sport, recreation and entertainment facility <sup>(44)</sup> |   | accommodation <sup>(71)</sup>             |
|   |                                 |   |  |   |   |

| • | Child care centres <sup>(13)</sup>          | • | Market <sup>(46)</sup>                               | • | Shop <sup>(75)</sup> - if for a                         |
|---|---|---|--|---|---|
|   |   |   |  |   | supermarket, department or                              |
| • | Club <sup>(14)</sup>                        | ٠ | Marine industry <sup>(45)</sup>                      |   | discount department store                               |
| • | Community residence <sup>(16)</sup>         | • | Medium impact industry <sup>(47)</sup>               |   | or having a GFA greater<br>than 100m <sup>²</sup>       |
| • | Community use <sup>(17)</sup>               | • | Motor sport facility <sup>(48)</sup>                 | • | Shopping centre <sup>(76)</sup> - if                    |
| • | Crematorium <sup>(18)</sup>                 | • | Nature based tourism <sup>(50)</sup>                 |   | including a supermarket, department or discount         |
| • | Cropping <sup>(19)</sup>                    | • | Nightclub entertainment facility <sup>(51)</sup>     |   | department store or a shop<br>having a GFA greater than |
| • | Detention facility <sup>(20)</sup>          |   | lacinty  |   | 100m <sup>2</sup>                                       |
| • | Dual occupancy <sup>(21)</sup>              | • | Non-resident workforce accommodation <sup>(52)</sup> |   | Showroom <sup>(78)</sup>                                |
| • | Dwelling house <sup>(22)</sup>              | • | Outdoor sales <sup>(54)</sup>                        | • | Special industry <sup>(79)</sup>                        |
| • | Extractive industry <sup>(27)</sup>         | • | Outdoor sport and                                    | • | Theatre <sup>(82)</sup>                                 |
| • | Food and drink outlet <sup>(28)</sup> - if  |   | recreation <sup>(55)</sup>                           | • | Tourist attraction <sup>(83)</sup>                      |
|   | including a drive through                   | • | Permanent plantation <sup>(59)</sup>                 | - | Tourist park <sup>(84)</sup>                            |
| • | Function facility <sup>(29)</sup>           | • | Port services <sup>(61)</sup>                        | ~ | Transport depot <sup>(85)</sup>                         |
| • | Garden centre <sup>(31)</sup>               | • | Relocatable home park <sup>(62)</sup>                | • | Warehouse <sup>(88)</sup>                               |
| • | Hardware and trade supplies <sup>(32)</sup> | • | Renewable energy facility <sup>(63)</sup>            | • | Winery <sup>(90)</sup>                                  |
|   |   |   |  |   |   |

q. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

#### 7.2.3.2.2.2 Criteria for assessment

#### Part E — Criteria for assessable development - Mixed business sub-precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part E, Table 7.2.3.2.2.1.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

#### Table 7.2.3.2.2.1 Assessable development - Mixed business sub-precinct

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| Ger  | neral criteria                  |
| Centre network and function  |                                 |
| PO1  | No acceptable outcome provided. |
| Development in the Mixed business sub-precinct is<br>of a size, scale, range of services and location<br>commensurate with the role and function of this<br>sub-precinct in the centres network. |                                 |

| Note - Refer to Table 7.2.3.3 Caboolture West - centres network.  |  |
|---|--|
| Active frontage   |  |
| PO2   | A02.1  |
| Development addresses and activates streets and public spaces by:   | New buildings and extensions adjacent to street frontages are built to the street alignment.   |
| <ul> <li>a. establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. the use of windows or glazing and avoiding blank walls with the use of sleeving);</li> <li>b. ensuring buildings and individual tenancies address street frontages and other areas of pedestrian movement;</li> <li>c. new buildings adjoin or are within 3m of a primary street frontage, civic space or public open space;</li> <li>d. locating car parking areas behind or under buildings to not dominate the street</li> </ul> | <ul> <li>AO2.2</li> <li>At-grade car parking: <ul> <li>a. does not adjoin a main street or a corner;</li> </ul> </li> <li>b. where at grade car parking adjoins a street (other than a main street) or civic space it does not take up more than 40% of the length of the street frontage.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> <li>AO2.3</li> |
| <ul> <li>environment;</li> <li>e. providing visual interest to the façade (e.g. windows or glazing, variation in colours, materials, finishes, articulation, recesses or projections);</li> <li>f. establishing or maintaining human scale.</li> </ul>  | <ul> <li>Development on corner lots:</li> <li>a. addresses both street frontages;</li> <li>b. express strong visual elements, including feature building entries.</li> </ul>   |
|   | AO2.4  |
| 2C Plai   | <ul> <li>The front facade of the building:</li> <li>a. is made up of a minimum of 50% windows or glazing between a height of 1m and 2m;</li> <li>b. the minimum amount of window or glazing is to remain uncovered and free of signage.</li> </ul>   |
| NBI   | Note - This does not apply to Adult stores <sup>(1)</sup> .  |
|   | AO2.5  |
|   | Where adjoining the main street frontage, individual tenancies do not exceed a frontage length of 20m.   |
| Setbacks  |  |
| <b>PO3</b><br>Side and rear setbacks are of a dimension to:   | No acceptable outcome provided.  |

| a. cater for required openings, the location of loading docks and landscaped buffers etc.;  |   |
|---|---|
| b. protect the amenity of adjoining sensitive land uses.  |   |
| Site area   |   |
| PO4   | No acceptable outcome provided.   |
| The development has sufficient area and dimensions<br>to accommodate required buildings and structures,<br>vehicular access, manoeuvring and parking and<br>landscaping.  |   |
| Building height   |   |
| PO5<br>The height of buildings reflect the individual<br>character of the centre.   | AO5<br>Building heights do not to exceed that mapped on<br>Neighbourhood development plan map - Building<br>heights.                  |
| Streetscape   |   |
| PO6<br>Development contributes to an attractive and<br>walkable street environment in the centre through<br>the provision of streetscape features (e.g. Footpaths,<br>lighting, bins, furniture, landscaping, pedestrian<br>crossings etc), as outlined in Planning scheme policy<br>- Integrated design.<br>Editor's note - Additional approvals may be required where<br>works are required within road reserves. | No acceptable outcome provided.   |
| Built form  |   |
| P07   | A07   |
| Ground floor spaces are designed to enable the flexible re-use of floor area for commercial and retail activities.  | The ground floor has a minimum ceiling height of 4.2m.  |
| PO8   | A08   |
| <ul><li>Awnings are provided at the ground level fronting pedestrian footpaths. Awnings:</li><li>a. provide adequate protection for pedestrians from solar exposure and inclement weather;</li></ul>  | <ul><li>Buildings incorporate an awning that:</li><li>a. is cantilevered;</li><li>b. extends from the face of the building;</li></ul> |
| b. are integrated with the design of the building and the form and function of the street;  | <ul> <li>has a minimum height of 3.2m and a maximum heigh<br/>of 4.2m above pavement level;</li> </ul>                                |

| C.   | do not compromise the provision of street trees and signage;   | d. does not extend past a vertical plane of 1.5m inside the kerb line to allow for street trees and regulatory signage; |
|------|--|---|
| d.   | ensure the safety of pedestrians and vehicles (e.g. No support poles).   | e. aligns with adjoining buildings to provide continuous shelter where possible.  |
|      |  | Figure - Awning requirements  |
|      |  | Consistent height with<br>adjoining properties.   |
| POS  |  | No acceptable outcome provided.   |
|      | uildings exhibit a high standard of design and struction, which:   |   |
| a.   | adds visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, cantilevered awning);  | SCI   |
| b.   | enables differentiation between buildings;   | $\diamond$  |
| C.   | contributes to a safe environment;   |   |
| d.   | incorporates architectural features within the<br>building facade at the street level to create<br>human scale;  |   |
| e.   | treat or break up blank walls that are visible from public areas;  |   |
| f.   | includes building entrances that are readily<br>identifiable from the road frontage, located and<br>oriented to favour active and public transport<br>usage by connecting to pedestrian footpaths<br>on the street frontage and adjoining sites; |   |
| g.   | facilitate casual surveillance of all public spaces.   |   |
| PO1  | 0  | No acceptable outcome provided.   |
| Buil | ding entrances:  |   |
| a.   | are readily identifiable from the road frontage;   |   |
| b.   | add visual interest to the streetscape;  |   |

| C.    | are designed to limit opportunities for concealment;   |  |  |  |
|-------|--|--|--|--|
| d.    | are located and oriented to favour active and<br>public transport usage by connecting to<br>pedestrian footpaths on the street frontage;                             |  |  |  |
| e.    | include footpaths that connect with adjoining sites;   |  |  |  |
| f.    | provide a dedicated, sealed pedestrian<br>footpath between the street frontage and the<br>building entrance.   |  | 0  | 2  |
| sche  | e - The design provisions for footpaths outlined in Planning<br>eme policy - Integrated design may assist in demonstrating<br>pliance with this Performance Outcome. |  | 5  | SION   |
| Car   | parking  |  | 10   |  |
| PO1   | 1  | AO11   |  |  |
| The   | number of car parking spaces is managed to:  | Car parking is pro   | ovided in accordance   | e with the table below.  |
| a.    | provide for the parking of visitors and<br>employees that is appropriate to the use and<br>the sites proximity to public and active                                  | Land use   | Maximum number of<br>Car Spaces to be<br>Provided                                    | Minimum Number of<br>Car Spaces to be<br>Provided                                  |
|       | transport options;   | Non-residential  | 1 per 30m <sup>2</sup> of GFA  | 1 per 50m <sup>2</sup> of GFA  |
| b.    | not include an oversupply of car parking spaces.   | Residential -<br>Permanent/Long<br>term                                  | N/A  | 1 per dwelling   |
| asse  | e - Refer to Planning scheme policy - Integrated transport<br>essment for guidance on how to achieve compliance with<br>outcome.                                     | Residential -<br>Services/short term                                     | 3 per 4 dwellings +<br>staff spaces  | 1 per 5 dwellings +<br>staff spaces  |
|       |  |  |  | the nearest whole number.  |
|       |  | Note - Allocation of c<br>the developer.                                 | ar parking spaces to dwe   | llings is at the discretion of   |
|       |  | Note - Residential - I<br>Relocatable home p<br>facility <sup>(67)</sup> | <sup>D</sup> ermanent/long term inclu<br>ark <sup>(62)</sup> , Residential care t    | udes: Multiple dwelling <sup>(49)</sup> ,<br>facility <sup>(65)</sup> , Retirement |
|       | Br   | Note - Residential - ;<br>accommodation <sup>(69)</sup>                  | Services/short term incluc<br>or Short-term accommod                                 | les: Rooming<br>ation <sup>(77)</sup> .  |
|       |  | disability required by   | tes exclude car parking s<br>Disability Discrimination<br>ion legislation and standa | Act 1992 or the relevant   |
| P01   | 2  | No acceptable ou   | tcome provided.  |  |
| of la | parking is designed to avoid the visual impact<br>rge areas of surface car parking on the<br>etscape.  |  |  |  |

| PO13  | No acceptable outcome pro   | vided.   |
|---|---|--|
| Car parking design includes innovative solutions, including on-street parking and shared parking areas.   |   |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples of on-street parking.   |   |  |
| PO14  | A014  |  |
| The design of car parking areas:  | All car parking areas are de accordance with Australian                 |  |
| a. does not impact on the safety of the external road network;  | .6  |  |
| b. ensures the safe movement of vehicles within the site.   | 0   | SIG  |
| PO15  | No acceptable outcome pro   | vided.   |
| <ul> <li>The safety and efficiency of pedestrian movement is prioritised in the design of car parking areas through providing pedestrian paths in car parking areas that are:</li> <li>a. located along the most direct pedestrian routes between building entrances, car parks and adjoining uses;</li> <li>b. protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);</li> <li>c. of a width to allow safe and efficient access for prams and wheelchairs.</li> </ul> | Scheme  |  |
| Bicycle parking and end of trip facilities  |   |  |
| Note - Building work to which this code applies constitutes Maj facilities prescribed in the Queensland Development Code MP   | or Development for purposes of deve<br>4.1.                             | lopment requirements for end of trip                             |
| P016  | AO16.1  |  |
| a. End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:  | Minimum bicycle parking fac<br>with the table below (rounde<br>number). | ilities are provided in accordance<br>ed up to the nearest whole |
| <ul> <li>adequate bicycle parking and storage<br/>facilities; and</li> </ul>  | Use   | Minimum Bicycle Parking  |
|   | Residential uses comprised of dwellings                                 | Minimum 1 space per dwelling                                     |

|  |   | ·  |  |
|--|---|--|--|
|  | quate provision for securing<br>ngings; and   | All other residential uses   | Minimum 1 space per 2 car parking<br>spaces identified in Schedule 7 – car<br>parking  |
| show   | nge rooms that include adequate<br>vers, sanitary compartments, wash<br>ns and mirrors.   | Non-residential uses   | Minimum 1 space per 200m2 of GFA   |
| b. Notwithsta<br>provide er  | anding a. there is no requirement to<br>nd of trip facilities if it would be<br>able to provide these facilities having   | under the Queensland Developn<br>instrument to prescribe facility leve<br>in those acceptable solutions. Th<br>of the default levels set for end o   | lutions for end of trip facilities prescribed<br>nent Code permit a local planning<br>els higher than the default levels identified<br>nis acceptable outcome is a combination<br>of trip facilities in the Queensland<br>tional facilities required by Council. |
| forw   | projected population growth and<br>ard planning for road upgrading and<br>elopment of cycle paths; or   | AO16.2<br>Bicycle parking is:  |  |
| to ar<br>havi  | ther it would be practical to commute<br>nd from the building on a bicycle,<br>ng regard to the likely commute  | a. provided in accordance<br>to Traffic Management   | ce with Austroads (2008), Guide<br>at - Part 11: Parking;  |
|  | nces and nature of the terrain; or condition of the road and the nature   | b. protected from the wear roof structure;   | ather by its location or a dedicated   |
| and  | amount of traffic potentially affecting safety of commuters.  | c. located within the buil structure for residents   | ding or in a dedicated, secure<br>and staff;   |
| Editor's note - The  | e intent of b above is to ensure the  | d. adjacent to building en<br>customers and visitors   | ntrances or in public areas for<br>s.  |
| requirements for to<br>not applied in unre<br>these requiremen   | bicycle parking and end of trip facilities are<br>easonable circumstances. For example<br>ts should not, and do not apply in the Rural<br>residential zone etc. | Note - Bicycle parking structures prescribed in AS2890.3.  | are to be constructed to the standards   |
| Editor's note - This performance outcome is the same as the<br>Performance Requirement prescribed for end of trip facilities<br>under the Queensland Development Code. For development<br>incorporating building work, that Queensland Development<br>Code performance requirement cannot be altered by a local<br>planning instrument and has been reproduced here solely for<br>information purposes. Council's assessment in its building<br>work concurrence agency role for end of trip facilities will be<br>against the performance requirement in the Queensland<br>Development Code. As it is subject to change at any time,<br>applicants for development incorporating building work should<br>ensure that proposals that do not comply with the acceptable<br>outcomes under this heading meet the current performance |   |  | trip facilities provided for residential and pooled, provided they are within 100 lding.   |
|  |   | under the Queensland Developn<br>instrument to prescribe facility leve<br>in those acceptable solutions. This<br>of the default levels set for end o | lutions for end of trip facilities prescribed<br>nent Code permit a local planning<br>els higher than the default levels identified<br>s acceptable outcome is an amalgamation<br>of trip facilities in the Queensland<br>tional facilities required by Council. |
| requirement presc  | ribed in the Queensland Development Code.   | AO16.3   |  |
|  |   | For non-residential uses, st   | torage lockers:  |
|  | *   | a. are provide at a rate of (rounded up to the ne  | of 1.6 per bicycle parking space arest whole number);  |
|  |   | b. have minimum dimens<br>(width) x 450mm (dep   | sions of 900mm (height) x 300mm<br>th).  |
|  |   |  | ooled across multiple sites and activities<br>ntrance to the building and within 50<br>prage facilities.   |
|  |   |  |  |

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

#### AO16.4

For non-residential uses, changing rooms:

- a. are provided at a rate of 1 per 10 bicycle parking spaces;
- b. are fitted with a lockable door or otherwise screened from public view;
- c. are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:

| Bicycle<br>spaces<br>provided | Male/<br>Female       | Change<br>rooms<br>required | Showers required   | Sanitary<br>compartments<br>required   | Washbasins<br>required  |
|-------------------------------|-----------------------|-----------------------------|--|--|---|
| 1-5                           | Male<br>and<br>female | 1 unisex<br>change<br>room  | 1  | 1 closet pan   | 1   |
| 6-19                          | Female                | 1                           | 1  | 1 closet pan   | 1   |
| 20 or<br>more                 | Male                  | 1                           | 1  | 1 closet pan   | 1   |
| C                             | Female                |                             | 2, plus 1 for<br>every 20<br>bicycle<br>spaces<br>provided<br>thereafter | 2 closet pans, plus 1<br>sanitary compartment<br>for every 60 bicycle<br>parking spaces<br>provided thereafter   | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
| 9                             | Male                  | 1                           | 2, plus 1 for<br>every 20<br>bicycle<br>spaces<br>provided<br>thereafter | 1 urinal and 1 closet<br>pans, plus 1 sanitary<br>compartment at the<br>rate of 1 closet pan or<br>1 urinal for every 60<br>bicycle space<br>provided thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |

Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.

Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).

#### d. are provided with:

- i. a mirror located above each wash basin;
- ii. a hook and bench seating within each shower compartment;
- iii. a socket-outlet located adjacent to each wash basin.

Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation

of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council. Loading and servicing **PO17** No acceptable outcome provided. Loading and servicing areas: are not visible from any street frontage; a. b. are integrated into the design of the building; include screening and buffers to reduce C. negative impacts on adjoining sensitive land uses; are consolidated and shared with adjoining d. sites where possible. Note - Refer to Planning scheme policy - Centre and neighbourhood hub design. Waste **PO18** AO18 Bins and bins storage areas are provided, designed and Bins and bins storage areas are designed, located and managed to prevent amenity impacts on the managed in accordance with Planning scheme policy - Waste. locality. Landscaping and fencing PO19 No acceptable outcome provided. On-site landscaping: is incorporated into the design of the a. development; reduces the dominance of car parking and b. servicing areas from the street frontage; incorporates shade trees in car parking areas; C. d. retains mature trees wherever possible; e. contributes to quality public spaces and the microclimate by providing shelter and shade; f. maintains the achievement of active frontages and sightlines for casual surveillance. Note - All landscaping is to accord with Planning scheme policy - Integrated design.

| PO20   | No acceptable outcome provided.  |
|--|--|
| Surveillance and overlooking are maintained between the road frontage and the main building line.  |  |
| Lighting   |  |
| PO21   | No acceptable solution provided.   |
| Lighting is designed to provide adequate levels of<br>illumination to public and communal spaces to<br>maximise safety while minimising adverse impacts<br>on residential and other sensitive land uses.   |  |
| Amenity  |  |
| PO22   | No acceptable solution provided.   |
| The amenity of the area and adjacent sensitive land<br>uses are protected from the impacts of dust, odour,<br>chemicals and other environmental nuisances.   |  |
| Noise  |  |
| P023   | No acceptable outcome provided.  |
| Noise generating uses do not adversely affect<br>existing or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from<br>or adjoin a road or public area are not appropriate noise<br>attenuation measures unless adjoining a motorway, arterial<br>road or rail line.<br>Note - A noise impact assessment may be required to<br>demonstrate compliance with this PO. Noise impact<br>assessments are to be prepared in accordance with Planning<br>scheme policy - Noise. | SCI  |
| P024   | AO24.1   |
| Sensitive land uses are provided with an appropriate<br>acoustic environment within designated external<br>private outdoor living spaces and internal areas  | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.   |
| while:   | AO24.2   |
| <ul> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> </ul>  | <ul> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public area unless:</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not</li> </ul> |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.  | serve an existing or future active transport purpose<br>(e.g. pedestrian paths or cycle lanes) or where<br>attenuation through building location and materials<br>is not possible.   |

| Note - Refer to Planning Scheme Policy – Integrated design<br>for details and examples of noise attenuation structures.   | <ul> <li>b. do not remove existing or prevent future active transport<br/>routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance<br/>with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details<br/>and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport<br/>routes.</li> </ul> |
|---|--|
| W   | orks criteria  |
| Utilities   |  |
| PO25  | A025   |
| The development is connected to an existing reticulated electricity supply system (approved by the relevant energy regulating authority) and the infrastructure does not negatively impact the streetscape. | The development is connected to underground electricity.   |
| PO26  | No acceptable outcome provided.  |
| The development has access to telecommunications<br>and broadband services in accordance with current<br>standards.   | Scher  |
| PO27<br>Where available the development is to safely<br>connect to reticulated gas.   | No acceptable outcome provided.  |
| PO28<br>The development provides for the treatment and<br>disposal of sewage and other waste water in a way<br>that will not cause environmental harm or pose a<br>risk to public health.                   | AO28.1<br>Where in a sewered area, the development is connected to<br>a reticulated sewerage system.   |
| NBR   | AO28.2<br>Where not in a sewered area, the development is serviced<br>by an appropriate on-site sewerage facility.<br>Note - A site and soil evaluation report is generally required to demonstrate  |
| PO29 The development is provided with an adequate and   | compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.         AO29.1         Where in an existing connections area or a future connections   |
| sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.  | area as detailed in the Unitywater Water Connections Policy,<br>the development is connected to the reticulated water supply<br>system in accordance with the South East Queensland Water  |

|  | Supply and Sewerage Design and Construction Code and<br>the relevant Water Service Association of Australia (WSAA)<br>codes and standards.<br>AO29.2<br>Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater Connections<br>Policy, the development is provided with an adequate water<br>supply of at least 45,000 litres by way of on-site storage which<br>provides equivalent water quality and reliability to support the<br>use requirements of the development. |
|--|---|
| <b>PO30</b><br>The development is provided with dedicated and constructed road access.   | No acceptable outcome provided.   |
| Access   |   |
| <ul> <li>PO31</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> | No acceptable outcome provided.   |
| <b>PO32</b><br>Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.   | No acceptable outcome provided.   |
| <ul><li>PO33</li><li>The layout of the development does not compromise:</li><li>a. the development of the road network in the area;</li></ul>  | AO33.1<br>Direct vehicle access for residential development does not<br>occur from arterial or sub-arterial roads or a motorway.<br>Editor's note - Residential developments should consider amalgamation<br>with the lot to the rear and gaining access via a laneway.   |

| <ul> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> <li>Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).</li> </ul> | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).         AO33.2         The development provides for the extension of the road network in the area in accordance with Council's road network planning.         AO33.3         The development does not compromise future road widening |
|--|--|
|  | of frontage roads in accordance with the relevant standard<br>and Council's road planning.<br>AO33.4<br>The lot layout allows forward access to and from the site.   |
|  | The lot layout allows forward access to and norm the site.   |
| PO34   | A034.1   |
| Safe access facilities are provided for all vehicles required to access the site.  | Site access and driveways are designed and located in accordance with:   |
|  | <ul> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul>  |
|  | AO34.2   |
| Plan   | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.  |
| R  | Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.   |
|  | AO34.3   |
|  | Access driveways, manoeuvring areas and loading facilities<br>provide for service vehicles listed in Schedule 8 Service<br>vehicle requirements for the relevant use. The on-site<br>manoeuvring is to be in accordance with Schedule 8 Service<br>vehicle requirements.   |
|  | A034.4   |
|  | The driveway construction across the verge conforms to the relevant standard drawing for the classification of the road in accordance with Planning scheme policy - Integrated design.   |

| PO35  | AO35                            |
|---|---------------------------------|
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:   | No acceptable outcome provided. |
| <ul> <li>a. ensure the type or volume of traffic generated<br/>by the development does not have a negative<br/>impact on the external road network;</li> <li>b. ensure the orderly and efficient continuation<br/>of the active transport network;</li> <li>c. ensure the site frontage is constructed to a<br/>suitable urban standard generally in<br/>accordance with Planning scheme policy -<br/>Integrated design.</li> </ul>   |                                 |
| Note - An Integrated Transport Assessment (ITA) may be<br>required to demonstrate compliance with this performance<br>outcome. An ITA should be prepared in accordance with<br>Planning scheme policy - Integrated transport assessment.  |                                 |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  |                                 |
| Note - To demonstrate compliance with c. of this performance<br>outcome, site frontage works where in existing road reserve<br>(non-trunk) are to be designed and constructed as follows:   | enne                            |
| <ul> <li>i. Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or</li> <li>ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.</li> </ul> | SCIL                            |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.  |                                 |
| Stormwater  |                                 |
| PO36  | No acceptable outcome provided. |
| Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.<br>Note - Refer to Planning scheme policy - Integrated design for details and examples.  |                                 |
| Note - A downstream drainage discharge report in accordance<br>with Planning scheme policy - Stormwater management may<br>be required to demonstrate achievement of this performance<br>outcome.  |                                 |
| Note - A watercourse as defined in the Water Act may be<br>accepted as a lawful point of discharge providing the drainage<br>discharge from the site does not increase the downstream<br>flood levels during events up to and including the 1% AEP  |                                 |


| storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.  |   |
|---|---|
| PO37  | No acceptable outcome provided.   |
| Stormwater generated from the development does<br>not compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report in accordance<br>with Planning scheme policy - Stormwater management may<br>be required to demonstrate compliance with this performance<br>outcome.   |   |
| PO38<br>Stormwater quality management systems are<br>designed and constructed to minimise the<br>environmental impact of stormwater discharge on<br>surface and underground receiving water quality<br>and meet the design objectives in Tables A and B<br>in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared<br>by a suitably qualified professional will be required in<br>accordance with Planning scheme policy - Stormwater<br>management. | No acceptable outcome provided.   |
| PO39  | No acceptable outcome provided.   |
| <ul> <li>Easements for drainage purposes are provided over:</li> <li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li> <li>b. overland flow paths where they cross more than one property boundary.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul>               |   |
| Site works and construction management  |   |
| <b>PO40</b><br>The site and any existing structures are maintained<br>in a tidy and safe condition.   | No acceptable outcome provided.   |
| PO41  | AO41.1  |
| All works on-site are managed to:   | Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, |


| <ul> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Planning scheme policy - Stormwater management and<br/>Planning scheme policy - Integrated design, including but not<br/>limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in<br/>a manner that differs significantly from pre-existing<br/>conditions;</li> <li>b. stormwater discharged to adjoining and downstream<br/>properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing<br/>conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm<br/>for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm<br/>for all silt barriers and sediment controls are<br/>constructed prior to commencement of any clearing work or<br/>earthworks and are maintained and adjusted as necessary<br/>at all times to ensure their ongoing effectiveness.</li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>AO41.3</li> <li>The completed earthworks (fill or excavation) area is stabilised<br/>using turf, established grass seeding, mulch or sprayed<br/>stabilisation techniques to control erosion and sediment and<br/>dust from leaving the property.</li> </ul> |
|--|--|
| PO42<br>Dust suppression measures are implemented during<br>construction works to protect nearby premises from<br>unreasonable dust impacts.   | No acceptable outcome provided   |
| PO43   | AO43.1   |
| All works on-site and the transportation of material<br>to and from the site are managed to not negatively<br>impact the existing road network, the amenity of the<br>surrounding area or the streetscape.   | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform Traffic<br>Control Devices (MUTCD) to ensure all traffic movements to<br>and from the site are safe.   |
| 50m <sup>3</sup> , a haulage route must be identified and approved by<br>Council.  | AO43.2   |
|  | All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors' vehicles are generally not to be parked in existing roads.   |
|  | Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).  |

|   | AO43.3  |
|---|---|
|   | Any material dropped, deposited or spilled on the roads as a result of construction processes associated with the site are to be cleaned at all times.  |
| PO44  | A044  |
| All disturbed areas are rehabilitated at the completion of construction.<br>Note - Refer to Planning scheme policy - Integrated design for details and examples.  | <ul> <li>At completion of construction all disturbed areas of the site are to be:</li> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. grassed.</li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.</li> </ul>  |
| PO45  | A045.1  |
| <ul> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> </ul> <b>PO46</b> Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council. | <ul> <li>All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.</li> <li>Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.</li> <li>AO45.2</li> <li>Disposal of materials is managed in one or more of the following ways: <ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> </ul> </li> <li>No acceptable outcome provided.</li> </ul> |
| Earthworks  |   |
| PO47  | AO47.1  |
| On-site earthworks are designed to consider the visual and amenity impact as they relate to:<br>a. the natural topographical features of the site;  | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains as<br>necessary.   |

| b. short and long-term slope stability;  | AO47.2  |
|--|---|
| <ul> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may<br/>exist on-site;</li> </ul> | Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.  |
| g. the stability and maintenance of steep rock slopes and batters;   | AO47.3  |
| h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)   | All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.   |
| Note - Filling or excavation works are to be completed within six (6) months of the commencement date.   | AO47.4  |
|  | All filling or excavation is contained within the site.   |
|  | A047.5  |
|  | All fill placed on-site is:   |
|  | <ul> <li>a. limited to that required for the necessary approved use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).</li> </ul> |
|  | AO47.6<br>The site is prepared and the fill placed on-site in accordance  |
|  | with AS3798.  |
|  | Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.   |
|  | AO47.7  |
|  | Materials used for structural fill are in accordance with AS3798.   |
|  | AO47.8  |
| BR   | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.   |
| PO48   | AO48  |
| Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area.  | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |
|  |   |

|   | Figure - Embankment  |
|---|--|
|   | soorm<br>min<br>15m<br>15m<br>15m<br>15m<br>15m<br>15m<br>15m<br>15m<br>15m<br>15m   |
| PO49  | AO49.1   |
| <ul> <li>On-site earthworks are undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity as defined in the Sustainable Planning Act 2009.</li> </ul>   | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.<br>Note - Public sector entity as defined in the <i>Sustainable Planning Act</i> 2009.<br><b>AO49.2</b><br>Earthworks that would result in any of the following are not carried out on-site:<br>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;<br>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.<br>Note - Public sector entity as defined in the <i>Sustainable Planning Act</i> 2009. |
| Filling or excavation does not result in land instability.<br>Note - A slope stability report prepared by an RPEQ may be<br>required.   |  |
| P051  | No acceptable outcome provided.  |
| <ul> <li>Filling or excavation does not result in</li> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements |  |

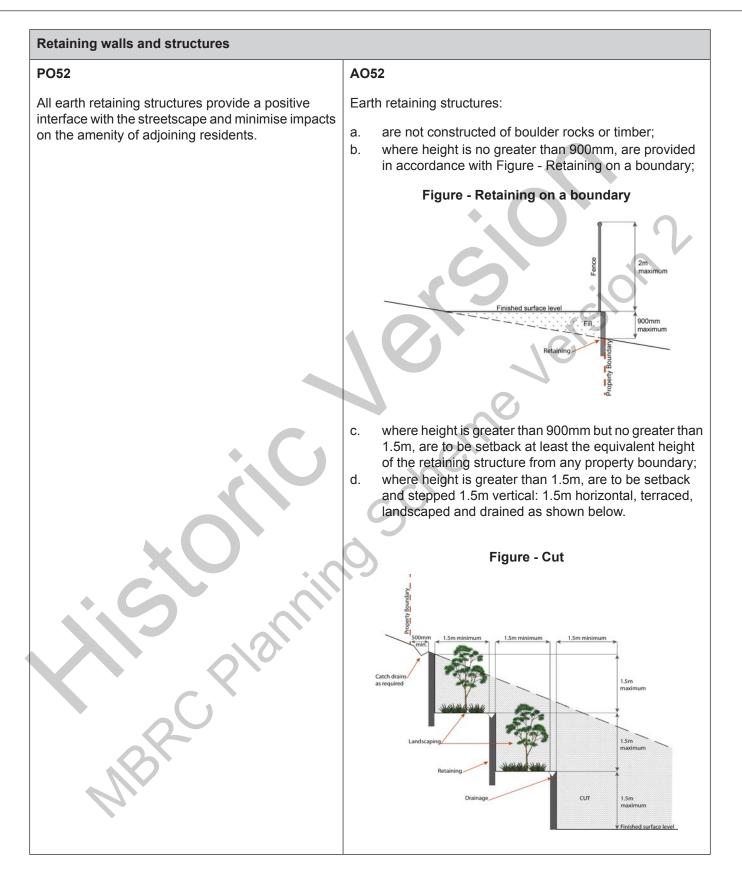

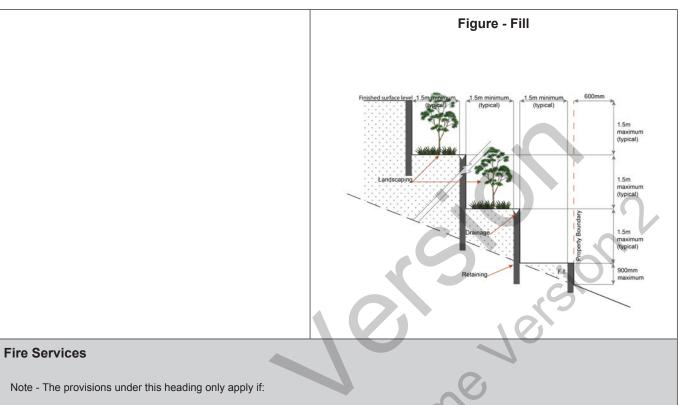

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - ii.
  - iii.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. iv.

#### AND

b. none of the following exceptions apply:

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| PO5  | 3  | AO53.1   |    |
|------|--|--|----|
| Deve | elopment incorporates a fire fighting system that:   | External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian</i>   | m  |
| a.   | satisfies the reasonable needs of the fire fighting entity for the area;   | Standard AS 2419.1 (2005) – Fire Hydrant Installations.  |    |
| b.   | is appropriate for the size, shape and<br>topography of the development and its<br>surrounds;                      | Note - For this acceptable outcome, the following are the relevant part of AS 2419.1 (2005) that may be applicable:  | ts |
| C.   | is compatible with the operational equipment<br>available to the fire fighting entity for the area;                | <ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2 with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings</li> </ul> |    |
| d.   | considers the fire hazard inherent in the materials comprising the development and their proximity to one another; | single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;  |    |
|      |  |  |    |

| e. considers the fire hazard inherent in the  | b. in regard to the general locational requirements for fire hydrants -  |
|---|--|
| surrounds to the development site;<br>f. is maintained in effective operating order.  | Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);   |
|   | c. in regard to the proximity of hydrants to buildings and other facilities<br>- Part 3.2.2.2 (b), (c) and (d), with the exception that:   |
| Note - The Queensland Fire and Emergency Services is the<br>entity currently providing the fire fighting function for the urban<br>areas of the Moreton Bay Region.     | <ul> <li>i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;</li> <li>iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul>  |
|   | A053.2   |
|   | <ul> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:</li> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.</li> </ul> AO53.3 On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i> |
| P054  | AO54   |
| On-site fire hydrants that are external to buildings,<br>as well as the available fire fighting appliance access<br>routes to those hydrants, can be readily identified | For development that contains on-site fire hydrants external to buildings:   |
| at all times from, or at, the vehicular entry point to<br>the development site.   | a. those external hydrants can be seen from the vehicular entry point to the site; or  |
|   | <ul> <li>a sign identifying the following is provided at the<br/>vehicular entry point to the site:</li> </ul>   |
|   | i. the overall layout of the development (to scale);   |
|   | ii. internal road names (where used);  |
|   | iii. all communal facilities (where provided);   |
|   | <ul><li>iv. the reception area and on-site manager's office (where provided);</li></ul>  |
|   |  |

|   | v. external hydrants and hydrant booster points;  |
|---|---|
|   | vi. physical constraints within the internal roadway<br>system which would restrict access by fire fighting<br>appliances to external hydrants and hydrant<br>booster points.   |
|   |   |
|   | Note - The sign prescribed above, and the graphics used are to be:  |
|   | a. in a form;   |
|   | b. of a size;   |
|   | <ul> <li>c. illuminated to a level;</li> <li>which allows the information on the sign to be readily understood, at all</li> </ul>   |
|   | times, by a person in a fire fighting appliance up to 4.5m from the sign.   |
|   |   |
| PO55  | A055  |
| Each on-site fire hydrant that is external to a building<br>is signposted in a way that enables it to be readily<br>identified at all times by the occupants of any<br>firefighting appliance traversing the development<br>site. | For development that contains on-site fire hydrants external<br>to buildings, those hydrants are identified by way of marker<br>posts and raised reflective pavement markers in the manner<br>prescribed in the technical note <i>Fire hydrant indication system</i><br>produced by the Queensland Department of Transport and<br>Main Roads. |
|   | Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.  |
| Use s   | specific criteria   |
| Home based business <sup>(35)</sup>   |   |
| P056  | AO56.1  |
| The scale and intensity of the Home based<br>business <sup>(35)</sup> :<br>a. is compatible with the physical characteristics   | A maximum of 1 employee (not a resident) OR 2 customers<br>OR customers from within 1 Small rigid vehicle (SRV) or<br>smaller are permitted on the site at any one time.  |
| of the site and the character of the local area;  | AO56.2  |
| b. is able to accommodate anticipated car parking demand without negatively impacting the streetscape or road safety;   | The Home based business <sup>(35)</sup> occupies an area of the existing dwelling or on-site structure not greater than 40m <sup>2</sup> gross floor area.  |
| c. does not adversely impact on the amenity of the adjoining and nearby premises;   |   |
| d. remains ancillary to the residential use of the dwelling house <sup>(22)</sup> ;   |   |
|   |   |

| <ul> <li>e. does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;</li> <li>f. ensures employees and visitors to the site do not negatively impact the expected amenity of adjoining properties.</li> </ul>  | (86)  |
|--|---|
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup>  | and Utility installation <sup>(66)</sup>  |
| <ul> <li>PO57</li> <li>The development does not have an adverse impact on the visual amenity of a locality and is: <ul> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> </li> <li>PO58</li> <li>PO59</li> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility: <ul> <li>a. generates no audible sound at the site boundaries where in a residential setting; or b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul> </li> </ul> | <ul> <li>AO57.1 Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment: <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls. </li> <li>AO57.2 A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries. </li> <li>AC58 Access control arrangements: <ul> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire. </li> <li>AC59 All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li></ul></li></ul></li></ul> |
| Residential uses   |   |
| PO60<br>Residential uses form part of mixed-use buildings<br>are in the form of:   | No acceptable outcome provided.   |

| a.               | a Dwelling unit <sup>(23)</sup> located above a retail or commercial use or   |  |
|------------------|---|--|
| b.               | a Medium-density development achieving a minimum site density of 60 dwellings per ha.   |  |
| PO               | 61  | A061   |
|                  | ellings are provided with adequate functional and active private open space that is:  | A dwelling has a clearly defined, private outdoor living space that is:  |
| a.               | directly accessible from the dwelling and is<br>located so that residents and neighbouring<br>uses experience a suitable level of amenity;  | a. as per the table below;   |
| b.               | designed and constructed to achieve adequate  | Use Minimum Area Minimum Dimension in all directions   |
|                  | privacy for occupants from other dwelling units <sup>(23)</sup> and centre uses;  | Ground level dwellings   |
| C.               | accessible and readily identifiable for residents, visitors and emergency services;   | All dwelling types     16m <sup>2</sup> 4m       Above ground level dwellings     4m   |
| d                |   | 1 bedroom or studio 8m <sup>2</sup> 2.5m   |
| d.               | located to not compromise active frontages.   | 2 or more bedrooms 12m <sup>2</sup> 3.0m   |
|                  |   | <ul> <li>b. accessed from a living area;</li> <li>c. sufficiently screened or elevated for privacy;</li> <li>d. ground level open space is located behind the main<br/>building line and not within the primary or secondary<br/>frontage setbacks;</li> <li>e. balconies orientate to the street;</li> <li>f. clear of any non-recreational structure (including but not<br/>limited to air-conditioning units, water tanks, clothes<br/>drying facilities, storage structures, retaining structures<br/>and refuse storage areas).</li> <li>Note - Areas for clothes drying are not visible from street frontages or<br/>public areas (e.g. Separate clothes drying areas are provided that are<br/>oriented to the side or rear of the site or screening is provided).</li> </ul> |
| PO               |   | AO62   |
| Acce<br>resident | ellings are provided with a reasonable level of<br>ess, identification and privacy from adjoining<br>dential and non-residential uses.<br>e - Refer to State Government standards for CPTED.<br>e - Refer to Planning scheme policy - Residential design<br>details and examples. | <ul> <li>The dwelling:</li> <li>a. includes screening to a maximum external transparency of 50% for all habitable room windows that are visible from other dwellings and non-residential uses;</li> <li>b. clearly displays the street number at the entrance to the dwelling and at the front of the site to enable identification by emergency services;</li> </ul>  |
|                  |   |  |

| Retail and commercial uses   | <ul> <li>c. is provided with a separate entrance to that of any non-residential use on the site;</li> <li>d. where located on a site with a non-residential use the dwelling is located behind or above the non-residential use.</li> <li>Note - External fixed or movable screening, opaque glass and window tinting are considered acceptable forms of screening.</li> </ul> |
|--|--|
| PO63   | No acceptable outcome provided.  |
| The Mixed business sub-precinct remains the primary location for significant commercial activity in the Town centre precinct and the Caboolture West Local plan area.  | C ersion   |
| P064   | AO64   |
| Retail activities are provided only where of a small<br>scale, forming an ancillary function and serving the<br>immediate needs of the working population.   | <ul> <li>Retail uses within the mixed business sub-precinct consists of no more than:</li> <li>a. 1 small format supermarket with a maximum gfa of 500m<sup>2</sup>;</li> <li>b. 10 small format retail or commercial tenancies with a maximum gfa of 100m<sup>2</sup> each.</li> </ul>  |
| PO65   | No acceptable outcome provided.  |
| Retail and Food and drink outlets <sup>(28)</sup> are located on<br>lots or tenancies adjacent to a street frontage, civic<br>spaces, public open space, main street boulevard<br>or pedestrian thoroughfare.  |  |
| Telecommunications facility <sup>(81)</sup>  |  |
| Editor's note - In accordance with the Federal legislation Teleco that will not cause human exposure to electromagnetic radiation  | mmunications facilities <sup>(81)</sup> must be constructed and operated in a manner<br>n beyond the limits outlined in the Radiocommunications (Electromagnetic<br>ion Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz   |
| PO66   | AO66.1   |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.   |
|  | AO66.2   |
|  | If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.   |

| PO67  | AO67   |
|---|--|
| A new Telecommunications facility <sup>(81)</sup> is designed<br>and constructed to ensure co-masting or co-siting<br>with other carriers both on the tower or pole and at<br>ground level is possible in the future. | A minimum of 45m <sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.   |
| PO68  | A068   |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.  | The development results in no net reduction in the minimum<br>quantity and standard of landscaping, private or communal<br>open space or car parking spaces required under the planning<br>scheme or under an existing development approval. |
| PO69  | AO69.1   |
| The Telecommunications facility <sup>(81)</sup> does not have<br>an adverse impact on the visual amenity of a locality<br>and is:<br>a. high quality design and construction;   | Where in an urban area, the development does not protrude<br>more than 5m above the level of the existing treeline,<br>prominent ridgeline or building rooftops in the surrounding<br>townscape.   |
| <ul><li>b. visually integrated with the surrounding area;</li><li>c. not visually dominant or intrusive;</li></ul>  | AO69.2   |
| <ul> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy<br/>or the level of the surrounding buildings and</li> </ul>  | In all other areas towers do not exceed 35m in height.   |
| structures;   | AO69.3   |
| <ul><li>f. camouflaged through the use of colours and<br/>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li></ul>   | Towers, equipment shelters and associated structures are of a design, colour and material to:  |
| <ul> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and<br/>character of the zone and surrounding area.</li> </ul>  | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>  |
|   | AO69.4   |
| Plan.   | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is 3m.     |
|   | Where there is no established building line the facility is located at the rear of the site.   |
|   | AO69.5   |
| All -   | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |
|   | AO69.6   |
|   | A minimum 3m wide strip of dense planting is provided around<br>the perimeter of the fenced area, between the facility and<br>street frontage and adjoining uses.  |
|   | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |

|  | Note - Council may require a detailed landscaping plan, prepared by a<br>suitably qualified person, to ensure compliance with Planning scheme<br>policy - Integrated design.   |
|--|--|
| PO70   | A070   |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour<br>vehicular access will be obtained and maintained to the facility<br>in a manner that is appropriate to the site's context.  |
| PO71   | A071   |
| All activities associated with the development occur<br>within an environment incorporating sufficient<br>controls to ensure the facility generates no audible<br>sound at the site boundaries where in a residential<br>setting.  | All equipment comprising the Telecommunications facility <sup>(81</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.  |
| Values and   | constraints criteria   |
| Reconfiguring a lot or Material change of use or Operational wor   | where the development is consistent with a current Development permit for<br>rk, where that approval has considered and addressed (e.g. through a<br>azard) or conditions of approval) the identified value or constraint under this   |
| Haritage and lands one observator (refer Quarlay   | map - Heritage and landscape character to determine if   |
| the following assessment criteria apply)   | GO.  |
| Note - To assist in demonstrating achievement of heritage perfor   | mance outcomes, a Cultural beritage impact assessment report is prepared   |
| by a suitably qualified person verifying the proposed developme  | int is in accordance with The Australia ICOMOS Burra Charter.  |
| Note - To assist in demonstrating achievement of this performan  | ent is in accordance with The Australia ICOMOS Burra Charter.<br>ne outcome, a Tree assessment report is prepared by a qualified arborist in<br>ape character. The Tree assessment report will also detail the measures  |
| Note - To assist in demonstrating achievement of this performan<br>accordance with Planning scheme policy – Heritage and landsca<br>adopted in accordance with AS 4970-2009 Protection of trees of<br>Note - Places, including sites, objects and buildings having local<br>landscape character and listed in Schedule 1 of Planning schem   | ent is in accordance with The Australia ICOMOS Burra Charter.<br>Ince outcome, a Tree assessment report is prepared by a qualified arborist in<br>ape character. The Tree assessment report will also detail the measures<br>in development sites.   |
| Note - To assist in demonstrating achievement of this performan<br>accordance with Planning scheme policy – Heritage and landsca<br>adopted in accordance with AS 4970-2009 Protection of trees of<br>Note - Places, including sites, objects and buildings having local<br>landscape character and listed in Schedule 1 of Planning schem<br>heritage significance at a State level and being entered in the Q  | ent is in accordance with The Australia ICOMOS Burra Charter.<br>the outcome, a Tree assessment report is prepared by a qualified arborist in<br>the ape character. The Tree assessment report will also detail the measures<br>in development sites.<br>I cultural heritage significance, are identified on Overlay map - Heritage and<br>the policy - Heritage and landscape character. Places also having cultural  |
| Note - To assist in demonstrating achievement of this performan<br>accordance with Planning scheme policy – Heritage and landsca<br>adopted in accordance with AS 4970-2009 Protection of trees of<br>Note - Places, including sites, objects and buildings having local<br>landscape character and listed in Schedule 1 of Planning schem<br>heritage significance at a State level and being entered in the Q<br>scheme policy - Heritage and landscape character. | ent is in accordance with The Australia ICOMOS Burra Charter.<br>the outcome, a Tree assessment report is prepared by a qualified arborist in<br>ape character. The Tree assessment report will also detail the measures<br>in development sites.<br>I cultural heritage significance, are identified on Overlay map - Heritage and<br>he policy - Heritage and landscape character. Places also having cultural<br>ueensland Heritage Register, are also identified in Schedule 1 of Planning |

| e.                               | incorporate complementary elements, detailing<br>and ornamentation to those present on the<br>heritage site, object or building;   |  |
|----------------------------------|--|--|
| f.                               | retain public access where this is currently provided.   |  |
| PO7                              | 73   | No acceptable outcome provided.  |
| Dem                              | nolition and removal is only considered where:   |  |
| a.                               | a report prepared by a suitably qualified<br>conservation architect or conservation engineer<br>demonstrates that the building is structurally<br>unsound and is not reasonably capable of<br>economic repair; or  |  |
| b.                               | demolition is confined to the removal of<br>outbuildings, extensions and alterations that<br>are not part of the original structure; or  |  |
| c.<br>d.                         | limited demolition is performed in the course<br>of repairs, maintenance or restoration; or<br>demolition is performed following a<br>catastrophic event which substantially destroys  | VC Jers  |
|                                  | the building or object.  |  |
| PO7                              | <sup>7</sup> 4   | No acceptable outcome provided.  |
| a sit<br>to be<br>herit<br>their | ere development is occurring on land adjoining<br>e of cultural heritage value, the development is<br>e sympathetic to and consistent with the cultural<br>tage values present on the site and not result in<br>values being eroded, degraded or unreasonably<br>cured from public view. | scher  |
| Ove                              | rland flow path (refer Overlay map - Overland  | flow path to determine if the following assessment criteria                  |
| app                              |  |  |
|                                  | e - The applicable river and creek flood planning levels asso<br>ained by requesting a flood check property report from Cour   | ciated with defined flood event (DFE) within the inundation area can be cil. |
|                                  |  |  |
| P07<br>Dev                       | elopment:  | No acceptable outcome provided.  |
| a.                               | minimises the risk to persons from overland flow;  |  |
| b.                               | does not increase the potential for damage<br>from overland flow either on the premises or<br>other premises, public land, watercourses,<br>roads or infrastructure.   |  |
| P07                              | 76   | A076   |
| Dev                              | elopment:  | No acceptable outcome provided.  |
| a.                               | maintains the conveyance of overland flow<br>predominantly unimpeded through the<br>premises for any event up to and including the   |  |

| <ul><li>1% AEP for the fully developed upstream catchment;</li><li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li></ul>   |  |
|---|--|
| Note - A report from a suitably qualified Registered<br>Professional Engineer Queensland is required certifying that<br>the development does not increase the potential for significant<br>adverse impacts on an upstream, downstream or surrounding<br>premises. |  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.   |  |
| P077  | No acceptable outcome provided.  |
| Development does not:<br>a. directly, indirectly or cumulatively cause any  |  |
| increase in overland flow velocity or level;  |  |
| <ul> <li>b. increase the potential for flood damage from<br/>overland flow either on the premises or other<br/>premises, public lands, watercourses, roads<br/>or infrastructure.</li> </ul>  |  |
| Note - Open concrete drains greater than 1m in width are not<br>an acceptable outcome, nor are any other design options that<br>may increase scouring.  | Sche   |
| P078  | A078   |
| Development ensures that public safety and the risk<br>to the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous   | Development ensures that a hazardous chemical is not located or stored in an Overland flow path area.  |
| chemical located or stored on the premises.   | Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances. |
| P079  | A079   |
|   |  |
| Development which is not in a Rural zone ensures<br>that overland flow is not conveyed from a road or<br>public open space onto a private lot.  | Development which is not in a Rural zone that an overland<br>flow paths and drainage infrastructure is provided to convey<br>overland flow from a road or public open space area away<br>from a private lot.   |
| PO80  | AO80.1   |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for<br>a fully developed upstream catchment and are able<br>to be easily maintained.                | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;   |
|   | b. Rural area – N/A;   |

| Note - A report from a suitably qualified Registered<br>Professional Engineer Queensland is required certifying that<br>the development does not increase the potential for significant | <ul> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul>  |
|---|---|
| adverse impacts on an upstream, downstream or surrounding premises.   | AO80.2  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow  | Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up to<br>and including the 1% AEP for the fully developed upstream<br>catchment.       |
| PO81  | No acceptable outcome provided.   |
| Development protects the conveyance of overland<br>flow such that an easement for drainage purposes<br>is provided over:  |   |
| a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;  | S   |
| b. an overland flow path where it crosses more than one premises;   | VO Joi  |
| c. inter-allotment drainage infrastructure.   | N Q   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  | Ner I   |
| Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   | SCI   |
| Additional criteria for development for a Park <sup>(57)</sup>  | 0   |
| P082  | AO82  |
| Development for a Park <sup>(57)</sup> ensures that the design<br>and layout responds to the nature of the overland<br>flow affecting the premises such that:                           | Development for a Park <sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.                  |
| a. public benefit and enjoyment is maximised;   |   |
| b. impacts on the asset life and integrity of park structures is minimised;   |   |
| c. maintenance and replacement costs are minimised.   |   |
| Infrastructure buffer areas (refer Overlay map – Inf<br>criteria apply)   | rastructure buffers to determine if the following assessment  |
| PO83  | A083  |
| Development within a High voltage electricity line<br>buffer:<br>a. is located and designed to avoid any potential<br>adverse impacts on personal health and                            | Except where located on an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer. |

adverse impacts on personal health and wellbeing from electromagnetic fields;

V

Jersi

neme

| b. | is located and designed in a manner that maintains a high level of security of supply; |
|----|--|
| C. | is located and designed so not to impede upon  |
|    | the functioning and maintenance of high  |
|    | voltage electrical infrastructure.   |

Ç

## 7.2.3.2.3 Teaching and learning sub-precinct

#### 7.2.3.2.3.1 Purpose - Teaching and learning sub-precinct

Note - The Teaching and learning sub-precinct assumes a high school and a TAFE or university campus (both being urban campuses of multi-storey buildings).

- 1. The purpose of the Teaching and learning sub-precinct will be achieved through the following overall outcomes:
  - a. Development reinforces the Teaching and learning sub-precinct as the main sub-precinct for secondary and tertiary educational uses and functions within the town centre.
  - b. Education activities must:
    - i. be located in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.2.1 Town centre urban design framework;
    - ii. be developed as an urban campus including multi-storey buildings;
    - iii. provide active frontages to the major street network
  - c. Retail and commercial activities must:
    - i. be located at the ground floor, adjoining main streets and pedestrian thoroughfares, fostering opportunities for social and economic exchange;
    - ii. be of a small scale, ancillary to the education and health function of the sub-precinct;
    - iii. not negatively impact the streetscape;
    - iv. not undermine the role or viability of the Centre core sub-precinct or the Mixed business sub-precinct as the main retail and commercial sub-precincts in the Town centre precinct; or existing or future centres or neighbourhood hubs;
    - v. be designed, sited and constructed to:
      - A. maintain a human scale, through appropriate building heights and form;
      - B. provide attractive, active frontages that maximise pedestrian activity along street frontages, movement corridors and public spaces;
      - C. provide active and passive surveillance of road frontages, movement corridors and public spaces;
      - D. promote active transport options and ensures an oversupply of car parking is not provided;
      - E. not result in large internalised shopping centres<sup>(76)</sup> with large blank external walls with tenancies only accessible from within the building.
  - d. General works associated with the development achieves the following:
    - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
    - ii. the development manages stormwater to:
      - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
      - B. prevent stormwater contamination and the release of pollutants;

- C. maintain or improve the structure and condition of drainage lines and riparian areas;
- D. avoid off-site adverse impacts from stormwater.
- iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- e. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- f. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- g. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- h. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- i. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- j. No acceptable outcome provided.
- k. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- I. Development in the Teaching and learning sub-precinct is for one or more of the uses identified below:

m. Development in the Teaching and learning sub-precinct does not include one or more of the following uses:

| ſ |   |   |   | T  |   |  |
|---|---|---|---|--|---|--|
|   | • | Air services <sup>(3)</sup>                 | • | High impact industry <sup>(34)</sup>             | • | Retirement facility <sup>(67)</sup>                  |
|   | • | Animal husbandry <sup>(4)</sup>             | • | Home based business <sup>(35)</sup>              | • | Roadside stall <sup>(68)</sup>                       |
|   | • | Animal keeping <sup>(5)</sup>               | • | Hotel <sup>(37)</sup>                            | • | Rooming<br>accommodation <sup>(69)</sup>             |
|   | • | Aquaculture <sup>(6)</sup>                  | • | Intensive animal industry <sup>(39)</sup>        |   |  |
|   | • | Bar <sup>(7)</sup>                          | • | Intensive horticulture <sup>(40)</sup>           | • | Rural industry <sup>(70)</sup>                       |
|   | • | Brothel <sup>(8)</sup>                      | • | Low impact industry <sup>(42)</sup>              |   | Rural workers' accommodation <sup>(71)</sup>         |
|   | • | Car wash <sup>(11)</sup>                    | • | Major sport, recreation and                      | • | Shop <sup>(75)</sup> - if for a                      |
|   | • | Cemetery <sup>(12)</sup>                    |   | entertainment facility <sup>(44)</sup>           |   | supermarket, department or discount department store |
|   | • | Child care centres <sup>(13)</sup>          | • | Market <sup>(46)</sup>                           |   | or having a GFA greater than 100m <sup>2</sup>       |
|   | • | Club <sup>(14)</sup>                        | • | Marine industry <sup>(45)</sup>                  | • | Shopping centre <sup>(76)</sup> - if                 |
|   | • | Community residence <sup>(16)</sup>         | • | Medium impact industry <sup>(47)</sup>           |   | including a supermarket,<br>department or discount   |
|   | • | Community use <sup>(17)</sup>               | • | Motor sport facility <sup>(48)</sup>             |   | department store or a shop having a GFA greater than |
|   | • | Crematorium <sup>(18)</sup>                 | • | Nature based tourism <sup>(50)</sup>             | 3 | 100m <sup>2</sup>                                    |
|   | • | Cropping <sup>(19)</sup>                    | • | Nightclub entertainment facility <sup>(51)</sup> | • | Showroom <sup>(78)</sup>                             |
|   | • | Detention facility <sup>(20)</sup>          |   | Non-resident workforce                           | • | Special industry <sup>(79)</sup>                     |
|   | • | Dwelling unit <sup>(23)</sup>               |   | accommodation <sup>(52)</sup>                    | • | Theatre <sup>(82)</sup>                              |
|   | • | Dual occupancy <sup>(21)</sup>              | • | Outdoor sales <sup>(54)</sup>                    | • | Tourist attraction <sup>(83)</sup>                   |
|   | • | Dwelling house <sup>(22)</sup>              | • | Outdoor sport and recreation <sup>(55)</sup>     | • | Tourist park <sup>(84)</sup>                         |
|   | • | Extractive industry <sup>(27)</sup>         |   | Permanent plantation <sup>(59)</sup>             | • | Transport depot <sup>(85)</sup>                      |
|   | • | Food and drink outlet <sup>(28)</sup> - if  |   | Port services <sup>(61)</sup>                    | • | Warehouse <sup>(88)</sup>                            |
|   |   | including a drive through                   | • | Relocatable home park <sup>(62)</sup>            | • | Winery <sup>(90)</sup>                               |
|   | • | Function facility <sup>(29)</sup>           | • | Renewable energy                                 |   |  |
|   | • | Garden centre <sup>(31)</sup>               |   | facility <sup>(63)</sup>                         |   |  |
|   | • | Hardware and trade supplies <sup>(32)</sup> | • | Resort complex <sup>(66)</sup>                   |   |  |
|   |   |   |   |  |   |  |

n. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

#### 7.2.3.2.3.2 Criteria for assessment

#### Part F — Criteria for assessable development - Teaching and learning sub-precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part F, Table 7.2.3.2.3.1.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

| Performance outcomes   |   | Acceptable outcomes  |  |  |
|--|---|--|--|--|
|  | General   | l criteria   |  |  |
| Centre network and function  |   |  |  |  |
| <ul> <li>PO1</li> <li>Development in the Teaching and learning sub-precinct: <ul> <li>a. reflects the prominence of the sub-precinct as a key focal point within the Town centre for education;</li> <li>b. includes activities that have a synergy with the above;</li> </ul> </li> <li>c. does not undermine the viability, role or function of the Centre core or Mixed business sub-precincts within the Town centre;</li> <li>d. does not undermine the viability, role or function of other centres in the Caboolture west area.</li> <li>Note - Refer to Table 7.2.3.3 Caboolture West - Centre network.</li> </ul> PO2 Development maximises the efficient use of land and provides for future growth within the precinct by |   | No acceptable outcome provided.  |  |  |
| Acti   | ive frontage  |  |  |  |
| PO3  |   | AO3.1  |  |  |
|  | elopment addresses and activates streets and public ces by:   | Development addresses the street frontage.   |  |  |
| a.   | establishing and maintaining interaction, pedestrian<br>activity and casual surveillance through appropriate<br>land uses and building design (e.g. the use of<br>windows or glazing and avoiding blank walls with<br>the use of sleeving);   | AO3.2<br>New buildings and extensions are built to the street<br>alignment.  |  |  |
| b.<br>c.<br>d.   | ensuring buildings and individual tenancies address<br>street frontages and other areas of pedestrian<br>movement;<br>new buildings adjoin or are within 3m of a primary<br>street frontage, civic space or public open space;<br>locating car parking areas behind or under buildings<br>to not dominate the street environment; | <ul> <li>AO3.3</li> <li>At-grade car parking:</li> <li>a. does not adjoin a main street or a corner;</li> <li>b. where at-grade car parking adjoin a street (other than a main street) or civic space it does not take up more than 40% of the length of the street frontage.</li> </ul> |  |  |
|  |   |  |  |  |

## Table 7.2.3.2.3.1 Assessable development - Teaching and learning sub-precinct

| e.                                       | providing visual interest to the façade (e.g. windows<br>or glazing, variation in colours, materials, finishes,<br>articulation, recesses or projections);   | Note - Refer to Planning scheme policy - Centre and hub design for details and examples.                |
|--|--|---|
| f.                                       | establishing or maintaining human scale.   | AO3.4   |
|  |  | Development on corner lots:   |
|  |  | a. addresses both street frontages;   |
|  |  | b. expresses strong visual elements, including feature building entries.                                |
| Setb                                     | acks   |   |
| PO4                                      |  | No acceptable outcome provided.   |
| Side                                     | and rear setbacks are of a dimension to:   | 5   |
| a.                                       | cater for required openings, the location of loading docks and landscaped buffers etc.;  | 0 10.   |
| b.                                       | protect the amenity of adjoining sensitive land uses.  | C   |
| Site                                     | area   |   |
| PO5                                      |  | No acceptable outcome provided.   |
| acco                                     | development has sufficient area and dimensions to<br>mmodate required buildings and structures, vehicular<br>ss, manoeuvring and parking and landscaping.  | SC  |
| Buil                                     | ding height  |   |
| PO6                                      |  | AO6   |
|  | height of buildings reflect the individual character of<br>centre.   | Building heights do not to exceed that mapped on Neighbourhood development plan map - Building heights. |
| Stre                                     | etscape  |   |
| PO7                                      |  | No acceptable outcome provided.   |
| stree<br>featu<br>lands<br>Plan<br>Edito | elopment contributes to an attractive and walkable<br>et environment through the provision of streetscape<br>ares (e.g. footpaths, lighting, bins, furniture,<br>scaping, pedestrian crossings etc), as outlined in<br>ning scheme policy - Integrated design.<br>or's note - Additional approvals may be required where works<br>required within road reserves. |   |
| Built                                    | tform  |   |
| PO8                                      |  | A08   |
|  |  | The ground floor has a minimum ceiling height of 4.2m.  |

| Ground floor spaces that adjoin major streets are<br>designed to enable the flexible re-use of floor area for<br>commercial and retail activities.   |  |
|--|--|
| PO9  | AO9  |
| <ul> <li>Awnings are provided at the ground level fronting pedestrian footpaths. Awnings:</li> <li>a. provide adequate protection for pedestrians from solar exposure and inclement weather;</li> <li>b. are integrated with the design of the building and the form and function of the street;</li> <li>c. do not compromise the provision of street trees and signage;</li> <li>d. ensure the safety of pedestrians and vehicles (e.g. No support poles).</li> </ul>  | <ul> <li>Buildings incorporate an awning that:</li> <li>a. is cantilevered;</li> <li>b. extends from the face of the building;</li> <li>c. has a minimum height of 3.2m and a maximum height of 4.2m above pavement level;</li> <li>d. does not extend past a vertical plane of 1.5m inside the kerb line to allow for street trees and regulators signage;</li> <li>e. aligns with adjoining buildings to provide continuous shelter where possible.</li> </ul> |
|  | Figure - Awning requirements   |
| <ul> <li>PO10</li> <li>All buildings exhibit a high standard of design and construction, which:</li> <li>a. adds visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, cantilevered awning);</li> <li>b. enables differentiation between buildings;</li> <li>c. contributes to a safe environment;</li> <li>d. incorporates architectural features within the building facade at the street level to create human scale;</li> <li>e. treat or break up blank walls that are visible from public areas;</li> </ul> | No acceptable outcome provided.  |

| f.  | includes building entrances that are readily<br>identifiable from the road frontage, located and<br>oriented to favour active and public transport usage<br>by connecting to pedestrian footpaths on the street<br>frontage and adjoining sites; |  |   |   |  |
|---|--|--|---|---|--|
| g.  | facilitate casual surveillance of all public spaces.   |  |   |   |  |
| PO1   | 1  | No acceptable outcome provided.                      |   |   |  |
| Buil  | ding entrances:  |  |   |   |  |
| a.  | are readily identifiable from the road frontage;   |  |   | · L   |  |
| b.  | add visual interest to the streetscape;  |  |   |   |  |
| C.  | are designed to limit opportunities for concealment;   |  |   | à   |  |
| d.  | are located and oriented to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage;   | 0  | Jer   |   |  |
| e.  | include footpaths that connect with adjoining sites;   |  | 0   |   |  |
| f.  | Provide a dedicated, sealed pedestrian footpath between the street frontage and the building entrance.   | ret  |   |   |  |
| Note - The design provisions for footpaths outlined in Planning scheme policy - Integrated design may assist in demonstrating compliance with this Performance Outcome. |  | S  |   |   |  |
| Car   | parking  |  |   |   |  |
| PO1   | 2  | AO12   |   |   |  |
| The number of car parking spaces is managed to:   |  | Car parking is provided in accordance with the table |   |   |  |
| а.  | provide for the parking of visitors and employees  | below.   |   |   |  |
|   | that is appropriate to the use and the site's proximity<br>to public and active transport options;   | Land use   | Maximum number<br>of Car Spaces to be<br>Provided | Minimum Number<br>of Car Spaces to be<br>Provided |  |
| b.  | not include an oversupply of car parking spaces.   | Non-residential                                      | 1 per 30m <sup>2</sup> of GFA                     | 1 per 50m <sup>2</sup> of GFA                     |  |
| ass   | e - Refer to Planning scheme policy - Integrated transport<br>essment for guidance on how to achieve compliance with this<br>come.   | Residential -<br>Permanent/Long<br>term              | N/A   | 1 per dwelling                                    |  |
|   |  | Residential -<br>Services/short<br>term              | 3 per 4 dwellings +<br>staff spaces               | 1 per 5 dwellings +<br>staff spaces               |  |
|   |  | number.  | f car parking spaces to                           | d up to the nearest whole<br>dwellings is at the  |  |

|       |  | Note - Residential - Permanent/long term includes: Multiple<br>dwelling <sup>(49)</sup> , Relocatable home park <sup>(62)</sup> , Residential care facility <sup>(65)</sup> ,<br>Retirement facility <sup>(67)</sup> . |
|-------|--|--|
|       |  | Note - Residential - Services/short term includes: Rooming accommodation <sup>(69)</sup> or Short-term accommodation <sup>(77)</sup> .   |
|       |  | Note - The above rates exclude car parking spaces for people with<br>a disability required by Disability Discrimination Act 1992 or the<br>relevant disability discrimination legislation and standards.               |
| PO1   | 3  | No acceptable outcome provided.  |
| Car   | parking is designed to avoid the visual impact of<br>e areas of surface car parking on the streetscape.  |  |
|       | <b>4</b><br>parking design includes innovative solutions,<br>iding on-street parking and shared parking areas.   | No acceptable outcome provided.  |
|       | e - Refer to Planning scheme policy - Integrated design for details examples of on-street parking.   |  |
| PO1   | 5  | A015   |
| The   | design of car parking areas:   | All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1.  |
| a.    | does not impact on the safety of the external road network;  | accordance with Australian Standard AS2690.1.  |
| b.    | ensures the safe movement of vehicles within the site.   |  |
| P01   | 6  | No acceptable outcome provided.  |
| prior | safety and efficiency of pedestrian movement is<br>ritised in the design of car parking areas through<br>iding pedestrian paths in car parking areas that are: |  |
| a.    | located along the most direct pedestrian routes<br>between building entrances, car parks and adjoining<br>uses;  |  |
| b.    | protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);  |  |
| C.    | of a width to allow safe and efficient access for prams and wheelchairs.   |  |
| Bicy  | cle parking and end of trip facilities   |  |
|       |  |  |

Note - Building work to which this code applies constitutes Major Development for purposes of development requirements for end of trip facilities prescribed in the Queensland Development Code MP 4.1.

**PO17** 

- a. End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:
  - i. adequate bicycle parking and storage facilities; and
  - ii. adequate provision for securing belongings; and
  - change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.
- Notwithstanding a. there is no requirement to provide end of trip facilities if it would be unreasonable to provide these facilities having regard to:
  - the projected population growth and forward planning for road upgrading and development of cycle paths; or
  - ii. whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute distances and nature of the terrain; or
  - the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.

Editor's note - The intent of b above is to ensure the requirements for bicycle parking and end of trip facilities are not applied in unreasonable circumstances. For example these requirements should not, and do not apply in the Rural zone or the Rural residential zone etc.

Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the acceptable outcomes under this heading meet the current performance requirement prescribed in the Queensland Development Code. Minimum bicycle parking facilities are provided in accordance with the table below (rounded up to the nearest whole number).

| Use  | Minimum Bicycle Parking   |
|--|---|
| Residential uses comprised<br>of dwellings | Minimum 1 space per dwelling  |
| All other residential uses                 | Minimum 1 space per 2 car parking<br>spaces identified in Schedule 7 –<br>car parking |
| Non-residential uses                       | Minimum 1 space per 200m2 of GFA  |

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is a combination of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

## AO17.2

Bicycle parking is:

- a. provided in accordance with Austroads (2008), Guide to Traffic Management - Part 11: Parking;
- b. protected from the weather by its location or a dedicated roof structure;
- c. located within the building or in a dedicated, secure structure for residents and staff;
- d. adjacent to building entrances or in public areas for customers and visitors.

Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.

Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### AO17.3

For non-residential uses, storage lockers:

|     | b. ha<br>30<br>Note - S   | vace (ro<br>nve mini<br>00mm (v   | unded u<br>imum di<br>width) x<br>ckers may  | up to the<br>mension:<br>450mm (<br>y be pooled   | 6 per bicycle p<br>nearest whole<br>s of 900mm (l<br>(depth).   | e number);<br>neight) x<br>sites and  |
|-----|---|---|--|---|---|---|
|     | within 50<br>Editor's<br>prescrib<br>planning<br>levels id<br>outcome<br>facilities<br>facilities | D metres<br>note - Th<br>ed under<br>i instrume<br>entified ir<br>e is an am<br>in the Qu<br>required | of bicycle<br>e accepta<br>the Quee<br>ent to prese<br>n those ac<br>nalgamatic<br>ueensland<br>by Counc | parking an<br>ble solution<br>nsland Dev<br>cribe facility<br>ceptable so<br>on of the de<br>I Developm<br>cil. | d storage facilitie<br>ns for end of trip f<br>elopment Code p<br>levels higher tha<br>olutions. This acc<br>efault levels set for<br>ent Code and the                    | facilities<br>ermit a local<br>n the default<br>eptable<br>or end of trip           |
|     | a. ar<br>sp<br>b. ar<br>fro<br>c. ar  | e provid<br>aces;<br>e fitted v<br>om publ<br>e provid<br>mpartm                                      | ded at a<br>with a loo<br>ic view;<br>ded with   | rate of 1<br>ckable do<br>shower(<br>and wash   | jing rooms:<br>per 10 bicycl<br>or or otherwis<br>s), sanitary<br>basin(s) in a   | e screened  |
|     | Bicycle<br>spaces<br>provided   | Male/<br>Female   | Change<br>rooms<br>required  | Showers required  | Sanitary<br>compartments<br>required  | Washbasins<br>required  |
|     | 1-5   | Male<br>and<br>female   | 1 unisex<br>change<br>room   | 1   | 1 closet pan  | 1   |
|     | 6-19  | Female  | 1  | 1   | 1 closet pan  | 1   |
|     | 20 or<br>more   | Male  | 1  | 1   | 1 closet pan  | 1   |
|     |   | Female  | 1  | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter  | 2 closet pans,<br>plus 1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided<br>thereafter  | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
| MBK |   | Male  | 1  | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter  | 1 urinal and 1<br>closet pans, plus<br>1 sanitary<br>compartment at<br>the rate of 1<br>closet pan or 1<br>urinal for every 60<br>bicycle space<br>provided<br>thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|     | and Sta<br>Note - A   | ndards (V<br>II sanitary  | VELS) rati   | ing shower  | onstructed in com   |   |
|     |   |   |  |   |   |   |

|  | <ul> <li>ii. a hook and bench seating within each shower compartment;</li> <li>iii. a socket-outlet located adjacent to each wash basin.</li> <li>Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities</li> <li>Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.</li> </ul> |
|--|---|
| Loading and servicing  | Ne constable suitering groupided  |
| PO18<br>Loading and servicing areas:   | No acceptable outcome provided.   |
| a. are not visible from any street frontage;   |   |
| <ul><li>b. are integrated into the design of the building;</li></ul>                                     |   |
| <ul><li>c. include screening and buffers to reduce negative</li></ul>                                    | G   |
| impacts on adjoining sensitive land uses;  | 5   |
| d. are consolidated and shared with adjoining sites where possible.                                      |   |
|  |   |
| Note - Refer to Planning scheme policy - Centre and neighbourhood hub design.                            |   |
|  |   |
| Waste  |   |
| PO19   | AO19  |
| Bins and bin storage areas are designed, located and managed to prevent amenity impacts on the locality. | Bins and bin storage areas are designed, located and managed in accordance with Planning scheme policy - Waste.   |
| Landscaping and fencing  |   |
| PO20   | No acceptable outcome provided.   |
| On-site landscaping:   |   |
| a. is incorporated into the design of the development;   |   |
| b. reduces the dominance of car parking and servicing areas from the street frontage;                    |   |
| c. incorporates shade trees in car parking areas;  |   |

| d. retains mature trees wherever possible;  |  |
|---|--|
| e. contributes to quality public spaces and the microclimate by providing shelter and shade;  |  |
| f. maintains the achievement of active frontages and sightlines for casual surveillance.  |  |
| Note - All landscaping is to accord with Planning scheme policy -<br>Integrated design.   |  |
| PO21  | No acceptable outcome provided.  |
| Surveillance and overlooking are maintained between the road frontage and the main building line.   |  |
| Lighting  |  |
| PO22  | No acceptable solution provided.   |
| Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety while minimising adverse impacts on residential and other sensitive land uses.                 | eme  |
| Amenity   |  |
| P023  | No acceptable solution provided.   |
| The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, chemicals<br>and other nuisance.   |  |
| Noise   |  |
| P024  | No acceptable outcome provided.  |
| Noise generating uses do not adversely affect existing or potential noise sensitive uses.   |  |
| Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line. |  |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.                         |  |
| PO25  | AO25.1   |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:  | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise. |
| <ul> <li>contributing to safe and usable public spaces,<br/>through maintaining high levels of surveillance of</li> </ul>   | AO25.2   |

| parks, streets and roads that serve active transport<br>purposes (e.g. existing or future pedestrian paths<br>or cycle lanes etc);   | Noise attenuation structures (e.g. walls, barriers or fences):  |
|--|---|
| b. maintaining the amenity of the streetscape.   | a. are not visible from an adjoining road or public area unless:  |
| Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise.<br>Note - Refer to Planning Scheme Policy – Integrated design for<br>details and examples of noise attenuation structures. | <ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does no<br/>serve an existing or future active transport<br/>purpose (e.g. pedestrian paths or cycle lanes<br/>or where attenuation through building location<br/>and materials is not possible.</li> </ul> |
|  | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> </ul>  |
|  | Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.  |
|  | Note - Refer to Overlay map – Active transport for future active transport routes.  |
| Works  | criteria  |
| Utilities  | CC C  |
| P026   | A026  |
| The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant<br>energy regulating authority) and the infrastructure does<br>not negatively impact the streetscape.   | The development is connected to underground electricity   |
| PO27<br>The development has access to telecommunications and<br>broadband services in accordance with current standards.   | No acceptable outcome provided.   |
| P028   | No acceptable outcome provided.   |
| Where available the development is to safely connect to reticulated gas.   |   |
| PO29   | AO29.1  |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.   | Where in a sewered area, the development is connected to a reticulated sewerage system.   |
|  | A029.2  |
|  |   |

|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.   |
|--|---|
| PO30   | AO30.1  |
| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards. |
|  | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development.  |
| P031   | No acceptable outcome provided.   |
| The development is provided with dedicated and constructed road access.  | SCI   |
| Access   |   |
| <ul> <li>PO32</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> | No acceptable outcome provided.   |
| PO33   | No acceptable outcome provided.   |

| Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design.   |   |
|---|---|
| PO34  | AO34.1  |
| PO34<br>The layout of the development does not compromise:<br>a. the development of the road network in the area;<br>b. the function or safety of the road network;<br>c. the capacity of the road network.<br>Note - The road hierarchy is in accordance with a Neighbourhood<br>development plan (conceptually shown on Figure 7.2.3.2 -<br>Movement, Major streets). | Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a<br>motorway.<br>Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.<br>Note - The road hierarchy is in accordance with a Neighbourhood<br>development plan (conceptually shown on Figure 7.2.3.2 -<br>Movement, Major streets).<br>AO34.2<br>The development provides for the extension of the road<br>network in the area in accordance with Council's road<br>network planning.<br>AO34.3<br>The development does not compromise future road<br>widening of frontage roads in accordance with the<br>relevant standard and Council's road planning. |
|   | The lot layout allows forward access to and from the site.  |
| P035  | AO35.1  |
| Safe access facilities are provided for all vehicles required to access the site.   | <ul> <li>Site access and driveways are designed and located in accordance with:</li> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul>   |
|   | AO35.2  |
|   | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.   |
|   |   |

Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.

#### AO35.3

Access driveways, manoeuvring areas and loading facilities provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements.

#### AO35.4

The driveway construction across the verge conforms to the relevant standard drawing for the classification of the road in accordance with Planning scheme policy -Integrated design.

#### AO36

No acceptable outcome provided.

#### PO36

Upgrade works (whether trunk or non-trunk) are provided where necessary to:

- a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;
- b. ensure the orderly and efficient continuation of the active transport network;
- c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy Integrated design.

Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.

Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).

Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:

- Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or
- Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy
   Integrated Design can be achieved in the existing reserve.

Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.

Stormwater

| PO37   | No acceptable outcome provided. |
|--|---------------------------------|
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.   |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.  |                                 |
| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. | ersion "                        |
| PO38   | No acceptable outcome provided. |
| Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.   | schenne                         |
| PO39   | No acceptable outcome provided. |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by a<br>suitably qualified professional will be required in accordance with<br>Planning scheme policy - Stormwater management.            |                                 |
| PO40   | No acceptable outcome provided. |
| Easements for drainage purposes are provided over:   |                                 |
| a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;   |                                 |
| b. overland flow paths where they cross more than one property boundary.   |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.  |                                 |


| Site works and construction management  |  |
|---|--|
| <b>PO41</b><br>The site and any existing structures are maintained in a tidy and safe condition.  | No acceptable outcome provided.  |
| PO42  | AO42.1   |
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.</li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>Note - The measures are adjusted on-site to control erosion and sediment and dust from leaving the property.</li> <li>No acceptable outcome provided</li> </ul> |
| PO44  | AO44.1   |

| All works on-site and the transportation of material to and<br>from the site are managed to not negatively impact the<br>existing road network, the amenity of the surrounding<br>area or the streetscape. | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic         |
|--|--|
| Note - Where the amount of imported material is greater than 50m <sup>3</sup> ,  | movements to and from the site are safe.   |
| a haulage route must be identified and approved by Council.  | AO44.2   |
|  | All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors' vehicles are generally not to be parked in existing roads. |
|  | Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).  |
|  | AO44.3   |
|  | Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.   |
| PO45   | AO45   |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | <ul> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. grassed.</li> </ul>  |
| is annih.  | Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.  |
| PO46   | AO46.1   |
| The clearing of vegetation on-site:<br>a. is limited to the area of infrastructure works,  | All native vegetation to be retained on-site is temporarily<br>fenced or protected prior to and during development<br>works.   |
| buildings areas and other necessary areas for the works;   |  |
| <ul> <li>b. includes the removal of declared weeds and other<br/>materials which are detrimental to the intended use<br/>of the land;</li> </ul>   | Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.  |
| <ul> <li>c. is disposed of in a manner which minimises<br/>nuisance and annoyance to existing premises.</li> </ul>   | AO46.2   |
| Note - No burning of cleared vegetation is permitted.  | Disposal of materials is managed in one or more of the following ways:   |

|   | <ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> </ul>  |
|---|--|
| PO47  | No acceptable outcome provided.  |
| Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.   | sion?  |
| Earthworks  | 0 10   |
| <ul> <li>PO48</li> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to: <ul> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes and batters;</li> <li>h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)</li> </ul> </li> <li>Note - Filling or excavation works are to be completed within six (6) months of the commencement date.</li> </ul> | <ul> <li>AO48.1</li> <li>All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.</li> <li>AO48.2</li> <li>Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.</li> <li>AO48.3</li> <li>All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.</li> <li>AO48.4</li> <li>All fill placed on-site is: <ul> <li>a. limited to that required for the necessary approved use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material</li> </ul> </li> </ul> |
|   | etc. is used as fill).<br><b>AO48.6</b><br>The site is prepared and the fill placed on-site in<br>accordance with AS3798.  |

|  | ۲<br>۲  |
|--|---|
|  | Note - The fill is to be inspected and tested in accordance with<br>Planning scheme policy - Operational works inspection, maintenance<br>and bonding procedures.   |
|  | AO48.7  |
|  |   |
|  | Materials used for structural fill are in accordance with AS3798.   |
|  | AO48.8  |
|  | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.   |
|  |   |
| PO49   | AO49  |
| Embankments are stepped, terraced and landscaped to  | Any embankments more than 1.5 metres in height are  |
| not adversely impact on the visual amenity of the surrounding area.  | stepped, terraced and landscaped.   |
|  | Figure - Embankment   |
|  | 15m 15m 15m min 15m |
| PO50   | AO50.1  |
| On-site earthworks are undertaken in a manner that:<br>a. does not adversely impact on a Council or public   | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.  |
| <ul> <li>sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or</li> </ul> | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .  |
| any drainage feature on, or adjacent to the land for   | AO50.2  |
| monitoring, maintenance or replacement purposes.<br>Note - Public sector entity as defined in the <i>Sustainable Planning</i><br><i>Act 2009</i> .   | Earthworks that would result in any of the following are not carried out on-site:   |
|  | <ul> <li>a reduction in cover over the Council or public<br/>sector entity maintained service to less than<br/>600mm;</li> </ul>  |
|  | <ul> <li>an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> </ul>  |
|  | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .  |
| PO51   | No acceptable outcome provided.   |

| Filling or excavation does not result in land instability.   |  |
|--|--|
| Note - A slope stability report prepared by an RPEQ may be required.   |  |
| PO52   | No acceptable outcome provided.  |
| <ul> <li>Filling or excavation does not result in</li> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning |  |
| scheme policy - Stormwater management provides guidance on the<br>preparation of a site based stormwater management plan by a<br>suitably qualified professional. Refer to Planning scheme policy -<br>Integrated design for guidance on infrastructure design and modelling<br>requirements   | C Jers   |
| Retaining walls and structures   |  |
| PO53<br>All earth retaining structures provide a positive interface<br>with the streetscape and minimise impacts on the amenity<br>of adjoining residents.   | AO53<br>Earth retaining structures:<br>a. are not constructed of boulder rocks or timber;<br>b. where height is no greater than 900mm, are<br>provided in accordance with Figure - Retaining on<br>a boundary;<br>Figure - Retaining on a boundary   |
| NBRC Y   | Finished surface level<br>Fill.<br>Retaining<br>Fill.<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Poorm<br>Po |
|  | <ul> <li>c. where height is greater than 900mm but no greater than 1.5m, are to be setback at least the equivalent height of the retaining structure from any property boundary;</li> <li>d. where height is greater than 1.5m, are to be setback and stepped 1.5m vertical: 1.5m horizontal, terraced, landscaped and drained as shown below.</li> </ul>  |

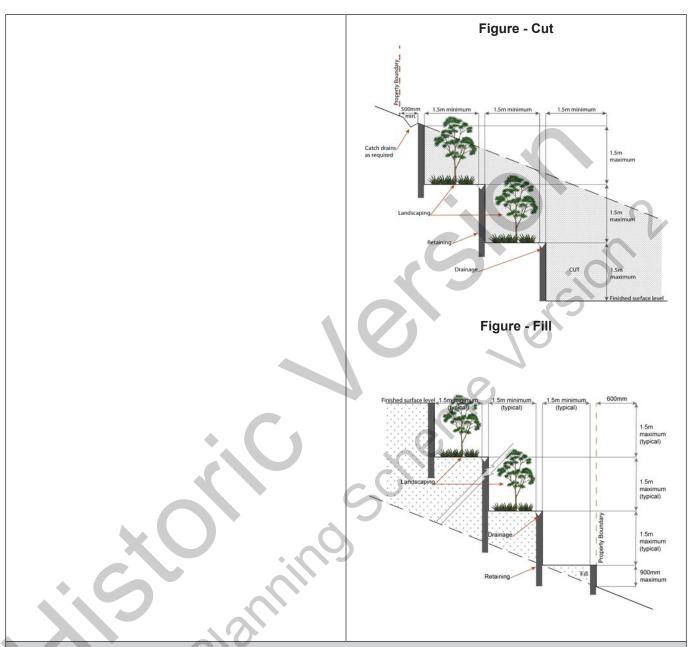

#### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole control park <sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for a Tourist park <sup>(84)</sup>, with accommodation in the form of caravans or tents; or material change of use for outdoor sales <sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii. iii.
  - iv.

#### AND

- none of the following exceptions apply: b
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - ii every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

#### PO54

**PO55** 

Development incorporates a fire fighting system that:

- a. satisfies the reasonable needs of the fire fighting entity for the area;
- b. is appropriate for the size, shape and topography of the development and its surrounds;
- c. is compatible with the operational equipment available to the fire fighting entity for the area;
- d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;
- e. considers the fire hazard inherent in the surrounds to the development site;
- f. is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

#### AO54.1

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of *Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.* 

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:

- a. in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
  - in regard to the general locational requirements for fire hydrants Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
- c. in regard to the proximity of hydrants to buildings and other facilities Part 3.2.2 (b), (c) and (d), with the exception that:
  - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
    - for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans; for outdoor sales<sup>(54)</sup>, processing or storage facilities,
    - hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;
- d. in regard to fire hydrant accessibility and clearance requirements Part 3.5 and, where applicable, Part 3.6.

#### AO54.2

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- a. an unobstructed width of no less than 3.5m;
- b. an unobstructed height of no less than 4.8m;
- c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

#### AO54.3

On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in *Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.* 

AO55

| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times<br>from, or at, the vehicular entry point to the development<br>site. | For development that contains on-site fire hydrants external to buildings:  |
|--|---|
|  | a. those external hydrants can be seen from the vehicular entry point to the site; or   |
|  | b. a sign identifying the following is provided at the vehicular entry point to the site:   |
|  | <ul> <li>the overall layout of the development (to scale);</li> </ul>   |
|  | ii. internal road names (where used);   |
|  | iii. all communal facilities (where provided);  |
|  | iv. the reception area and on-site manager's office (where provided);   |
|  | v. external hydrants and hydrant booster points;  |
|  | vi. physical constraints within the internal<br>roadway system which would restrict access<br>by fire fighting appliances to external hydrants<br>and hydrant booster points.   |
|  |   |
|  | Note - The sign prescribed above, and the graphics used are to be:  |
|  | a. in a form;   |
|  | <ul><li>b. of a size;</li><li>c. illuminated to a level;</li></ul>  |
|  | which allows the information on the sign to be readily understood,  |
|  | at all times, by a person in a fire fighting appliance up to 4.5m from<br>the sign.   |
| P056   | AO56  |
| Each on-site fire hydrant that is external to a building is<br>signposted in a way that enables it to be readily identified<br>at all times by the occupants of any firefighting appliance<br>traversing the development site.                             | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads. |
| •  | Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.  |
| Use speci  |   |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and  |   |
| PO57   | AO57.1  |

| <ul> <li>The development does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | <ul> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> AO57.2 A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries. |
|--|--|
| P058   | A058   |
| Infrastructure does not have an impact on pedestrian   | Access control arrangements:   |
| health and safety.   |  |
|  | <ul> <li>a. do not create dead-ends or dark alleyways adjacent<br/>to the infrastructure;</li> </ul>   |
|  | b. minimise the number and width of crossovers and   |
| + <b>(</b> )   | entry points;<br>c. provide safe vehicular access to the site;   |
|  | <ul> <li>d. do not utilise barbed wire or razor wire.</li> </ul>   |
| PO59   | A059   |
| All activities associated with the development occur within  | All equipment which produces audible or non-audible  |
| an environment incorporating sufficient controls to ensure   | sound is housed within a fully enclosed building   |
| the facility:  | incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the   |
| a. generates no audible sound at the site boundaries where in a residential setting; or  | Environmental Protection (Noise) Policy 2008.  |
| b. meet the objectives as set out in the Environmental   |  |
| Protection (Noise) Policy 2008.  |  |
| Retail and commercial uses   |  |
| PO60   | AO60   |
| Retail and commercial activities are provided only where<br>of a small scale, forming an ancillary function and serving<br>the immediate product of the weaking perculation  | Retail and commercial uses within the teaching and learning sub-precinct consists of no more than:   |
| the immediate needs of the working population.   | a. 1 small format supermarket with a maximum gfa or 500m <sup>2</sup> ;  |
|  | b. 10 small format retail or commercial tenancies with a maximum gfa of 100m <sup>2</sup> each.  |
| PO61   | No acceptable outcome provided.  |
| Retail and food and drink outlets <sup>(28)</sup> are located on lots<br>or tenancies adjacent to a street frontage, civic spaces,<br>public open space, main street boulevard or pedestrian<br>thoroughfare.  |  |
|  |  |

## Telecommunications facility <sup>(81)</sup>

Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup>must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz.

| PO62   | AO62.1  |
|--|---|
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.  |
|  | AO62.2<br>If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.  |
| PO63   | AO63  |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.   | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.   |
| PO64   | A064  |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.   | The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval. |
| PO65   | AO65.1  |
| <ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>  | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |
| <ul><li>c. not visually dominant or intrusive;</li><li>d. located behind the main building line;</li></ul>   | AO65.2  |
| <ul> <li>below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and<br/>structures;</li> </ul>   | In all other areas towers do not exceed 35m in height.  |
| f. camouflaged through the use of colours and  | AO65.3  |
| <ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li><li>h. landscaped;</li></ul>   | Towers, equipment shelters and associated structures are of a design, colour and material to:   |
| i. otherwise consistent with the amenity and character of the zone and surrounding area.   | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>   |
|  | AO65.4  |
|  |   |

|  | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m.  |
|--|--|
|  | Where there is no established building line the facility is located at the rear of the site.   |
|  | AO65.5   |
|  | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |
|  | AO65.6   |
|  | A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the<br>facility and street frontage and adjoining uses.  |
|  | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |
|  | Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design.   |
| PO66   | A066   |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |
| P067   | AO67   |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.   | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |
| Values and con   | straints criteria  |
| Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme. |  |
| Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)  |  |
| Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared<br>by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.  |  |

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

## PO68

#### AO68

Development will:

- a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;
- b. protect the fabric and setting of the heritage site, object or building;
- c. be consistent with the form, scale and style of the heritage site, object or building;
- d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;
- e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;
- f. retain public access where this is currently provided.

#### PO69

Demolition and removal is only considered where:

- a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or
- b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or
- c. limited demolition is performed in the course of repairs, maintenance or restoration; or
- d. demolition is performed following a catastrophic event which substantially destroys the building or object.

PO70No acWhere development is occurring on land adjoining a site<br/>of cultural heritage value, the development is to be<br/>sympathetic to and consistent with the cultural heritage<br/>values present on the site and not result in their values<br/>being eroded, degraded or unreasonably obscured from<br/>public view.

Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value.

Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.

# No acceptable outcome provided.

No acceptable outcome provided.

| Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)   |   |
|---|---|
| Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.  |   |
| P071  | No acceptable outcome provided.   |
| Development:  |   |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>  |   |
| P072  | A072  |
| Development:  | No acceptable outcome provided.   |
| <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> </ul> Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on | scheme  |
| an upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme  |   |
| policy – Flood hazard, Coastal hazard and Overland flow.  |   |
| P073  | No acceptable outcome provided.   |
| Development does not:   |   |
| <ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> </ul>  |   |
| P074  | A074  |
| Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.  | Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. |

|   | Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.  |
|---|---|
| PO75<br>Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.<br>PO76  | AO75<br>Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.<br>AO76.1  |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for a<br>fully developed upstream catchment and are able to be<br>easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme<br>policy – Flood hazard, Coastal hazard and Overland flow | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – Level III;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>AO76.2<br>Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment. |
| <ul> <li>PO77</li> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over: <ul> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> </ul> </li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul>   | No acceptable outcome provided.   |
| Additional criteria for development for a Park <sup>(57)</sup>  |   |
| P078  | A078  |

| layo   | elopment for a Park <sup>(57)</sup> ensures that the design and<br>ut responds to the nature of the overland flow<br>sting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design. |
|--|--|--|
| a.   | public benefit and enjoyment is maximised;   |  |
| b.   | impacts on the asset life and integrity of park structures is minimised;   |  |
| C.   | maintenance and replacement costs are minimised.   |  |
| Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment criteria apply) |  |  |
| PO7  | 9  | A079   |
| Dev  | elopment within a High voltage electricity line buffer:  | Except where located on an approved Neighbourhood development plan, development does not involve the   |

- a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;
- b. is located and designed in a manner that maintains a high level of security of supply;
- c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.

Except where located on an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer.

## 7.2.3.2.4 Residential north sub-precinct

### 7.2.3.2.4.1 Purpose - Residential north sub-precinct

- 1. The purpose of the Residential north sub-precinct will be achieved through the following overall outcomes:
  - a. Development in the Residential north sub-precinct will comprise a high density and high quality neighbourhood that will achieve a minimum net density of 60 dwellings per ha.
  - b. Residential development will be supported by small scale convenience retail and commercial activities within the sub-precinct.
  - c. The neighbourhood will have a mix of residential uses (e.g. medium-high rise apartments, plexes and row/terrace) and tenures, providing housing choice and affordability.
  - d. Residential activities must:
    - i. where part of a mixed use multi-storey building, with active retail and commercial uses at the ground level where adjoining the main street boulevard, residential activities are to be located above the non-residential uses with a separate residential access or with frontage to a secondary street;
    - ii. be designed, sited and constructed to:
      - A. provide small building setbacks to the street;
      - B. contribute to an attractive streetscape with priority given to pedestrians;
      - C. encourage passive surveillance of public spaces;
      - D. result in privacy and residential amenity consistent with a medium to high density residential character;
      - E. orientate to integrate with the street and surrounding neighbourhood;
      - F. provide a diverse and attractive built form where buildings are located closer to the street and encourage active frontages;
      - G. provide an attractive streetscape with street trees for shade and hard footpaths for walking;
      - H. incorporate sub-tropical urban design principles that respond to local climatic conditions;
      - I. incorporate sustainable practices including maximising energy efficiency and water conservation;
      - J. be of a scale and density consistent with the medium to high density residential character of the area (e.g. 3-5 storey buildings).
  - e. Retail and commercial activities must:
    - be small scale and provide convenience, speciality services that are ancillary in function to residential activities in the sub-precinct;
    - ii. be located within the precinct on the main street boulevard, at street level with active frontages to the main street which connects this sub-precinct to the Civic space sub-precinct and the Centre core sub-precinct;
    - iii. be located on the ground floor and lower levels of multi-storey buildings, to promote activity, enable casual surveillance and economic exchange.
  - f. General works associated with the development achieves the following:

- i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
- ii. the development manages stormwater to:
  - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
  - B. prevent stormwater contamination and the release of pollutants;
  - C. maintain or improve the structure and condition of drainage lines and riparian areas;
  - D. avoid off-site adverse impacts from stormwater.
- iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- g. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- h. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- i. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- j. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- k. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- I. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- m. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- n. Development constraints:

i i

- Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
- A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
- B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
- C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
- D. ensuring effective and efficient disaster management response and recovery capabilities;
- E. for overland flow path;
  - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
  - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;

- III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
- IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- o. Development in the Residential north sub-precinct is for one or more of the uses identified below:

| • | Food and drink outlet <sup>(28)</sup> - if | • | Home based business <sup>(35)</sup>       | <ul> <li>Shop<sup>(75)</sup> - if part of a mixed</li> </ul> |
|---|--|---|---|--|
|   | part of a mixed use building               | • | Multiple dwelling <sup>(49)</sup>         | use building   |
|   |  |   |   | Short-term     (77)  |
|   |  | • | Residential care facility <sup>(65)</sup> | accommodation <sup>(77)</sup>                                |
|   |  | • | Retirement facility <sup>(67)</sup>       |  |
|   |  |   | Rooming                                   | · · · · ·  |
|   |  |   | accommodation <sup>(69)</sup>             | S  |
|   |  |   |   |  |

p. Development in the Residential north sub-precinct does not include one or more of the following uses:

| • | Adult store <sup>(1)</sup>                 | • | Emergency services <sup>(25)</sup>                      | • | Office <sup>(53)</sup>                              |
|---|--|---|---|---|---|
| • | Agricultural supplies store <sup>(2)</sup> | • | Extractive industry <sup>(27)</sup>                     | • | Permanent plantation <sup>(59)</sup>                |
| • | Air services <sup>(3)</sup>                | • | Health care services <sup>(33)</sup>                    | • | Place of worship <sup>(60)</sup>                    |
| • | Animal husbandry <sup>(4)</sup>            | • | Hardware and trade supplies <sup>(32)</sup>             | • | Port services <sup>(61)</sup>                       |
| • | Animal keeping <sup>(5)</sup>              | • | High impact industry <sup>(34)</sup>                    | • | Renewable energy facility <sup>(63)</sup>           |
| • | Aquaculture <sup>(6)</sup>                 |   | Hotel <sup>(37)</sup>                                   | • | Research and technology<br>industry <sup>(64)</sup> |
| • | Cemetery <sup>(12)</sup>                   |   | Intensive animal industry <sup>(39)</sup>               | • | Rural industry <sup>(70)</sup>                      |
|   | Child care centre <sup>(13)</sup>          |   | Intensive horticulture <sup>(40)</sup>                  | • | Service industry <sup>(73)</sup>                    |
| • | Club <sup>(14)</sup>                       | • | Low impact industry <sup>(42)</sup>                     | • | Service Station - if standalone                     |
| • | Community care centre <sup>(15)</sup>      | • | Marine industry <sup>(45)</sup>                         |   | use <sup>(74)</sup>                                 |
| • | Community residence <sup>(15)</sup>        | • | Medium impact industry <sup>(47)</sup>                  | • | Special industry <sup>(79)</sup>                    |
| • | Community use <sup>(17)</sup>              | • | Motor sport facility <sup>(48)</sup>                    | • | Tourist attraction <sup>(83)</sup>                  |
| • | Crematorium <sup>(18)</sup>                | • | Nature-based tourism <sup>(50)</sup>                    | • | Tourist park <sup>(84)</sup>                        |
| • | Cropping <sup>(19)</sup>                   | • | Nightclub entertainment                                 | • | Transport depot <sup>(85)</sup>                     |
| • | Detention facility <sup>(20)</sup>         |   | facility <sup>(51)</sup>                                | • | Veterinary services <sup>(87)</sup>                 |
| • | Dual Occupancy <sup>(21)</sup>             | • | Non-resident workforce<br>accommodation <sup>(52)</sup> | • | Warehouse <sup>(88)</sup>                           |
| • | Dwelling house <sup>(22)</sup>             |   |   | • | Wholesale nursery <sup>(89)</sup>                   |
| • | Educational establishment <sup>(24)</sup>  |   |   | • | Winery <sup>(90)</sup>                              |
|   |  |   |   |   |   |

q. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

### 7.2.3.2.4.2 Criteria for assessment

### Part G—Criteria for assessable development - Residential north sub-precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part G, Table 7.2.3.2.4.1.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

### Table 7.2.3.2.4.1 Assessable development - Residential north sub-precinct

| Performance outcomes   | Acceptable outcomes  |  |  |  |
|--|--|--|--|--|
| General criteria   |  |  |  |  |
| Density  | S  |  |  |  |
| P01  | No acceptable outcome provided.  |  |  |  |
| Development in the Residential north sub-precinct has<br>a high residential density in accordance with the minimum<br>indicated on a neighbourhood development plan. | e  |  |  |  |
| Residential uses   |  |  |  |  |
| PO2  | No acceptable outcome provided.  |  |  |  |
| Dual occupancies <sup>(21)</sup> and low density residential uses are not located in this precinct.  | S  |  |  |  |
| Building height (Residential uses)   |  |  |  |  |
| PO3  | A03  |  |  |  |
| Buildings and structures have a height that:   | Building height does not exceed:   |  |  |  |
| a. is consistent with the medium to high rise character of the Residential north sub-precinct;   | <ul> <li>a. that mapped on Overlay map – Building heights; or</li> <li>b. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not</li> </ul> |  |  |  |
| <ul> <li>responds to the topographic features of the site,<br/>including slope and orientation;</li> </ul>   | exceeding 3.5m.  |  |  |  |
| c. is not visually dominant or overbearing with respect to the streetscape;  |  |  |  |  |
| d. responds to the height of development on adjoining land where contained within another precinct or zone.  |  |  |  |  |
| Note - Refer to Planning scheme policy - Residential design for details and examples.  |  |  |  |  |
| Building height (Non-residential uses)   |  |  |  |  |
| PO4  | A04  |  |  |  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| The height of buildings does not adversely affect amenity of the area or of adjoining properties.   | Building heights accord with the minimums and maximums mapped on the Neighbourhood development plan map - Building heights except for architectural features associated with religious expression on Place of worship <sup>(60)</sup> and Educational establishment <sup>(24)</sup> buildings.   |
| Setbacks (Residential uses)   |  |
| <b>PO5</b><br>Residential buildings and structures are setback to:  | AO5.1<br>Setbacks (excluding built to boundary walls) comply with  |
| <ul> <li>a. be consistent with medium to high density<br/>Residential north sub-precinct character where<br/>buildings are positioned close to the footpath to<br/>create active frontages;</li> <li>b. maintain private open space areas that are of a size<br/>and dimension to be usable and functional;</li> <li>c. maintain the privacy of adjoining properties;</li> <li>d. ensure parked vehicles do not restrict pedestrian<br/>and traffic movement and safety;</li> <li>e. limit the length, height and openings of boundary<br/>walls to maximise privacy and amenity on adjoining<br/>properties;</li> <li>f. ensure built to boundary walls do not create<br/>unusable or inaccessible spaces and do not<br/>negatively impact the streetscape character,<br/>amenity or functionality of adjoining properties;</li> <li>g. Provide adequate separation to particular<br/>infrastructure and water bodies to minimise adverse<br/>impacts on people, property, water quality and<br/>infrastructure.</li> <li>Note - Refer to Planning scheme policy - Residential design for<br/>details and examples.</li> </ul> | <ul> <li>AO5.2</li> <li>Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are: <ul> <li>a. of a length and height in Table 7.2.3.2.4.3;</li> <li>b. setback from the side boundary: <ul> <li>i. not more than 20mm; or</li> <li>ii. if a plan of development shows only one built to boundary wall on the boundary, not more than 150mm;</li> </ul> </li> <li>c. on the low side of a sloping lot.</li> </ul> Editor's note - Lots containing built to boundary. For boundaries with built to boundary. For boundary walls an adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls and 'easement for maintenance purposes' is recommended.</li></ul> |
| Setbacks (Non-residential uses)   |  |
| PO6   | AO6.1  |
| Front setbacks ensure buildings address and actively interface with streets and public spaces.  | <ul> <li>For the primary street frontage buildings are constructed:</li> <li>a. to the property boundary; or</li> <li>b. setback a maximum of 3m from the property boundary, where for the purpose of outdoor dining.</li> </ul>   |
|   | AO6.2  |

| Performance outcomes   | Acceptable outcomes   |  |  |  |
|--|---|--|--|--|
|  | For the secondary frontage, setbacks are consistent with an adjoining building.   |  |  |  |
| P07  | No acceptable outcome provided.   |  |  |  |
| Side and rear setbacks cater for driveway(s), services,<br>utilities and buffers required to protect the amenity of<br>adjoining sensitive land uses.  |   |  |  |  |
| Site cover (Residential uses)  |   |  |  |  |
| <ul><li>PO8</li><li>Residential buildings and structures will ensure that site cover:</li><li>a. does not result in a site density that is inconsistent</li></ul>  | AO8<br>Site cover (excluding eaves, sun shading devices, patios,<br>balconies and other unenclosed structures) does not<br>exceed the specified in the table below.   |  |  |  |
| with the character of the area;  | Building Lot Size   |  |  |  |
| <ul><li>b. does not result in an over development of the site;</li><li>c. does not result in other elements of the site being</li></ul>  | 300m²         301-         401-         501-         1001-         Greater           or         400m²         500m²         1000m²         2500m²         than           less         2501m²         1000m²         2501m²         1001-         1001-  |  |  |  |
| compromised (e.g. Setbacks, open space etc);   | Less than         N/A         N/A         N/A         60%         6 |  |  |  |
| d. ensures that buildings and structures reflect the attached medium to high density urban character.  | >8.5m to         N/A         N/A         N/A         50%         50%         50%           12.0m  |  |  |  |
| Note - Refer to Planning scheme policy - Residential design for  | >12.0m to N/A N/A N/A 50% 40% 40%   |  |  |  |
| details and examples.  | >21m to<br>27m         N/A         N/A         N/A         35%         35%  |  |  |  |
|  | Greater N/A N/A N/A N/A 25% 25%   |  |  |  |
|  | Note - Refer to Planning scheme policy - Residential design for details and examples.   |  |  |  |
| Movement network   |   |  |  |  |
| PO9<br>Development is designed to connect to and form part of<br>the surrounding neighbourhood by providing<br>interconnected street, pedestrian and cyclist pathways<br>to adjoining development, sub-precincts (e.g. Civic space<br>sub-precinct and Mixed business sub-precinct), public<br>transport nodes and open space. | No acceptable outcome provided.   |  |  |  |
| Water sensitive urban design   |   |  |  |  |
| PO10   | No acceptable outcome provided.   |  |  |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| Best practice Water Sensitive Urban Design (WSUD) is<br>incorporated within development sites adjoining street<br>frontages to mitigate impacts of stormwater run-off in<br>accordance with Planning scheme policy - Integrated<br>design.                         |   |
| Sensitive land use separation  |   |
| PO11   | A011  |
| Sensitive land uses within 250m of land in the General<br>industry sub-precinct must mitigate any potential<br>exposure to industrial air, noise or odour emissions that<br>impact on human health, amenity and wellbeing.   | Development is designed and operated to ensure that:<br>a. it meets the criteria outlined in the Planning Scheme<br>Policy - Noise; and |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy – Noise.  | b. the air quality objectives in the <i>Environmental Protection (Air) Policy 2008</i> , are met.                                       |
| Amenity  | 01  |
| PO12   | No acceptable outcome provided.   |
| The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, noise,<br>light, chemicals and other environmental nuisances.   | cher  |
| Noise  | 9   |
| P013   | No acceptable outcome provided.   |
| Noise generating uses do not adversely affect existing<br>or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation                         |   |
| measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise. |   |
|  |   |
| PO14   | AO14.1  |
| Sensitive land uses are provided with an appropriate<br>acoustic environment within designated external private<br>outdoor living spaces and internal areas while:   | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.  |
| a. contributing to safe and usable public spaces,  | A014.2  |
| through maintaining high levels of surveillance of parks, streets and roads that serve active transport  | Noise attenuation structures (e.g. walls, barriers or fences):  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| <ul> <li>purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> </ul> | <ul> <li>a. are not visible from an adjoining road or public area unless: <ol> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> </ol> </li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy + Integrated design for details and examples of noise attenuation structures.</li> </ul> |
| Works  | criteria  |
| Utilities  | ~ G   |
| PO15<br>The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant<br>energy regulating authority) and the infrastructure does<br>not negatively impact the streetscape.   | A015<br>The development is connected to underground electricity.  |
| PO16<br>The development has access to telecommunications and<br>broadband services in accordance with current standards.   | No acceptable outcome provided.   |
| PO17<br>Where available the development is to safely connect to<br>reticulated gas.  | No acceptable outcome provided.   |
| P018   | AO18.1  |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.   | Where in a sewered area, the development is connected to a reticulated sewerage system.   |
|  | AO18.2  |
|  | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.   |
|  | <u> </u>  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.   |
| PO19<br>The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | AO19.1<br>Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards.<br>AO19.2<br>Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development. |
| PO20   | No acceptable outcome provided.   |
| The development is provided with dedicated and constructed road access.  |   |
| Access   | Γ   |
| <ul> <li>PO21</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> | No acceptable outcome provided.   |
| PO22   | No acceptable outcome provided.   |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design.  |   |
| PO23   | AO23.1  |
| <ul> <li>The layout of the development does not compromise:</li> <li>a. the development of the road network in the area;</li> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> </ul> Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). | <ul> <li>Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a motorway.</li> <li>Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway.</li> <li>Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).</li> <li>AO23.2</li> <li>The development provides for the extension of the road network in the area in accordance with Council's road network planning.</li> <li>AO23.3</li> <li>The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.</li> </ul> |
|  | AO23.4<br>The lot layout allows forward access to and from the site.  |
| PO24<br>Safe access facilities are provided for all vehicles required<br>to access the site.   | <ul> <li>AO24.1</li> <li>Site access and driveways are designed and located in accordance with:</li> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> <li>AO24.2</li> <li>Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.</li> </ul>  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.   |
|  | A024.3   |
|  | Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in Schedule<br>8 Service vehicle requirements for the relevant use. The<br>on-site manoeuvring is to be in accordance with Schedule<br>8 Service vehicle requirements. |
|  | AO24.4<br>The driveway construction across the verge conforms to<br>the relevant standard drawing for the classification of the<br>road in accordance with Planning scheme policy -<br>Integrated design.  |
| PO25   | No acceptable outcome provided.  |
| <ul> <li>Upgrade works (whether trunk or non-trunk) are provided where necessary to:</li> <li>a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;</li> <li>b. ensure the orderly and efficient continuation of the active transport network;</li> <li>c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.</li> <li>Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.</li> <li>Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).</li> <li>Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:</li> <li>Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or</li> <li>Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.</li> </ul> | scheme   |

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| Stormwater   |                                 |
| PO26   | No acceptable outcome provided. |
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.   |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.  |                                 |
| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. | Clersi                          |
| P027   | No acceptable outcome provided. |
| Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.   | sche                            |
| PO28<br>Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by a<br>suitably qualified professional will be required in accordance with<br>Planning scheme policy - Stormwater management.    | No acceptable outcome provided. |
|  |                                 |
| PO29   | No acceptable outcome provided. |
| <ul> <li>Easements for drainage purposes are provided over:</li> <li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li> <li>b. overland flow paths where they cross more than one property boundary.</li> </ul>   |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |

| Performance outcomes  | Acceptable outcomes  |  |
|---|--|--|
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   |  |  |
| Site works and construction management  |  |  |
| PO30  | No acceptable outcome provided.  |  |
| The site and any existing structures are maintained in a tidy and safe condition.   |  |  |
| PO31  | A031.1   |  |
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following: <ul> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.</li> </ul> </li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>AO31.3</li> <li>The completed earthworks (fill or excavation) area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.</li> </ul> |  |
| PO32  | AO32.1   |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| All works on-site and the transportation of material to and<br>from the site are managed to not negatively impact the<br>existing road network, the amenity of the surrounding<br>area or the streetscape.   | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic<br>movements to and from the site are safe.  |
| Note - Where the amount of imported material is greater than 50m <sup>3</sup> , a haulage route must be identified and approved by Council.  | A032.2  |
|  | All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.<br>Note - A Traffic Management Plan may be required for the site in<br>accordance with the Manual of Uniform Traffic Control Devices<br>(MUTCD). |
|  | AO32.3<br>Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.  |
| PO33<br>Dust suppression measures are implemented during<br>construction works to protect nearby premises from<br>unreasonable dust impacts.   | No acceptable outcome provided  |
| P034   | AO34  |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | <ul><li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li><li>b. grassed.</li></ul>  |
| NBP-   | Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.   |
| PO35   | AO35.1  |
| <ul> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> </ul> | All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.<br>Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.   |
| <ul> <li>c. is disposed of in a manner which minimises<br/>nuisance and annoyance to existing premises.</li> </ul>   | AO35.2  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Note - No burning of cleared vegetation is permitted.   | Disposal of materials is managed in one or more of the following ways:  |
|   | a. all cleared vegetation, declared weeds, stumps,<br>rubbish, car bodies, scrap metal and the like are<br>removed and disposed of in a Council land fill<br>facility; or                                 |
|   | b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.   |
| PO36  | No acceptable outcome provided.   |
| Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council. | Jersion Jersion   |
| Earthworks  |   |
| P037  | A037.1  |
| <ul> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to:</li> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> </ul>   | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains<br>as necessary. |
| <ul> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes</li> </ul>   | AO37.2<br>Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.  |
| <ul> <li>and batters;</li> <li>h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)</li> <li>Note - Filling or excavation works are to be completed within six (6) months of the commencement date.</li> </ul>  | <b>AO37.3</b><br>All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.  |
|   | AO37.4  |
|   | All filling or excavation is contained within the site.   |
|   | AO37.5  |
|   | All fill placed on-site is:   |
|   | <ul><li>a. limited to that required for the necessary approved use;</li><li>b. clean and uncontaminated (i.e. no building waste,</li></ul>  |
|   | concrete, green waste or contaminated material etc. is used as fill).   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | AO37.6  |
|   | The site is prepared and the fill placed on-site in accordance with AS3798.   |
|   | Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.   |
|   | A037.7  |
|   | Materials used for structural fill are in accordance with AS3798.   |
|   | AO37.8  |
|   | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.   |
| PO38  | AO38  |
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area. | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |
|   | Figure - Embankment   |
|   | 500mm<br>1 Sm<br>1 Sm |
| PO39  | AO39.1  |
| On-site earthworks are undertaken in a manner that:<br>a. does not adversely impact on a Council or public                    | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.  |
| <ul> <li>b. does not preclude reasonable access to a Council</li> </ul>   | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .  |
| or public sector entity maintained infrastructure or<br>any drainage feature on, or adjacent to the land for                  | AO39.2  |
| monitoring, maintenance or replacement purposes.  | Earthworks that would result in any of the following are  |
| Note - Public sector entity as defined in the Sustainable Planning  | not carried out on-site:  |
| Act 2009.   | <ul> <li>a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> </ul>  |
|   | <ul> <li>an increase in finished surface grade over, or within<br/>1.5m on each side of, the Council or public sector<br/>entity maintained infrastructure above that which<br/>existed prior to the earthworks being undertaken.</li> </ul>  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .  |
| PO40   | No acceptable outcome provided.   |
| Filling or excavation does not result in land instability.   |   |
| Note - A slope stability report prepared by an RPEQ may be required.   |   |
| <ul> <li>PO41</li> <li>Filling or excavation does not result in <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> </li> <li>Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements</li> </ul> <b>Retaining walls and structures PO42</b> All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity | No acceptable outcome provided  A042 Earth retaining structures:  |
| of adjoining residents.  | <ul> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> </ul> |
|  | Figure - Retaining on a boundary  |
| MBA  | Finished surface level<br>900mm<br>maximum<br>Retaining   |
|  | c. where height is greater than 900mm but no greater than 1.5m, are to be setback at least the equivalent   |

| Performance outcomes                                    | Acceptable outcomes   |
|---|---|
|   | <ul> <li>height of the retaining structure from any property boundary;</li> <li>d. where height is greater than 1.5m, are to be setback and stepped 1.5m vertical: 1.5m horizontal, terraced, landscaped and drained as shown below.</li> </ul> |
|   | Figure - Cut  |
| Fire Services   | Figure - Fill   |
| Note - The provisions under this heading only apply if: |   |

the development is for, or incorporates: а.

- reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
- material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
- iii.
- iv.

| Performance outcomes | Acceptable outcomes |
|----------------------|---------------------|

b. none of the following exceptions apply:

- i. the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

### PO43

Development incorporates a fire fighting system that:

- a. satisfies the reasonable needs of the fire fighting entity for the area;
- b. is appropriate for the size, shape and topography of the development and its surrounds;
- c. is compatible with the operational equipment available to the fire fighting entity for the area;
- d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;
- e. considers the fire hazard inherent in the surrounds to the development site;
- f. is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

## AO43.1

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of *Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations*.

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:

- a. in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
- b. in regard to the general locational requirements for fire hydrants Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
  c. in regard to the proximity of hydrants to buildings and oth
  - in regard to the proximity of hydrants to buildings and other facilities Part 3.2.2.2 (b), (c) and (d), with the exception that:
    - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
    - ii. for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
       iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities,
    - iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;
- d. in regard to fire hydrant accessibility and clearance requirements Part 3.5 and, where applicable, Part 3.6.

### AO43.2

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- a. an unobstructed width of no less than 3.5m;
- b. an unobstructed height of no less than 4.8m;
- c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | AO43.3  |
|  | On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>  |
| PO44   | AO44  |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times<br>from, or at, the vehicular entry point to the development<br>site. | <ul> <li>For development that contains on-site fire hydrants external to buildings:</li> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>b. a sign identifying the following is provided at the vehicular entry point to the site: <ol> <li>the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.</li> </ol> </li> </ul> |
|  | Note - The sign prescribed above, and the graphics used are to be:  |
|  | <ul><li>a. in a form;</li><li>b. of a size;</li></ul>   |
|  | c. illuminated to a level;  |
| MBr  | which allows the information on the sign to be readily understood,<br>at all times, by a person in a fire fighting appliance up to 4.5m from<br>the sign.   |
| PO45   | AO45  |
| Each on-site fire hydrant that is external to a building is<br>signposted in a way that enables it to be readily identified<br>at all times by the occupants of any firefighting appliance<br>traversing the development site.                             | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads.   |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
|   | Note - Technical note Fire hydrant indication system is available on<br>the website of the Queensland Department of Transport and Main<br>Roads.   |
| Use specif  | fic criteria   |
| Home based business <sup>(35)</sup>   |  |
| PO46  | No acceptable outcome provided.  |
| The scale and intensity of the Home based business <sup>(35)</sup> :  |  |
| a. is compatible with the physical characteristics of the site and the character of the local area;   |  |
| <ul> <li>is able to accommodate anticipated car parking<br/>demand without negatively impacting the<br/>streetscape;</li> </ul>   | C ersi   |
| <ul> <li>does not adversely impact on the amenity of the adjoining and nearby premises;</li> </ul>  |  |
| <ul> <li>remains ancillary to the residential use of the dwelling;</li> </ul>   |  |
| e. does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;   | sche   |
| f. ensures employees and visitors to the site do not negatively impact the expected amenity of adjoining properties;  |  |
| g. ensures service and delivery vehicles do not negatively impact the amenity of the area.  |  |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and   | Utility installation <sup>(86)</sup>   |
| PO47  | A047.1   |
| The development does not have an adverse impact on the visual amenity of a locality and is:   | Development is designed to minimise surrounding land<br>use conflicts by ensuring infrastructure, buildings,<br>structures and other equipment:  |
| <ul> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and</li> </ul> | <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to the surrounding fabric;</li> </ul> |
| structures;<br>f. camouflaged through the use of colours and<br>materials which blend into the landscape;   | AO47.2   |
| <ul> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>   | A minimum 3m wide strip of dense planting is provided<br>around the outside of the fenced area, between the<br>development and street frontage, side and rear<br>boundaries.   |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| PO48   | AO48  |
| Infrastructure does not have an impact on pedestrian health and safety.  | <ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul> |
| PO49   | AO49  |
| <ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>  | All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the<br>Environmental Protection (Noise) Policy 2008.  |
| Sales office <sup>(72)</sup>   |   |
| <ul> <li>PO50 The Sales office<sup>(72)</sup> is designed to: <ul> <li>a. provide functional and safe access, manoeuvring areas and car parking spaces for the number and type of vehicles anticipated to access the site;</li> <li>b. complement the streetscape character while maintaining surveillance between buildings and public spaces; </li> <li>c. be temporary in nature.</li> </ul> Note - Refer to Planning scheme policy - Residential design for access and crossover requirements. Telecommunications facility <sup>(81)</sup></li></ul> | No acceptable outcome provided.   |

Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup>must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz.

| PO51   | AO51.1   |
|--|--|
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures. |
|  | AO51.2   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.  |
| <ul> <li>PO52</li> <li>A new Telecommunications facility<sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.</li> <li>PO53</li> <li>Telecommunications facilities<sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.</li> </ul>  | <ul> <li>AO52         A minimum of 45m<sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.     </li> <li>AO53         The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required     </li> </ul> |
|   | under the planning scheme or under an existing development approval.  |
| <ul> <li>PO54</li> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is: <ul> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> </ul> </li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | A054.1<br>Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |
|   | AO54.2<br>In all other areas towers do not exceed 35m in height.  |
|   | AO54.3<br>Towers, equipment shelters and associated structures<br>are of a design, colour and material to:  |
|   | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>   |
|   | A054.4  |
| MBH   | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m.   |
|   | Where there is no established building line the facility is located at the rear of the site.  |
|   | AO54.5  |
|   | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| PO55<br>Lawful access is maintained to the site at all times that<br>does not alter the amenity of the landscape or<br>surrounding uses.  | <ul> <li>AO54.6</li> <li>A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.</li> <li>Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.</li> <li>AO55</li> <li>An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.</li> </ul> |
| <b>PO56</b><br>All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting. | AO56<br>All equipment comprising the Telecommunications<br>facility <sup>(81)</sup> which produces audible or non-audible sound<br>is housed within a fully enclosed building incorporating<br>sound control measures sufficient to ensure no noise<br>from this equipment can be heard, or felt at the site<br>boundary.   |
| Retail and commercial activities  |   |
| PO57         Retail and commercial activities do not establish in this precinct unless adjoining:         a.       the main street boulevard (West street) or         b.       the transit stop.  | No acceptable outcome provided.   |
| P058  | AO58  |
| Retail and commercial uses within the sub-precinct are<br>of a small scale and are subordinate to the residential<br>activities within the Residential north sub-precinct<br>(approximate ratio 80% residential 20% retail or<br>commercial)  | Retail and commercial uses have a maximum GFA of 100m <sup>2</sup> each.  |
| <b>PO59</b><br>Non-residential uses address and activate streets and public spaces by:  | No acceptable outcome provided.   |

| Perf     | ormance outcomes  | Acceptable outcomes             |
|----------|---|---------------------------------|
| a.       | ensuring buildings and individual tenancies address<br>street frontage(s), civic space and other areas of<br>pedestrian movement;   |                                 |
| b.       | new buildings adjoin or are within 3m of the primary street frontage(s), civic space or public open space;  |                                 |
| C.       | locating car parking areas behind or under buildings to not dominate the street environment;  |                                 |
| d.       | establishing and maintaining interaction, pedestrian<br>activity and casual surveillance through appropriate<br>land uses and building design (e.g. the use of<br>windows or glazing and avoiding blank walls with<br>the use of sleeving); |                                 |
| e.       | providing visual interest to the façade (e.g. windows<br>or glazing, variation in colour, materials, finishes,<br>articulation, recesses or projections);   | C lets                          |
| f.       | establishing and maintaining human scale.   | - C                             |
| PO6      | 0   | No acceptable outcome provided. |
|          | uildings exhibit a high standard of design and struction, which:  | NO.                             |
| a.       | adds visual interest to the streetscape (e.g. variation<br>in materials, patterns, textures and colours,<br>cantilevered awning);   | S                               |
| b.       | enables differentiation between buildings;<br>contributes to a safe environment;  |                                 |
| c.<br>d. | incorporates architectural features within the<br>building facade at the street level to create human<br>scale (e.g. cantilevered awning);  |                                 |
| e.       | includes building entrances that are readily identifiable from the road frontage;   |                                 |
| f.       | locate and orientate to favour active and public<br>transport usage by connecting to pedestrian<br>footpaths on the street frontage and adjoining sites;  |                                 |
| g.       | incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;   |                                 |
| h.       | facilitate casual surveillance of all public spaces.  |                                 |
| PO6      | 1   | No acceptable outcome provided. |
|          | elopment provides functional and integrated car ing and vehicle access, that:   |                                 |

| Performance outcomes  |                          | Acceptable outcomes  |
|---|--------------------------|--|
| a. prioritises the movement an<br>between the street frontage<br>building;                                    |                          |  |
| b. provides safety and security at all times;   | y of people and property |  |
| c. does not impede active tra   | nsport options;          |  |
| d. does not impact on the safe of traffic external to the site  |                          |  |
| e. is consolidated and shared wherever possible.  | with adjoining sites     |  |
| PO62  |                          | No acceptable outcome provided.  |
| The safety and efficiency of ped-<br>prioritised in the design of car pa<br>providing pedestrian paths in car | arking areas through     | 0 10   |
| a. located along the most direct entrances, car parks and a   | •                        |  |
| <ul> <li>protected from vehicle intru<br/>physical and visual separa<br/>trees etc);</li> </ul>               |                          | a cher   |
| c. are of a width to allow safe prams and wheelchairs.  | and efficient access for | 5  |
| PO63  |                          | AO63.1   |
| The number of car parking spac  |                          | Car parking is provided in accordance with table 7.2.3.2.4.4.  |
| a. avoid significant impacts of efficiency of the road netwo  | ork;                     | Note - The above rates exclude car parking spaces for people with a disability required by Disability Discrimination Act 1992 or the |
| b. avoid an oversupply of car   |                          | relevant disability discrimination legislation and standards.  |
| c. avoid the visual impact of I parking from road frontage  |                          | AO63.2   |
| d. promote active and public t  | transport options;       | All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1.                                  |
| e. promote innovative solution parking and shared parking   |                          | accordance with Australian Standard AS2090.1.  |
| Note - Refer to Planning scheme policy assessment for guidance on how to ac outcome.                          |                          |  |
| PO64  |                          | AO64.1   |

| Performance outcomes   | Acceptable outcomes  |  |  |  |  |  |
|--|--|--|--|--|--|--|
| a. End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:   | Minimum bicycle parking facilities are provided in accordance with the table below (rounded up to the nearest whole number).   |  |  |  |  |  |
| <ul> <li>adequate bicycle parking and storage<br/>facilities; and</li> </ul>   | Use  | Minimum Bicycle Parking  |  |  |  |  |
| ii. adequate provision for securing belongings;  | Residential uses comprised of dwellings  | Minimum 1 space per dwelling   |  |  |  |  |
| <ul> <li>and</li> <li>iii. change rooms that include adequate showers, sanitary compartments, wash basins and</li> </ul>   | All other residential uses   | Minimum 1 space per 2 car parking<br>spaces identified in Schedule 7 –<br>car parking  |  |  |  |  |
| mirrors.   | Non-residential uses   | Minimum 1 space per 200m2 of GFA   |  |  |  |  |
| D. Notwithstanding a. there is no requirement to<br>provide end of trip facilities if it would be<br>unreasonable to provide these facilities having<br>regard to:   | prescribed under the Queensla<br>planning instrument to prescribe<br>levels identified in those accep<br>outcome is a combination of th  | Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is a combination of the default levels set for end of trip |  |  |  |  |
| <ul> <li>the projected population growth and forward<br/>planning for road upgrading and development<br/>of cycle paths; or</li> </ul>   | facilities in the Queensiand De facilities required by Council.  | velopment Code and the additional  |  |  |  |  |
| ii. whether it would be practical to commute to<br>and from the building on a bicycle, having<br>regard to the likely commute distances and<br>nature of the terrain; or   | <ul> <li>AO64.2</li> <li>Bicycle parking is:</li> <li>a. provided in accordance with Austroads (2008),<br/>Guide to Traffic Management - Part 11: Parking;</li> <li>b. protected from the weather by its location or a<br/>dedicated roof structure;</li> </ul>  |  |  |  |  |  |
| <li>the condition of the road and the nature and<br/>amount of traffic potentially affecting the safety<br/>of commuters.</li>   |  |  |  |  |  |  |
|  |  | ilding or in a dedicated, secure   |  |  |  |  |
| Editor's note - The intent of b above is to ensure the requirements<br>for bicycle parking and end of trip facilities are not applied in<br>unreasonable circumstances. For example these requirements<br>should not, and do not apply in the Rural zone or the Rural residential<br>zone etc.   | d. adjacent to building e customers and visito   | entrances or in public areas for<br>ors.   |  |  |  |  |
| Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating   | Note - Bicycle parking structure<br>standards prescribed in AS289  |  |  |  |  |  |
| building work, that Queensland Development Code performance<br>requirement cannot be altered by a local planning instrument and<br>has been reproduced here solely for information purposes. Council's<br>assessment in its building work concurrence agency role for end of<br>trip facilities will be against the performance requirement in the | Note - Bicycle parking and end of trip facilities provided for residentia<br>and non-residential activities may be pooled, provided they are within<br>100 metres of the entrance to the building.<br>Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a loca<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |  |  |  |  |  |
| Queensland Development Code. As it is subject to change at any<br>time, applicants for development incorporating building work should<br>ensure that proposals that do not comply with the acceptable<br>outcomes under this heading meet the current performance<br>requirement prescribed in the Queensland Development Code.                    |  |  |  |  |  |  |
|  | AO64.3   |  |  |  |  |  |
|  | For non-residential uses,  | storage lockers:   |  |  |  |  |

| Performance outcomes | Accept  | able ou   | utcome  | S   |  |   |  |
|----------------------|---|---|---|---|--|---|--|
|                      |   |   |   |   | δ per bicycle μ<br>nearest whole   |   |  |
|                      |   | <ul> <li>b. have minimum dimensions of 900mm (height) x<br/>300mm (width) x 450mm (depth).</li> </ul>   |   |   |  |   |  |
|                      | activities<br>within 50<br>Editor's<br>prescrib<br>planning<br>levels id<br>outcome<br>facilities<br>facilities<br>facilities<br>facilities<br>facilities<br>facilities<br>facilities<br>facilities<br>facilities<br>facilities<br>facilities | when wi<br>mote - Th<br>ed under<br>instrume<br>entified in<br>is an an<br>in the Qu<br>required<br>-reside<br>e provid<br>aces;<br>e fitted v<br>im publ<br>e provid<br>mpartn | thin 100 n<br>of bicycle<br>e accepta<br>the Queer<br>on to present to present<br>to present to present<br>to present<br>to present<br>nalgamatic<br>useensland<br>by Counce<br>ntial use<br>ded at a<br>with a loc<br>ic view;<br>ded with | hetres of the<br>parking an<br>oble solution<br>nsland Dev<br>cribe facility<br>cceptable si<br>on of the de<br>I Developm<br>il.<br>es, chang<br>rate of 1<br>ckable do<br>shower(<br>and wash | across multiple<br>e entrance to the<br>d storage facilitie<br>ns for end of trip<br>elopment Code p<br>r levels higher tha<br>olutions. This acc<br>efault levels set for<br>ent Code and the<br>ging rooms:<br>per 10 bicycl<br>por or otherwis<br>s), sanitary<br>basin(s) in a | building and<br>es.<br>facilities<br>ermit a local<br>in the default<br>ceptable<br>or end of trip<br>e additional<br>e parking<br>e screened |  |
|                      | Bicycle<br>spaces<br>provided   | Male/<br>Female   | Change<br>rooms<br>required   | Showers required  | Sanitary<br>compartments<br>required   | Washbasins required   |  |
|                      | 1-5   | Male<br>and<br>female   | 1 unisex<br>change<br>room  | 1   | 1 closet pan   | 1   |  |
|                      | 6-19  | Female  | 1   | 1   | 1 closet pan   | 1   |  |
|                      | 20 or   | Male  | 1   | 1   | 1 closet pan   | 1   |  |
| RC                   | more  | Female  | 1   | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter  | 2 closet pans,<br>plus 1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided<br>thereafter   | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter   |  |
|                      |   | Male  | 1   | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter  | 1 urinal and 1<br>closet pans, plus<br>1 sanitary<br>compartment at<br>the rate of 1<br>closet pan or 1<br>urinal for every 60<br>bicycle space<br>provided<br>thereafter  | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter   |  |
|                      | and Star<br>Note - A  | ndards (V<br>II sanitary  | VELS) rati  | ing shower  | tar Water Efficier<br>head.<br>onstructed in com   |   |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| <ul> <li>PO65</li> <li>Loading and servicing areas: <ul> <li>a. are not visible from the street frontage;</li> <li>b. are integrated into the design of the building;</li> <li>c. include screening and buffers to reduce negative impacts on adjoining sensitive land uses;</li> <li>d. where possible loading and servicing areas are consolidated and shared with adjoining sites.</li> </ul> </li> </ul> | <ul> <li>d. are provided with: <ol> <li>a mirror located above each wash basin;</li> <li>a hook and bench seating within each shower compartment;</li> <li>a socket-outlet located adjacent to each wash basin.</li> </ol> </li> <li>Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities</li> <li>Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels dentified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities required by Council.</li> <li>No acceptable outcome provided.</li> </ul> |
| PO66   | AO66  |
| Bins and bin storage areas are designed, located and managed to prevent amenity impacts on the locality.   | Bins and bin storage areas are designed, located and managed in accordance with Planning scheme policy - Waste.   |
| P067   | No acceptable outcome provided.   |
| On-site landscaping is provided, that:   |   |
| a. is incorporated into the design of the development;   |   |
| b. reduces the dominance of car parking and servicing areas from the street frontage;  |   |
| c. retains mature trees wherever possible;   |   |

| Perf          | ormance outcomes   | Acceptable outcomes  |  |  |  |  |
|---------------|--|--|--|--|--|--|
| d.            | does not create safety or security issues by creating<br>potential concealment areas or interfering with sight<br>lines;   |  |  |  |  |  |
| e.            | maintains the achievement of active frontages and sight lines for casual surveillance.   |  |  |  |  |  |
|               | e - All landscaping is to accord with Planning scheme policy -<br>grated design.   |  |  |  |  |  |
| PO6           | 8  | AO68   |  |  |  |  |
|               | eillance and overlooking are maintained between oad frontage and the main building line.   | No fencing is provided forward of the building line.   |  |  |  |  |
| PO6           | 9  | No acceptable outcome provided.  |  |  |  |  |
| illum<br>safe | ting is designed to provide adequate levels of<br>ination to public and communal spaces to maximise<br>ty and minimise adverse impacts on residential and<br>r sensitive land uses.  | ne   |  |  |  |  |
| P07           | 0  | No acceptable outcome provided.  |  |  |  |  |
|               | hours of operation minimise adverse amenity impacts<br>djoining sensitive land uses.   | S  |  |  |  |  |
|               | Values and con   | straints criteria  |  |  |  |  |
| Rec<br>deve   | onfiguring a lot or Material change of use or Operational work, wh   | e the development is consistent with a current Development permit for<br>here that approval has considered and addressed (e.g. through a<br>) or conditions of approval) the identified value or constraint under this   |  |  |  |  |
|               |  | - Heritage and landscape character to determine if   |  |  |  |  |
| tne           | ollowing assessment criteria apply)  |  |  |  |  |  |
|               | e - To assist in demonstrating achievement of heritage performanc<br>suitably qualified person verifying the proposed development is in  | e outcomes, a Cultural heritage impact assessment report is prepared n accordance with The Australia ICOMOS Burra Charter.   |  |  |  |  |
| acco          | Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites. |  |  |  |  |  |
| land<br>herit | scape character and listed in Schedule 1 of Planning scheme pol  | ral heritage significance, are identified on Overlay map - Heritage and<br>icy - Heritage and landscape character. Places also having cultural<br>sland Heritage Register, are also identified in Schedule 1 of Planning |  |  |  |  |
| PO7           | 1  | A071   |  |  |  |  |
|               |  |  |  |  |  |  |

| Per   | formance outcomes  | Acceptable outcomes  |
|---|--|--|
| a.<br>b.  | minimises the risk to persons from overland flow;<br>does not increase the potential for damage from<br>overland flow either on the premises or other<br>premises, public land, watercourses, roads or<br>infrastructure.  |  |
| PO  | 75   | No acceptable outcome provided.  |
| Dev<br>a.<br>b.<br>Not<br>poli<br><b>PO7</b><br>Dev<br>a.<br>b. | <pre>velopment:<br/>maintains the conveyance of overland flow<br/>predominantly unimpeded through the premises for<br/>any event up to and including the 1% AEP for the<br/>fully developed upstream catchment;<br/>does not concentrate, intensify or divert overland<br/>flow onto an upstream, downstream or surrounding<br/>property.</pre> te - A report from a suitably qualified Registered Professional<br>gineer Queensland is required certifying that the development<br>as not increase the potential for significant adverse impacts on<br>upstream, downstream or surrounding premises.<br>te - Reporting to be prepared in accordance with Planning scheme<br>icy – Flood hazard, Coastal hazard and Overland flow.<br>T6<br>velopment does not:<br>directly, indirectly or cumulatively cause any<br>increase in overland flow velocity or level;<br>increase the potential for flood damage from<br>overland flow either on the premises or other<br>premises, public lands, watercourses, roads or<br>infrastructure.<br>te - Open concrete drains greater than 1m in width are not an<br>epitable outcome, nor are any other design options that may<br>rease scouring. | No acceptable outcome provided.  |
| Dev<br>the<br>detr  | velopment ensures that public safety and the risk to<br>environment are not adversely affected by a<br>rimental impact of overland flow on a hazardous<br>mical located or stored on the premises.   | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994<br>and the relevant building assessment provisions under the Building<br>Act 1975 for requirements related to the manufacture and storage<br>of hazardous substances. |
| POT   | 78   | A078   |

| Performance outcomes  | Acceptable outcomes  |  |  |
|---|--|--|--|
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.  | Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.   |  |  |
| <ul> <li>PO79</li> <li>Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow</li> <li>PO80</li> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> </ul> | AO79.1<br>Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>AO79.2<br>Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment.<br>No acceptable outcome provided. |  |  |
| Note - Refer to Planning scheme policy - Integrated design for details<br>and examples.<br>Note - Stormwater Drainage easement dimensions are provided in<br>accordance with Section 3.8.5 of QUDM.   |  |  |  |
| Additional criteria for development for a Park <sup>(57)</sup>  |  |  |  |
| PO81  | AO81   |  |  |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:   | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design.   |  |  |
| a. public benefit and enjoyment is maximised;   |  |  |  |

| Per                   | formance outcomes   | Acceptable outcomes  |
|-----------------------|---|--|
| b.                    | impacts on the asset life and integrity of park structures is minimised;  |  |
| C.                    | maintenance and replacement costs are minimised.  |  |
|                       | astructure buffer areas (refer Overlay map – Infrastr<br>eria apply)  | ucture buffers to determine if the following assessment  |
| PO                    | 32  | A082   |
| Dev<br>a.<br>b.<br>c. | relopment within a High voltage electricity line buffer:<br>is located and designed to avoid any potential<br>adverse impacts on personal health and wellbeing<br>from electromagnetic fields;<br>is located and designed in a manner that maintains<br>a high level of security of supply;<br>is located and designed so not to impede upon the<br>functioning and maintenance of high voltage<br>electrical infrastructure. | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer. |

en

## Table 7.2.3.2.4.2 Setbacks

|                      |          |         |  | Res                 | idential us | es                                       |                                     |  |                    |          |
|----------------------|----------|---------|--|---------------------|-------------|--|-------------------------------------|--|--------------------|----------|
| Height               | Frontage |         | Frontage                                 |                     | Frontage    | Side                                     | Rear                                | Canal  |                    |          |
|                      |          | primary |  | secondary to street |             | secondary<br>to lane                     | non-built<br>to<br>boundary<br>wall | To OMP<br>and wall   | To OMP<br>and wall |          |
| 5                    | To wall  | To OMP  | To<br>covered<br>car<br>parking<br>space | To wall             | To<br>OMP   | To<br>covered<br>car<br>parking<br>space | To OMP<br>and wall                  | To OMP<br>and wall   |                    |          |
| Less than<br>4.5m    | Min 1m   | Min 1m  | Min 5.4m*                                | Min 1m              | Min 1m      | Min<br>5.4m*                             | Min 0.5m                            | Min 1.5m   | Min 1.5m           | Min 4.5m |
| 4.5 to<br>8.5m       | Min 1m   | Min 1m  | N/A                                      | Min 1m              | Min 1m      | N/A                                      | Min 0.5m                            | Min 2m   | Min 2m             | Min 4.5m |
| Greater<br>than 8.5m | Min 5m   | Min 3m  | N/A                                      | Min 2m              | Min 1m      | N/A                                      | Min 0.5m                            | Min 2m up<br>to 8.5m in<br>height;<br>plus 0.5m<br>for every<br>3m in<br>height or<br>part<br>thereof<br>over 8.5m | Min 5m             | Min 4.5m |

## Table 7.2.3.2.4.3 Built to boundary walls (Residential uses)

| Lot frontage width | Mandatory / Optional | Length and height of built to boundary wall |
|--------------------|----------------------|---|
|                    |                      | Urban neighbourhood precinct                |

| Less than 7.5m   | Mandatory - both sides unless a corner lot  | Max Length: 80% of the length of the boundary<br>Max Height: 8.5m                          |
|------------------|---|--|
| 7.5m to 12.5m    | Mandatory - one side  | Max Length: 70% of the length of the<br>boundary<br>Max Height: 10.5m                      |
| >12.5m to 18m    | Optional:<br>i. on 1 boundary only;<br>ii. where the built to boundary wall adjoins<br>a lot with a frontage less than 18m. | Max Length: the lesser of 15m or 60% of the<br>length of the boundary<br>Max Height: 10.5m |
| Greater than 18m | As per QDC  |  |

#### Table 7.2.3.2.4.4 Car parking spaces

| Site proximity   | Land use                          | Maximum number of car spaces to be provided | Minimum number of car Spaces to be provided |
|--|-----------------------------------|---|---|
| Within 800m<br>walkable<br>Catchment* of a<br>higher order<br>centre | Non-residential                   | 1 per 30m <sup>2</sup> GFA                  | 1 per 50m <sup>2</sup> GFA                  |
|  | Residential – permanent/long term | N/A   | 1 per dwelling                              |
|  | Residential – serviced/short term | 3 per 4 dwellings + staff spaces            | 1 per 5 dwellings + staff spaces            |
| Other (Wider catchment)  | Non-residential                   | 1 per 20m <sup>2</sup> GFA                  | 1 per 30m <sup>2</sup> GFA                  |
|  | Residential – permanent/long term | N/A   | 1 per dwelling                              |
|  | Residential – serviced/short term | 1 per dwelling + staff spaces               | 1 per 5 dwellings + staff spaces            |

Note - Car parking rates are to be rounded up to the nearest whole number.

C P V

Note - Allocation of car parking spaces to dwellings is at the discretion of the developer.

Note - Residential - Permanent/long term includes: Multiple dwelling<sup>(49)</sup>, Relocatable home park<sup>(62)</sup>, Residential care facility<sup>(65)</sup>, Retirement facility<sup>(67)</sup>.

Note - Residential - Services/short term includes: Rooming accommodation<sup>(69)</sup> or Short-term accommodation<sup>(77)</sup>.

## 7.2.3.2.5 Residential south sub-precinct

### 7.2.3.2.5.1 Purpose - Residential south sub-precinct

- 1. The purpose of the Residential south sub-precinct will be achieved through the following overall outcomes:
  - a. The Residential south sub-precinct will comprise a medium to high density neighbourhood that will achieve a minimum net density of 30 dwellings per ha, supporting the retail and commercial activities within the town centre precinct.
  - b. Residential development will be supported by small scale convenience retail and commercial activities within the sub-precinct.
  - c. The Residential south neighbourhood will have a mix of residential uses (e.g. low-medium rise walk up apartments, plexes, row/terrace housing etc), tenure and densities on a variety of lot sizes providing housing choice and affordability for different lifestyle choices and life stages to meet diverse community needs.
  - d. Residential activities are designed, sited and constructed to:
    - i. provide small building setbacks to the street;
    - ii. contribute to an attractive streetscape with priority given to pedestrians;
    - iii. encourage passive surveillance of public spaces;
    - iv. result in privacy and residential amenity consistent with the medium to high density residential character of the area;
    - v. orientate to integrate with the street and surrounding neighbourhood;
    - vi. provide a diverse and attractive built form where buildings are located closer to the street and encourage active frontages;
    - vii. provide an attractive streetscape with street trees for shade and hard footpaths for walking;
    - viii. incorporate sub-tropical urban design principles that respond to local climatic conditions;
    - ix. incorporate sustainable practices including maximising energy efficiency and water conservation;
      - x. incorporate natural features and respond to site topography;
      - xi. be of a scale and density consistent with the medium to high density residential character of the area;
      - xii. locate car parking so as not to dominate the street;
      - xiii. cater for appropriate car parking and manoeuvring areas on-site;
      - xiv. provide urban services such as reticulated water, sewerage, sealed roads, parks and other identified infrastructure.
  - e. Retail and commercial activities must:
    - i. be small scale and provide convenience, speciality services that are ancillary function to residential activities in the sub-precinct;
    - ii. be located within the precinct on or at the intersection of the major street network,
    - iii. where part of a mixed use development be at street level with active frontages to the major streets;
    - iv. be appropriately designed and located to include active frontages;

- v. not negatively impact adjoining residents or the streetscape;
- vi. the design, siting and construction of non-residential uses:
  - A. maintains a human scale, through appropriate building heights and form;
  - B. provides attractive, active frontages that maximise pedestrian activity along road frontages, movement corridors and public spaces;
  - C. provides for active and passive surveillance of road frontages, movement corridors and public spaces;
  - D. promotes active transport options and ensures an oversupply of car parking is not provided.
- f. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- g. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- h. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- i. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
  - Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- k. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- I. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- m. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- n. Development constraints:

j.

i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:

- A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
- B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
- C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
- D. ensuring effective and efficient disaster management response and recovery capabilities;
- E. for overland flow path;
  - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
  - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
  - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
  - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- o. Development in the Residential south sub-precinct is for one or more of the uses identified below:

|     | • | Community residence <sup>(16)</sup>                 | •      | Residential care facility <sup>(65)</sup> -                          | • | Sales office <sup>(72)</sup>                         |
|-----|---|---|--------|--|---|--|
|     | • | Dual occupancy <sup>(21)</sup>                      | 1      | if within 800m walking distance of a transit stop                    | • | Shop <sup>(75)</sup> - if for a corner               |
|     | • | Dwelling house <sup>(22)</sup>                      | •      | Retirement facility <sup>(67)</sup> - if                             |   | store  |
|     | • | Home based business <sup>(35)</sup>                 |        | within 800m walking distance of a transit stop                       | • | Short-term accommodation <sup>(77)</sup> - if within |
|     | • | Multiple dwelling <sup>(49)</sup>                   | •      | Rooming  |   | 800m walking distance of a transit stop              |
|     | • | Relocatable home park <sup>(62)</sup>               |        | accommodation <sup>(69)</sup> - if within 800m walking distance of a |   |  |
|     |   | - if within 800m walking distance of a higher order | $\sim$ | transit stop   |   |  |
|     |   | or district centre                                  |        |  |   |  |
| 7 L |   |   |        |  |   |  |

### p. Development in the Residential south sub-precinct does not include one or more of the following uses:

|   |   |  | r |  |      |   |
|---|---|--|---|--|------|---|
| , | • | Adult store <sup>(1)</sup>                 | • | Hardware and trade<br>supplies <sup>(32)</sup> | •    | Place of worship <sup>(60)</sup>                    |
|   | • | Agricultural supplies store <sup>(2)</sup> | • | Health care services <sup>(33)</sup>           | ٠    | Port services <sup>(61)</sup>                       |
|   | • | Air services <sup>(3)</sup>                |   |  | •    | Renewable energy<br>facility <sup>(63)</sup>        |
|   |   | Animal husbandry <sup>(4)</sup>            | • | High impact industry <sup>(34)</sup>           |      | -   |
|   | • | Animal keeping <sup>(5)</sup>              | • | Intensive animal industry <sup>(39)</sup>      | •    | Research and technology<br>industry <sup>(64)</sup> |
|   | • | Aquaculture <sup>(6)</sup>                 | • | Intensive horticulture <sup>(40)</sup>         |      | Rural industry <sup>(70)</sup>                      |
|   | - |  | • | Low impact industry <sup>(42)</sup>            | •    |   |
|   | • | Bar <sup>(7)</sup>                         | • | Marine industry <sup>(45)</sup>                | •    | Rural workers accommodation <sup>(71)</sup>         |
|   | • | Brothel <sup>(8)</sup>                     | • | Medium impact industry <sup>(47)</sup>         |      | Service Industry <sup>(73)</sup>                    |
|   | • | Cemetery <sup>(12)</sup>                   | - | Mediani impact industry                        | U.S. | Service industry                                    |
|   |   |  |   |  |      |   |

|   | Obild care contro (13)                       |   | Matan an art fa silit. (48)                             |     | Convice $Otation(74)$ if                               |
|---|--|---|---|-----|--|
| • | Child care centre <sup>(13)</sup>            | • | Motor sport facility <sup>(48)</sup>                    | •   | Service Station <sup>(74)</sup> - if<br>standalone use |
| • | Club <sup>(14)</sup>                         | • | Nature-based tourism <sup>(50)</sup>                    |     |  |
| • | Community care centre <sup>(15)</sup>        | • | Nightclub entertainment<br>facility <sup>(51)</sup>     | •   | Shop <sup>(75)</sup> - if not for a corner<br>store    |
| • | Community use <sup>(17)</sup>                |   |   | •   | Shopping centre <sup>(76)</sup>                        |
| • | Crematorium <sup>(18)</sup>                  | • | Non-resident workforce<br>accommodation <sup>(52)</sup> | •   | Showroom <sup>(78)</sup>                               |
| • | Cropping <sup>(19)</sup>                     | • | Office <sup>(53)</sup>                                  |     | Special industry <sup>(79)</sup>                       |
| • | Detention facility <sup>(20)</sup>           | • | Outdoor sales <sup>(54)</sup>                           |     | Theatre <sup>(82)</sup>                                |
| • | Educational<br>establishment <sup>(24)</sup> | • | Permanent plantation <sup>(59)</sup>                    |     | Tourist attraction <sup>(83)</sup>                     |
|   |  |   |   |     | Transport depot <sup>(85)</sup>                        |
| • | Extractive industry <sup>(27)</sup>          |   |   |     |  |
|   | Emergency services <sup>(25)</sup>           |   |   | •   | Veterinary services <sup>(87)</sup>                    |
|   |  |   |   | • 1 | Warehouse <sup>(88)</sup>                              |
| • | Food and drink outlet <sup>(28)</sup>        |   |   |     | Wholesale nursery <sup>(89)</sup>                      |
|   |  |   |   |     |  |
|   |  |   |   |     | Winery <sup>(90)</sup>                                 |
|   |  |   |   |     |  |

q. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

### 7.2.3.2.5.2 Criteria for assessment

### Part H — Criteria for assessable development - Residential south sub-precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part H, Table 7.2.3.2.5.1.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

#### Table 7.2.3.2.5.1 Assessable development - Residential south sub-precinct

| Performance outcomes  | Acceptable outcomes             |  |  |  |
|---|---------------------------------|--|--|--|
| General   | l criteria                      |  |  |  |
| Density   |                                 |  |  |  |
| <b>PO1</b><br>Development in the Residential south sub-precinct has<br>a medium to high residential density in accordance with<br>the minimum indicated on a neighbourhood development<br>plan. | No acceptable outcome provided. |  |  |  |
| Residential uses  |                                 |  |  |  |
| PO2   | AO2.1                           |  |  |  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| <ul> <li>Residential uses are appropriately located within the precinct having regard to:</li> <li>a. the housing diversity and mix sought within the precinct;</li> <li>b. the proximity to existing centres, neighbourhood hubs, public open space and train stations;</li> <li>c. the lot frontage;</li> <li>d. the order of road and street type.</li> </ul> Note - Refer to Planning scheme policy - Residential design for details and examples.  | Residential uses adjoining Bellmere road consist of 2-3<br>storey town houses that face Bellmere road and gain<br>vehicle access from the rear.<br>AO2.2<br>Residential uses south of those adjoining Bellmere road<br>comprise a mix of built forms and tenures.                          |
| Building height (Residential uses)  |  |
| <ul> <li>PO3</li> <li>Buildings and structures have a height that: <ul> <li>a. is consistent with the low to medium rise character of the Residential south sub-precinct;</li> </ul> </li> <li>b. responds to the topographic features of the site, including slope and orientation;</li> <li>c. is not visually dominant or overbearing with respect to the streetscape;</li> <li>d. responds to the height of development on adjoining land where contained within another precinct or zone.</li> </ul> Note - Refer to Planning scheme policy - Residential design for details and examples. | <ul> <li>AO3</li> <li>Building height does not exceed:</li> <li>a. that mapped on Overlay map – Building heights; or</li> <li>b. for domestic outbuildings, including free standing carports and garages, 4m and a mean height not exceeding 3.5m.</li> </ul>                              |
| Building height (Non-residential uses)  |  |
| PO4<br>The height of buildings does not adversely affect amenity<br>of the area or of adjoining properties.   | AO4<br>Building heights do not exceed that mapped on<br>Neighbourhood development plan map - Building heights<br>except for architectural features associated with religious<br>expression on Place of worship <sup>(60)</sup> and Educational<br>establishment <sup>(24)</sup> buildings. |
| Setbacks (Residential uses)   |  |
| PO5   | A05.1  |
| Residential buildings and structures are setback to:  | Setbacks (excluding built to boundary walls) comply with Table 7.2.3.2.5.2 - Setback (Residential uses).   |

| Per    | formance outcomes  | Acceptable outcomes   |
|--------|--|---|
| deta   | be consistent with the low to medium density next<br>generation neighbourhood character intended for<br>the area, where buildings are positioned closer to<br>the footpath to create more active frontages and<br>maximise private open space at the rear;<br>result in development not being visually dominant<br>or overbearing with respect to the streetscape and<br>the adjoining sites;<br>maintain private open space areas that are of a size<br>and dimension to be usable and functional;<br>maintain the privacy of adjoining properties;<br>ensure parked vehicles do not restrict pedestrian<br>and traffic movement and safety;<br>limit the length, height and openings of boundary<br>walls to maximise privacy and amenity on adjoining<br>properties;<br>provide adequate separation to particular<br>infrastructure and waterbodies to minimise adverse<br>impacts on people, property, water quality and<br>infrastructure;<br>ensure built to boundary walls do not create<br>unusable or inaccessible spaces and do not<br>negatively impact the streetscape character,<br>amenity or functionality of adjoining properties. | <ul> <li>AO5.2</li> <li>Buildings (excluding class 10 buildings and structures) ensure that built to boundary walls are: <ul> <li>a. of a length and height in Table 7.2.3.2.5.3;</li> <li>b. setback from the side boundary: <ul> <li>i. not more than 20mm; or</li> <li>ii. if a plan of development shows only one built to boundary wall on the boundary, not more than 150mm;</li> </ul> </li> <li>c. on the low side of a sloping lot.</li> </ul> Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls and 'easement for maintenance purposes' is recommended.</li></ul> |
| PO     |  | AQ6.1   |
|        | nt setbacks ensure buildings address and actively face with streets and public spaces.   | <ul> <li>For the primary frontage buildings are constructed:</li> <li>a. to the property boundary; or</li> <li>b. setback a maximum of 3m from the property boundary, where for the purpose of outdoor dining.</li> <li>AO6.2</li> <li>For the secondary frontage, setbacks are consistent with an adjoining building.</li> </ul>   |
| utilit | e and rear setbacks cater for driveway(s), services,<br>ies and buffers required to protect the amenity of<br>ining sensitive land uses.   | A07<br>No acceptable outcome provided.  |

| Performance outcomes   | Acceptat                 | ole out           | comes             |                   |                    |                                  |                            |  |
|--|--------------------------|-------------------|-------------------|-------------------|--------------------|----------------------------------|----------------------------|--|
| Site cover (Residential uses)  |                          |                   |                   |                   |                    |                                  |                            |  |
| PO8  | AO8                      |                   |                   |                   |                    |                                  |                            |  |
| Residential buildings and structures will ensure that site cover:<br>a. does not result in a site density that is inconsistent   |                          | and of            | ther une          | enclose           | d struct           | g device<br>ures) do<br>cordance | es not                     |  |
| with the character of the area;  |                          |                   |                   |                   | ot Size            |                                  |                            |  |
| b. does not result in an over development of the site;   | Building<br>height       | 300m <sup>2</sup> | 301-              | 401-              | 501-               | 1001-                            | Greater                    |  |
| <li>c. does not result in other elements of the site being<br/>compromised (e.g. Setbacks, open space etc);</li>   |                          | or<br>less        | 400m <sup>2</sup> | 500m <sup>2</sup> | 1000m <sup>2</sup> | 2500m <sup>2</sup>               | than<br>2501m <sup>2</sup> |  |
| d. reflects the low to medium density character  | Less than<br>8.5m        | 75%               | 70%               | 60%               | 60%                | 60%                              | 60%                        |  |
| intended for the area.   | 8.5m<br>-12.0m           | 50%               | 50%               | 60%               | 50%                | 50%                              | 50%                        |  |
| Note - Refer to Planning scheme policy - Residential design for details and examples.  | Greater<br>than<br>12.0m | N/A               | N/A               | N/A               | 50%                | 40%                              | 40%                        |  |
| Movement network   | method of                | calculati         | on.               |                   |                    |                                  |                            |  |
| PO9<br>Development is designed to connect to and form part of<br>the surrounding neighbourhood by providing<br>interconnected street, pedestrian and cyclist pathways<br>to adjoining development, nearby sub-precincts, public<br>transport nodes and open space. | No accep                 | table o           | utcome            | provid            | ed.                |                                  |                            |  |
| Water sensitive urban design   |                          |                   |                   |                   |                    |                                  |                            |  |
| PO10<br>Best practice Water Sensitive Urban Design (SWD) is<br>incorporated within development sites adjoining street<br>frontages to mitigate impacts of stormwater run-off in<br>accordance with Planning scheme policy - Integrated<br>design.                  | No accep                 | table o           | utcome            | e provid          | ed.                |                                  |                            |  |
| Sensitive land use separation  |                          |                   |                   |                   |                    |                                  |                            |  |
| PO11   | AO11                     |                   |                   |                   |                    |                                  |                            |  |
| Sensitive land uses within 250m of land in the General industry sub-precinct must mitigate any potential exposure to industrial air, noise or odour emissions that impact on human health, amenity and wellbeing.  | Developm                 | nent is           | designe           | ed and            | operate            | d to ensi                        | ure that                   |  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy – Noise.   | <ul> <li>a. it meets the criteria outlined in the Planning Scheme<br/>Policy - Noise; and</li> <li>b. the air quality objectives in the <i>Environmental</i><br/><i>Protection (Air) Policy 2008</i>, are met.</li> </ul>   |
| Amenity   |   |
| · · · · ·   |   |
| <b>PO12</b><br>The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, chemicals<br>and other nuisance.  | No acceptable outcome provided.   |
| Noise   | 5   |
| PO13  | No acceptable outcome provided.   |
| Noise generating uses do not adversely affect existing<br>or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be | cheme   |
| PO14  | A014.1  |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:  | Development is designed to meet the criteria outlined ir the Planning Scheme Policy – Noise.  |
| a. contributing to safe and usable public spaces,   | A014.2  |
| through maintaining high levels of surveillance of<br>parks, streets and roads that serve active transport<br>purposes (e.g. existing or future pedestrian paths<br>or cycle lanes etc);  | Noise attenuation structures (e.g. walls, barriers or fences):  |
| <ul> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> </ul>   | <ul> <li>a. are not visible from an adjoining road or public area unless:</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does no serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes or where attenuation through building locatior and materials is not possible.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy -</li> </ul> |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.  |
|  | Note - Refer to Overlay map – Active transport for future active transport routes.  |
| Works  | criteria  |
| Utilities  |   |
| PO15   | A015  |
| The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant<br>energy regulating authority) and the infrastructure does<br>not negatively impact the streetscape. | The development is connected to underground electricity.  |
| PO16   | No acceptable outcome provided.   |
| The development has access to telecommunications and broadband services in accordance with current standards.  |   |
| P017   | No acceptable outcome provided.   |
| Where available the development is to safely connect to reticulated gas.   | SCI   |
| PO18   | AO18.1  |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.                                       | Where in a sewered area, the development is connected to a reticulated sewerage system.   |
|  | AO18.2  |
|  | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.   |
| R  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.   |
| PO19   | AO19.1  |
| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards. |
|  | AO19.2  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development. |
| PO20   | No acceptable outcome provided.  |
| The development is provided with dedicated and constructed road access.  |  |
| Access   |  |
| <ul> <li>PO21</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> | No acceptable outcome provided.  |
| <b>PO22</b><br>Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.   | No acceptable outcome provided.  |
| P023   | AO23.1   |
| <ul> <li>The layout of the development does not compromise:</li> <li>a. the development of the road network in the area;</li> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> </ul> Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement Major streets)   | Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a<br>motorway.<br>Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.  |
| <ul> <li>The layout of the development does not compromise:</li> <li>a. the development of the road network in the area;</li> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> </ul> Note - The road hierarchy is in accordance with a Neighbourhood  | Direct vehicle access for residential development<br>not occur from arterial or sub-arterial roads or a<br>motorway.<br>Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  |
|   | AO23.2<br>The development provides for the extension of the road<br>network in the area in accordance with Council's road<br>network planning.  |
|   | AO23.3<br>The development does not compromise future road<br>widening of frontage roads in accordance with the<br>relevant standard and Council's road planning.<br>AO23.4  |
|   | The lot layout allows forward access to and from the site.  |
| PO24  | A024.1  |
| Safe access facilities are provided for all vehicles required to access the site. | Site access and driveways are designed and located in accordance with:  |
|   | <ul> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul> |
|   | A024.2  |
| PC Rio  | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.   |
|   | vehicle requirements), pavement widths and construction.  |
|   | AO24.3  |
|   | Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in Schedule<br>8 Service vehicle requirements for the relevant use. The<br>on-site manoeuvring is to be in accordance with Schedule<br>8 Service vehicle requirements.  |
|   | A024.4  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | The driveway construction across the verge conforms to<br>the relevant standard drawing for the classification of the<br>road in accordance with Planning scheme policy -<br>Integrated design. |
| PO25  | No acceptable outcome provided.   |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:   |   |
| <ul> <li>ensure the type or volume of traffic generated by<br/>the development does not have a negative impact<br/>on the external road network;</li> </ul>   |   |
| <ul> <li>ensure the orderly and efficient continuation of the<br/>active transport network;</li> </ul>  |   |
| c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.  | C Jers  |
| Note - An Integrated Transport Assessment (ITA) may be required<br>to demonstrate compliance with this performance outcome. An ITA<br>should be prepared in accordance with Planning scheme policy -<br>Integrated transport assessment.  | ne  |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  | cone  |
| Note - To demonstrate compliance with c. of this performance<br>outcome, site frontage works where in existing road reserve<br>(non-trunk) are to be designed and constructed as follows:   |   |
| <ul> <li>i. Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or</li> <li>ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.</li> </ul> |   |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.  |   |
| Stormwater  |   |
| PO26  | No acceptable outcome provided.   |
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.  |   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |   |
| Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate achievement of this performance outcome.   |   |

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. |                                 |
| PO27   | No acceptable outcome provided. |
| Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.   | c, ersion?                      |
| PO28   | No acceptable outcome provided. |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by a<br>suitably qualified professional will be required in accordance with<br>Planning scheme policy - Stormwater management.            | scheme                          |
| PO29   | No acceptable outcome provided. |
| Easements for drainage purposes are provided over:   |                                 |
| <ul><li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li><li>b. overland flow paths where they cross more than one property boundary.</li></ul>  |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.  |                                 |
| Site works and construction management   | ·                               |
| PO30   | No acceptable outcome provided. |
| The site and any existing structures are maintained in a tidy and safe condition.  |                                 |
| PO31   | AO31.1                          |


| Performance outcomes  | Acceptable outcomes  |
|---|--|
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.</li> </ul> |
|   | AO31.3<br>The completed earthworks (fill or excavation) area is<br>stabilised using turf, established grass seeding, mulch<br>or sprayed stabilisation techniques to control erosion and<br>sediment and dust from leaving the property.   |
| P032  | No acceptable outcome provided   |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.  |  |
| P033  | AO33.1   |
| All works on-site and the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.   | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic<br>movements to and from the site are safe.   |
| Note - Where the amount of imported material is greater than 50m <sup>3</sup> , a haulage route must be identified and approved by Council.   | AO33.2   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.<br>Note - A Traffic Management Plan may be required for the site in<br>accordance with the Manual of Uniform Traffic Control Devices<br>(MUTCD).<br><b>AO33.3</b><br>Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the |
|  | site are to be cleaned at all times.   |
| P034   | A034   |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | <ul><li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li><li>b. grassed.</li></ul>   |
|  | Note - These areas are to be maintained during any maintenance<br>period to maximise grass coverage from grass seeding of these<br>areas.  |
| P035   | AO35.1   |
| <ul><li>The clearing of vegetation on-site:</li><li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the</li></ul> | All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.   |
| <ul> <li>works;</li> <li>includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> </ul>              | Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.  |
| c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.   | AO35.2   |
| Note - No burning of cleared vegetation is permitted.  | Disposal of materials is managed in one or more of the following ways:   |
|  | a. all cleared vegetation, declared weeds, stumps,<br>rubbish, car bodies, scrap metal and the like are<br>removed and disposed of in a Council land fill<br>facility; or  |
|  | b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.  |
| PO36   | No acceptable outcome provided.  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.  |  |
| Earthworks   |  |
| PO37   | A037.1   |
| <ul> <li>PO37</li> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to: <ul> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes and batters;</li> <li>h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)</li> </ul> Note - Filling or excavation works are to be completed within six (6) months of the commencement date. </li> </ul> | <ul> <li>AU37.1</li> <li>All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.</li> <li>AO37.2</li> <li>Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.</li> <li>AO37.3</li> <li>All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.</li> <li>AO37.4</li> <li>All filling or excavation is contained within the site.</li> <li>AO37.5</li> <li>All fill placed on-site is: <ul> <li>a. limited to that required for the necessary approved use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).</li> </ul> </li> <li>AO37.6</li> <li>The site is prepared and the fill placed on-site in accordance with AS3798.</li> <li>Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.</li> </ul> |
|  | AO37.7<br>Materials used for structural fill are in accordance with<br>AS3798.   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | AO37.8  |
|   | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.   |
| PO38  | AO38  |
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |
| PO39  | A039.1  |
| On-site earthworks are undertaken in a manner that:   | No earthworks are undertaken in an easement issued in   |
| <ul> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council</li> </ul> | favour of Council or a public sector entity.<br>Note - Public sector entity as defined in the <i>Sustainable Planning</i><br><i>Act 2009</i> .  |
| or public sector entity maintained infrastructure or<br>any drainage feature on, or adjacent to the land for  | AO39.2  |
| monitoring, maintenance or replacement purposes.<br>Note - Public sector entity as defined in the <i>Sustainable Planning</i>   | Earthworks that would result in any of the following are not carried out on-site:   |
| Act 2009.   | <ul> <li>a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> </ul>  |
| NBRC  | <ul> <li>b. an increase in finished surface grade over, or within<br/>1.5m on each side of, the Council or public sector<br/>entity maintained infrastructure above that which<br/>existed prior to the earthworks being undertaken.</li> <li>Note - Public sector entity as defined in the Sustainable Planning<br/>Act 2009.</li> </ul> |
| PO40  | No acceptable outcome provided.   |
| Filling or excavation does not result in land instability.  |   |
| Note - A slope stability report prepared by an RPEQ may be required.  |   |
| PO41  | No acceptable outcome provided  |
| Filling or excavation does not result in  |   |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements |  |
| Retaining walls and structures  | SI   |
| PO42<br>All earth retaining structures provide a positive interface<br>with the streetscape and minimise impacts on the amenity<br>of adjoining residents.  | AO42 Earth retaining structures: <ul> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> </ul> Figure - Retaining on a boundary Finished surface level <ul> <li>Finished surface level</li> <li>Getaining</li> </ul> |
| MBRC  | <ul> <li>c. where height is greater than 900mm but no greater than 1.5m, are to be setback at least the equivalent height of the retaining structure from any property boundary;</li> <li>d. where height is greater than 1.5m, are to be setback and stepped 1.5m vertical: 1.5m horizontal, terraced, landscaped and drained as shown below.</li> </ul>  |

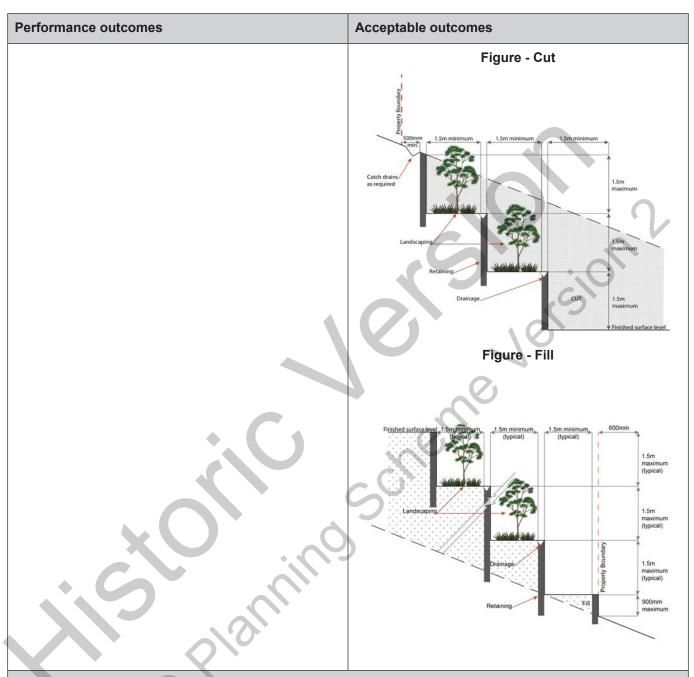

### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - ii.
  - iii.
  - material change of use for 2 or more sole occurring rot more stocking rot more stocking rot more sole occurring rot more sole occurre sole occurring rot more sole occurring r iv.

#### AND

- b. none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

| Performance outcomes  | Acceptable outcomes  |  |
|---|--|--|
| Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.  |  |  |
| PO43  | A043.1   |  |
| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> </ul> Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region. | <ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.</i></li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable: <ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Touris parks<sup>64</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> <li>b. in regard to the general locational requirements for fire hydrants. Part 3.2.2.2 (a), (b), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: <ul> <li>i. for dwellings and their associated outbuildings, hydrant doverage need only extend to the roof and external wells of those tents and caravans;</li> <li>iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> </ul> </li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul> </li> <li>AO43.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land: <ul> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.</li> </ul></li></ul> |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| PO44   | AO44  |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times   | For development that contains on-site fire hydrants external to buildings:  |
| from, or at, the vehicular entry point to the development site.  | a. those external hydrants can be seen from the vehicular entry point to the site; or   |
|  | b. a sign identifying the following is provided at the vehicular entry point to the site:   |
|  | <ul><li>i. the overall layout of the development (to scale);</li><li>ii. internal road names (where used);</li></ul>  |
|  |   |
|  | <ul><li>iii. all communal facilities (where provided);</li><li>iv. the reception area and on-site manager's office (where provided);</li></ul>  |
|  | v. external hydrants and hydrant booster points;  |
|  | vi. physical constraints within the internal<br>roadway system which would restrict access<br>by fire fighting appliances to external hydrants<br>and hydrant booster points.   |
|  | Note - The sign prescribed above, and the graphics used are to be:  |
|  | a. in a form;   |
|  | <ul> <li>b. of a size;</li> <li>c. illuminated to a level;</li> </ul>   |
|  |   |
|  | which allows the information on the sign to be readily understood,<br>at all times, by a person in a fire fighting appliance up to 4.5m from<br>the sign.   |
|  |   |
| PO45   | AO45  |
| Each on-site fire hydrant that is external to a building is<br>signposted in a way that enables it to be readily identified<br>at all times by the occupants of any firefighting appliance<br>traversing the development site. | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads. |
|  | Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.  |
| Use speci  | fic criteria  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Dual occupancies <sup>(21)</sup>  | 1   |
| PO46  | No acceptable outcome provided.   |
| Dual Occupancies <sup>(21)</sup> :  |   |
| a. are dispersed within the streetscape;  |   |
| <ul> <li>contribute to the diversity of dwelling types and forms;</li> </ul>  |   |
| c. are not the predominant built form.  |   |
| Note - Refer to Planning scheme policy - Residential design for dispersal methods and calculation.  | sion'   |
| Home based business <sup>(35)</sup>   | 0   |
| PO47  | No acceptable outcome provided.   |
| The scale and intensity of the Home based business <sup>(35)</sup> :  |   |
| a. is compatible with the physical characteristics of the site and the character of the local area;   | en  |
| b. is able to accommodate anticipated car parking demand and on-site manoeuvring without negatively impacting the streetscape;                                      | SCI   |
| c. does not adversely impact on the amenity of the adjoining and nearby premises;   |   |
| d. remains ancillary to the residential use of the dwelling house <sup>(22)</sup> ;   |   |
| e. does not create conditions which cause hazards or nuisances to neighbours or other persons not associated with the activity;                                     |   |
| f. ensure employees and visitor to the site do not negatively impact the expected amenity of adjoining properties;  |   |
| g. ensure service and delivery vehicles do not negatively impact the amenity of the area.   |   |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and   | Utility installation <sup>(86)</sup>  |
| PO48  | AO48.1  |
| The development does not have an adverse impact on the visual amenity of a locality and is:   | Development is designed to minimise surrounding land<br>use conflicts by ensuring infrastructure, buildings,<br>structures and other equipment: |
| <ul><li>a. high quality design and construction;</li><li>b. visually integrated with the surrounding area;</li><li>c. not visually dominant or intrusive;</li></ul> | <ul><li>a. are enclosed within buildings or structures;</li><li>b. are located behind the main building line;</li></ul>                         |

| <ul> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and<br/>structures;</li> <li>f. camouflaged through the use of colours and<br/>materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> </ul>   | <ul> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul>  |
|--|---|
| <ul><li>h. landscaped;</li><li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li></ul>  | AO48.2<br>A minimum 3m wide strip of dense planting is provided<br>around the outside of the fenced area, between the<br>development and street frontage, side and rear<br>boundaries.  |
| PO49<br>Infrastructure does not have an impact on pedestrian<br>health and safety.   | <ul> <li>AO49</li> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul> |
| <ul> <li>PO50</li> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> <li>Sales office <sup>(72)</sup></li> </ul>  | AO50<br>All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the<br>Environmental Protection (Noise) Policy 2008.  |
| <ul> <li>Sales office (<sup>12</sup>)</li> <li>PO51</li> <li>The sales office<sup>(72)</sup> is designed to: <ul> <li>a. provide functional and safe access, manoeuvring areas and car parking spaces for the number and type of vehicles anticipated to access the site;</li> <li>b. complement the streetscape character while maintaining surveillance between buildings and public spaces;</li> <li>c. be temporary in nature.</li> </ul> </li> <li>Note - Refer to Planning scheme policy - Integrated design for access and crossover requirements.</li> </ul> | No acceptable outcome provided.   |

| Performance outcomes  | Acceptable outcomes   |  |
|---|---|--|
| Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz. |   |  |
| PO52  | AO52.1  |  |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area.  | New telecommunication facilities <sup>(81)</sup> are co-located on<br>existing towers with new equipment shelter and<br>associated structures positioned adjacent to the existing<br>shelters and structures.                                   |  |
|   | A052.2  |  |
|   | If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.  |  |
|   |   |  |
| PO53  | A053  |  |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.  | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.   |  |
| PO54  | A054  |  |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.  | The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval. |  |
| PO55  | AO55.1  |  |
| <ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>   | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |  |
| <ul><li>c. not visually dominant or intrusive;</li><li>d. located behind the main building line;</li></ul>  | AO55.2  |  |
| <ul> <li>below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and<br/>structures;</li> </ul>  | In all other areas towers do not exceed 35m in height.  |  |
| f. camouflaged through the use of colours and   | AO55.3  |  |
| <ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li><li>h. landscaped;</li></ul>  | Towers, equipment shelters and associated structures are of a design, colour and material to:   |  |
| i. otherwise consistent with the amenity and character of the zone and surrounding area.  | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>   |  |
| Ű   |   |  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m.  |
|  | Where there is no established building line the facility is located at the rear of the site.   |
|  | AO55.5<br>The facility is enclosed by security fencing or by other   |
|  | means to ensure public access is prohibited.   |
|  | AO55.6<br>A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the  |
|  | facility and street frontage and adjoining uses.<br>Note - Landscaping is provided in accordance with Planning scheme<br>policy - Integrated design.   |
|  | Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design.   |
| PO56   | AO56   |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |
| P057   | AO57   |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting. | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |
| Retail and commercial activities   |  |
| PO58   | No acceptable outcome provided.  |
| Corner stores may establish as standalone uses where:  |  |
| a. having a maximum GFA of 250m <sup>2</sup> ;   |  |
|  | <u> </u>   |

| Perf | ormance outcomes  | Acceptable outcomes             |  |  |  |  |  |
|------|---|---------------------------------|--|--|--|--|--|
| b.   | the building adjoins the street frontage and has its main pedestrian entrance from the street frontage;   |                                 |  |  |  |  |  |
| C.   | not within 1600m of another corner store, neighbourhood hub or centre.  |                                 |  |  |  |  |  |
| PO5  | 9   | No acceptable outcome provided. |  |  |  |  |  |
|      | -residential uses address and activate streets and ic spaces by:  |                                 |  |  |  |  |  |
| a.   | ensuring buildings and individual tenancies address<br>street frontage(s), civic space and other areas of<br>pedestrian movement;   |                                 |  |  |  |  |  |
| b.   | new buildings adjoin or are within 3m of the primary frontage(s), civic space or public open space;   |                                 |  |  |  |  |  |
| C.   | locating car parking areas behind or under buildings to not dominate the street environment;  |                                 |  |  |  |  |  |
| d.   | establishing and maintaining interaction, pedestrian<br>activity and casual surveillance through appropriate<br>land uses and building design (e.g. The use of<br>windows or glazing and avoiding blank walls with<br>the use of sleeving); | neme                            |  |  |  |  |  |
| e.   | providing visual interest to the façade (e.g. Windows<br>or glazing, variation in colour, materials, finishes,<br>articulation, recesses or projections);   | S                               |  |  |  |  |  |
| f.   | establishing and maintaining human scale.   |                                 |  |  |  |  |  |
| PO6  | 0   | No acceptable outcome provided. |  |  |  |  |  |
|      | uildings exhibit a high standard of design and struction, which:  |                                 |  |  |  |  |  |
| a.   | adds visual interest to the streetscape (e.g. variation<br>in materials, patterns, textures and colours,<br>cantilevered awning);   |                                 |  |  |  |  |  |
| b.   | enables differentiation between buildings;  |                                 |  |  |  |  |  |
| C.   | contributes to a safe environment;  |                                 |  |  |  |  |  |
| d.   | incorporates architectural features within the<br>building facade at the street level to create human<br>scale (e.g. cantilevered awning);  |                                 |  |  |  |  |  |
| e.   | includes building entrances that are readily identifiable from the road frontage;   |                                 |  |  |  |  |  |
| f.   | locate and orientate to favour active and public<br>transport usage by connecting to pedestrian<br>footpaths on the street frontage and adjoining sites;  |                                 |  |  |  |  |  |

| Per      | formance outcomes  | Acceptable outcomes  |
|----------|--|--|
| g.       | incorporate appropriate acoustic treatments, having regard to any adjoining residential uses;  |  |
| h.       | facilitate casual surveillance of all public spaces.   |  |
| POe      | 61   | No acceptable outcome provided.  |
|          | elopment provides functional and integrated car<br>king and vehicle access, that:  |  |
| a.       | prioritises the movement and safety of pedestrians<br>between the street frontage and the entrance to the<br>building;   |  |
| b.       | provides safety and security of people and property at all times;  | S  |
| C.       | does not impede active transport options;  | 0  |
| d.       | does not impact on the safe and efficient movement of traffic external to the site;  | 01   |
| e.       | is consolidated and shared with adjoining sites wherever possible.   | en   |
| POe      | 52   | No acceptable outcome provided.  |
| prio     | safety and efficiency of pedestrian movement is<br>ritised in the design of car parking areas through<br>viding pedestrian paths in car parking areas that are:                  | 5  |
| a.       | located along the most direct route between building entrances, car parks and adjoining uses;  |  |
| b.<br>c. | protected from vehicle intrusion through the use of<br>physical and visual separation (e.g. wheel stops,<br>trees etc);<br>are of a width to allow safe and efficient access for |  |
|          | prams and wheelchairs.   |  |
| POe      | 53   | AO63.1   |
| The      | number of car parking spaces is managed to:  | Car parking is provided in accordance with table 7.2.3.2.5.4.  |
| a.       | avoid significant impacts on the safety and efficiency of the road network;  | Note - The above rates exclude car parking spaces for people with  |
| b.       | avoid an oversupply of car parking spaces;   | a disability required by Disability Discrimination Act 1992 or the relevant disability discrimination legislation and standards. |
|          |  |  |
| C.       | avoid the visual impact of large areas of open car parking from road frontages and public areas;   | AO63.2   |
| c.<br>d. |  | AO63.2<br>All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1.                    |

| Perf  | orma         | ince outcomes   | Acceptable outcomes   |   |  |  |  |  |
|---|--------------|---|---|---|--|--|--|--|
| asse  |              | er to Planning scheme policy - Integrated transport<br>nt for guidance on how to achieve compliance with this   |   |   |  |  |  |  |
|   | parki        | ng is designed to avoid the visual impact of as of surface car parking.   | No acceptable outcome   | provided.   |  |  |  |  |
|   | parki        | ng design includes innovative solutions,<br>on-street parking and shared parking areas.   | No acceptable outcome provided.   |   |  |  |  |  |
| PO6   | 6            |   | AO66.1  |   |  |  |  |  |
| a.  | occi         | of trip facilities are provided for employees or<br>upants, in the building or on-site within a<br>conable walking distance, and include:   |   | a facilities are provided in e below (rounded up to the                               |  |  |  |  |
|   | i.           | adequate bicycle parking and storage facilities; and  | Use   | Minimum Bicycle Parking   |  |  |  |  |
|   | ii.          | adequate provision for securing belongings;   | Residential uses comprised of dwellings   | Minimum 1 space per dwelling  |  |  |  |  |
| and<br>iii. change rooms that include adequate showers, |              | change rooms that include adequate showers,   | All other residential uses  | Minimum 1 space per 2 car parking<br>spaces identified in Schedule 7 –<br>car parking |  |  |  |  |
|   |              | sanitary compartments, wash basins and mirrors.   | Non-residential uses  | Minimum 1 space per 200m2 of GFA  |  |  |  |  |
| b.  | prov<br>unre | withstanding a. there is no requirement to<br>ride end of trip facilities if it would be<br>easonable to provide these facilities having<br>and to:<br>the projected population growth and forward<br>planning for road upgrading and development<br>of cycle paths; or | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is a combination of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |   |  |  |  |  |
|   | ii.          | whether it would be practical to commute to   | AO66.2  |   |  |  |  |  |
|   |              | and from the building on a bicycle, having regard to the likely commute distances and   | Bicycle parking is:   |   |  |  |  |  |
|   |              | nature of the terrain; or   | <ul> <li>a. provided in accordance with Austroads (2008),<br/>Guide to Traffic Management - Part 11: Parking;</li> <li>b. protected from the weather by its location or a<br/>dedicated roof structure;</li> <li>c. located within the building or in a dedicated, secure<br/>structure for residents and staff;</li> <li>d. adjacent to building entrances or in public areas for</li> </ul>   |   |  |  |  |  |
|   | iii.         | the condition of the road and the nature and<br>amount of traffic potentially affecting the safety<br>of commuters.   |   |   |  |  |  |  |
| for b   | oicycle      | te - The intent of b above is to ensure the requirements parking and end of trip facilities are not applied in  |   |   |  |  |  |  |
| shou  |              | ble circumstances. For example these requirements and do not apply in the Rural zone or the Rural residential   | customers and visi  | •   |  |  |  |  |
|   |              | te - This performance outcome is the same as the<br>ce Requirement prescribed for end of trip facilities under  | Note - Bicycle parking structu<br>standards prescribed in AS28  | ires are to be constructed to the 390.3.  |  |  |  |  |

| Performance outcomes  | Accept  | able ou  | Itcomes   | 5  |  |  |
|---|---|--|---|--|--|--|
| the Queensland Development Code. For development incorporating<br>building work, that Queensland Development Code performance<br>requirement cannot be altered by a local planning instrument and<br>has been reproduced here solely for information purposes. Council's<br>assessment in its building work concurrence agency role for end of<br>trip facilities will be against the performance requirement in the<br>Queensland Development Code. As it is subject to change at any<br>time, applicants for development incorporating building work should<br>ensure that proposals that do not comply with the acceptable<br>outcomes under this heading meet the current performance<br>requirement prescribed in the Queensland Development Code. | and non-<br>100 met<br>Editor's i<br>prescribe<br>planning<br>levels id<br>outcome<br>facilities  | residentia<br>res of the<br>note - The<br>ed under<br>instrume<br>entified ir<br>is an am<br>in the Qu<br>required | e accepta<br>the Queer<br>nt to prese<br>those ac<br>nalgamatic | s may be po<br>to the build<br>ble solution<br>hsland Dev<br>cribe facility<br>ceptable so<br>on of the de<br>Developm | cilities provided fo<br>oled, provided th<br>ding.<br>Is for end of trip<br>elopment Code p<br>levels higher tha<br>olutions. This acc<br>fault levels set fo<br>ent Code and th | facilities<br>permit a local<br>in the default<br>ceptable<br>or end of trip |
|   | For non   | -reside  | ntial use   | es, storag   | je lockers:  |  |
|   |   |  |   | -  | s per bicycle j  | parkina  |
|   |   |  |   |  | nearest whole  |  |
|   |   |  |   |  | s of 900mm (   | height) x  |
|   | 30  | Umm (V   | width) x  | 450mm (  | (depth).   |  |
|   | Note - 9  | torage lo  | ckers may   | he nooled  | across multiple  | sites and  |
|   | Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.  |  |   |  |  |  |
|   | within 50 metres of bicycle parking and storage facilities.   |  |   |  |  |  |
|   | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |  |   |  |  |  |
|   | AO66.4  | 1  |   |  |  |  |
|   | For non   | -reside  | ntial use   | es, chang  | ing rooms:   |  |
|   |   | •  | ded at a  | rate of 1  | per 10 bicycl  | le parking   |
|   |   | aces;<br>e fitted v  | with a loc  | kable do   | or or otherwis   | e screene  |
|   |   | •  | ic view;<br>led with  | shower(  | s), sanitary   |  |
|   | со  | mpartm   | nent(s) a   | and wash   | basin(s) in a  | ccordance  |
|   | Wi  | in the ta  | able bel  | ow:  | 1  |  |
|   | Bicycle<br>spaces<br>provided   | Male/<br>Female  | Change<br>rooms<br>required                                     | Showers<br>required  | Sanitary<br>compartments<br>required   | Washbasins<br>required   |
|   | 1-5   | Male<br>and<br>female  | 1 unisex<br>change<br>room                                      | 1  | 1 closet pan   | 1  |
|   | 6-19  | Female   | 1   | 1  | 1 closet pan   | 1  |
|   | 20 or   | Male   | 1   | 1  | 1 closet pan   | 1  |
|   | more  | Female   | 1   | 2, plus 1  | 2 closet pans,   | 1, plus 1 for  |

| Performance outcomes   | Acceptable outcomes  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
|  | spaces         every 60 bicycle         parking           provided         parking spaces         spaces           thereafter         provided         thereafter  |  |  |  |  |  |  |
|  | Male12, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter1 urinal and 1<br>closet pans, plus<br>1 sanitary<br>compartment at<br>the rate of 1<br>urinal for every 60<br>bicycle<br>parking<br>provided<br>thereafter1, plus 1 for<br>every 60<br>bicycle<br>parking<br>provided<br>thereafter  |  |  |  |  |  |  |
|  | <ul> <li>Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.</li> <li>Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).</li> <li>are provided with: <ol> <li>a mirror located above each wash basin;</li> <li>a hook and bench seating within each shower compartment;</li> <li>a socket-outlet located adjacent to each wash basin.</li> </ol> </li> <li>Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities</li> <li>Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities required by Council.</li> </ul> |  |  |  |  |  |  |
| PO67<br>Loading and servicing areas:   | No acceptable outcome provided.  |  |  |  |  |  |  |
| a. are not visible from the street frontage;   |  |  |  |  |  |  |  |
| b. are integrated into the design of the building;   |  |  |  |  |  |  |  |
| <li>c. include screening and buffers to reduce negative impacts on adjoining sensitive land uses;</li>               |  |  |  |  |  |  |  |
| <ul> <li>where possible loading and servicing areas are<br/>consolidated and shared with adjoining sites;</li> </ul> |  |  |  |  |  |  |  |
| e. waste and waste storage areas are managed in accordance with Planning scheme policy - Waste.                      |  |  |  |  |  |  |  |
| PO68   | AO68   |  |  |  |  |  |  |

| Performance outcomes  | Acceptable outcomes  |  |  |  |  |
|---|--|--|--|--|--|
| Bins and bin storage areas are designed, located and managed to prevent amenity impacts on the locality.  | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy - Waste.   |  |  |  |  |
| PO69  | No acceptable outcome provided.  |  |  |  |  |
| On-site landscaping is provided, that:  |  |  |  |  |  |
| a. is incorporated into the design of the development;  |  |  |  |  |  |
| b. reduces the dominance of car parking and servicing areas from the street frontage;   |  |  |  |  |  |
| c. retains mature trees wherever possible;  |  |  |  |  |  |
| d. does not create safety or security issues by creating potential concealment areas or interfering with sight lines;   | C ersi   |  |  |  |  |
| e. maintains the achievement of active frontages and sight lines for casual surveillance.   | C C  |  |  |  |  |
| Note - All landscaping is to accord with Planning scheme policy -<br>Integrated design.   | nen  |  |  |  |  |
| P070  | A070   |  |  |  |  |
| Surveillance and overlooking are maintained between<br>the road frontage and the main building line.  | No fencing is provided forward of the building line.   |  |  |  |  |
| P071  | No acceptable outcome provided.  |  |  |  |  |
| Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety and minimise adverse impacts on residential and other sensitive land uses. |  |  |  |  |  |
| P072  | A072   |  |  |  |  |
| The hours of operation minimise adverse amenity impacts on adjoining sensitive land uses.   | Hours of operation do not exceed 6:00am to 9:00pm<br>Monday to Sunday.   |  |  |  |  |
| Values and con  | istraints criteria   |  |  |  |  |
| Reconfiguring a lot or Material change of use or Operational work, wh   | e the development is consistent with a current Development permit for<br>here that approval has considered and addressed (e.g. through a<br>) or conditions of approval) the identified value or constraint under this |  |  |  |  |
| Heritage and landscape character (refer Overlay map<br>the following assessment criteria apply)   | - Heritage and landscape character to determine if   |  |  |  |  |

| Perf   | ormance outcomes   | Acceptable outcomes  |
|--|--|--|
| by a<br>Note<br>adop<br>Note<br>land<br>herit  | suitably qualified person verifying the proposed development is i<br>e - To assist in demonstrating achievement of this performance ou<br>ordance with Planning scheme policy – Heritage and landscape c<br>oted in accordance with AS 4970-2009 Protection of trees on dev<br>e - Places, including sites, objects and buildings having local cultu<br>scape character and listed in Schedule 1 of Planning scheme pol  | Itcome, a Tree assessment report is prepared by a qualified arborist in haracter. The Tree assessment report will also detail the measures   |
| PO7  | 3  | A073   |
| a.<br>b.<br>c.<br>d.<br>e.<br>f.<br><b>PO7</b> | alopment will: not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building; protect the fabric and setting of the heritage site, object or building; be consistent with the form, scale and style of the heritage site, object or building; utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes; incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building; retain public access where this is currently provided. 4 notifion and removal is only considered where: a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or limited demolition is performed in the course of repairs, maintenance or restoration; or demolition is performed following a catastrophic | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value.<br>Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object<br>or building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The<br>plan is sent to, and approved by Council prior to the commencement<br>of any preservation, maintenance, repair and restoration works. |
| PO7  | object. 5 re development is occurring on land adjoining a site   | No acceptable outcome provided.  |
| of cu  | Itural heritage value, the development is to be<br>pathetic to and consistent with the cultural heritage   |  |

| Performance outcomes   | Acceptable outcomes   |  |  |  |  |
|--|---|--|--|--|--|
| values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view.  |   |  |  |  |  |
| Overland flow path (refer Overlay map - Overland flow apply)   | v path to determine if the following assessment criteria            |  |  |  |  |
| Note - The applicable river and creek flood planning levels associate  | d with defined flood event (DEE) within the injundation area can be |  |  |  |  |
| obtained by requesting a flood check property report from Council.   |   |  |  |  |  |
| P076   | No acceptable outcome provided.                                     |  |  |  |  |
| Development:   |   |  |  |  |  |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>   | C Jersi   |  |  |  |  |
| P077   | No acceptable outcome provided.                                     |  |  |  |  |
| Development:   |   |  |  |  |  |
| <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.</li> </ul> | S   |  |  |  |  |
| P078   | No acceptable outcome provided.                                     |  |  |  |  |
| Development does not:  |   |  |  |  |  |
| <ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> </ul>   |   |  |  |  |  |
| Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.   |   |  |  |  |  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| PO79  | A079   |
| Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.  | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994<br>and the relevant building assessment provisions under the Building<br>Act 1975 for requirements related to the manufacture and storage<br>of hazardous substances.   |
| PO80  | A080   |
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.  | Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.   |
| PO81  | AO81.1   |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for a<br>fully developed upstream catchment and are able to be<br>easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme<br>policy – Flood hazard, Coastal hazard and Overland flow | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br><b>A081.2</b><br>Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment. |
| PO82  | No acceptable outcome provided.  |
| <ul> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul>   |  |

| Per  | formance outcomes   | Acceptable outcomes  |  |  |  |  |
|------|---|--|--|--|--|--|
| Add  | ditional criteria for development for a Park <sup>(57)</sup>  | 1  |  |  |  |  |
| PO   | 83  | AO83   |  |  |  |  |
| layo | velopment for a Park <sup>(57)</sup> ensures that the design and<br>out responds to the nature of the overland flow<br>octing the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design. |  |  |  |  |
| a.   | public benefit and enjoyment is maximised;  |  |  |  |  |  |
| b.   | impacts on the asset life and integrity of park structures is minimised;  |  |  |  |  |  |
| C.   | maintenance and replacement costs are minimised.  |  |  |  |  |  |
|      | astructure buffer areas (refer Overlay map – Infrastr<br>eria apply)  | ructure buffers to determine if the following assessment   |  |  |  |  |
| PO   | 84  | A084   |  |  |  |  |
| Dev  | velopment within a High voltage electricity line buffer:  | Except where located on an approved Neighbourhood development plan, development does not involve the   |  |  |  |  |
| a.   | is located and designed to avoid any potential<br>adverse impacts on personal health and wellbeing<br>from electromagnetic fields;                    | construction of any buildings or structures within a high voltage electricity line buffer.   |  |  |  |  |
| b.   | is located and designed in a manner that maintains a high level of security of supply;  |  |  |  |  |  |
| C.   | is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.                              | S  |  |  |  |  |

### Table 7.2.3.2.5.2 Setbacks

electrical infrastructure.

|                      | Residential uses    |        |  |                              |        |  |                                  |  |                            |                             |
|----------------------|---------------------|--------|--|------------------------------|--------|--|----------------------------------|--|----------------------------|-----------------------------|
| Height               | Frontage<br>primary |        |  | Frontage secondary to street |        |  | Frontage<br>secondary<br>to lane | Side<br>non-built<br>to<br>boundary  | Rear<br>To OMP<br>and wall | Canal<br>To OMP<br>and wall |
|                      | To wall             | To OMP | To<br>covered<br>car<br>parking<br>space | To wall                      | To OMP | To<br>covered<br>car<br>parking<br>space | To OMP<br>and wall               | To OMP<br>and wall   |                            |                             |
| Less than<br>4.5m    | Min 3m              | Min 2m | Min 5.4m*                                | Min 2m                       | Min 1m | Min 5.4m*                                | Min 0.5m                         | Min 1.5m   | Min 1.5m                   | Min 4.5m                    |
| 4.5m to<br>8.5m      | Min 3m              | Min 2m | N/A                                      | Min 2m                       | Min 1m | N/A                                      | Min 0.5m                         | Min 2m   | Min 2m                     | Min 4.5m                    |
| Greater<br>than 8.5m | Min 6m              | Min 5m | N/A                                      | Min 3m                       | Min 2m | N/A                                      | Min 0.5m                         | Min 2m up<br>to 8.5m in<br>height;<br>plus 0.5m<br>for every<br>3m in<br>height or<br>part<br>thereof<br>over 8.5m | Min 5m                     | Min 4.5m                    |

Note - \* for Dwelling Houses<sup>(22)</sup> and Dual Occupancies<sup>(21)</sup> only

| Lot frontage width | Mandatory / optional   | Length and height of built to boundary wall   |
|--------------------|--|---|
|                    |  | Next generation neighbourhood   |
| Less than 7.5m     | Mandatory - both sides unless a corner lot   | Max Length: 80% of the length of the boundary<br>Max Height: 7.5m                         |
| 7.5m to 12.5m      | Mandatory - one side   | Max Length: 60% of the length of the boundary<br>Max Height: 7.5m                         |
| >12.5m to 18m      | Optional:<br>i. on 1 boundary only;<br>i. where the built to boundary wall adjoins<br>a lot with a frontage less than 18m. | Max Length: the lesser of 15m or 60% of the<br>length of the boundary<br>Max Height: 7.5m |
| Greater than 18m   | As per QDC   | 10  |

#### Table 7.2.3.2.5.4 Car parking spaces

| Site proximity   | Land use                          | Maximum number of car spaces to be provided | Minimum number of car spaces to be provided |
|--|-----------------------------------|---|---|
| Within 800m<br>walkable<br>Catchment* of a<br>higher order<br>centre | Non-residential                   | 1 per 30m <sup>2</sup> GFA                  | 1 per 50m <sup>2</sup> GFA                  |
|  | Residential – permanent/long term | N/A   | 1 per dwelling                              |
|  | Residential – serviced/short term | 3 per 4 dwellings + staff spaces            | 1 per 5 dwellings + staff spaces            |
| Other (Wider<br>catchment)   | Non-residential                   | 1 per 20m <sup>2</sup> GFA                  | 1 per 30m <sup>2</sup> GFA                  |
|  | Residential – permanent/long term | N/A   | 1 per dwelling                              |
|  | Residential – serviced/short term | 1 per dwelling + staff spaces               | 1 per 5 dwellings + staff spaces            |

Note - Car parking rates are to be rounded up to the nearest whole number.

Note - Allocation of car parking spaces to dwellings is at the discretion of the developer.

Note - Residential - Permanent/long term includes: Multiple dwelling<sup>(49)</sup>, Relocatable home park<sup>(62)</sup>, Residential care facility<sup>(65)</sup>, Retirement facility<sup>(67)</sup>.

Note - Residential - Services/short term includes: Rooming accommodation<sup>(69)</sup> or Short-term accommodation<sup>(77)</sup>.

### 7.2.3.2.6 Open space sub-precinct

#### 7.2.3.2.6.1 Purpose - Open space sub-precinct

Note - A key feature of the Town centre Concept is the incorporation of a green perimeter to the town centre providing a legible transition between town centre land uses and densities, and neighbouring suburbs.

- 1. The purpose of the Open space sub-precinct will be achieved through the following overall outcomes:
  - a. Development in this precinct forms part of a green space network surrounding the Town centre and is made up of a combination of signature tree lined streets and boulevards, landscaped areas with visual impact, recreation facilities, pathways and statement pieces and ecologically significant areas remaining in their natural state.
  - b. Development is an appropriate size, scale and intensity and having minimal adverse impacts on the use, enjoyment, function and operation of the Council's open space network.
  - c. Small scale commercial activities having a nexus with, and ancillary to, sport and recreation uses establish where they complement the social, leisure and recreation experience of open space users.
  - d. Where applicable, development is undertaken in accordance with a Council Master Plan approved under Council policy or Management Plan under the Land Act 1994.
  - e. Recreation and open space areas remain well connected, diverse, functional, safe, secure and accessible to the general public and include:
    - i. well designed and quality passive and active recreation and open spaces areas and facilities;
    - i. the adoption of principles of Crime Prevention Through Environment Design (CPTED);
    - ii. a high level of connectivity of the open space and community green space areas to the active transport network; and
    - iii. appropriate design considerations, separation, buffering, siting and operation of facilities and infrastructure to reduce adverse or nuisance impact on surrounding land uses.
    - General works associated with the development achieves the following:
      - new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
      - ii. the development manages stormwater to:

f.

- A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
- B. prevent stormwater contamination and the release of pollutants;
- C. maintain or improve the structure and condition of drainage lines and riparian areas;
- D. avoid off-site adverse impacts from stormwater.
- iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- g. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- h. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.

- i. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- j. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- k. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- I. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- m. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- n. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - . development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- o. Development in the Open space sub-precinct is for one or more of the uses identified below:

| Environment facility <sup>(26)</sup> | <ul> <li>Outdoor sport and<br/>recreation<sup>(55)</sup></li> </ul> | • Park <sup>(57)</sup> |
|--------------------------------------|---|------------------------|
|--------------------------------------|---|------------------------|

p. Development in the Open space sub-precinct does not include one or more of the following uses:

| • | Adult store <sup>(1)</sup>           | • | Hotel <sup>(37)</sup>                     | • | Research and technology industry <sup>(64)</sup> |
|---|--------------------------------------|---|---|---|--|
| • | Agricultural supplies <sup>(2)</sup> | • | Intensive animal industry <sup>(39)</sup> |   | -  |
| • | Air services <sup>(3)</sup>          | • | Intensive horticulture <sup>(40)</sup>    | • | Residential care facility <sup>(65)</sup>        |
| • | Animal husbandry <sup>(4)</sup>      | • | Landing <sup>(41)</sup>                   | • | Resort complex <sup>(66)</sup>                   |
|   |                                      |   |   | • | Retirement facility <sup>(67)</sup>              |

| • | Aquaculture <sup>(6)</sup>                     | • | Low impact industry <sup>(42)</sup>                 | • | Roadside stall <sup>(68)</sup>                  |
|---|--|---|---|---|---|
| • | Bar <sup>(7)</sup>                             | • | Major electricity<br>infrastructure <sup>(43)</sup> | • | Rooming   |
| • | Brothel <sup>(8)</sup>                         |   |   |   | accommodation <sup>(69)</sup>                   |
| • | Bulk landscape supplies <sup>(9)</sup>         | • | Marine industry <sup>(45)</sup>                     | • | Rural industry <sup>(70)</sup>                  |
| • | Car wash <sup>(11)</sup>                       | • | Medium impact industry <sup>(47)</sup>              | • | Rural workers'<br>accommodation <sup>(71)</sup> |
| • | Cemetery <sup>(12)</sup>                       | • | Multiple dwelling <sup>(49)</sup>                   |   | Sales office <sup>(72)</sup>                    |
|   | Community residence <sup>(16)</sup>            | • | Nature-based tourism <sup>(50)</sup>                |   | Service industry <sup>(73)</sup>                |
| • | Crematorium <sup>(18)</sup>                    | • | Nightclub entertainment facility <sup>(51)</sup>    |   | Shop <sup>(75)</sup>                            |
| • | Cropping <sup>(19)</sup>                       | • | Non-resident workforce                              |   | Shopping centre <sup>(76)</sup>                 |
| • | Detention facility <sup>(20)</sup>             |   | accommodation <sup>(52)</sup>                       | • | Short-term                                      |
| • | Dual occupancy <sup>(21)</sup>                 | • | Office <sup>(53)</sup>                              |   | accommodation <sup>(77)</sup>                   |
|   | Dwelling house <sup>(22)</sup>                 | • | Outdoor sales <sup>(54)</sup>                       | - | Showroom <sup>(78)</sup>                        |
|   | Dwelling unit <sup>(23)</sup>                  | • | Parking station <sup>(58)</sup>                     | 3 | Special industry <sup>(79)</sup>                |
|   | Extractive industry <sup>(27)</sup>            | • | Permanent plantation <sup>(59)</sup>                | • | Theatre <sup>(82)</sup>                         |
|   | Funeral parlour <sup>(30)</sup>                | • | Place of worship <sup>(60)</sup>                    | • | Transport depot <sup>(85)</sup>                 |
| • | Garden centre <sup>(31)</sup>                  | • | Port services <sup>(61)</sup>                       | • | Veterinary services <sup>(87)</sup>             |
| • |  | • | Relocatable home park <sup>(62)</sup>               | • | Warehouse <sup>(88)</sup>                       |
| • | Hardware and trade<br>supplies <sup>(32)</sup> | • | Renewable energy                                    | • | Wholesale nursery <sup>(89)</sup>               |
| • | High impact industry <sup>(34)</sup>           |   | facility <sup>(63)</sup>                            | • | Winery <sup>(90)</sup>                          |
|   | Home based business <sup>(35)</sup>            |   |   |   |   |
|   | Hospital <sup>(36)</sup>                       |   |   |   |   |
|   |  |   |   |   |   |

q. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

### 7.2.3.2.6.2 Criteria for assessment

#### Part I — Criteria for assessable development - Open space sub-precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part I, Table 7.2.3.2.6.1.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

#### Table 7.2.3.2.6.1 Assessable development - Open space sub-precinct

| Performance Outcome | Acceptable Outcome |  |
|---------------------|--------------------|--|
| General criteria    |                    |  |

| Built form outcomes for all development   |  |  |  |  |
|---|--|--|--|--|
| P01   | A01.1  |  |  |  |
| Development will:   | Site cover does not exceed 10%.  |  |  |  |
| a. maintain the open and unbuilt character of a site,uncluttered by building and maintaining the availability of a site for unobstructed outdoor recreational use;  | AO1.2<br>Building and structures are set back 10m from all<br>boundaries.                                    |  |  |  |
| <ul> <li>b. ensure that buildings and structures are not overbearing, visually dominant or out of character with the surrounding built environment nor detract from the amenity of adjoining land;</li> <li>c. ensure buildings and structures do not result in overlooking of private areas when adjoining residential areas, or block or impinge upon the receipt of natural</li> </ul> | AO1.3<br>Building height does not exceed that on<br>Neighbourhood development plan map - Building<br>height. |  |  |  |
| <ul> <li>sunlight and outlook;</li> <li>be designed in accordance with the principles of Crime<br/>Prevention Through Environment Design (CPTED) to<br/>achieve a high level of safety, surveillance and security;</li> </ul>   |  |  |  |  |
| e. incorporate appropriate design response, relative to size and function of buildings, that acknowledge and reflect the region's sub-tropical climate;   | 1 en le  |  |  |  |
| f. reduce the visual appearance of building bulk through:   | G  |  |  |  |
| <ul> <li>i. design measures such as the provision of<br/>meaningful recesses and projections through the<br/>horizontal and vertical plane;</li> <li>ii. use of a variety of building materials and colours;</li> <li>iii. use of landscaping and screening.</li> </ul>   |  |  |  |  |
| g. maintain the open space character as a visual contrast to urban development;   |  |  |  |  |
| h. achieves the design principles outlined in Planning scheme policy - Integrated design.   |  |  |  |  |
| Amenity   |  |  |  |  |
| PO2   | No acceptable outcome provided.  |  |  |  |
| The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, noise, light,<br>chemicals and other environmental nuisances.  |  |  |  |  |
| Lighting  |  |  |  |  |
| PO3   | AO3  |  |  |  |

| Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.  | Artificial lighting on-site is directed and shielded in<br>such a manner as not to exceed the recommended<br>maximum values of light technical parameters for<br>the control of obtrusive light given in Table 2.1 of<br>Australian Standard AS 4282 (1997) Control of<br>Obtrusive Effects of Outdoor Lighting.<br>Note - "Curfewed hours" are taken to be those hours between<br>10pm and 7am on the following day. |
|---|---|
| Landscaping and screening   |   |
| PO4   | A04.1   |
| Landscaping and screening is provided in a manner that:   | A minimum area of 20% of the site is provided for landscaping.  |
| a. achieves a high level of privacy and amenity to adjoining properties and when viewed from the street;  | A04.2   |
| b. reduces the visual impact of building bulk and presence<br>and hard surface areas on the local character and<br>amenity of adjoining properties and from the street; | Outdoor storages areas are screened from adjoining<br>sites and roads by either planting, wall(s), fence(s)<br>or a combination to at least 1.8m in height along the  |
| c. creates a secure and safe environment by incorporating key elements of crime prevention through environmental design;  | length of the storage area.   |
| d. achieves the design principles outlined in Planning scheme policy - Integrated design.   | C.  |
| Loading and servicing   |   |
| P05   | AO5   |
| Waste storage, recycling, disposal and bin washout facilities are provided in locations which:  | Refuse storage areas are designed and serviced in accordance with Council Planning scheme policy - Waste.   |
| a. are appropriately screened from public areas of the site and adjacent land;  |   |
| <ul> <li>b. do not have an adverse effect on the amenity of the<br/>users of the site or the occupants of adjacent land;</li> </ul>                                     |   |
| c. are readily accessible by waste collection vehicles.   |   |
| Car parking   |   |
| PO6   | AO6   |
| On-site car parking associated with an activity provides safe<br>and convenient on-site parking and manoeuvring to meet<br>anticipated parking demand.                  | On-site car parking is provided in accordance with Schedule 7 - Car parking.  |
| Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.                                   |   |
| Noise   |   |

| provided.  |
|--|
|  |
|  |
|  |
|  |
| d to meet the criteria outlined<br>Policy – Noise.   |
| ures (e.g. walls, barriers or  |
| n an adjoining road or public  |
| notorway or rail line; or<br>t of an arterial road that does<br>existing or future active<br>pose (e.g. pedestrian paths |
| s) or where attenuation<br>ling location and materials is  |
| sting or prevent future active<br>connections to the street<br>ructed and landscaped in                                  |
| Planning scheme policy -   |
| eme policy – Integrated design for<br>se attenuation structures.   |
| <ul> <li>Active transport for future active</li> </ul>   |
|  |
|  |
|  |
| nected to underground  |
|  |

| PO10  | No acceptable outcome provided.  |
|---|--|
| The development has access to telecommunications and broadband services in accordance with current standards.   |  |
| PO11  | No acceptable outcome provided.  |
| Where available the development is to safely connect to reticulated gas.  |  |
| PO12  | A012.1   |
| The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk to public health.           PO13           The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water. | Where in a sewered area, the development is<br>connected to a reticulated sewerage system.<br><b>AO12.2</b><br>Where not in a sewered area, the development is<br>serviced by an appropriate on-site sewerage facility.<br>Note - A site and soil evaluation report is generally required to<br>demonstrate compliance with this outcome. Reports are to be<br>prepared in accordance with The Plumbing and Drainage Act<br>2002.<br><b>AO13.1</b><br>Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected<br>to the reticulated water supply system in accordance<br>with the South East Queensland Water Supply and |
| BR Plannin  | Sewerage Design and Construction Code and the<br>relevant Water Service Association of Australia<br>(WSAA) codes and standards.<br>AO13.2<br>Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided<br>with an adequate water supply of at least 45,000<br>litres by way of on-site storage which provides<br>equivalent water quality and reliability to support the  |
|   | use requirements of the development.   |
| PO14<br>The development is provided with dedicated and constructed<br>road access.  | No acceptable outcome provided.  |
| Access  |  |
| PO15  | No acceptable outcome provided.  |

Development provides functional and integrated car parking and vehicle access, that:

- a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);
- b. provides safety and security of people and property at all times;
- c. does not impede active transport options;
- d. does not impact on the safe and efficient movement of traffic external to the site;
- e. where possible vehicle access points are consolidated and shared with adjoining sites.

Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.

### PO16

Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.

### PO17

The layout of the development does not compromise:

- a. the development of the road network in the area;
- b. the function or safety of the road network;
- c. the capacity of the road network.

Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).

No acceptable outcome provided

### AO17.1

Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a motorway.

Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway.

Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).

### AO17.2

The development provides for the extension of the road network in the area in accordance with Council's road network planning.

### AO17.3

The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.

### AO17.4

The lot layout allows forward access to and from the site.

| PO18  | AO18.1  |
|---|---|
| Safe access facilities are provided for all vehicles required to access the site.   | <ul> <li>Site access and driveways are designed and located in accordance with:</li> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul> |
|   | AO18.2<br>Internal driveways and access ways are designed<br>and constructed in accordance with AS/NZS2890.1<br>Parking Facilities – Off street car parking and the<br>relevant standards in Planning scheme policy -<br>Integrated design.<br>Note - This includes queue lengths (refer to Schedule 8 Service<br>vehicle requirements), pavement widths and construction.                                |
|   | AO18.3<br>Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in<br>Schedule 8 Service vehicle requirements for the<br>relevant use. The on-site manoeuvring is to be in<br>accordance with Schedule 8 Service vehicle<br>requirements.   |
| i S planning  | AO18.4<br>The driveway construction across the verge conforms<br>to the relevant standard drawing for the classification<br>of the road in accordance with Planning scheme<br>policy - Integrated design.   |
| PO19  | No acceptable outcome provided.   |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:   |   |
| <ul> <li>ensure the type or volume of traffic generated by the<br/>development does not have a negative impact on the<br/>external road network;</li> </ul>   |   |
| <ul> <li>b. ensure the orderly and efficient continuation of the active transport network;</li> <li>c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.</li> </ul> |   |
| Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.                                 |   |

| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major stretes).         Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:         i. Where the street is pratially established to an urban standard, metch the asign met id existing kerb and channel and provide carringway widening and underground drainage where required; or a design that demonstrates how the relevant features of the particular road as shown in the Panning scheme policy - Integrated design for road network and active transport network design standards.         Stormwater         PO20         Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.         Note - Refer to Planning scheme policy - Integrated design for details and examples.         Note - A downstream drainage discharge report in accordance with Planning scheme policy - Integrated design for details and examples.         Note - A downstream drainage discharge report in accordance with Planning scheme policy - Integrated design for details and examples.         Note - A dwaterourse as defined in the Water Act may be accepted as a a lawful point of diabetry environment of this performance outcome.         Note - A dwaterourse as defined in the Water Act may be accepted on Council comboled fand and or almage discharge to more the size downstream for this performance outcome.         Note - A dwaterourse as defined in the Water Act may be accepted as a lawful point di discharg  |
|--|
| <ul> <li>site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:         <ul> <li>Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or</li> <li>Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as thown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.</li> </ul> </li> <li>Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.</li> <li>Stormwater</li> <li>PO20</li> <li>Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - A downstream drainage discharge report in accordance with Planning scheme policy - Integrated design for details and examples.</li> <li>Note - A downstream drainage discharge report in accordance with Planning scheme policy - Integrated design for the site achievement of this performance outcome.</li> <li>Note - A downstream drainage discharge report in accordance with Planning scheme policy - Integrated design for the site does not noce the downstrate not on any person. An afflux of +20mm may be accepted on Councident and and read infrastructure. No worsening is ensured when stormwater indication the drainage discharge report in the state gradient of the drainage discharge report in the state gradient of the drainage discharge report in the state grade does not noce interventioned in an calchingent that includes State Transport infrastructure.</li> <li>PO21</li> <li>Stormwater generated from the development does not compromise</li></ul> |
| match the alignment of existing kerb and channel and provide<br>carriageway widening and underground drainage where required;<br>or         ii.       Where the street is not established to a ruban standard, prepare<br>a design that demonstrates how the relevant features of the<br>particular coad as shown in the Planning scheme policy-Integrated<br>Design can be achieved in the existing reserve.         Note - Refer to Planning scheme policy - Integrated design for road<br>network and active transport network design standards. <b>PO20</b> Stormwater         PO20         Stormwater roun-off from the site is conveyed to a point of<br>lawful discharge without causing nuisance or annoyance to<br>any person, property or premises;       No acceptable outcome provided.         Note - Refer to Planning scheme policy - Integrated design for details<br>and examples.       Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stomwater management may be required to<br>demonstrate achievement of this performance outcome.       Note - A dwatercourse as defined in the Water Act may be accepted as a<br>lawful point of discharge providing the drainage discharge from the site<br>does not increase the downstream Model needs during events us to and<br>including the 1% AEP storm. An afflux of +20mm may be accepted on<br>Council combieled fland and needs during events us to and<br>including the 1% AEP storm. An afflux of +20mm may be accepted on<br>Council combieled fland and needs during events us to and<br>including the 1% AEP storm. An afflux of +20mm may be accepted on<br>Council combieled fland and needs during events us to and<br>including the 1% AEP storm. An afflux of +20mm may be accepted on<br>Council combieled fland and needs during eventing is ensured<br>when stormwater is discharged into a c   |
| a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve. Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.  Stormwater PO20 Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises. Note - Refer to Planning scheme policy - Integrated design for details and examples. Note - A watercourse as defined in the Water Act may be accepted to demonstrate achievement of this performance outcome. Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site is during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. New worsening is ensured when stormwater is discharge throw a coefficient of planning scheme policy of existing storm may be accepted on Council controlled from the development does not compromise the capacity of existing stormwater infrastructure. Note acceptable outcome provided. Note acceptable outcome provided.   |
| network and active transport network design standards.         Stormwater         PO20         Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.         Note - Refer to Planning scheme policy - Integrated design for details and examples.         Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stomwater management may be required to demonstrate achievement of this performance outcome.         Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flox of +20mm may be accepted on Council controlled land and read infrastructure. No worsening is ensured when stormwater infastructure. No worsening is ensured when stormwater discharged into a catchment that includes State Transport Infrastructure.         PO21       No acceptable outcome provided.         Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure   |
| PO20       No acceptable outcome provided.         Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.       Note - Refer to Planning scheme policy - Integrated design for details and examples.         Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.       Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Counci controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.       No acceptable outcome provided.         PO21       Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure   |
| PO20       No acceptable outcome provided.         Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.       Note - Refer to Planning scheme policy - Integrated design for details and examples.         Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.       Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Counci controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.       No acceptable outcome provided.         PO21       Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure   |
| Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.         Note - Refer to Planning scheme policy - Integrated design for details and examples.         Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.         Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% ACP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.         PO21       No acceptable outcome provided.  |
| Iawful discharge without causing nuisance or annoyance to any person, property or premises.         Note - Refer to Planning scheme policy - Integrated design for details and examples.         Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.         Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.         PO21       No acceptable outcome provided.   |
| Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure   |
| Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure   |
| downstream of the site.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required to<br>demonstrate compliance with this performance outcome.  |
|  |

| Stormwater quality management systems are designed and<br>constructed to minimise the environmental impact of<br>stormwater discharge on surface and underground receiving<br>water quality and meet the design objectives in Tables A and<br>B in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by a suitably<br>qualified professional will be required in accordance with Planning scheme<br>policy - Stormwater management.   |  |
|---|--|
| PO23  | No acceptable outcome provided.  |
| Easements for drainage purposes are provided over:  |  |
| <ul> <li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li> <li>b. overland flow paths where they cross more than one property boundary.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> </ul>  | 2 Jersion  |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   | ane  |
| Site works and construction management  | No   |
| PO24  | No acceptable outcome provided.  |
| The site and any existing structures are maintained in a tidy and safe condition.   | 2  |
| PO25  | AO25.1   |
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> </ul> |


|  | Stormwater run-off, erosion and sediment controls<br>are constructed prior to commencement of any<br>clearing work or earthworks and are maintained and<br>adjusted as necessary at all times to ensure their<br>ongoing effectiveness.  |
|--|--|
|  | Note - The measures are adjusted on-site to maximise their effectiveness.  |
|  | A025.3   |
|  | The completed earthworks (fill or excavation) area<br>is stabilised using turf, established grass seeding,<br>mulch or sprayed stabilisation techniques to control<br>erosion and sediment and dust from leaving the<br>property.  |
| PO26   | No assessable outcome provided.  |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.   | ane  |
| PO27   | A027.1   |
| All works on-site and the transportation of material to and<br>from the site are managed to not negatively impact the<br>existing road network, the amenity of the surrounding area<br>or the streetscape. | Construction traffic including contractor car parking<br>is controlled in accordance with a traffic management<br>plan, prepared in accordance with the Manual of<br>Uniform Traffic Control Devices (MUTCD) to ensure<br>all traffic movements to and from the site are safe. |
| haulage route must be identified and approved by Council.  | A027.2   |
| C Plair  | All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors' vehicles are generally not to be parked in existing roads.                                     |
| 1BF  | Note - A Traffic Management Plan may be required for the site<br>in accordance with the Manual of Uniform Traffic Control<br>Devices (MUTCD).  |
|  | AO27.3   |
|  | Any material dropped, deposited or spilled on the roads as a result of construction processes associated with the site are to be cleaned at all times.   |
| PO28   | AO28   |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:   |


AO25.2

|  | · · · · · · · · · · · · · · · · · · ·   |
|--|---|
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | <ul><li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li><li>b. grassed.</li></ul>  |
|  | Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.                                       |
| PO29   | AO29.1  |
| The clearing of vegetation on-site:  | All native vegetation to be retained on-site is   |
| a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;  | temporarily fenced or protected prior to and during development works.  |
| <ul> <li>b. includes the removal of declared weeds and other<br/>materials which are detrimental to the intended use of<br/>the land;</li> </ul>   | Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.   |
| c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.   | A029.2  |
| Note - No burning of cleared vegetation is permitted.  | Disposal of materials is managed in one or more of the following ways:  |
|  | a. all cleared vegetation, declared weeds, stumps,<br>rubbish, car bodies, scrap metal and the like<br>are removed and disposed of in a Council land<br>fill facility; or |
| C C  | b. all native vegetation with a diameter below<br>400mm is to be chipped and stored on-site.  |
| P030   | No acceptable outcome provided.   |
| Any alteration or relocation in connection with or arising from<br>the development to any service, installation, plant, equipment<br>or other item belonging to or under the control of the<br>telecommunications authority, electricity authorities, the<br>Council or other person engaged in the provision of public<br>utility services is to be carried with the development and at<br>no cost to Council.  |   |
| Earthworks   |   |
| P031   | AO31.1  |
| On-site earthworks are designed to consider the visual and amenity impact as they relate to:   | All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters                |
| <ul> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>a. and the normalized foundation acidation acida</li></ul> | and lined batter drains as necessary.   |
| <ul><li>c. soft or compressible foundation soils;</li><li>d. reactive soils;</li></ul>   | AO31.2  |
| <ul> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> </ul>  | Stabilisation measures are provided, as necessary,<br>to ensure long-term stability and low maintenance<br>of steep rock slopes and batters.                              |
|  |   |

| <ul> <li>g. the stability and maintenance of steep rock slopes and<br/>batters;</li> </ul>                              | AO31.3  |
|---|---|
| h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)                            | All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.   |
| Note - Filling or excavation works are to be completed within six (6) months of the commencement date.                  | AO31.4  |
|   | All filling or excavation is contained within the site.   |
|   | AO31.5  |
|   | All fill placed on-site is:   |
|   | <ul> <li>a. limited to that required for the necessary approved use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated</li> </ul> |
|   | material etc. is used as fill). AO31.6  |
|   | The site is prepared and the fill placed on-site in accordance with AS3798.   |
|   | Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.                         |
|   | AO31.7  |
|   | Materials used for structural fill are in accordance with AS3798.   |
|   | AO31.8  |
| DISU.   | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.   |
| PO32  | AO32  |
| Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area. | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |
|   | Figure - Embankment   |
|   | Somm<br>min<br>min<br>somm<br>somm<br>somm<br>som<br>som<br>som<br>som<br>som<br>som  |
|   | 1.5m<br>max   |
| PO33  | AO33.1  |

| On-site earthworks are undertaken in a manner that:<br>a. does not adversely impact on a Council or public sector  | No earthworks are undertaken in an easement issued<br>in favour of Council or a public sector entity.   |
|--|---|
| <ul><li>entity maintained infrastructure or any drainage feature<br/>on, or adjacent to the land;</li><li>b. does not preclude reasonable access to a Council or<br/>public sector entity maintained infrastructure or any</li></ul>   | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .  |
| drainage feature on, or adjacent to the land for<br>monitoring, maintenance or replacement purposes.<br>Note - Public sector entity as defined in the <i>Sustainable Planning Act</i><br>2009.   | <ul> <li>AO33.2</li> <li>Earthworks that would result in any of the following are not carried out on-site:</li> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> <li>Note - Public sector entity as defined in the Sustainable Planning Act 2009.</li> </ul> |
|  |   |
| PO34<br>Filling or excavation does not result in land instability.<br>Note - A slope stability report prepared by an RPEQ may be required.   | No acceptable outcome provided.   |
| <ul> <li>PO35</li> <li>Filling or excavation does not result in</li> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> <li>Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements</li> </ul> | No acceptable outcome provided.   |
| PO36   | AO36  |
| All earth retaining structures provide a positive interface with   | Earth retaining structures:   |
| the streetscape and minimise impacts on the amenity of adjoining residents.  | <ul> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> </ul>   |

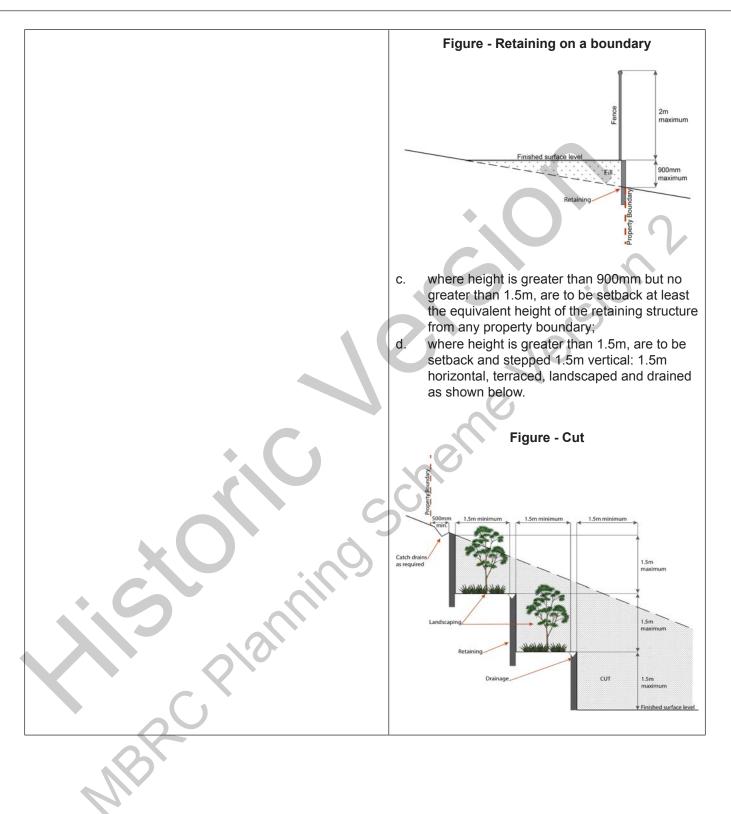

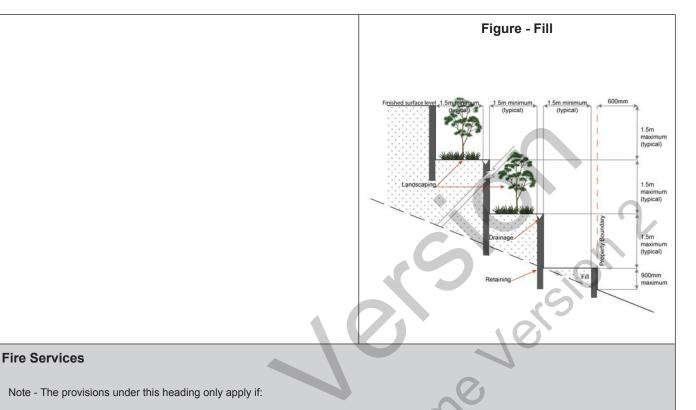

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.
  - iv.

#### AND

b. none of the following exceptions apply:

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| PO37   | A037.1   |
|--|--|
| <ul><li>Development incorporates a fire fighting system that:</li><li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li></ul>  | External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .  |
| <ul> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul> | <ul> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul> |

| <ul> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> <li>Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.</li> </ul> | <ul> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: <ol> <li>i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>iii. for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;</li> <li>iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> </ol> </li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul> AO37.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydran and hydrant booster point on the land: <ul> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance</li> </ul> |
|--|--|
| 19 planning  | AO37.3<br>On-site fire hydrant facilities are maintained in<br>effective operating order in a manner prescribed in<br>Australian Standard AS1851 (2012) – Routine service<br>of fire protection systems and equipment.   |
| P038   | AO38   |
| On-site fire hydrants that are external to buildings, as well as<br>the available fire fighting appliance access routes to those   | For development that contains on-site fire hydrants external to buildings:   |
| hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.   | a. those external hydrants can be seen from the vehicular entry point to the site; or  |
|  | b. a sign identifying the following is provided at the vehicular entry point to the site:  |
|  | i. the overall layout of the development (to scale);   |
|  | ii. internal road names (where used);  |
|  | iii. all communal facilities (where provided   |
|  |  |

|  | iv. the reception area and on-site manager's office (where provided);  |
|--|--|
|  | <ul> <li>v. external hydrants and hydrant booster<br/>points;</li> </ul>   |
|  | vi. physical constraints within the internal<br>roadway system which would restrict<br>access by fire fighting appliances to<br>external hydrants and hydrant booster<br>points.   |
|  | Note - The sign prescribed above, and the graphics used are to be:<br>a. in a form;  |
|  | b. of a size;  |
|  | c. illuminated to a level;   |
|  | which allows the information on the sign to be readily<br>understood, at all times, by a person in a fire fighting appliance<br>up to 4.5m from the sign.  |
| • C 1  |  |
| PO39   | AO39   |
| Each on-site fire hydrant that is external to a building is<br>signposted in a way that enables it to be readily identified at<br>all times by the occupants of any firefighting appliance<br>traversing the development site. | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified<br>by way of marker posts and raised reflective<br>pavement markers in the manner prescribed in the<br>technical note <i>Fire hydrant indication system</i><br>produced by the Queensland Department of<br>Transport and Main Roads. |
| Plan.  | Note - Technical note Fire hydrant indication system is available<br>on the website of the Queensland Department of Transport<br>and Main Roads.   |
| Use specific o   | criteria   |
| Caretaker's accommodation <sup>(10)</sup>  |  |
| PO40   | AO40   |
| Development for a Caretaker's accommodation <sup>(10)</sup> :  | Development for Caretaker's accommodation <sup>(10)</sup> :  |
| a. does not compromise the productivity of the use occurring on-site and in the surrounding area;  | a. a caretaker's accommodation <sup>(10)</sup> has a maximum GFA of 80m <sup>2</sup> ;   |
| b. is domestic in scale;   | b. no more than 1 caretaker's accommodation <sup>(10)</sup> is established per site;   |
| c. provides adequate car parking provisions exclusive on the primary use of the site;  | c. does not gain access from a separate driveway from a road frontage.   |
|  | 1  |

| d. is safe for the residents;  |  |
|--|--|
| e. has regard to the open space and recreation needs of the residents.   |  |
| Food and drink outlet <sup>(28)</sup>  |  |
| PO41   | AO41.1   |
| Food and drink outlets <sup>(28)</sup> :   | The GFA does not exceed 150m <sup>2</sup> .  |
| a. remain secondary and ancillary to an open space, sport<br>or recreation use;  | A041.2   |
| b. do not restrict or inhibit the ability for a recreation and open space area to be used for its primary sport and recreation purpose;  | Operates in conjunction with a recreation or open space use occurring on the same site.  |
| c. not appear, act or function as a separate and stand-alone commercial activity but has a clearly expressed relationship with an open space, sport or recreation use;   | AO41.3<br>Does not have a liquor or gambling licence.  |
| d. not generate nuisance effects such as noise, dust and odour on the character and amenity of the recreation and open space areas or on adjoining properties;   | ene  |
| e. any liquor or gambling activities associated with a food and drink outlet <sup>(28)</sup> is a secondary and minor component.   | Cre  |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and Ut   | lity installation <sup>(86)</sup>  |
| P042   | AO42.1   |
| The development does not have an adverse impact on the visual amenity of a locality and is:<br>a. high quality design and construction;  | Development is designed to minimise surrounding<br>land use conflicts by ensuring infrastructure,<br>buildings, structures and other equipment:  |
| <ul> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials</li> </ul> | <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> |
| <ul><li>which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li></ul>  | AO42.2   |
| <ul> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of<br/>the zone and surrounding area.</li> </ul>   | A minimum 3m wide strip of dense planting is<br>provided around the outside of the fenced area,<br>between the development and street frontage, side<br>and rear boundaries.   |
| PO43   | AO43   |
| Infrastructure does not have an impact on pedestrian health and safety.  | <ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> </ul>   |

| [  |  |
|--|--|
|  | <li>b. minimise the number and width of crossovers<br/>and entry points;</li>  |
|  | c. provide safe vehicular access to the site;  |
|  | d. do not utilise barbed wire or razor wire.   |
| PO44   | AO44   |
| All activities associated with the development occur within  | All equipment which produces audible or non-audible  |
| an environment incorporating sufficient controls to ensure   | sound is housed within a fully enclosed building   |
| the facility:  | incorporating sound control measures sufficient to<br>ensure noise emissions meet the objectives as set  |
| a. generates no audible sound at the site boundaries   | out in the Environmental Protection (Noise) Policy   |
| where in a residential setting; or   | 2008.  |
| b. meet the objectives as set out in the Environmental<br>Protection (Noise) Policy 2008.  |  |
| Telecommunications facility <sup>(81)</sup>  |  |
|  | S  |
| Editor's note - In accordance with the Federal legislation Telecommunication that will not cause human exposure to electromagnetic radiation beyond the transmission of the second secon |  |
| Radiation - Human Exposure) Standard 2003 and Radio Protection Standa  |  |
| to 300Ghz.   |  |
|  | 0.   |
| PO45   | AO45.1   |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing   | New telecommunication facilities <sup>(81)</sup> are co-located  |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already   | on existing towers with new equipment shelter and  |
| electricity infrastructure <sup>(43)</sup> or Substation <sup>(60)</sup> if there is already   | associated structures positioned adjacent to the   |
| a facility in the same coverage area.  | existing shelters and structures.  |
|  | AQ45.2   |
|  |  |
|  | If not co-located with an existing facility, all   |
|  | co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.  |
|  |  |
| PO46   | AO46   |
| A new Telecommunications facility <sup>(81)</sup> is designed and  | A minimum of 45m <sup>2</sup> is available at ground level to  |
| constructed to ensure co-masting or co-siting with other   | allow for additional equipment shelters and  |
| carriers both on the tower or pole and at ground level is possible in the future.  | associated structures for the purpose of co-locating<br>on the proposed facility.  |
| possible in the luttile.   | on the proposed facility.  |
| PO47   | AO47   |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful  | The development results in no net reduction in the   |
| existing land uses both on and adjoining the site.   | minimum quantity and standard of landscaping,  |
|  | private or communal open space or car parking  |
|  |  |
|  | spaces required under the planning scheme or under<br>an existing development approval.  |
|  | spaces required under the planning scheme or under   |
| PO48   | spaces required under the planning scheme or under   |
| PO48<br>The Telecommunications facility <sup>(81)</sup> does not have an adverse   | spaces required under the planning scheme or under<br>an existing development approval.  |
|  | <ul> <li>spaces required under the planning scheme or under<br/>an existing development approval.</li> <li>AO48.1</li> <li>Where in an urban area, the development does not<br/>protrude more than 5m above the level of the existing</li> </ul> |
| The Telecommunications facility <sup>(81)</sup> does not have an adverse   | spaces required under the planning scheme or under<br>an existing development approval.<br>AO48.1<br>Where in an urban area, the development does not  |

visually integrated with the surrounding area;

not visually dominant or intrusive;

b.

c.

| <ul> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the</li> </ul>  | In all other areas towers do not exceed 35m in height.   |
|--|--|
| <ul><li>level of the surrounding buildings and structures;</li><li>f. camouflaged through the use of colours and materials</li></ul>   | AO48.3   |
| <ul><li>which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li></ul>  | Towers, equipment shelters and associated structures are of a design, colour and material to:  |
| <ul> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of<br/>the zone and surrounding area.</li> </ul>   | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>  |
|  | AO48.4   |
|  | All structures and buildings are setback behind the<br>main building line and a minimum of 10m from side<br>and rear boundaries, except where in the Industry<br>and Extractive industry zones, the minimum side and<br>rear setback is 3m.<br>Where there is no established building line the facility<br>is located at the rear of the site. |
|  | AO48.5   |
|  | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |
| C  | AO48.6   |
|  | A minimum 3m wide strip of dense planting is<br>provided around the perimeter of the fenced area,<br>between the facility and street frontage and adjoining<br>uses.   |
|  | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |
|  | Note - Council may require a detailed landscaping plan,<br>prepared by a suitably qualified person, to ensure compliance<br>with Planning scheme policy - Integrated design.   |
| PO49   | AO49   |
| Lawful access is maintained to the site at all times that does<br>not alter the amenity of the landscape or surrounding uses.  | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |
| PO50   | AO50   |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site boundaries<br>where in a residential setting. | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.   |

AO48.2

#### Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

# Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.


Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

| PO5 <sup>7</sup> | 1  | A051   |
|------------------|--|--|
| Deve             | elopment will:   | Development is for the preservation, maintenance, repair and restoration of a site, object or building of  |
| a.               | not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;  | cultural heritage value.   |
| b.               | protect the fabric and setting of the heritage site, object or building;   | Note - A cultural heritage conservation management plan for<br>the preservation, maintenance, repair and restoration of a site,<br>object or building of cultural heritage value is prepared in<br>accordance with Planning scheme policy - Heritage and |
| c.<br>d.         | be consistent with the form, scale and style of the<br>heritage site, object or building;<br>utilise similar materials to those existing, or where this  | landscape character. The plan is sent to, and approved by<br>Council prior to the commencement of any preservation,<br>maintenance, repair and restoration works.  |
|                  | is not reasonable or practicable, neutral materials and finishes;  |  |
| e.               | incorporate complementary elements, detailing and<br>ornamentation to those present on the heritage site,<br>object or building;   |  |
| f.               | retain public access where this is currently provided.   |  |
| PO52             | 2  | No acceptable outcome provided.  |
| Dem              | olition and removal is only considered where:  |  |
| a.               | a report prepared by a suitably qualified conservation<br>architect or conservation engineer demonstrates that<br>the building is structurally unsound and is not<br>reasonably capable of economic repair; or |  |
| b.               | demolition is confined to the removal of outbuildings,<br>extensions and alterations that are not part of the<br>original structure; or  |  |
| C.               | limited demolition is performed in the course of repairs, maintenance or restoration; or   |  |
| d.               | demolition is performed following a catastrophic event<br>which substantially destroys the building or object.   |  |

| PO53   | No acceptable outcome provided.                             |
|--|---|
| Where development is occurring on land adjoining a site of<br>cultural heritage value, the development is to be sympathetic<br>to and consistent with the cultural heritage values present<br>on the site and not result in their values being eroded,<br>degraded or unreasonably obscured from public view.                    |   |
| Overland flow path (refer Overlay map - Overland flow pat  | h to determine if the following assessment criteria         |
| apply)   |   |
| Note - The applicable river and creek flood planning levels associated with  | defined flood event (DFE) within the inundation area can be |
| obtained by requesting a flood check property report from Council.   |   |
| P054   | No acceptable outcome provided.                             |
| Development:   | - 5   |
| a. minimises the risk to persons from overland flow;   |   |
| b. does not increase the potential for damage from   |   |
| overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.  | 0   |
| P055   | A055  |
|  |   |
| Development:   | No acceptable outcome provided.                             |
| <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> </ul> |   |
| Note - A report from a suitably qualified Registered Professional Engineer<br>Queensland is required certifying that the development does not increase<br>the potential for significant adverse impacts on an upstream, downstream<br>or surrounding premises.   |   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.  |   |
| PO56   | No acceptable outcome provided.                             |
| Development does not:  |   |
| a. directly, indirectly or cumulatively cause any increase   |   |
| <ul><li>in overland flow velocity or level;</li><li>b. increase the potential for flood damage from overland</li></ul>   |   |
| flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.  |   |
| Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.   |   |
| PO57   | A057  |

| Additional criteria for development for a Park <sup>(57)</sup><br>PO61   | AO61   |
|--|--|
| Additional criteria for development for a Park <sup>(57)</sup>   |  |
| Note - Refer to Planning scheme policy - Integrated design for details<br>and examples.<br>Note - Stormwater Drainage easement dimensions are provided in<br>accordance with Section 3.8.5 of QUDM.  |  |
| c. inter-allotment drainage infrastructure.  |  |
| premises;  |  |
| 300mm;   |  |
| <ul><li>that an easement for drainage purposes is provided over:</li><li>a. a stormwater pipe if the nominal pipe diameter exceeds</li></ul>   |  |
| Development protects the conveyance of overland flow such  |  |
| P060   | infrastructure is designed to accommodate any event<br>up to and including the 1% AEP for the fully<br>developed upstream catchment.<br>No acceptable outcome provided.  |
| policy – Flood hazard, Coastal hazard and Overland flow  | Development ensures that inter-allotment drainage  |
| Note - A report from a suitably qualified Registered Professional Engineer<br>Queensland is required certifying that the development does not increase<br>the potential for significant adverse impacts on an upstream, downstream<br>or surrounding premises. | <ul> <li>a. Urban area – Level III;</li> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul>   |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains through<br>private property cater for overland flows for a fully developed<br>upstream catchment and are able to be easily maintained.                | Development ensures that roof and allotment<br>drainage infrastructure is provided in accordance<br>with the following relevant level as identified in<br>QUDM:  |
| PO59   | A059.1   |
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.   | Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or<br>public open space area away from a private lot.   |
| PO58   | AO58   |
| stored on the premises.  | Note - Refer to the Work Health and Safety Act 2011 and<br>associated Regulation and Guidelines, the Environmental<br>Protection Act 1994 and the relevant building assessment<br>provisions under the Building Act 1975 for requirements related<br>to the manufacture and storage of hazardous substances. |
| Development ensures that public safety and the risk to the<br>environment are not adversely affected by a detrimental<br>impact of overland flow on a hazardous chemical located or  | Development ensures that a hazardous chemical is not located or stored in an Overland flow path area.  |

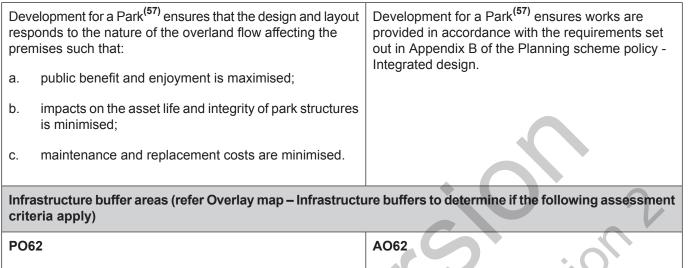

Development within a High voltage electricity line buffer:

- a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;
- b. is located and designed in a manner that maintains a high level of security of supply;
- c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.

Except where located on an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer.

### 7.2.3.2.7 Civic space sub-precinct

#### 7.2.3.2.7.1 Purpose - Civic space sub-precinct

Note - A key feature of the Town Centre concept is a civic precinct incorporating a civic building (e.g. library and community hub) and a town centre park.

- 1. The purpose of the Civic space sub-precinct will be achieved through the following overall outcomes:
  - a. The Civic space sub-precinct provides a central gathering and meeting place for civic, cultural and community events.
  - b. Development reinforces the Civic space sub-precinct as the main sub-precinct for government, cultural and community activities within the Town centre precinct.
  - c. Development provides and maintains direct, safe, attractive and comfortable main street and active transport connectivity between the Residential north sub-precinct and the Centre core sub-precinct.
  - d. The Civic space sub-precinct includes a centrally located Town centre park<sup>(57)</sup> with views to the Glasshouse Mountains and is overlooked by civic buildings.
  - e. Civic activities must:
    - i. be located to adjoin and have clear access to the Centre core sub-precinct;
    - ii. be located on land that maximises view corridors to the Glasshouse Mountains and D'Aguilar Range;
    - iii. contribute to a high level of open space amenity within the precinct;
    - iv. create a destination for community gathering and interaction;
    - v. encourage social activity through the provision of high-quality spaces;
    - vi. be designed and configured on land as well-integrated, compact, land efficient urban buildings.
  - f. General works associated with the development achieves the following:
    - new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
    - ii. the development manages stormwater to:
      - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
      - B. prevent stormwater contamination and the release of pollutants;
      - C. maintain or improve the structure and condition of drainage lines and riparian areas;
      - D. avoid off-site adverse impacts from stormwater.
    - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
  - g. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
  - h. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
  - i. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.

- j. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- k. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- I. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- m. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- n. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
  - Development in the Civic space sub-precinct is for one or more of the uses identified below:

| • | Community care centre <sup>(15)</sup><br>Community use <sup>(17)</sup><br>Function facility <sup>(29)</sup> | • | Major sport, recreation and<br>entertainment facility <sup>(44)</sup><br>Market <sup>(46)</sup> | • | Office <sup>(53)</sup> - if for State or<br>Local Government offices<br>Park <sup>(57)</sup><br>Place of worship <sup>(60)</sup> |
|---|---|---|---|---|--|
|   | Indoor sport and recreation <sup>(38)</sup>   |   |   | • | Theatre <sup>(82)</sup>  |

p. Development in the Civic space sub-precinct does not include one or more of the following uses:

| Adult store <sup>(1)</sup>                     | • | High impact industry <sup>(34)</sup> | • | Renewable energy<br>facility <sup>(63)</sup> |
|--|---|--------------------------------------|---|--|
| Agricultural supplies store <sup>(2)</sup>     | • | Home based business <sup>(35)</sup>  | • | Research and technology                      |
| <ul> <li>Air services<sup>(3)</sup></li> </ul> | • | Hospital <sup>(36)</sup>             |   | industry <sup>(64)</sup>                     |

| • | Animal husbandry <sup>(4)</sup>             | • | Hotel <sup>(37)</sup>                                | • | Retirement facility <sup>(67)</sup>         |
|---|---|---|--|---|---|
| • | Animal keeping <sup>(5)</sup>               | • | Intensive animal industry <sup>(39)</sup>            | • | Roadside stall <sup>(68)</sup>              |
| • | Aquaculture <sup>(6)</sup>                  | • | Intensive horticulture <sup>(40)</sup>               | • | Rooming                                     |
| • | Bar <sup>(7)</sup>                          | • | Low impact industry <sup>(42)</sup>                  |   | accommodation <sup>(69)</sup>               |
| • | Brothel <sup>(8)</sup>                      | • | Marine industry <sup>(45)</sup>                      | • | Rural industry <sup>(70)</sup>              |
| • | Bulk landscape supplies <sup>(9)</sup>      | • | Medium impact industry <sup>(47)</sup>               |   | Rural workers accommodation <sup>(71)</sup> |
| • | Car wash <sup>(11)</sup>                    | • | Motor sport facility <sup>(48)</sup>                 |   | Short-term (77)                             |
| • | Cemetery <sup>(12)</sup>                    | • | Multiple dwelling <sup>(49)</sup>                    |   | accommodation <sup>(77)</sup>               |
| • | Community residence <sup>(16)</sup>         | • | Nature-based tourism <sup>(50)</sup>                 | • | Showroom <sup>(78)</sup>                    |
| • | Crematorium <sup>(18)</sup>                 | • | Nightclub entertainment                              | • | Special industry <sup>(79)</sup>            |
| • | Cropping <sup>(19)</sup>                    |   | facility <sup>(51)</sup>                             | • | Transport depot <sup>(85)</sup>             |
| • | Detention facility <sup>(20)</sup>          |   | Non-resident workforce accommodation <sup>(52)</sup> |   | Warehouse <sup>(88)</sup>                   |
| • | Dual occupancy <sup>(21)</sup>              | • | Outdoor sales <sup>(54)</sup>                        | B | Wholesale nursery <sup>(89)</sup>           |
| • | Dwelling house <sup>(22)</sup>              |   | Parking station <sup>(58)</sup>                      | • | Winery <sup>(90)</sup>                      |
| • | Dwelling unit <sup>(23)</sup>               | • | Permanent plantation <sup>(59)</sup>                 |   |   |
| • | Extractive industry <sup>(27)</sup>         | • | Port services <sup>(61)</sup>                        |   |   |
| • | Garden centre <sup>(31)</sup>               |   | ~  |   |   |
| • | Hardware and trade supplies <sup>(32)</sup> |   | 0  |   |   |
|   |   |   |  |   |   |

q. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

### 7.2.3.2.7.2 Criteria for assessment

#### Part J - Criteria for assessable development - Civic space sub-precinct

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part J, Table 7.2.3.2.7.1.


Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

#### Table 7.2.3.2.7.1 Assessable development - Civic space sub-precinct

| Performance outcomes             | Acceptable outcomes             |  |  |  |
|----------------------------------|---------------------------------|--|--|--|
| General                          | al criteria                     |  |  |  |
| Role of Civic space sub-precinct |                                 |  |  |  |
| P01                              | No acceptable outcome provided. |  |  |  |


| Devel  | lopment in the Civic space sub-precinct:  |                                 |
|--|---|---------------------------------|
| a. I   | primarily consists of civic buildings and activities<br>(e.g. library, markets <sup>(46)</sup> ) and a Town centre park <sup>(57)</sup> ;   |                                 |
|  | reflects the prominence of the Town centre precinct as a key focal point for the Caboolture west area;  |                                 |
|  | is of a size, scale, range of services and location commensurate with the role and function of this sub-precinct in the centres network.  |                                 |
| Note -   | - Refer to Caboolture West - centres network Table 7.2.3.3.   |                                 |
| PO2  |   | No acceptable outcome provided. |
|  | Civic space sub-precinct retains a strong cultural ntertainment focus, with:  | 0                               |
|  | commercial activities provided only where for a community or government function;   |                                 |
|  | food and drink outlets <sup>(28)</sup> provided only where of a small scale, where they adjoin open space areas and include areas for alfresco dining;  |                                 |
|  | large open areas suitable for large numbers of<br>people to congregate or to accommodate temporary<br>activities  | School                          |
|  | landscaped areas and street trees, with mature trees retained wherever possible.  |                                 |
| PO3  | + 6   | No acceptable outcome provided. |
| provic<br>increa<br>precir<br>cultur<br>Note -<br>to cap<br>transp | lopment maximises the efficient use of land and<br>des for future growth within the sub-precinct by<br>asing the GFA and land use intensity within the<br>net boundaries to promote economic development,<br>al exchange and interaction. |                                 |
| Activit<br>develo  | ties that are land intensive, but do not promote economic<br>opment or social interaction, such as open car parks, are<br>uraged.   |                                 |
| Activ  | e frontage  |                                 |
| PO4  |   | No acceptable outcome provided. |
|  | lopment incorporates transit oriented development<br>ples and encourages active and public transport<br>e, by:  |                                 |
|  |   |                                 |

| a. contributing to attractive, highly walkable street<br>environments, through streetscape upgrades and<br>enhancements (e.g wide footpaths, furniture, art,<br>street trees etc.); |   |
|---|---|
| b. prioritising pedestrian and cycle safety and movement over private vehicle access and movement.  |   |
| Note - Streetscape upgrades are to be designed and constructed<br>in accordance with Planning scheme policy - Integrated design.  |   |
| PO5   | A05   |
| Buildings are designed and oriented to address and activate areas of pedestrian movement, to:   | Development on-sites shown on Figure 6.2.1.1.1 as requiring a frontage type A incorporates:   |
| a. promote vitality, interaction and casual surveillance;   | a. a minimum of 60% of the length of the street frontage glazed between 0.8m and 2.0m above   |
| b. concentrate and reinforce pedestrian activity;   | ground level;   |
| c. avoid opaque facades to provide visual interest to the street frontage.  | <ul> <li>external doors which directly adjoin the street<br/>frontage at least every 15m;</li> </ul>  |
|   | c. modulation in the facade, by incorporating a change in tenancy or the use of pillars or similar elements every 5-10m;                          |
|   | d. the minimum window or glazing is to remain uncovered and free of signage.  |
|   | Figure - Frontage Type A  |
| MBRCPIZINI  | 2m<br>0.8m<br>Minimum of between doorn<br>60% glazing<br>Frontage modulated<br>through the use of<br>plains or the grain<br>tenancies every 5-10m |
| PO6   | AO6   |
| Building frontages encourage streetscape activity, by providing pedestrian protection from solar exposure and inclement weather.  | Buildings incorporate an awning, which:<br>a. is cantilevered;  |
|   | b. extends for the full width of the site;  |
|   | <ul> <li>c. is a minimum of 3.2m and maximum 4.2m above the pavement height;</li> </ul>   |

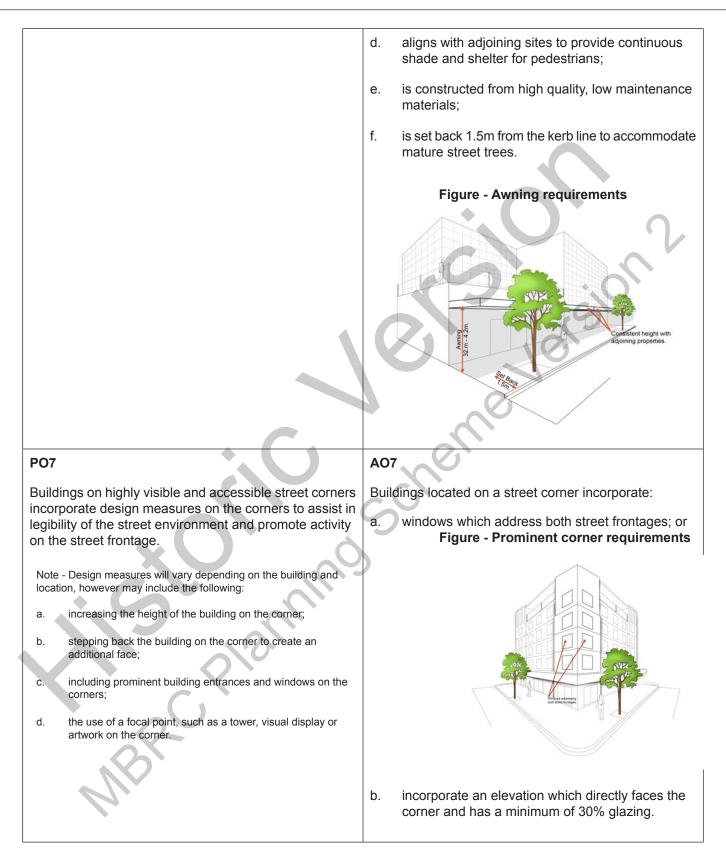

|  | Figure - Feature corner requirements   |
|--|--|
|  |  |
| Setbacks   | 5  |
| <b>PO8</b><br>Front building setbacks ensure buildings address and actively interface with streets and public spaces.  | No acceptable outcome provided.  |
| Site area  |  |
| <ul> <li>PO9</li> <li>The development has sufficient area and dimensions to accommodate required buildings and structures, vehicular access, manoeuvring and parking and landscaping.</li> <li>Building height</li> <li>PO10</li> <li>Building height: <ul> <li>a. reflects the prominence of the Civic space sub-precinct as a key focal point for the Town centre;</li> <li>b. maximises land use intensity in proximity to the southern transit stop;</li> <li>c. allows for distinctive and innovative design outcomes on prominent sites;</li> <li>d. maintains important view corridors to the Glasshouse Mountains and D'Aguilar Range and within the Town centre.</li> </ul> </li> </ul> | No acceptable outcome provided.         AO10         Minimum and maximum building heights are in accordance with Neighbourhood development plan map - Building height.         Note - Development on prominent street corners may incorporate an increased building height on the corner, if the building:         a.       provides high quality and unique architectural design outcomes that emphasise the prominence of the street corner;         b.       positively contributes to the cityscape;         c.       Does not negatively impact important view corridors. |
| <b>PO11</b><br>Taller buildings incorporate a podium which provides a human-scaled, strong and continuous frontage to the street.  | <b>AO11</b><br>For buildings that include a podium:  |

|   | The pedium has a maximum height of 10m.  |
|---|--|
|   | a. The podium has a maximum height of 12m;   |
|   | b. all parts of the building that are greater than 12m in height are setback a minimum of 6m.          |
| Built form  |  |
| PO12  | A012.1   |
| Buildings are designed to be adaptable to ac<br>a variety of uses over the life of the building                                 |  |
|   | A012.2   |
|   | Where a building incorporates a podium, the minimum floor to ceiling height for podium levels is 3.3m. |
| PO13  | No acceptable outcome provided.  |
| Buildings are designed and constructed to:  |  |
| a. incorporate a mix of colours and high materials to add diversification to treat finishes;                                    |  |
| b. articulate and detail the building facad<br>level and respond to the human scale   |  |
| c. visually integrate with the surrounding adjoining buildings through appropriate materials;                                   |  |
| d. avoid blank walls through articulation architectural treatments to create visu   |  |
| e. avoid highly reflective finishes;  |  |
| f. avoid the visual dominance of plant an<br>on building roofs.   | d equipment  |
| P014  | No acceptable outcome provided.  |
| Building entrances:   |  |
| a. are readily identifiable from the road f   | rontage;   |
| b. are designed to limit opportunities for c  | concealment;   |
| c. are located and oriented to favour activ<br>transport usage by connecting to pede<br>footpaths on the street frontage and ad | estrian  |
| d. include footpaths that connect with ad   | joining sites;   |

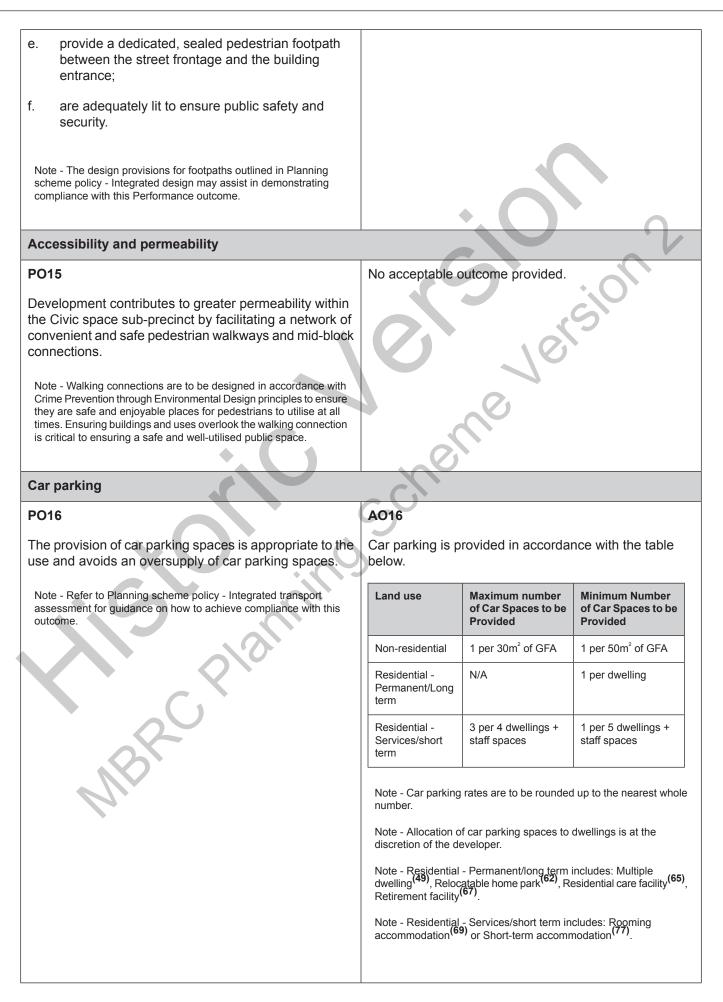

|  |  | e car parking spaces for people with<br>ity Discrimination Act 1992 or the<br>on legislation and standards. |  |
|--|--|---|--|
| P017   | No acceptable outcome provided.  |   |  |
| Car parking is designed to avoid the visual impact of large areas of surface car parking on the streetscape.   |  |   |  |
| PO18   | No acceptable outcome provided.  |   |  |
| Car parking design includes innovative solutions, including on-street parking and shared parking areas.  | C  |   |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples of on-street parking.  |  | Ś   |  |
| PO19   | AO19   | 10  |  |
| The design of car parking areas:   | All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1.  |   |  |
| a. does not impact on the safety of the external road network;   |  |   |  |
| b. ensures the safe movement of vehicles within the site.  | - cher   |   |  |
| <b>Bicycle parking and end of trip facilities</b><br>Note - Building work to which this code applies constitutes Major Dev<br>facilities prescribed in the Queensland Development Code MP 4.1. | elopment for purposes of develop   | ment requirements for end of trip   |  |
| P020   | AO20.1   |   |  |
| a. End of trip facilities are provided for employees or occupants, in the building or on-site within a reasonable walking distance, and include:   | Minimum bicycle parking accordance with the table nearest whole number).   | facilities are provided in<br>below (rounded up to the  |  |
| <ul> <li>adequate bicycle parking and storage<br/>facilities; and</li> </ul>   | Use  | Minimum Bicycle Parking   |  |
| ii. adequate provision for securing belongings;  | Residential uses comprised of dwellings  | Minimum 1 space per dwelling  |  |
| <ul> <li>iii. change rooms that include adequate showers, sanitary compartments, wash basins and</li> </ul>  | All other residential uses   | Minimum 1 space per 2 car parking<br>spaces identified in Schedule 7 –<br>car parking                       |  |
| mirrors.   | Non-residential uses   | Minimum 1 space per 200m2 of GFA  |  |
| <ul> <li>Notwithstanding a. there is no requirement to<br/>provide end of trip facilities if it would be<br/>unreasonable to provide these facilities having<br/>regard to:</li> </ul>         | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is a combination of the default levels set for end of trip |   |  |
| i. the projected population growth and forward   | facilities in the Queensland De<br>facilities required by Council.   | evelopment Code and the additional  |  |

ii. whether it would be practical to commute to and from the building on a bicycle, having regard to the likely commute distances and nature of the terrain; or

iii. the condition of the road and the nature and amount of traffic potentially affecting the safety of commuters.

Editor's note - The intent of b above is to ensure the requirements for bicycle parking and end of trip facilities are not applied in unreasonable circumstances. For example these requirements should not, and do not apply in the Rural zone or the Rural residential zone etc.

Editor's note - This performance outcome is the same as the Performance Requirement prescribed for end of trip facilities under the Queensland Development Code. For development incorporating building work, that Queensland Development Code performance requirement cannot be altered by a local planning instrument and has been reproduced here solely for information purposes. Council's assessment in its building work concurrence agency role for end of trip facilities will be against the performance requirement in the Queensland Development Code. As it is subject to change at any time, applicants for development incorporating building work should ensure that proposals that do not comply with the acceptable outcomes under this heading meet the current performance requirement prescribed in the Queensland Development Code.

#### AO20.2

Bicycle parking is:

- a. provided in accordance with Austroads (2008), Guide to Traffic Management - Part 11: Parking;
- b. protected from the weather by its location or a dedicated roof structure;
- c. located within the building or in a dedicated, secure structure for residents and staff;
- d. adjacent to building entrances or in public areas for customers and visitors.

Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.

Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### AO20.3

For non-residential uses, storage lockers:

- a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);
- b. have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).

Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

### AO20.4

For non-residential uses, changing rooms:

a. are provided at a rate of 1 per 10 bicycle parking spaces;

- b. are fitted with a lockable door or otherwise screened from public view;
- are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:

| Bicycle<br>spaces<br>provided | Male/<br>Female       | Change<br>rooms<br>required | Showers required   | Sanitary<br>compartments<br>required  | Washbasins<br>required  |
|-------------------------------|-----------------------|-----------------------------|--|---|---|
| 1-5                           | Male<br>and<br>female | 1 unisex<br>change<br>room  | 1  | 1 closet pan  | 1   |
| 6-19                          | Female                | 1                           | 1  | 1 closet pan  | 1   |
| 20 or<br>more                 | Male                  | 1                           | 1  | 1 closet pan  | 1   |
| 0                             | Female                | 5                           | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 2 closet pans,<br>plus 1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided<br>thereafter  | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
| K                             | Male                  |                             | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 1 urinal and 1<br>closet pans, plus<br>1 sanitary<br>compartment at<br>the rate of 1<br>closet pan or 1<br>urinal for every 60<br>bicycle space<br>provided<br>thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |

Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.

Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).

#### are provided with:

d.

- i. a mirror located above each wash basin;
- ii. a hook and bench seating within each shower compartment;
- iii. a socket-outlet located adjacent to each wash basin.

Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities

Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the Queensland Development Code and the additional facilities required by Council.

No acceptable outcome provided.

Loading and servicing

**PO21** 

| Loading and servicing areas:   |   |  |
|--|---|--|
| a. are not visible from the street frontage;   |   |  |
| b. are integrated into the design of the building;   |   |  |
| <ul> <li>c. include screening and buffers to reduce negative impacts on adjoining sensitive land uses;</li> </ul>  |   |  |
| d. are consolidated and shared with adjoining sites, where possible.   |   |  |
| Note - Refer to Planning scheme policy - Centre and neighbourhood hub design.  |   |  |
| Waste  | S   |  |
| P022   | A022  |  |
| Bins and bin storage area/s are designed, located and managed to prevent amenity impacts on the locality.  | Bins and bin storage area/s are provided, designed and managed in accordance with Planning scheme policy - Waste. |  |
| Landscaping  |   |  |
| PO23   | No acceptable outcome provided.   |  |
| On-site landscaping is provided, that:   |   |  |
| a. is incorporated into the design of the development;   | 5   |  |
| <ul> <li>reduces the dominance of car parking and servicing areas from the street frontage;</li> </ul>   |   |  |
| c. incorporates shade trees in car parking areas;  |   |  |
| d. retains mature trees wherever possible;   |   |  |
| e. contributes to quality public spaces and the microclimate by providing shelter and shade;   |   |  |
| f. maintains the achievement of active frontages and sightlines for casual surveillance.   |   |  |
| Note - Landscaping is to be provided in accordance with Planning scheme policy - Integrated design.  |   |  |
| Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design. |   |  |
| Environmentally sensitive design   |   |  |
| PO24   | No acceptable outcome provided.   |  |
| Development incorporates energy efficient design principles, including:  |   |  |

| a. maximising internal cross-ventilation and prevailing breezes;   |                                 |
|--|---------------------------------|
| b. maximising the effect of northern winter sun and screening undesirable northern summer sun and western sun;   |                                 |
| c. reducing demand on non-renewable energy sources for cooling and heating;  |                                 |
| d. maximising the use of daylight for lighting;  |                                 |
| e. retaining existing established trees on-site where possible.  |                                 |
| PO25   | No acceptable outcome provided. |
| Best practice Water Sensitive Urban Design (WSUD) is<br>incorporated within development sites to mitigate the<br>impacts of stormwater run-off in accordance with Planning<br>scheme policy - Integrated design.   | C Jersi                         |
| Crime prevention through environmental design  |                                 |
| PO26   | No acceptable outcome provided. |
| <ul> <li>Development contributes to a safe public realm by incorporating crime prevention through environmental design principles including:</li> <li>a. orienting buildings towards the street and public spaces and providing clear sightlines to public spaces to allow opportunities for casual surveillance;</li> <li>b. ensuring the site layout, building design and landscaping does not result in potential concealment or entrapment areas;</li> <li>c. ensuring high risk areas, including stairwells, arcades, walkways and concealed car parking areas have adequate surveillance to reduce risk or able to be secured outside of business hours.</li> <li>Note - Further information is available in Crime Prevention through Environmental Design: Guidelines for Queensland, State of Queensland, 2007.</li> </ul> |                                 |
| Lighting   |                                 |
| PO27   | No acceptable outcome provided. |
| Lighting is designed to provide adequate levels of<br>illumination to public and communal spaces to maximise<br>safety while minimising adverse impacts on residential<br>and other sensitive land uses.   |                                 |


| <ul> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>i. adjoining a motorway or rail line; or adjoining part of an arterial road that does no serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes)</li> </ul>   | Amenity   |   |
|---|---|---|
| <ul> <li>PO29</li> <li>No acceptable outcome provided.</li> <li>A030.1</li> <li>A030.2</li> <li>Note anoise timpact assessment may be required to demonstrate or purposes (e.g. existing or future pedestrian paths or cycle lanes etc).</li> <li>Tarintaining the amenity of the streetscape.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning scheme</li></ul> | The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, chemicals   | No acceptable outcome provided.   |
| Noise generating uses do not adversely affect existing or potential noise sensitive uses.         Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rall line.         Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact dassessments are to be parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths, or cycle lange setc);       A030.1         Anote - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.       A030.2         Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures. <ul> <li>a contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths, or cycle lange setc);              Noise attenuation structures (e.g. walls, barriers or fences);</li></ul>  | Noise   |   |
| <ul> <li>Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:</li> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with Planning Scheme Policy – Noise.</li> <li>a. are not visible from an adjoining road or public area unless: <ul> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does no serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes or onlice attenuation structures.</li> </ul> </li> <li>b. Mote - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy – Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy – Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> </ul>   | Noise generating uses do not adversely affect existing<br>or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be   | No acceptable outcome provided.   |
| <ul> <li>acoustic environment within designated external private outdoor living spaces and internal areas while:</li> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples of noise attenuation structures.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples of noise attenuation structures.</li> </ul>   | PO30  | AO30.1  |
|   | <ul> <li>acoustic environment within designated external private outdoor living spaces and internal areas while:</li> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for</li> </ul> | <ul> <li>the Planning Scheme Policy – Noise.</li> <li>A030.2</li> <li>Noise attenuation structures (e.g. walls, barriers or fences): <ul> <li>a. are not visible from an adjoining road or public area unless:</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> </ul> </li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> </ul> |

| Utilities  |   |
|--|---|
| PO31   | AO31  |
| The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant<br>energy regulating authority) and the infrastructure does<br>not negatively impact the streetscape. | The development is connected to underground electricity.  |
| PO32   | No acceptable outcome provided.   |
| The development has access to telecommunications and broadband services in accordance with current standards.  |   |
| PO33   | No acceptable outcome provided.   |
| Where available the development is to safely connect to reticulated gas.   | C, C, S, C  |
| PO34   | AO34.1  |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.                                       | Where in a sewered area, the development is connected to a reticulated sewerage system.   |
| * ( )  | A034.2  |
|  | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.   |
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.   |
| P035   | AO35.1  |
| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards. |
|  | AO35.2  |
|  | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development.  |
| PO36   | No acceptable outcome provided.   |

| The development is provided with dedicated and constructed road access.  |   |  |  |
|--|---|--|--|
| Access   |   |  |  |
| PO37   | No acceptable outcome provided.   |  |  |
| Development provides functional and integrated car parking and vehicle access, that:   |   |  |  |
| <ul> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> | No acceptable outcome provided.   |  |  |
| Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design.  | S   |  |  |
| PO39   | AO39.1  |  |  |
| <ul> <li>The layout of the development does not compromise:</li> <li>a. the development of the road network in the area;</li> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> </ul> Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 -   | Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a<br>motorway.<br>Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway. |  |  |
| Movement, Major streets).  | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  |  |  |
|  | AO39.2  |  |  |
|  | The development provides for the extension of the road<br>network in the area in accordance with Council's road<br>network planning.  |  |  |
|  | AO39.3  |  |  |

|  | ,  |
|--|--|
|  | The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.   |
|  | AO39.4   |
|  | The lot layout allows forward access to and from the site.   |
| PO40   | AO40.1   |
| Safe access facilities are provided for all vehicles required to access the site.  | Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a<br>motorway.<br>Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.                      |
|  | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |
|  | AO40.2   |
|  | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.<br>Note - This includes queue lengths (refer to Schedule 8 Service |
|  | vehicle requirements), pavement widths and construction.   |
|  | AO40.3   |
| Plain  | Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in Schedule<br>8 Service vehicle requirements for the relevant use. The<br>on-site manoeuvring is to be in accordance with Schedule<br>8 Service vehicle requirements.                 |
| PO41   | No acceptable outcome provided.  |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:  |  |
| <ul> <li>ensure the type or volume of traffic generated by<br/>the development does not have a negative impact<br/>on the external road network;</li> </ul>                  |  |
| <ul> <li>b. ensure the orderly and efficient continuation of the active transport network;</li> </ul>  |  |
| <ul> <li>c. ensure the site frontage is constructed to a suitable<br/>urban standard generally in accordance with<br/>Planning scheme policy - Integrated design.</li> </ul> |  |
| Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome. An ITA  |  |

| should be prepared in accordance with Planning scheme policy -<br>Integrated transport assessment.   |                                 |
|--|---------------------------------|
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |                                 |
| Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:  |                                 |
| <ul> <li>Where the street is partially established to an urban standard,<br/>match the alignment of existing kerb and channel and provide<br/>carriageway widening and underground drainage where<br/>required; or</li> </ul>  | 2                               |
| <ul> <li>Where the street is not established to an urban standard,<br/>prepare a design that demonstrates how the relevant features<br/>of the particular road as shown in the Planning scheme policy</li> <li>Integrated Design can be achieved in the existing reserve.</li> </ul>   | ion ion                         |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.   | C Jel                           |
| Stormwater   | S C                             |
| PO42   | No acceptable outcome provided. |
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.<br>Note - Refer to Planning scheme policy - Integrated design for details   | SCI                             |
| and examples.  |                                 |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.  |                                 |
| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. |                                 |
| P042   | No cocontoble outcome provided  |
| PO43   | No acceptable outcome provided. |
| Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.   |                                 |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate compliance with this performance outcome.   |                                 |
| PO44   | No acceptable outcome provided. |
|  |                                 |

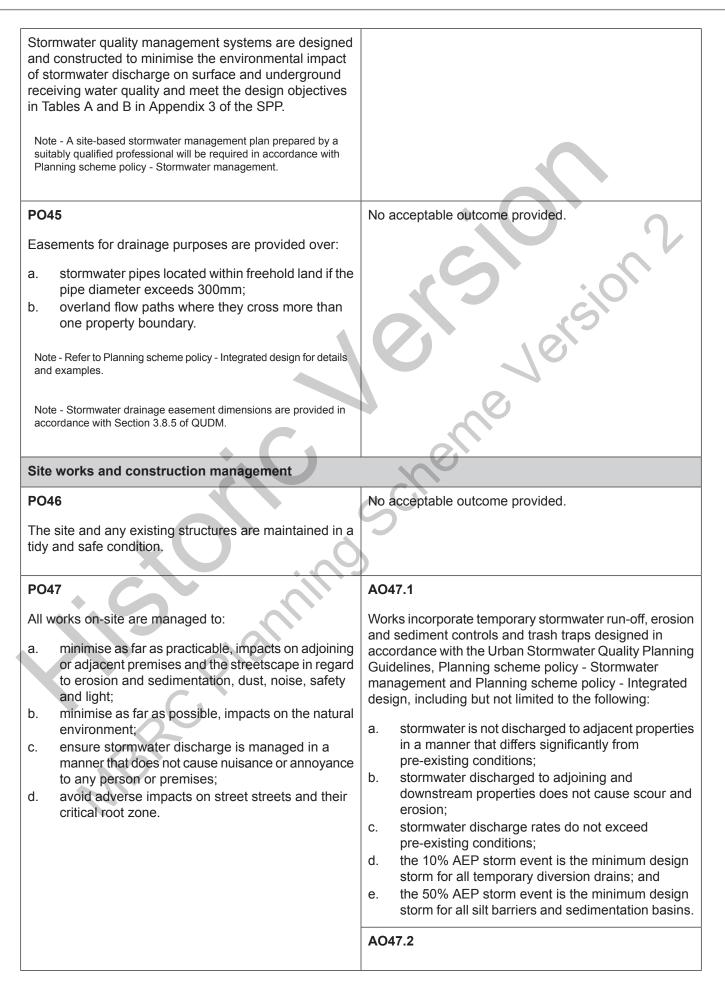



|   | Stormwater run-off, erosion and sediment controls are<br>constructed prior to commencement of any clearing work<br>or earthworks and are maintained and adjusted as<br>necessary at all times to ensure their ongoing<br>effectiveness.<br>Note - The measures are adjusted on-site to maximise their<br>effectiveness.<br><b>AO47.3</b><br>The completed earthworks (fill or excavation) area is<br>stabilised using turf, established grass seeding, mulch<br>or sprayed stabilisation techniques to control erosion and<br>sediment and dust from leaving the property. |
|---|--|
| PO48<br>Dust suppression measures are implemented during<br>construction works to protect nearby premises from<br>unreasonable dust impacts.  | No acceptable outcome provided   |
| PO49  | AO49.1   |
| All works on-site and the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape. | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic<br>movements to and from the site are safe.   |
| a haulage route must be identified and approved by Council.   | AO49.2<br>All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.<br>Note - A Traffic Management Plan may be required for the site in<br>accordance with the Manual of Uniform Traffic Control Devices<br>(MUTCD).  |
| NBK   | AO49.3<br>Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.   |
| PO50  | AO50   |
| All disturbed areas are rehabilitated at the completion of construction.  | At completion of construction all disturbed areas of the site are to be:   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  | <ul><li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li><li>b. grassed.</li></ul>   |

|   | 1   |
|---|---|
|   | Note - These areas are to be maintained during any maintenance<br>period to maximise grass coverage from grass seeding of these<br>areas.   |
| PO51  | AO51.1  |
| <ul> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> </ul> <b>PO52</b> Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council. | <ul> <li>All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.</li> <li>Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.</li> <li>AO51.2</li> <li>Disposal of materials is managed in one or more of the following ways: <ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> </ul> </li> <li>No acceptable outcome provided.</li> </ul> |
| Earthworks  |   |
| P053  | AO53.1  |
| <ul><li>On-site earthworks are designed to consider the visual and amenity impact as they relate to:</li><li>a. the natural topographical features of the site;</li><li>b. short and long-term slope stability;</li></ul>   | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains<br>as necessary.   |
| <ul><li>c. soft or compressible foundation soils;</li><li>d. reactive soils;</li></ul>  | A053.2  |
| <ul> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes</li> </ul>  | Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.  |
| <ul><li>and batters;</li><li>h. excavation (cut) and fill and impacts on the amenity</li></ul>  | AO53.3  |
| of adjoining lots (e.g. residential)  | All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.   |
|   |   |

| Note - Filling or excavation works are to be completed within six (6)   | AO53.4   |
|---|--|
| months of the commencement date.  | All filling or excavation is contained within the site.  |
|   | AO53.5   |
|   | All fill placed on-site is:  |
|   | a. limited to that required for the necessary approved   |
|   | <ul> <li>use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).</li> </ul>   |
|   | AO53.6   |
|   | The site is prepared and the fill placed on-site in accordance with AS3798.  |
|   | Note - The fill is to be inspected and tested in accordance with<br>Planning scheme policy - Operational works inspection, maintenance<br>and bonding procedures.  |
|   | A053.7   |
|   | Materials used for structural fill are in accordance with AS3798.  |
|   | A053.8   |
|   | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.  |
| P054  | AO54   |
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area. | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.   |
|   | Figure - Embankment  |
| MBR   | 50mm<br>min<br>15m<br>max<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m<br>min<br>15m |
|   |  |
| PO55  | AO55.1   |
| On-site earthworks are undertaken in a manner that:   | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.   |

| a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;  | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .   |
|---|--|
| <ul> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> </ul>                               | <ul> <li>AO55.2</li> <li>Earthworks that would result in any of the following are not carried out on-site:</li> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> </ul> |
|   | 0  |
| P056  | No acceptable outcome provided.  |
| Filling or excavation does not result in land instability.  |  |
| Note - A slope stability report prepared by an RPEQ may be required.  |  |
| P057  | No acceptable outcome provided.  |
| Filling or excavation does not result in  | S  |
| a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;  |  |
| b. increased flood inundation outside the site;   |  |
| c. any reduction in the flood storage capacity in the floodway;   |  |
| d. any clearing of native vegetation.   |  |
| Note - To demonstrate compliance with this outcome, Planning<br>scheme policy - Stormwater management provides guidance on the<br>preparation of a site based stormwater management plan by a<br>suitably qualified professional. Refer to Planning scheme policy -<br>Integrated design for guidance on infrastructure design and modelling<br>requirements. |  |
| Retaining walls and structures  |  |
| P058  | A058   |
| All earth retaining structures provide a positive interface<br>with the streetscape and minimise impacts on the amenity   | Earth retaining structures:  |
| of adjoining residents.   | <ul> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> </ul>  |
|   |  |

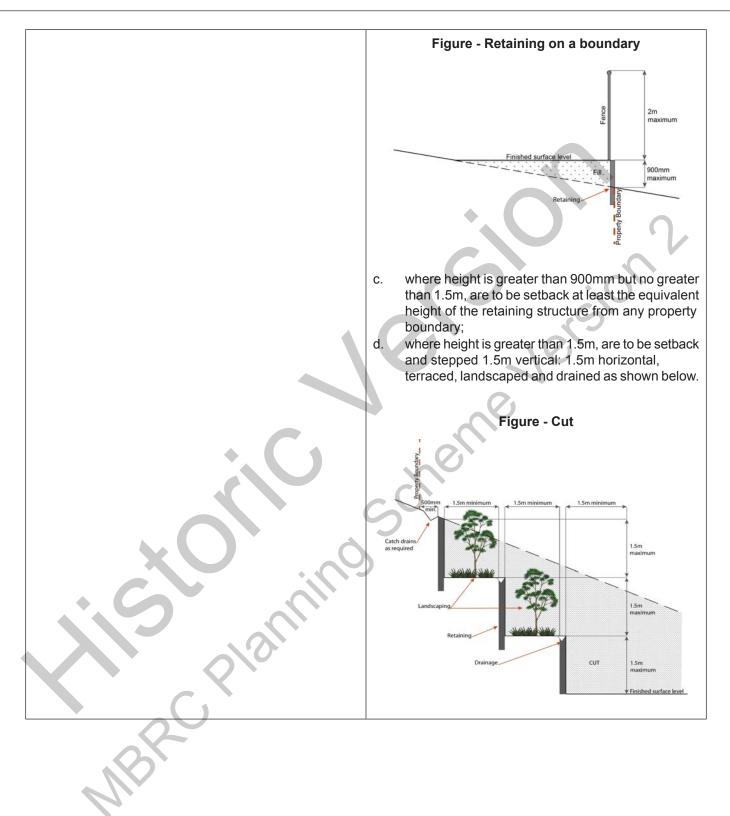

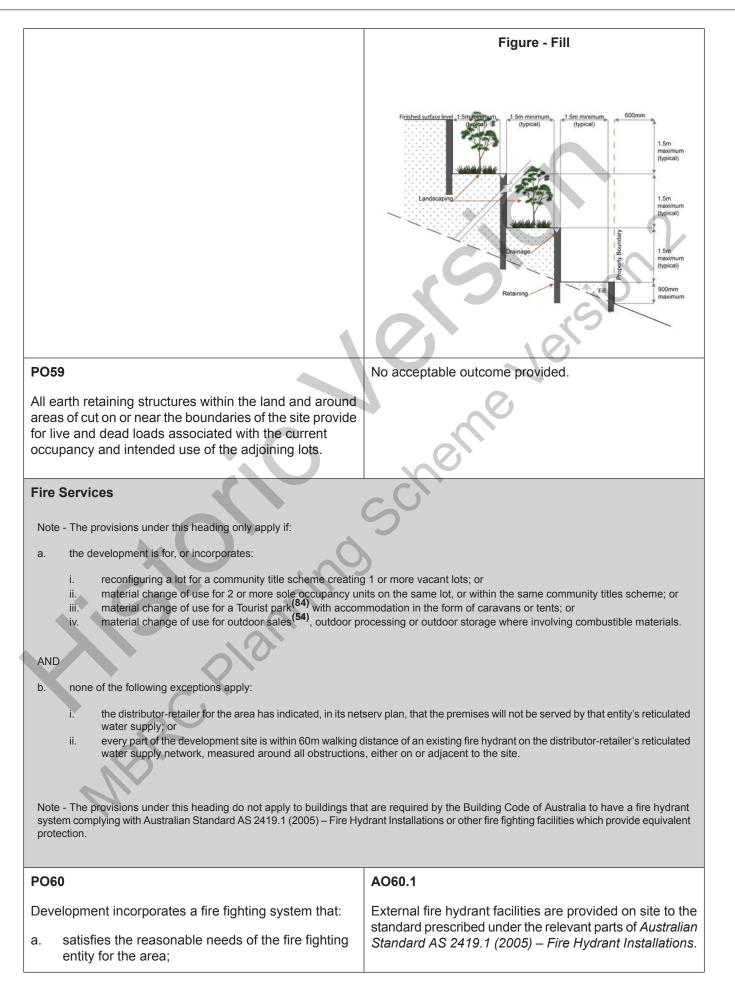

| <ul> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> </ul> Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region. | <ul> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(B4)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:</li> <li>i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only extend to the roof storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul> |
|---|---|
|   | <ul> <li>AO60.2</li> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:</li> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.</li> </ul>  |
|   | AO60.3  |
| BRC   | On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>  |
| PO61  | AO61  |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times  | For development that contains on-site fire hydrants external to buildings:  |
| from, or at, the vehicular entry point to the development site.   | a. those external hydrants can be seen from the vehicular entry point to the site; or   |
|   | b. a sign identifying the following is provided at the vehicular entry point to the site:   |
|   | <ul> <li>the overall layout of the development (to scale);</li> </ul>   |

| ii internal read names (where yead):  |  |  |  |  |  |
|---|--|--|--|--|--|
| ii. internal road names (where used);   |  |  |  |  |  |
| iii. all communal facilities (where provided);  |  |  |  |  |  |
| <ul> <li>iv. the reception area and on-site manager's office (where provided);</li> </ul>   |  |  |  |  |  |
| v. external hydrants and hydrant booster points;  |  |  |  |  |  |
| vi. physical constraints within the internal<br>roadway system which would restrict access<br>by fire fighting appliances to external hydrants<br>and hydrant booster points.   |  |  |  |  |  |
|   |  |  |  |  |  |
| Note - The sign prescribed above, and the graphics used are to be:  |  |  |  |  |  |
| a. in a form;   |  |  |  |  |  |
| <ul><li>b. of a size;</li><li>c. illuminated to a level;</li></ul>  |  |  |  |  |  |
| c. illuminated to a level;  |  |  |  |  |  |
| which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from   |  |  |  |  |  |
| the sign.   |  |  |  |  |  |
|   |  |  |  |  |  |
| A062  |  |  |  |  |  |
| For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads. |  |  |  |  |  |
| Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.  |  |  |  |  |  |
| ific criteria   |  |  |  |  |  |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and Utility installation <sup>(86)</sup>  |  |  |  |  |  |
| AO63.1  |  |  |  |  |  |
| Development is designed to minimise surrounding land<br>use conflicts by ensuring infrastructure, buildings,<br>structures and other equipment:   |  |  |  |  |  |
| <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> </ul>   |  |  |  |  |  |
| _   |  |  |  |  |  |

| f compared through the use of colours and   | 4002.2   |
|---|--|
| f. camouflaged through the use of colours and materials which blend into the landscape;   | AO63.2   |
| g. treated to eliminate glare and reflectivity;   | A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the   |
| <ul><li>h. landscaped;</li><li>i. otherwise consistent with the amenity and character</li></ul>   | development and street frontage, side and rear   |
| of the zone and surrounding area.   | boundaries.  |
| PO64  | AO64   |
| Infrastructure does not have an impact on pedestrian  | Access control arrangements:   |
| health and safety.  | a. do not create dead-ends or dark alleyways adjacent  |
|   | to the infrastructure;   |
|   | b. minimise the number and width of crossovers and entry points;   |
|   | c. provide safe vehicular access to the site;  |
|   | d. do not utilise barbed wire or razor wire.   |
| PO65  | A065   |
| All activities associated with the development occur within   | All equipment which produces audible or non-audible  |
| an environment incorporating sufficient controls to ensure the facility:  | sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure |
| a. generates no audible sound at the site boundaries  | noise emissions meet the objectives as set out in the  |
| where in a residential setting; or  | Environmental Protection (Noise) Policy 2008.  |
| b. meet the objectives as set out in the Environmental  |  |
| Protection (Noise) Policy 2008.   |  |
| Telecommunications facility <sup>(81)</sup>   | $\sim$   |
| Editor's note - In accordance with the Federal legislation Telecommur<br>that will not cause human exposure to electromagnetic radiation beyo<br>Radiation - Human Exposure) Standard 2003 and Radio Protection Sta<br>to 300Ghz.   |  |
| PO66  | AO66.1   |
| Telecommunications facilities <sup>(81)</sup> are co-located with   | New telecommunication facilities <sup>(81)</sup> are co-located on   |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same | existing towers with new equipment shelter and   |
| Substation <sup>(80)</sup> if there is already a facility in the same   | associated structures positioned adjacent to the existing shelters and structures.                         |
| coverage area.  |  |
|   | AO66.2   |
|   | If not co-located with an existing facility, all co-location   |
|   | opportunities have been investigated and fully exhausted   |
|   | within a 2km radius of the site.   |
| PO67  | AO67   |
| A new Telecommunications facility <sup>(81)</sup> is designed and   | A minimum of 45m <sup>2</sup> is available at ground level to allow  |
| constructed to ensure co-masting or co-siting with other<br>carriers both on the tower or pole and at ground level is   | for additional equipment shelters and associated structures for the purpose of co-locating on the proposed |
| possible in the future.   | facility.  |
|   |  |
| PO68  | AO68   |
| L   | 1  |

| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.  | The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval.  |  |  |
|---|--|--|--|
| PO69<br>The Telecommunications facility <sup>(81)</sup> does not have an<br>adverse impact on the visual amenity of a locality and is:<br>a. high quality design and construction;<br>b. visually integrated with the surrounding area;<br>c. not visually dominant or intrusive;<br>d. located behind the main building line;<br>e. below the level of the predominant tree canopy or<br>the level of the surrounding buildings and<br>structures;<br>f. camouflaged through the use of colours and<br>materials which blend into the landscape;<br>g. treated to eliminate glare and reflectivity;<br>h. landscaped;<br>i. otherwise consistent with the amenity and character<br>of the zone and surrounding area. | <ul> <li>AO69.1</li> <li>Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.</li> <li>AO69.2</li> <li>In all other areas towers do not exceed 35m in height.</li> <li>AO69.3</li> <li>Towers, equipment shelters and associated structures are of a design, colour and material to: <ul> <li>a. reduce recognition in the landscape;</li> <li>b. reduce glare and reflectivity.</li> </ul> </li> <li>AO69.4</li> <li>All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.</li> <li>Where there is no established building line the facility is located at the rear of the site.</li> </ul> <li>AO69.5</li> <li>The facility is enclosed by security fencing or by other means to ensure public access is prohibited.</li> <li>AO69.6</li> <li>A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.</li> <li>Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.</li> |  |  |
| PO70  | A070   |  |  |

| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |  |  |
|--|--|--|--|
| P071   | A071   |  |  |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.   | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.   |  |  |
| Values and cor   | nstraints criteria   |  |  |
| Reconfiguring a lot or Material change of use or Operational work, w   | e the development is consistent with a current Development permit for<br>here that approval has considered and addressed (e.g. through a<br>d) or conditions of approval) the identified value or constraint under this  |  |  |
| Heritage and landscape character (refer Overlay may<br>the following assessment criteria apply)  | o - Heritage and landscape character to determine if   |  |  |
| Note - To assist in demonstrating achievement of heritage performan-<br>by a suitably qualified person verifying the proposed development is   | ce outcomes, a Cultural heritage impact assessment report is prepared<br>in accordance with The Australia ICOMOS Burra Charter.  |  |  |
| Note - To assist in demonstrating achievement of this performance of accordance with Planning scheme policy – Heritage and landscape of adopted in accordance with AS 4970-2009 Protection of trees on demonstrational scheme policy and protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection of trees on demonstration accordance with AS 4970-2009 Protection accordance with AS 4970-20 |  |  |  |
|  |  |  |  |
| Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage a<br>landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural<br>heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning<br>scheme policy - Heritage and landscape character.  |  |  |  |
| P072   | A072   |  |  |
| <ul> <li>Development will:</li> <li>a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;</li> <li>b. protect the fabric and setting of the heritage site, object or building;</li> <li>c. be consistent with the form, scale and style of the heritage site, object or building;</li> <li>d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral</li> </ul>   | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value.<br>Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object<br>or building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The<br>plan is sent to, and approved by Council prior to the commencement<br>of any preservation, maintenance, repair and restoration works. |  |  |
| <ul> <li>this is not reasonable or practicable, neutral materials and finishes;</li> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul>   |  |  |  |
| P073   | No acceptable outcome provided.  |  |  |
|  |  |  |  |

| Demolition and removal is only considered where:   |  |
|--|--|
| <ul> <li>a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or</li> <li>b. demolition is confined to the removal of</li> </ul>                                |  |
| outbuildings, extensions and alterations that are<br>not part of the original structure; or<br>c. limited demolition is performed in the course of   |  |
| <ul> <li>repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic event which substantially destroys the building or object.</li> </ul>  |  |
| P074   | No acceptable outcome provided.                                    |
| Where development is occurring on land adjoining a site<br>of cultural heritage value, the development is to be<br>sympathetic to and consistent with the cultural heritage<br>values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view. | Clers  |
| apply)<br>Note - The applicable river and creek flood planning levels associated<br>obtained by requesting a flood check property report from Council.   | a with defined flood event (DFE) within the inundation area can be |
| P075   | No acceptable outcome provided.                                    |
| Development:   |  |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>   |  |
| P076   | A076   |
| Development:   | No acceptable outcome provided.                                    |
| a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;   |  |
| <ul> <li>b. does not concentrate, intensify or divert overland<br/>flow onto an upstream, downstream or surrounding<br/>property.</li> </ul>   |  |
| Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.   |  |
|  |  |

| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.   |   |
|---|---|
| P077  | No acceptable outcome provided.   |
| <ul> <li>Development does not:</li> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> </ul>   | son?  |
| PO78<br>Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.<br>PO79<br>Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.  | <ul> <li>A078         Development ensures that a hazardous chemical is not located or stored in an Overland flow path area.         Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.     </li> <li>A079         Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.     </li> </ul> |
| PO80<br>Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for a<br>fully developed upstream catchment and are able to be<br>easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme<br>policy – Flood hazard, Coastal hazard and Overland flow | <ul> <li>AO80.1</li> <li>Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:</li> <li>a. Urban area – Level III;</li> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul> AO80.2 Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed  |
| PO81  | upstream catchment. No acceptable outcome provided.   |

|   | elopment protects the conveyance of overland flow<br>n that an easement for drainage purposes is provided<br>r:                                    |  |  |  |  |
|---|--|--|--|--|--|
| a.  | a stormwater pipe if the nominal pipe diameter exceeds 300mm;  |  |  |  |  |
| b.  | an overland flow path where it crosses more than one premises;   |  |  |  |  |
| C.  | inter-allotment drainage infrastructure.   |  |  |  |  |
|   | e - Refer to Planning scheme policy - Integrated design for details examples.  |  |  |  |  |
|   | e - Stormwater Drainage easement dimensions are provided in ordance with Section 3.8.5 of QUDM.  | cillo silo   |  |  |  |
| Ado   | litional criteria for development for a Park <sup>(57)</sup>   | V VO   |  |  |  |
| PO  | 32   | A082   |  |  |  |
| layc  | elopment for a Park <sup>(57)</sup> ensures that the design and<br>ut responds to the nature of the overland flow<br>cting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design. |  |  |  |
| a.  | public benefit and enjoyment is maximised;   |  |  |  |  |
| b.  | impacts on the asset life and integrity of park structures is minimised;   | S  |  |  |  |
| C.  | maintenance and replacement costs are minimised.   |  |  |  |  |
|   | Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment criteria apply)                   |  |  |  |  |
| PO  | 33   | AO83   |  |  |  |
| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> </ul> |  | Except where located on an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high                       |  |  |  |

- b. is located and designed in a manner that maintains a high level of security of supply;
- c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.

### 7.2.3.2.8 Light industry sub-precinct

#### 7.2.3.2.8.1 Purpose - Light industry sub-precinct

Note - The Town centre light industry sub-precinct is intended to serve local and short term needs close to the town centre community, with good access and low amenity impacts.

- 1. The purpose of the Light industry sub-precinct will be achieved through the following overall outcomes:
  - a. The Light industry sub-precinct will facilitate and maintain the long term viability of a range of low impact and low intensity industry, service and business activities which are compatible with the adjacent Mixed business sub-precinct, and nearby Residential north sub-precinct.
  - b. Development for a use that is ancillary to a low impact industry<sup>(42)</sup> activity on the same site which directly supports industry and workers may be accommodated.
  - c. The operation and viability of low impact industry<sup>(42)</sup> activities is protected from the intrusion of incompatible uses.
  - d. Low impact industry<sup>(42)</sup> activities are located, designed and managed to:
    - i. maintain the health and safety of people;
    - ii. avoid significant adverse effects on the natural environment;
    - iii. minimise the possibility of adverse impacts on surrounding non-industrial uses.
  - e. Development incorporates a range of building materials, vertically and horizontally articulated facades, landscaping, promotion of customer entry points, and safe and legible pedestrian access.
  - f. Development encourages public transport patronage and active transport choices through the increased provision of appropriate end of trip facilities.
  - g. Low impact industry<sup>(42)</sup> activities which involve a high level of contact with the general public are located along a main street and provide a high quality built form and landscaped environment to the street.
  - h. Development fronting the main street is of a scale, character and built form that will positively contribute to a high standard of visual amenity along main street (East Street).
    - General works associated with the development achieves the following:
      - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
      - ii. the development manages stormwater to:
        - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
        - B. prevent stormwater contamination and the release of pollutants;
        - C. maintain or improve the structure and condition of drainage lines and riparian areas;
        - D. avoid off-site adverse impacts from stormwater.
      - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
  - j. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
  - k. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.

- I. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- m. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- n. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- o. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- p. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- q. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - . development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- r. Development in the Light industry sub-precinct is for one or more of the uses identified below:

| • | Agricultural supplies store <sup>(2)</sup>  | • | Emergency services <sup>(25)</sup>                            | • | Low impact industry <sup>(42)</sup>   |
|---|---|---|---|---|---|
| • | Animal husbandry <sup>(4)</sup>   | • | Food and drink<br>outlet <sup>(28)</sup> (where not exceeding | • | Outdoor sales <sup>(54)</sup>   |
| • | Aquaculture <sup>(6)</sup> (where in a<br>building)<br>Bulk landscape supplies <sup>(9)</sup> | • | 100m <sup>2</sup> GFA)<br>Garden centre <sup>(31)</sup>       | • | Research and technology<br>industry <sup>(64)</sup><br>Sales office <sup>(72)</sup> |
|   | Buik lanuscape supplies   |   |   | • | Sales Unice   |

| <ul> <li>Caretaker's<br/>accommodation<sup>(10)</sup></li> </ul>  | <ul> <li>Hardware and trade<br/>supplies<sup>(32)</sup></li> </ul>      | <ul> <li>Service industry<sup>(73)</sup></li> </ul> |
|---|---|---|
| <ul> <li>Car wash<sup>(11)</sup></li> </ul>   |   | <ul> <li>Service station<sup>(74)</sup></li> </ul>  |
|   | Indoor sport and recreation <sup>(38)</sup> (if not within 100m walking | Warehouse <sup>(88)</sup>                           |
| <ul> <li>Educational establishmer<br/>(where for technical and the<br/>related education only)</li> </ul> |   |   |

s. Development in the Light industry sub-precinct does not include one or more of the following uses:

| <ul> <li>Air services<sup>(3)</sup></li> <li>Animal keeping<sup>(6)</sup></li> <li>Bar<sup>(7)</sup></li> <li>Bar<sup>(7)</sup></li> <li>Brothel<sup>(8)</sup></li> <li>Cemetery<sup>(12)</sup></li> <li>Child care centre<sup>(13)</sup></li> <li>Child care centre<sup>(13)</sup></li> <li>Club<sup>(14)</sup></li> <li>Community care centre<sup>(15)</sup></li> <li>Intensive animal industry<sup>(34)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Major sport, recreation and entertainment facility<sup>(41)</sup></li> <li>Maior sport, recreation and entertainment facility<sup>(41)</sup></li> <li>Major sport, recreation and entertainment facility<sup>(41)</sup></li> <li>Maior sport, recreation and entertainment facility<sup>(44)</sup></li> <li>Major sport, recreation and entertainment facility<sup>(44)</sup></li> <li>Maior sport, recreation and entertainment facility<sup>(44)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Tourist attraction<sup>(83)</sup></li> <li>Tourist attraction<sup>(83)</sup></li> <li>Tourist park<sup>(44)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>   |   |                                      |   |   |    |  |
|---|---|--------------------------------------|---|---|----|--|
| <ul> <li>Animal keeping<sup>(6)</sup></li> <li>Bar<sup>(7)</sup></li> <li>Brothel<sup>(8)</sup></li> <li>Function facility<sup>(29)</sup></li> <li>Funcal parlour<sup>(30)</sup></li> <li>Funeral parlour<sup>(30)</sup></li> <li>Funeral parlour<sup>(30)</sup></li> <li>Funeral parlour<sup>(30)</sup></li> <li>Permanent plantation<sup>(69)</sup></li> <li>Relocatable home park<sup>(62)</sup></li> <li>Renewable energy facility<sup>(63)</sup></li> <li>Club<sup>(14)</sup></li> <li>Home based business<sup>(35)</sup></li> <li>Residential care facility<sup>(65)</sup></li> <li>Intensive animal industry<sup>(34)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Intensive horticulture<sup>(40)</sup></li> <li>Retirement facility<sup>(67)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Roadside stall<sup>(68)</sup></li> <li>Rural industry<sup>(70)</sup></li> <li>Rural workers'<br/>accommodation<sup>(77)</sup></li> <li>Short-term accommodation<sup>(77)</sup></li> <li>Market<sup>(46)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(62)</sup></li> <li>Winery<sup>(80)</sup></li> </ul>  | • | Air services <sup>(3)</sup>          | • | Food and drink outlet <sup>(28)</sup> - if greater than 100m <sup>2</sup> GFA |    | Outdoor sport and recreation <sup>(55)</sup> |
| <ul> <li>Bar<sup>1,7</sup></li> <li>Brothel<sup>(8)</sup></li> <li>Cemetery<sup>(12)</sup></li> <li>Child care centre<sup>(13)</sup></li> <li>Club<sup>(14)</sup></li> <li>Community care centre<sup>(15)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Crematorium<sup>(18)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling nuis<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup></li> <li>Nightclub entertainment facility<sup>(61)</sup></li> <li>Nightclub entertainment facility<sup>(61)</sup></li> <li>Non-resident workforce accommodation<sup>(52)</sup></li> <li>Environment facility<sup>(26)</sup></li> </ul>  | • | Animal keeping <sup>(5)</sup>        |   |   |    |  |
| <ul> <li>Brothel<sup>19</sup></li> <li>Cemetery<sup>(12)</sup></li> <li>Child care centre<sup>(13)</sup></li> <li>Child care centre<sup>(13)</sup></li> <li>Club<sup>(14)</sup></li> <li>Club<sup>(14)</sup></li> <li>Community care centre<sup>(15)</sup></li> <li>Intensive animal industry<sup>(39)</sup></li> <li>Residential care facility<sup>(65)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Intensive horticulture<sup>(40)</sup></li> <li>Retirement facility<sup>(67)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Crematorium<sup>(18)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Major sport, recreation and entertainment facility<sup>(44)</sup></li> <li>Major sport, recreation and entertainment facility<sup>(44)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Short-term accommodation<sup>(77)</sup></li> <li>Short-term accommodation<sup>(83)</sup></li> <li>Tourist attraction<sup>(83)</sup></li> <li>Tourist park<sup>(84)</sup></li> <li>Non-resident workforce accommodation<sup>(52)</sup></li> <li>Winery<sup>(80)</sup></li> </ul>   | • | Bar <sup>(7)</sup>                   |   |   |    |  |
| <ul> <li>Cemetery<sup>(12)</sup></li> <li>Child care centre<sup>(13)</sup></li> <li>Club<sup>(14)</sup></li> <li>Club<sup>(14)</sup></li> <li>Community care centre<sup>(15)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Major electricity<br/>infrastructure<sup>(43)</sup></li> <li>Major sport, recreation and<br/>entertainment facility<sup>(20)</sup></li> <li>Market<sup>(46)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Environment facility<sup>(26)</sup></li> <li>Environment facility<sup>(26)</sup></li> <li>Environment facility<sup>(26)</sup></li> <li>Kenewable energy facility<sup>(63)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Resort complex<sup>(66)</sup></li> <li>Retirement facility<sup>(67)</sup></li> <li>Roadside stall<sup>(68)</sup></li> <li>Rural industry<sup>(70)</sup></li> <li>Rural workers'<br/>accommodation<sup>(77)</sup></li> <li>Short-term accommodation<sup>(77)</sup></li> <li>Theatre<sup>(82)</sup></li> <li>Tourist attraction<sup>(83)</sup></li> <li>Tourist park<sup>(84)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>  | • | Brothel <sup>(8)</sup>               |   |   | •  |  |
| <ul> <li>Child care centre<sup>(13)</sup></li> <li>Club<sup>(14)</sup></li> <li>Club<sup>(14)</sup></li> <li>Community care centre<sup>(15)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Crematorium<sup>(18)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling nouse<sup>(22)</sup></li> <li>Nightclub entertainment facility<sup>(49)</sup></li> <li>Nightclub entertainment facility<sup>(49)</sup></li> <li>Nightclub entertainment facility<sup>(61)</sup></li> <li>Non-resident workforce accommodation<sup>(52)</sup></li> <li>Kon-resident workforce accommodation<sup>(52)</sup></li> </ul>  | • | Cemetery <sup>(12)</sup>             | • |   | •  |  |
| <ul> <li>Club<sup>(14)</sup></li> <li>Community care centre<sup>(15)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Crematorium<sup>(18)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup></li> <li>Kon-resident workforce accommodation<sup>(52)</sup></li> <li>Kon-resident workforce accommodation<sup>(52)</sup><td>•</td><td></td><td>•</td><td></td><td>2,</td><td></td></li></ul> | • |                                      | • |   | 2, |  |
| <ul> <li>Community care centre<sup>(15)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Community residence<sup>(16)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Major electricity<br/>infrastructure<sup>(43)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and<br/>trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>Intensive animal industry<sup>(39)</sup></li> <li>Intensive animal industry<sup>(39)</sup></li> <li>Intensive animal industry<sup>(39)</sup></li> <li>Intensive horticulture<sup>(40)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Major electricity<br/>infrastructure<sup>(43)</sup></li> <li>Major sport, recreation and<br/>entertainment facility<sup>(44)</sup></li> <li>Market<sup>(46)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>   | • |                                      | • |   | •  | Residential care facility <sup>(65)</sup>    |
| <ul> <li>Community residence<sup>(16)</sup></li> <li>Community use<sup>(17)</sup></li> <li>Crematorium<sup>(18)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and<br/>trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>Intensive horticulture<sup>(40)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Major sport, recreation and<br/>entertainment facility<sup>(44)</sup></li> <li>Major sport, recreation and<br/>entertainment facility<sup>(44)</sup></li> <li>Market<sup>(46)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>  |   |                                      | • | Intensive animal industry <sup>(39)</sup>                                     | •  | Resort complex <sup>(66)</sup>               |
| <ul> <li>Community use<sup>(17)</sup></li> <li>Crematorium<sup>(18)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and<br/>trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>Landing<sup>(41)</sup></li> <li>Major electricity<br/>infrastructure<sup>(43)</sup></li> <li>Major sport, recreation and<br/>entertainment facility<sup>(44)</sup></li> <li>Market<sup>(46)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>  |   |                                      |   | Intensive horticulture <sup>(40)</sup>  | •  | Retirement facility <sup>(67)</sup>          |
| <ul> <li>Community use<sup>(11)</sup></li> <li>Crematorium<sup>(18)</sup></li> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and<br/>trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>Major electricity<br/>infrastructure<sup>(43)</sup></li> <li>Major sport, recreation and<br/>entertainment facility<sup>(44)</sup></li> <li>Market<sup>(46)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>  |   |                                      |   | Landing <sup>(41)</sup>   | •  | Roadside stall <sup>(68)</sup>               |
| <ul> <li>Cropping<sup>(19)</sup></li> <li>Detention facility<sup>(20)</sup></li> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and<br/>trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>Major sport, recreation and<br/>entertainment facility<sup>(44)</sup></li> <li>Market<sup>(46)</sup></li> <li>Market<sup>(46)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>  |   |                                      | • | Major electricity   | •  | Rural industry <sup>(70)</sup>               |
| <ul> <li>Detention facility<sup>(20)</sup></li> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>entertainment facility<sup>(44)</sup></li> <li>Market<sup>(46)</sup></li> <li>Market<sup>(46)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Nightclub entertainment facility<sup>(44)</sup></li> <li>Non-resident workforce accommodation<sup>(52)</sup></li> <li>Short-term accommodation<sup>(77)</sup></li> <li>Theatre<sup>(82)</sup></li> <li>Tourist attraction<sup>(83)</sup></li> <li>Tourist park<sup>(84)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>   | • |                                      | • |   | •  | Rural workers'                               |
| <ul> <li>Detention facility<sup>(20)</sup></li> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>Market<sup>(46)</sup></li> <li>Market<sup>(46)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Nightclub entertainment facility<sup>(51)</sup></li> <li>Non-resident workforce accommodation<sup>(52)</sup></li> <li>Short-term accommodation<sup>(77)</sup></li> <li>Theatre<sup>(82)</sup></li> <li>Tourist attraction<sup>(83)</sup></li> <li>Tourist park<sup>(84)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>  | • |                                      |   | Major sport, recreation and entertainment facility <sup>(44)</sup>            |    |  |
| <ul> <li>Dual occupancy<sup>(21)</sup></li> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and<br/>trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>Multiple dwelling<sup>(49)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>  |   |                                      |   |   | •  | Short-term accommodation <sup>(77)</sup>     |
| <ul> <li>Dwelling house<sup>(22)</sup></li> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and<br/>trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Nightclub entertainment<br/>facility<sup>(51)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Veterinary services<sup>(87)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>  | • | Dual occupancy <sup>(21)</sup>       |   |   | •  | Theatre <sup>(82)</sup>                      |
| <ul> <li>Dwelling unit<sup>(23)</sup></li> <li>Educational establishment<sup>(24)</sup><br/>(where not for technical and<br/>trade related education)</li> <li>Environment facility<sup>(26)</sup></li> <li>facility<sup>(51)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> <li>Winery<sup>(90)</sup></li> </ul>   |   | Dwelling house <sup>(22)</sup>       |   |   | •  | Tourist attraction <sup>(83)</sup>           |
| (where not for technical and<br>trade related education)accommodation <sup>(52)</sup> Winery <sup>(90)</sup> • Environment facility <sup>(26)</sup>   |   | Dwelling unit <sup>(23)</sup>        | • |   | •  | Tourist park <sup>(84)</sup>                 |
| (where not for technical and trade related education)       accommodation <sup>(52)</sup> Winery <sup>(90)</sup> • Environment facility <sup>(26)</sup> •       Winery <sup>(90)</sup>  | • |                                      | • |   | •  | Veterinary services <sup>(87)</sup>          |
| Environment facility <sup>(26)</sup>  |   |                                      |   | accommodation <sup>(92)</sup>   | •  |  |
|   | • | Environment facility <sup>(26)</sup> |   |   |    |  |
|   | • | *                                    |   |   |    |  |
|   |   | -                                    |   |   |    |  |

t. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

### 7.2.3.2.8.2 Criteria for assessment

#### Part K - Criteria for assessable development - Light industry sub-precinct

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part K, Table 7.2.3.2.8.1.

Where development is impact assessable, the assessment criteria become the whole of the planning scheme.

#### Table 7.2.3.2.8.1 Assessable development - Light industry sub-precinct

| Performance outcome  | Acceptable outcome  |  |  |  |
|--|---|--|--|--|
| General criteria   |   |  |  |  |
| Site cover   |   |  |  |  |
| PO1  | No acceptable outcome provided.   |  |  |  |
| Building site cover allows for adequate on-site provision of:  |   |  |  |  |
| a. car parking;  | 5   |  |  |  |
| b. vehicle access and manoeuvring;   |   |  |  |  |
| c. setbacks to boundaries;   |   |  |  |  |
| d. landscaped areas.   |   |  |  |  |
| Building height  |   |  |  |  |
| PO2  | A02   |  |  |  |
| The height of buildings reflect the individual character of the precinct.  | Building heights do not to exceed that mapped on Neighbourhood development plan map - Building heights.   |  |  |  |
| Setbacks   |   |  |  |  |
| P03  | AO3.1   |  |  |  |
| Development addresses and activates streets and public spaces by:  | New buildings and extensions adjacent to street frontages are built to the street alignment.  |  |  |  |
| <ul> <li>a. establishing and maintaining interaction, pedestrian activity and casual surveillance through appropriate land uses and building design (e.g. the use of windows or glazing and avoiding blank walls with the use of sleeving);</li> <li>b. ensuring buildings and individual tenancies address street frontages and other areas of pedestrian movement;</li> <li>c. new buildings adjoin or are within 3m of a primary street frontage, civic space or public open space;</li> <li>d. locating car parking areas behind or under buildings to not dominate the street environment;</li> </ul> | <ul> <li>AO3.2</li> <li>At grade car parking: <ul> <li>a. does not adjoin a main street or a corner;</li> </ul> </li> <li>b. where at grade car parking areas adjoins a street (other than a main street) or civic space they should not take up more than 40% of the length of the street frontage.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> |  |  |  |
|  | AO3.3   |  |  |  |

| Per  | formance outcome  | Acceptable outcome   |  |  |  |  |
|--|---|--|--|--|--|--|
| e.<br>f.   | providing visual interest to the façade (e.g.<br>windows or glazing, variation in colours,<br>materials, finishes, articulation, recesses or<br>projections);<br>establishing or maintaining human scale.   | Development on corner lots:         a. addresses both street frontages;         b. express strong visual elements, including feature building entries.         AO3.4         Where adjoining the main street frontage, individual tenancies do not exceed 20m in length.   |  |  |  |  |
| PO4<br>Side and rear boundary setbacks maintain views,<br>privacy, access to natural light and the visual amenity<br>of adjoining sensitive land uses. |   | AO4<br>Where development adjoins non-Light industry sub-precinct<br>land, the building is setback a minimum of 3m from the<br>property boundary and includes landscaping along the<br>boundary appropriate for screening with a mature height of<br>at least 3m.<br>Note - Refer to Planning scheme policy - Integrated design for<br>determining acceptable levels of landscaping for screening purposes. |  |  |  |  |
| Building appearance and design   |   |  |  |  |  |  |
| PO   | 5   | A05  |  |  |  |  |
| star<br>add<br>the   | lding on highly visible sites incorporate a high<br>ndard of industrial design and construction, which<br>is visual interest to the streetscape and reduces<br>perceived bulk of the building from the street.<br>te - The following example illustrates an acceptable design | <ul> <li>Where fronting a main street, or visible from a residential use or Mixed business sub-precinct lot, buildings provide a high level of architectural design, by incorporating:</li> <li>a. a range of building materials, colours and features;</li> <li>b. facade articulation along street frontages;</li> </ul>   |  |  |  |  |

- response to this outcome.
- facade articulation along street frontages; b.
- design features to promote customer entry points; C.
- d. materials that are not highly reflective.



| Performance outcome   | Acceptable outcome                                   |
|---|--|
| P06   | No acceptable outcome provided.                      |
| Buildings on highly visible corner allotments:  |  |
| a. address both street frontages;   |  |
| <li>contain building openings facing both street<br/>frontages;</li>                    |  |
| c. do not present blank unarticulated walls to either frontage.                         | 2  |
| Note - The following example illustrates an acceptable design response to this outcome. |  |
|   | Scheme   |
| Staff recreation area   |  |
| P07   | No acceptable outcome provided.                      |
| Development provides an on-site recreation area for staff that:                         |  |
| a. includes seating, tables and rubbish bins;   |  |
| b. is adequately protected from the weather;  |  |
| c. is safely accessible to all staff;   |  |
| d. is separate and private from public areas;   |  |
| e. is located away from a noisy or odorous activity.                                    |  |
| Landscaping   |  |
| PO8   | A08  |
| Landscaping is provided on the site to:   | Landscaping is provided and maintained in accordance |

| Perf | formance outcome   | Acceptable outcome   |  |  |  |  |
|------|--|--|--|--|--|--|
| a.   | visually soften the built form, areas of hardstand,<br>storage areas and mechanical plant associated<br>with the on-site activities; |  |  |  |  |  |
| b.   | complement the existing or desired streetscape;  |  |  |  |  |  |
| C.   | minimise the impact of industrial development<br>on adjoining lots not within an industrial precinct<br>or sub-precinct.             |  |  |  |  |  |
| Fen  | cing   |  |  |  |  |  |
| POg  | )  | A09  |  |  |  |  |
|      | provision of fencing on street frontages does not inate the streetscape or create safety issues.                                     | Where fencing is provided on the street frontage, it has a minimum transparency of 70%.  |  |  |  |  |
|      | e - The following example illustrates an acceptable design<br>bonse to this outcome.   | 10° 10'  |  |  |  |  |
|      |  | Scheme   |  |  |  |  |
| Pub  | lic access   |  |  |  |  |  |
| PO1  | 0  | AO10.1   |  |  |  |  |
| sepa | use has a safe, clearly identifiable public access<br>arated from service and parking areas.   | Pedestrian linkages are provided from the street and customer car parking areas directly to the main entrance of the building. |  |  |  |  |
|      | e - The following diagram illustrates an acceptable design<br>bonse to this outcome.   |  |  |  |  |  |
|      |  | AO10.2   |  |  |  |  |

| Performance outcome   | Acceptable outcome   |  |  |  |
|---|--|--|--|--|
| Industrial Activity.  | The public access is separated from industrial service areas.  |  |  |  |
| Car parking   |  |  |  |  |
| PO11<br>Car parking is provided on-site to meet the anticipated<br>demand of employees and visitors and avoid adverse<br>impacts on the external road network.<br>Note - Refer to Planning scheme policy - Integrated transport<br>assessment for guidance on how to achieve compliance with<br>this outcome.     | AO11<br>Car parking is provided in accordance with Schedule 7 -<br>Car parking.                                |  |  |  |
| PO12<br>The design of car parking areas:<br>a. does not impact on the safety of the external  | AO12<br>All car parking areas are designed and constructed in<br>accordance with Australian Standard AS2890.1. |  |  |  |
| <ul><li>road network;</li><li>ensures the safety of pedestrians at all times;</li><li>ensures the safe movement of vehicles within the site.</li></ul>  |  |  |  |  |
| <ul> <li>PO13</li> <li>The safety and efficiency of pedestrian movement is prioritised in the design of car parking areas through providing pedestrian paths in car parking areas that are:</li> <li>a. located along the most direct routes between building entrances, car parks and adjoining uses;</li> </ul> | No acceptable outcome provided.  |  |  |  |

|   | Performance outcome   |              |   | Acceptable outcome   |    |  |  |  |
|---|---|--------------|---|--|----|--|--|--|
|   | b.  | of pl        | ected from vehicle intrusion through the use<br>hysical and visual separation (e.g. wheel<br>s, trees etc);                                       |  |    |  |  |  |
|   | c. of a width to allow safe and efficient access for prams and wheelchairs.   |              |   |  |    |  |  |  |
|   | Bicycle parking and end of trip facilities Note - Building work to which this code applies constitutes Major De   |              |   | Development for purposes of development requirements for end of trip   |    |  |  |  |
|   | facil   | ities pr     | escribed in the Queensland Development Code MP 4.1  |  |    |  |  |  |
| Γ | PO1   | 4            |   | A014.1   |    |  |  |  |
|   | a.  | or o         | of trip facilities are provided for employees<br>ccupants, in the building or on-site within a<br>onable walking distance, and include:           | Minimum bicycle parking facilities are provided at a rate<br>1 bicycle parking space for every 3 vehicles parking spac<br>required by Schedule 7 – Car parking.  |    |  |  |  |
|   |   | i.           | adequate bicycle parking and storage facilities; and  | Editor's note - The acceptable solutions for end of trip facilities prescribe<br>under the Queensland Development Code permit a local planning<br>instrument to prescribe facility levels higher than the default levels   |    |  |  |  |
|   |   | ii.          | adequate provision for securing belongings; and   | identified in those acceptable solutions. This acceptable outcome is a<br>combination of the default levels set for end of trip facilities in the<br>Queensland Development Code and the additional facilities required<br>by Council.   | a  |  |  |  |
|   |   | iii.         | change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.   | A014.2   |    |  |  |  |
|   |   |              |   |  |    |  |  |  |
|   | b.  | prov<br>unre | vithstanding a. there is no requirement to<br>ide end of trip facilities if it would be<br>asonable to provide these facilities having<br>ird to: | <ul> <li>Bicycle parking is:</li> <li>a. provided in accordance with Austroads (2008), Guit to Traffic Management - Part 11: Parking;</li> </ul>   | de |  |  |  |
|   | 4   | i.           | the projected population growth and forward planning for road upgrading and   | <ul> <li>protected from the weather by its location or a<br/>dedicated roof structure;</li> </ul>  |    |  |  |  |
|   |   | ii.          | development of cycle paths; or<br>whether it would be practical to commute  | c. located within the building or in a dedicated, secure structure for residents and staff;  | e  |  |  |  |
|   |   |              | to and from the building on a bicycle,<br>having regard to the likely commute<br>distances and nature of the terrain; or                          | d. adjacent to building entrances or in public areas fo customers and visitors.  | r  |  |  |  |
|   |   | iii.         | the condition of the road and the nature<br>and amount of traffic potentially affecting<br>the safety of commuters.                               | Note - Bicycle parking structures are to be constructed to the standard prescribed in AS2890.3.  | s  |  |  |  |
|   |   |              | e - The intent of b above is to ensure the requirements   | Note - Bicycle parking and end of trip facilities provided for residentia and non-residential activities may be pooled, provided they are within 100 metres of the entrance to the building.   |    |  |  |  |
|   | for bicycle parking and end of trip facilities are not applied in<br>unreasonable circumstances. For example these requirements<br>should not, and do not apply in the Rural zone or the Rural<br>residential zone etc. |              | ble circumstances. For example these requirements and do not apply in the Rural zone or the Rural   | Editor's note - The acceptable solutions for end of trip facilities prescribe<br>under the Queensland Development Code permit a local planning<br>instrument to prescribe facility levels higher than the default levels<br>identified in those acceptable solutions. This acceptable outcome is a<br>amalgamation of the default levels set for end of trip facilities in the<br>Queensland Development Code and the additional facilities required |    |  |  |  |
|   | Perf  | orman        | ce Requirement prescribed for end of trip facilities  | by Council.  |    |  |  |  |

| Performance outcome  | Accepta                       | able ou   | itcome                      |  |  |   |
|--|-------------------------------|---|-----------------------------|--|--|---|
| under the Queensland Development Code. For development   | ment AO14.3                   |   |                             |  |  |   |
| corporating building work, that Queensland Development Code<br>erformance requirement cannot be altered by a local planning<br>strument and has been reproduced here solely for information<br>urposes. Council's assessment in its building work concurrence<br>gency role for end of trip facilities will be against the<br>erformance requirement in the Queensland Development Code.<br>Is it is subject to change at any time, applicants for development<br>corporating building work should ensure that proposals that<br>to not comply with the acceptable outcomes under this heading | For non                       | reside  | ntial use                   | s, storage   | e lockers:   |   |
|  |                               |   |                             | -  |  | dia e -   |
|  |                               | <ul> <li>are provide at a rate of 1.6 per bicycle parking space<br/>(rounded up to the nearest whole number);</li> </ul>  |                             |  |  |   |
|  |                               |   |                             |  |  |   |
|  |                               |   |                             | 450mm (c   | of 900mm (heig<br>lepth).  | gnt) x  |
| neet the current performance requirement prescribed in the<br>Queensland Development Code.   |                               |   |                             |  |  |   |
|  | when wit                      | Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.                        |                             |  |  |   |
|  | Editor's r                    | iote - The  | accentab                    | le solutions f   | or end of trip facilitie   | s prescribe   |
|  | under th                      | e Queen   | sland Dev                   | elopment Co  | ode permit a local p   | lanning   |
| 1  | identified                    | instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities in the |                             |  |  |   |
|  | Queensl                       | and Deve  |                             |  | e additional facilitie   |   |
|  | by Coun                       | UII.  | (                           | 0,   |  |   |
| +. C )   | A014.4                        |   | 2                           |  |  |   |
|  | For non                       | -reside   | ntial use                   | s, changii   | ng rooms:  |   |
|  | a. are                        | e provic  | led at a                    | rate of 1 r  | per 10 bicycle p   | arking  |
|  | sp                            | aces;   |                             |  |  | -   |
|  |                               |   | with a lc<br>ic view;       | ckable do  | or or otherwise  | screene   |
| XU   | c. are                        |   |                             |  |  |   |
|  | an                            | a wasn  | basin(s                     | ) in accord  | lance with the ta  |   |
|  | Bicycle<br>spaces<br>provided | Male/<br>Female   | Change<br>rooms<br>required | Showers<br>required  | Sanitary<br>compartments<br>required   | Washbasin<br>required   |
|  | 1-5                           | Male<br>and<br>female   | 1 unisex<br>change<br>room  | 1  | 1 closet pan   | 1   |
|  | 6-19                          | Female  | 1                           | 1  | 1 closet pan   | 1   |
|  | 20 or<br>more                 | Male  | 1                           | 1  | 1 closet pan   | 1   |
| MBK  |                               | Female  | 1                           | 2, plus 1 for<br>every 20<br>bicycle<br>spaces<br>provided<br>thereafter | 2 closet pans, plus<br>1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided thereafter  | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|  |                               | Male  | 1                           | 2, plus 1 for<br>every 20<br>bicycle<br>spaces<br>provided<br>thereafter | 1 urinal and 1 closet<br>pans, plus 1 sanitary<br>compartment at the<br>rate of 1 closet pan<br>or 1 urinal for every<br>60 bicycle space<br>provided thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|  |                               |   | 1                           | 1  | 1  | 1   |

| Performance outcome   | Acceptable outcome  |  |  |  |  |
|---|---|--|--|--|--|
| Loading and servicing   | <ul> <li>d. are provided with: <ul> <li>i. a mirror located above each wash basin;</li> <li>ii. a hook and bench seating within each shower compartment;</li> <li>iii. a socket-outlet located adjacent to each wash basin.</li> </ul> </li> <li>Note - Change rooms may be pooled across multiple sites, residential and non-residential activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities</li> <li>Editor's note - The acceptable solutions for end of trip facilities prescribed under the Queensland Development Code permit a local planning instrument to prescribe facility levels higher than the default levels identified in those acceptable solutions. This acceptable outcome is an amalgamation of the default levels set for end of trip facilities required by Council.</li> </ul> |  |  |  |  |
| P015  | No acceptable outcome provided.   |  |  |  |  |
| Service areas including loading/unloading facilities,<br>plant areas, bin storage and outdoor storage areas<br>are screened from the direct view from public areas<br>and non-Light industry sub-precinct land.<br>Note - If landscaping is proposed for screening purposes, refer<br>to Planning scheme policy - Integrated design for determining<br>acceptable levels. | Sche  |  |  |  |  |
| PO16<br>Waste and waste storage areas are designed and<br>managed in accordance with Planning scheme policy<br>- Waste.   | No acceptable outcome provided.   |  |  |  |  |
| Environmental impacts   |   |  |  |  |  |
| P017  | A017  |  |  |  |  |
| Where a use is not an environmentally relevant activity<br>under the Environmental Protection Act, the release<br>of any containment that may cause environmental<br>harm is mitigated to an acceptable level.  | Development achieves the standard listed in Schedule 1<br>Air Quality Objectives, Environmental Protection (Air) Policy<br>2008.  |  |  |  |  |
| Lighting  |   |  |  |  |  |
| PO18  | AO18  |  |  |  |  |

| Performance outcome   | Acceptable outcome  |  |  |  |  |
|---|---|--|--|--|--|
| Lighting is directed and shielded to not cause<br>unreasonable disturbance to any person on adjoining<br>land.  | Artificial lighting on-site is directed and shielded in such<br>manner as not to exceed the recommended maximum<br>values of light technical parameters for the control of<br>obtrusive light given in Table 2.1 of Australian Standard AS<br>4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.   |  |  |  |  |
|   | Note - "Curfewed hours' are taken to be those hours between 10pm and 7am on the following day.  |  |  |  |  |
| Noise   |   |  |  |  |  |
| PO19  | No acceptable outcome provided.   |  |  |  |  |
| Noise generating uses do not adversely affect existing or potential noise sensitive uses.   | is ion  |  |  |  |  |
| Note - The use of walls, barriers or fences that are visible from<br>or adjoin a road or public area are not appropriate noise<br>attenuation measures unless adjoining a motorway, arterial road<br>or rail line.  | 10,   |  |  |  |  |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.   | neme  |  |  |  |  |
| PO20  | A020.1  |  |  |  |  |
| ensitive land uses are provided with an appropriate<br>coustic environment within designated external<br>ivate outdoor living spaces and internal areas while:<br>contributing to safe and usable public spaces,<br>through maintaining high levels of surveillance   | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.  |  |  |  |  |
|   | AO20.2  |  |  |  |  |
| of parks, streets and roads that serve active transport purposes (e.g. existing or future   | Noise attenuation structures (e.g. walls, barriers or fences):  |  |  |  |  |
| pedestrian paths or cycle lanes etc);<br>b. maintaining the amenity of the streetscape.   | a. are not visible from an adjoining road or public area unless:  |  |  |  |  |
| Note - A noise impact assessment may be required to<br>demonstrate compliance with this PO. Noise impact<br>assessments are to be prepared in accordance with Planning<br>scheme policy - Noise.<br>Note - Refer to Planning Scheme Policy – Integrated design for<br>details and examples of noise attenuation structures. | <ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not<br/>serve an existing or future active transport<br/>purpose (e.g. pedestrian paths or cycle lanes)<br/>or where attenuation through building location<br/>and materials is not possible.</li> </ul> |  |  |  |  |
|   | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> </ul>  |  |  |  |  |
|   | Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.  |  |  |  |  |
|   | Note - Refer to Overlay map – Active transport for future active transport routes.  |  |  |  |  |

| Performance outcome   | Acceptable outcome  |  |  |
|---|---|--|--|
| Wor   | ks criteria   |  |  |
| Utilities   |   |  |  |
| PO21  | A021  |  |  |
| The development is connected to an existing<br>reticulated electricity supply system (approved by the<br>relevant energy regulating authority) and the<br>infrastructure does not negatively impact the<br>streetscape. | The development is connected to underground electricity.  |  |  |
| <b>PO22</b><br>The development has access to telecommunications and broadband services in accordance with current standards.  | No acceptable outcome provided.   |  |  |
| PO23  | No acceptable outcome provided.   |  |  |
| Where available the development is to safely connect to reticulated gas.  | ne  |  |  |
| PO24<br>The development provides for the treatment and<br>disposal of sewage and other waste water in a way<br>that will not cause environmental harm or pose a risk<br>to public health.                               | <ul> <li>AO24.1</li> <li>Where in a sewered area, the development is connected to a reticulated sewerage system.</li> <li>AO24.2</li> <li>Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.</li> <li>Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.</li> </ul> |  |  |
| e development is provided with an adequate and<br>stainable supply of potable (drinking and general<br>e e.g. gardening, washing, fire fighting) water.   | AO25.1<br>Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage Design<br>and Construction Code and the relevant Water Service<br>Association of Australia (WSAA) codes and standards.  |  |  |
|   | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater Connections<br>Policy, the development is provided with an adequate water<br>supply of at least 45,000 litres by way of on-site storage<br>which provides equivalent water quality and reliability to<br>support the use requirements of the development.   |  |  |

| Performance outcome   | Acceptable outcome  |
|---|---|
| <b>PO26</b><br>The development is provided with dedicated and constructed road access.  | No acceptable outcome provided.   |
| Access  |   |
| <ul> <li>PO27</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> <li>PO28</li> <li>Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.</li> </ul> | No acceptable outcome provided.   |
| PO29  | AO29.1  |
| <ul> <li>The layout of the development does not compromise:</li> <li>a. the development of the road network in the area;</li> <li>b. the function or safety of the road network;</li> <li>c. the capacity of the road network.</li> </ul> Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  | Direct vehicle access for residential development does not<br>occur from arterial or sub-arterial roads or a motorway.<br>Editor's note - Residential developments should consider amalgamation<br>with the lot to the rear and gaining access via a laneway.<br>Note - The road hierarchy is in accordance with a Neighbourhood<br>development plan (conceptually shown on Figure 7.2.3.2 - Movement,<br>Major streets). |
|   | AO29.2<br>The development provides for the extension of the road<br>network in the area in accordance with Council's road<br>network planning.  |
|   | AO29.3  |

| Performance outcome  | Acceptable outcome  |
|--|---|
|  | The development does not compromise future road widening<br>of frontage roads in accordance with the relevant standard<br>and Council's road planning.  |
|  | AO29.4  |
|  | The lot layout allows forward access to and from the site.  |
| PO30   | AO30.1  |
| Safe access facilities are provided for all vehicles required to access the site.  | Site access and driveways are designed and located in accordance with:  |
|  | <ul> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul> |
|  | AO30.2  |
|  | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.<br>Note - This includes queue lengths (refer to Schedule 8 Service vehicle                          |
|  | requirements), pavement widths and construction.  |
|  | AO30.3  |
| Plan   | Access driveways, manoeuvring areas and loading facilities<br>provide for service vehicles listed in Schedule 8 Service<br>vehicle requirements for the relevant use. The on-site<br>manoeuvring is to be in accordance with Schedule 8 Service<br>vehicle requirements.  |
| PO31   | AO31  |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:  | No acceptable outcome provided.   |
| a. ensure the type or volume of traffic generated<br>by the development does not have a negative<br>impact on the external road network;                             |   |
| <ul> <li>b. ensure the orderly and efficient continuation of<br/>the active transport network;</li> </ul>  |   |
| <ul> <li>c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.</li> </ul> |   |
| Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance  |   |

|  | Acceptable outcome              |
|--|---------------------------------|
| outcome. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.  |                                 |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |                                 |
| Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:  |                                 |
| <ul> <li>i. Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or</li> <li>ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.</li> </ul>  | C ersion                        |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.   |                                 |
| Stormwater   |                                 |
| PO32   | No acceptable outcome provided. |
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.<br>Note - Refer to Planning scheme policy - Integrated design for<br>details and examples.<br>Note - A downstream drainage discharge report in accordance<br>with Planning scheme policy - Stormwater management may be   | S                               |
| required to demonstrate achievement of this performance<br>outcome.<br>Note - A watercourse as defined in the Water Act may be<br>accepted as a lawful point of discharge providing the drainage<br>discharge from the site does not increase the downstream flood<br>levels during events up to and including the 1% AEP storm. An<br>afflux of +20mm may be accepted on Council controlled land<br>and road infrastructure. No worsening is ensured when<br>stormwater is discharged into a catchment that includes State<br>Transport Infrastructure. |                                 |
| outcome.<br>Note - A watercourse as defined in the Water Act may be<br>accepted as a lawful point of discharge providing the drainage<br>discharge from the site does not increase the downstream flood<br>levels during events up to and including the 1% AEP storm. An<br>afflux of +20mm may be accepted on Council controlled land<br>and road infrastructure. No worsening is ensured when<br>stormwater is discharged into a catchment that includes State   | No acceptable outcome provided. |
| outcome.<br>Note - A watercourse as defined in the Water Act may be<br>accepted as a lawful point of discharge providing the drainage<br>discharge from the site does not increase the downstream flood<br>levels during events up to and including the 1% AEP storm. An<br>afflux of +20mm may be accepted on Council controlled land<br>and road infrastructure. No worsening is ensured when<br>stormwater is discharged into a catchment that includes State<br>Transport Infrastructure.  | No acceptable outcome provided. |

| Performance outcome   | Acceptable outcome   |
|---|--|
| required to demonstrate compliance with this performance outcome.   |  |
| PO34  | No acceptable outcome provided.  |
| Stormwater quality management systems are<br>designed and constructed to minimise the<br>environmental impact of stormwater discharge on<br>surface and underground receiving water quality and<br>meet the design objectives in Tables A and B in<br>Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by<br>a suitably qualified professional will be required in accordance<br>with Planning scheme policy - Stormwater management.  | sion?  |
| PO35  | No acceptable outcome provided.  |
| <ul> <li>Easements for drainage purposes are provided over:</li> <li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li> <li>b. overland flow paths where they cross more than one property boundary.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul> Site works and construction management                                | scheme   |
| PO36<br>The site and any existing structures are maintained<br>in a tidy and safe condition.  | No acceptable outcome provided.  |
| P037  | AO37.1   |
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Works incorporate temporary stormwater run-off, erosion<br/>and sediment controls and trash traps designed in<br/>accordance with the Urban Stormwater Quality Planning<br/>Guidelines, Planning scheme policy - Stormwater<br/>management and Planning scheme policy - Integrated<br/>design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in<br/>a manner that differs significantly from pre-existing<br/>conditions;</li> <li>b. stormwater discharged to adjoining and downstream<br/>properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing<br/>conditions;</li> </ul> |


| Performance outcome  | Acceptable outcome   |
|--|--|
|  | <ul> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins.</li> </ul>   |
|  | AO37.2<br>Stormwater run-off, erosion and sediment controls are<br>constructed prior to commencement of any clearing work<br>or earthworks and are maintained and adjusted as<br>necessary at all times to ensure their ongoing effectiveness.<br>Note - The measures are adjusted on-site to maximise their<br>effectiveness. |
|  | AO37.3<br>The completed earthworks (fill or excavation) area is<br>stabilised using turf, established grass seeding, mulch or<br>sprayed stabilisation techniques to control erosion and<br>sediment and dust from leaving the property.   |
| PO38<br>Dust suppression measures are implemented during<br>construction works to protect nearby premises from<br>unreasonable dust impacts.   | No acceptable outcome provided   |
| PO39<br>All works on-site and the transportation of material to<br>and from the site are managed to not negatively<br>impact the existing road network, the amenity of the<br>surrounding area or the streetscape. | AO39.1<br>Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform Traffic<br>Control Devices (MUTCD) to ensure all traffic movements<br>to and from the site are safe.                                       |
| 50m <sup>3</sup> , a haulage route must be identified and approved by Council.   | AO39.2<br>All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.   |
|  | Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).  |
|  | Any material dropped, deposited or spilled on the roads as<br>a result of construction processes associated with the site<br>are to be cleaned at all times.   |

| Performance outcome  | Acceptable outcome  |
|--|---|
| PO40   | AO40  |
| All disturbed areas are rehabilitated at the completion<br>of construction.<br>Note - Refer to Planning scheme policy - Integrated design for<br>details and examples.   | <ul> <li>At completion of construction all disturbed areas of the site are to be:</li> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. grassed.</li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.</li> </ul>  |
| <ul> <li>PO41</li> <li>The clearing of vegetation on-site: <ul> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> </ul> </li> <li>Note - No burning of cleared vegetation is permitted.</li> <li>PO42</li> <li>Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.</li> </ul> | <ul> <li>AO41.1</li> <li>All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.</li> <li>Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.</li> <li>AO41.2</li> <li>Disposal of materials is managed in one or more of the following ways: <ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> </ul> </li> <li>No acceptable outcome provided.</li> </ul> |
| Earthworks   |   |
| PO43   | AO43.1  |
| <ul> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to:</li> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> </ul>  | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains as<br>necessary.   |
| <ul><li>c. soft or compressible foundation soils;</li><li>d. reactive soils;</li></ul>   | AO43.2  |

| Per                  | formance outcome   | Acceptable outcome  |
|----------------------|--|---|
| e.<br>f.<br>g.<br>h. | low density or potentially collapsing soils;<br>existing fills and soil contamination that may exist<br>on-site;<br>the stability and maintenance of steep rock<br>slopes and batters;<br>excavation (cut) and fill and impacts on the | Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.<br>AO43.3      |
|                      | amenity of adjoining lots (e.g. residential)<br>e - Filling or excavation works are to be completed within six<br>months of the commencement date.   | All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.   |
|                      |  | All filling or excavation is contained within the site.   |
|                      | All fill placed on-site is:<br>a. limited to that required for the necessary approved<br>use;  |   |
|                      |  | <ul> <li>b. clean and uncontaminated (i.e. no building waste,<br/>concrete, green waste or contaminated material etc.<br/>is used as fill).</li> </ul>      |
|                      |  | AO43.6<br>The site is prepared and the fill placed on-site in accordance<br>with AS3798.  |
|                      |  | Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures. |
|                      |  | AO43.7  |
|                      |  | Materials used for structural fill are in accordance with AS3798.   |
|                      |  | AO43.8  |
|                      | ABR  | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.                                 |
| PO4                  | 14   | AO44  |
| to n                 | pankments are stepped, terraced and landscaped<br>ot adversely impact on the visual amenity of the<br>ounding area.  | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |

| Performance outcome  | Acceptable outcome   |
|--|--|
|  | Figure - Embankment  |
|  | Soommin 1.5m 1.5m man 1.5m max   |
| PO45   | AO45.1   |
| <ul> <li>On-site earthworks are undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity as defined in the Sustainable Planning Act 2009.</li> </ul> PO46 Filling or excavation does not result in land instability.                        | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.<br>Note - Public sector entity as defined in the <i>Sustainable Planning Act</i> 2009.<br><b>AO45.2</b><br>Earthworks that would result in any of the following are not carried out on-site:<br>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;<br>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.<br>Note - Public sector entity as defined in the <i>Sustainable Planning Act</i> 2009. |
| Note - A slope stability report prepared by an RPEQ may be required.   |  |
| <ul> <li>PO47</li> <li>Filling or excavation does not result in <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> </li> <li>Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme</li> </ul> | No acceptable outcome provided.  |

| Performance outcome  | Acceptable outcome   |
|--|--|
| policy - Integrated design for guidance on infrastructure design and modelling requirements  |  |
| Retaining walls and structures   |  |
| PO48   | AO48   |
| All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents. | <ul> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> </ul> |
|  | Figure - Retaining on a boundary   |
|  | Prinished surface level  |
|  | Ell. 900mm<br>maximum<br>Retaining   |
| XO   | c. where height is greater than 900mm but no greater than 1.5m, are to be setback at least the equivalent height of the retaining structure from any property boundary;  |
|  | d. where height is greater than 1.5m, are to be setback<br>and stepped 1.5m vertical: 1.5m horizontal, terraced<br>landscaped and drained as shown below.  |
|  | Figure - Cut   |
| RC   | 500mm 1.5m minimum 1.5m minimum  |
|  | Catch drains<br>as required<br>Landscaping   |
|  | Drainage CUT 1.5m  |
|  | maximum  |

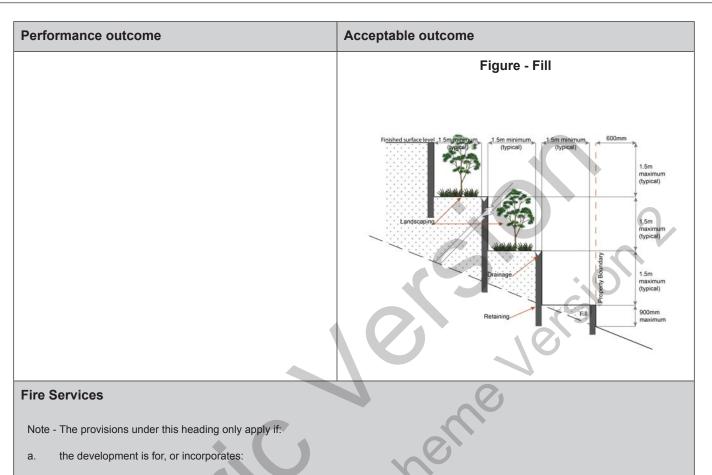

- reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
- material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or ii.
- iii.
- material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. iv.

#### AND

none of the following exceptions apply: b.

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| PO49   | AO49.1   |
|--|--|
| <ul><li>Development incorporates a fire fighting system that:</li><li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li></ul>  | External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .  |
| <ul> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul> | <ul> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably</li> </ul> |

| Performance outcome   | Acceptable outcome  |
|---|---|
| <ul> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> </ul> Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region. | <ul> <li>signposted in-ground hydrants would be an acceptable alternative;</li> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: <ol> <li>for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>for caravans, and tents, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>for caravans, and tents, hydrant coverage facilities, hydrant coverage frequired across the entire area of the outdoor sales<sup>154</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>164</sup>, outdoor processing and outdoor storage facilities;</li> <li>a. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ol> </li> <li>AC049.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land: <ul> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance; <ul> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.</li> </ul> A049.3 On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment</i>. A050 For development that contains on-site fire hydrants external to buildings:</li></ul></li></ul> |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access<br>routes to those hydrants, can be readily identified at<br>all times from, or at, the vehicular entry point to the   | For development that contains on-site fire hydrants external to buildings:<br>a. those external hydrants can be seen from the vehicular   |
| development site.   | <ul> <li>entry point to the site; or</li> <li>a sign identifying the following is provided at the vehicular entry point to the site: <ol> <li>the overall layout of the development (to scale);</li> <li>internal road names (where used);</li> <li>all communal facilities (where provided);</li> </ol> </li> </ul>  |

| Performance outcome   | Acceptable outcome   |
|---|--|
|   | iv. the reception area and on-site manager's office (where provided);  |
|   | v. external hydrants and hydrant booster points;   |
|   | vi. physical constraints within the internal roadway<br>system which would restrict access by fire<br>fighting appliances to external hydrants and<br>hydrant booster points.  |
|   | Note - The sign prescribed above, and the graphics used are to be:   |
|   | a. in a form;  |
|   | b. of a size;  |
|   | c. illuminated to a level;   |
|   | which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.  |
|   |  |
| PO51  | A051   |
| Each on-site fire hydrant that is external to a building<br>is signposted in a way that enables it to be readily<br>identified at all times by the occupants of any<br>firefighting appliance traversing the development site.  | For development that contains on-site fire hydrants external<br>to buildings, those hydrants are identified by way of marker<br>posts and raised reflective pavement markers in the manner<br>prescribed in the technical note <i>Fire hydrant indication</i><br><i>system</i> produced by the Queensland Department of<br>Transport and Main Roads. |
|   | Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.   |
| Use spo   | ecific criteria  |
| Industrial land uses  |  |
| PO52  | AO52   |
| Ancillary office <sup>(53)</sup> , administration functions, retail sales<br>and customer service components do not compromise<br>the primary use of the site for industrial purposes or<br>compromise the viability, role or function of the<br>Caboolture West centres network. | The combined area of ancillary non-industrial activities, including but not limited to offices <sup>(53)</sup> , administration functions, display and retail sale of commodities, articles or goods resulting from the industrial processes on-site, does not exceed 30% of the GFA or 500m <sup>2</sup> , whichever is the lesser.                 |
| PO53  | No acceptable outcome provided.  |
| Buildings directly adjoining non-Enterprise and employment precinct land:   |  |
| a. are compatible with the character of the adjoining area;   |  |

| No acceptable outcome provided. |
|---------------------------------|
| C S or sion                     |
|                                 |
| No acceptable outcome provided. |
| neme                            |
| No acceptable outcome provided. |
| 5                               |
| 3                               |
|                                 |
|                                 |
|                                 |
|                                 |
| No acceptable outcome provided. |
|                                 |
| No acceptable outcome provided. |
|                                 |

| Performance outcome  | Acceptable outcome   |  |
|--|--|--|
| Traffic generated by non-industrial uses does not detrimentally impact the operation and functionality of the external road network.   |  |  |
| PO59   | No acceptable outcome provided.  |  |
| <ul> <li>The design of non-industrial buildings in the Light industry sub-precinct:</li> <li>a. adds visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, a consistent building line, blank walls that are visible from public places are treated to not negatively impact the surrounding amenity);</li> <li>b. contributes to a safe environment (e.g. through the use of lighting and not resulting in concealed recesses or potential entrapment areas);</li> <li>c. incorporates architectural features within the building facade at the street level to create human scale (e.g. awnings).</li> <li>PO60</li> <li>Building entrances: <ul> <li>a. are readily identifiable from the road frontage;</li> <li>b. add visual interest to the streetscape;</li> <li>c. are designed to limit opportunities for concealment;</li> </ul> </li> <li>d. are located and oriented to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites.</li> </ul> | AO60.1<br>The main entrance to the building is clearly visible from and<br>addresses the primary street frontage.<br>AO60.2<br>Where the building does not adjoin the street frontage, a<br>dedicated and sealed pedestrian footpath is provided<br>between the street frontage and the building entrance. |  |
| Note - The design provisions for footpaths outlined in Planning<br>scheme policy - Integrated design may assist in demonstrating<br>compliance with this outcome.  | 4064   |  |
| PO61   | AO61   |  |
| <ul> <li>Development of caretaker's accommodation<sup>(10)</sup>:</li> <li>a. does not compromise the productivity of the use occurring on-site and in the surrounding area;</li> </ul>  | Caretaker's accommodation <sup>(10)</sup> :<br>a. has a maximum GFA is 80m <sup>2</sup> ;  |  |
| <ul><li>b. is domestic in scale;</li></ul>   | b. does not gain access from a separate driveway to that of the industrial use;  |  |

| Performance outcome   |  | Acceptable outcome  |  |  |
|---|--|---|--|--|
| C.  | provides adequate car parking provisions exclusive on the primary use of the site;   | c. provides a minimum 16m <sup>2</sup> of private open space directly accessible from a habitable room;   |  |  |
| d.  | is safe for the residents;   | d. provides car parking in accordance with the car parking rates table.   |  |  |
| e.  | has regard to the open space and recreation needs of the residents.  |   |  |  |
| Мај   | or electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> a   | nd Utility installation <sup>(86)</sup>   |  |  |
| PO  | 62   | AO62.1  |  |  |
| on t  | e development does not have an adverse impact<br>the visual amenity of a locality and is:  | Development is designed to minimise surrounding land use<br>conflicts by ensuring infrastructure, buildings, structures and<br>other equipment:   |  |  |
| a.<br>b.<br>c.<br>d.<br>e.<br>f.  | high quality design and construction;<br>visually integrated with the surrounding area;<br>not visually dominant or intrusive;<br>located behind the main building line;<br>below the level of the predominant tree canopy<br>or the level of the surrounding buildings and<br>structures;<br>camouflaged through the use of colours and | <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul>                                  |  |  |
| g.<br>h.<br>i.  | materials which blend into the landscape;<br>treated to eliminate glare and reflectivity;<br>landscaped;<br>otherwise consistent with the amenity and<br>character of the zone and surrounding area.   | AO62.2<br>A minimum 3m wide strip of dense planting is provided<br>around the outside of the fenced area, between the<br>development and street frontage, side and rear boundaries  |  |  |
| PO  | 63   | AO63  |  |  |
|   | astructure does not have an impact on pedestrian<br>lith and safety.   | <ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul> |  |  |
| PO  | 64   | AO64  |  |  |
| <ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul> |  | All equipment which produces audible or non-audible sound<br>is housed within a fully enclosed building incorporating<br>sound control measures sufficient to ensure noise emissions<br>meet the objectives as set out in the Environmental<br>Protection (Noise) Policy 2008.  |  |  |

Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup>must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz.

| Performance outcome  | Acceptable outcome   |
|--|--|
| PO65   | AO65.1   |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.   |
|  | AO65.2   |
|  | If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.   |
| PO66   | A066   |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.   | A minimum of 45m <sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.   |
| PO67   | A067   |
| Telecommunications facilities <sup>(81)</sup> do not conflict with<br>lawful existing land uses both on and adjoining the<br>site.   | The development results in no net reduction in the minimum<br>quantity and standard of landscaping, private or communal<br>open space or car parking spaces required under the<br>planning scheme or under an existing development approval. |
| PO68   | AO68.1   |
| The Telecommunications facility <sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:<br>a. high quality design and construction;<br>b. visually integrated with the surrounding area;   | Where in an urban area, the development does not protrude<br>more than 5m above the level of the existing treeline,<br>prominent ridgeline or building rooftops in the surrounding<br>townscape.   |
|  | AO68.2   |
|  | In all other areas towers do not exceed 35m in height.   |
| structures;  | AO68.3   |
| <ul> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>             | Towers, equipment shelters and associated structures are of a design, colour and material to:  |
|  | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>  |
|  | AO68.4   |
|  | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is 3m.     |
|  | Where there is no established building line the facility is located at the rear of the site.   |

| Performance outcome   | Acceptable outcome   |  |  |
|---|--|--|--|
|   | AO68.5   |  |  |
|   | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |  |  |
|   | AO68.6   |  |  |
|   | A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the facility<br>and street frontage and adjoining uses.  |  |  |
|   | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |  |  |
|   | Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.   |  |  |
| PO69  | A069   |  |  |
| Lawful access is maintained to the site at all times<br>that does not alter the amenity of the landscape or<br>surrounding uses.  | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |  |  |
| P070  | A070   |  |  |
| All activities associated with the development occur<br>within an environment incorporating sufficient controls<br>to ensure the facility generates no audible sound at<br>the site boundaries where in a residential setting.  | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |  |  |
| Values and c  | constraints criteria   |  |  |
| Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.  |  |  |  |
| Heritage and landscape character (refer Overlay m<br>the following assessment criteria apply)   | nap - Heritage and landscape character to determine if   |  |  |
| Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.  |  |  |  |
| Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.  |  |  |  |
| Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and<br>landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural<br>heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning<br>scheme policy - Heritage and landscape character. |  |  |  |

| Performance outcome   | Acceptable outcome   |
|---|--|
| P071  | A071   |
| <ul> <li>Development will:</li> <li>a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;</li> <li>b. protect the fabric and setting of the heritage site, object or building;</li> <li>c. be consistent with the form, scale and style of the heritage site, object or building;</li> <li>d. utilise similar materials to those existing, or</li> </ul> | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value.<br>Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object or<br>building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The plan<br>is sent to, and approved by Council prior to the commencement of any<br>preservation, maintenance, repair and restoration works. |
| <ul> <li>where this is not reasonable or practicable, neutral materials and finishes;</li> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul>  | C lersion  |
| P072  | No acceptable outcome provided.  |
| Demolition and removal is only considered where:<br>a. a report prepared by a suitably qualified  |  |
| conservation architect or conservation engineer<br>demonstrates that the building is structurally<br>unsound and is not reasonably capable of<br>economic repair; or  | Sche   |
| <ul> <li>b. demolition is confined to the removal of<br/>outbuildings, extensions and alterations that are<br/>not part of the original structure; or</li> </ul>  | <b>D</b>   |
| <ul> <li>c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic</li> </ul>  |  |
| event which substantially destroys the building<br>or object.   |  |
| <b>PO73</b><br>Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.  | No acceptable outcome provided.  |
|   |  |
| Overland flow path (refer Overlay map - Overland f<br>apply)  | low path to determine if the following assessment criteria   |
| Note - The applicable river and creek flood planning levels assoc<br>obtained by requesting a flood check property report from Counc  | iated with defined flood event (DFE) within the inundation area can be il.   |
|   |  |

| P074         | No acceptable outcome provided. |
|--------------|---------------------------------|
| Development: |                                 |

| Performance outcome      |   | Acceptable outcome   |  |
|--------------------------|---|--|--|
| a.<br>b.                 | minimises the risk to persons from overland flow;<br>does not increase the potential for damage from<br>overland flow either on the premises or other<br>premises, public land, watercourses, roads or<br>infrastructure.   |  |  |
| PO7                      | 5   | A075   |  |
| Deve                     | elopment:   | No acceptable outcome provided.  |  |
|                          | maintains the conveyance of overland flow<br>predominantly unimpeded through the premises<br>for any event up to and including the 1% AEP<br>for the fully developed upstream catchment;<br>does not concentrate, intensify or divert overland<br>flow onto an upstream, downstream or<br>surrounding property. | ersion?  |  |
| on a<br>Note             | s not increase the potential for significant adverse impacts<br>an upstream, downstream or surrounding premises.<br>e - Reporting to be prepared in accordance with Planning<br>eme policy – Flood hazard, Coastal hazard and Overland  | cheme  |  |
| P07                      | 6   | No acceptable outcome provided.  |  |
| a.<br>b.<br>Note<br>an a | elopment does not:<br>directly, indirectly or cumulatively cause any<br>increase in overland flow velocity or level;<br>increase the potential for flood damage from<br>overland flow either on the premises or other<br>premises, public lands, watercourses, roads or<br>infrastructure.                      |  |  |
| P07                      | 7   | A077   |  |
| to th<br>detri           | elopment ensures that public safety and the risk<br>e environment are not adversely affected by a<br>mental impact of overland flow on a hazardous<br>nical located or stored on the premises.  | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994 and<br>the relevant building assessment provisions under the Building Act 1975<br>for requirements related to the manufacture and storage of hazardous<br>substances. |  |
|                          |   |  |  |

| Performance outcome  | Acceptable outcome   |
|--|--|
| Development which is not in a Rural zone ensures<br>that overland flow is not conveyed from a road or<br>public open space onto a private lot.   | Development which is not in a Rural zone that an overland<br>flow paths and drainage infrastructure is provided to convey<br>overland flow from a road or public open space area away<br>from a private lot.   |
| PO79   | A079.1   |
| <ul> <li>Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow</li> <li>PO80</li> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over: <ul> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> </ul> </li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul> | <ul> <li>Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:</li> <li>a. Urban area – Level III;</li> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul> AO79.2 Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment. No acceptable outcome provided. |
|  |  |
| Additional criteria for development for a Park <sup>(57)</sup>   |  |
| PO81   | AO81   |
| Development for a Park <sup>(57)</sup> ensures that the design<br>and layout responds to the nature of the overland flow<br>affecting the premises such that:  | Development for a Park <sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.   |
| a. public benefit and enjoyment is maximised;  |  |

| Per | formance outcome   | Acceptable outcome |
|-----|--|--------------------|
| b.  | impacts on the asset life and integrity of park structures is minimised; |                    |
| C.  | maintenance and replacement costs are minimised.                         |                    |

Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment criteria apply)

| PO82  | A082   |
|---|--|
| Development within a High voltage electricity line buffer:  | Except where located on an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high |
| <ul> <li>a. is located and designed to avoid any potential<br/>adverse impacts on personal health and<br/>wellbeing from electromagnetic fields;</li> </ul> | voltage electricity line buffer.   |
| <ul> <li>b. is located and designed in a manner that<br/>maintains a high level of security of supply;</li> </ul>   |  |
| c. is located and designed so not to impede upon<br>the functioning and maintenance of high voltage<br>electrical infrastructure.                           |  |
|   | schell   |

### 7.2.3.2.9 Specialised centre sub-precinct

#### 7.2.3.2.9.1 Purpose - Specialised centre sub-precinct

- 1. The purpose of the Specialised centre sub-precinct will be achieved through the following overall outcomes:
  - a. Development of uses that support and complement the role and function of the Specialised centre and provide a local function may be accommodated.
  - b. The operation and viability of the Specialised centre are protected from the intrusion of incompatible uses.
  - c. The design, siting and construction of buildings for large footprint bulky goods retail, hardware and trade supplies and complementary activities:
    - i. maintain a human scale, through appropriate building heights and form;
    - ii. provides attractive frontages that address internal and external public spaces and adjoining main streets;
    - iii. improve pedestrian connectivity and walkability between key destinations within and external to the site through public realm improvements;
    - iv. ensure the safety, comfort and enjoyment of residents, visitors and workers;
    - v. provide for active and passive surveillance of the public spaces and road frontages;
    - vi. ensure parking, manoeuvring and servicing areas are designed, located and aesthetically treated to not be visually dominant features from the streetscape and public spaces.
  - d. General works associated with the development achieves the following:
    - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
    - ii. the development manages stormwater to:
      - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
      - B. prevent stormwater contamination and the release of pollutants;
      - C. maintain or improve the structure and condition of drainage lines and riparian areas;
      - D. avoid off-site adverse impacts from stormwater.
    - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
  - e. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
  - f. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
  - g. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
  - h. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
  - i. Development does not result in unacceptable impacts on the capacity and safety of the external road network.

- j. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- k. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- I. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- m. Development in the Specialised centre sub-precinct is for one or more of the uses identified below:

|   | Caretaker's   | Garden centre <sup>(31)</sup>               | ٠ | Outdoor sales <sup>(54)</sup> |
|---|---|---|---|-------------------------------|
| • | accommodation <sup>(10)</sup><br>Car wash <sup>(11)</sup> | Hardware and trade supplies <sup>(32)</sup> | • | Showroom <sup>(78)</sup>      |
|   | Emergency services <sup>(25)</sup>                        |   |   |                               |

n. Development in the Specialised centre sub-precinct does not include one or more of the following uses:

| • | Air services <sup>(3)</sup>     | • | Hotel <sup>(37)</sup>  | • | Rooming accommodation <sup>(69)</sup> |
|---|---------------------------------|---|--|---|---------------------------------------|
| • | Animal husbandry <sup>(4)</sup> | • | Intensive animal industry <sup>(39)</sup>                        | • | Resort complex <sup>(66)</sup>        |
| • | Animal keeping <sup>(5)</sup>   | • | Intensive horticulture <sup>(40)</sup>                           | • | Retirement facility <sup>(67)</sup>   |
| • | Aquaculture <sup>(6)</sup>      | • | Low impact industry <sup>(42)</sup>                              | • | Roadside stall <sup>(68)</sup>        |
| • | Bar <sup>(7)</sup>              | • | Major sport, recreation and                                      | • | Rural industry <sup>(70)</sup>        |
| • | Brothel <sup>(8)</sup>          |   | entertainment facility <sup>(44)</sup><br>Market <sup>(46)</sup> | • | Rural workers'                        |
| • | Cemetery <sup>(12)</sup>        | • | Market   |   | accommodation <sup>(71)</sup>         |

|   | (12)                                       |                         | (45)   |   | (72)  |
|---|--|-------------------------|--|---|---|
| • | Child care centre <sup>(13)</sup>          | •                       | Marine industry <sup>(45)</sup>                      | • | Sales office <sup>(72)</sup>                                  |
| • | Club <sup>(14)</sup>                       | •                       | Medium impact industry <sup>(47)</sup>               | • | Service industry <sup>(73)</sup>                              |
| • | Community care centre <sup>(15)</sup>      | •                       | Motor sport facility <sup>(48)</sup>                 | • | Shop <sup>(75)</sup> - if for a                               |
| • | Community residence <sup>(16)</sup>        | •                       | Multiple dwelling <sup>(49)</sup>                    |   | supermarket, department or discount department store or       |
| • | Community use <sup>(17)</sup>              | •                       | Nature based tourism <sup>(50)</sup>                 |   | having a gfa less than $500m^2$                               |
| • | Crematorium <sup>(18)</sup>                | •                       | Nightclub entertainment                              | • | Shopping centre <sup>(76)</sup> - if including a supermarket, |
| • | Cropping <sup>(19)</sup>                   |                         | facility <sup>(51)</sup>                             |   | department or discount<br>department store or a shop          |
| • | Detention facility <sup>(20)</sup>         | •                       | Non-resident workforce accommodation <sup>(52)</sup> |   | having a gfa less than 500m <sup>2</sup>                      |
| • | Dual occupancy <sup>(21)</sup>             | •                       | Office <sup>(53)</sup>                               |   | Short-term accommodation <sup>(77)</sup>                      |
| • | Dwelling house <sup>(22)</sup>             | •                       | Outdoor sport and                                    | • | Special industry <sup>(79)</sup>                              |
| • | Dwelling unit <sup>(23)</sup>              |                         | recreation <sup>(55)</sup>                           | • | Theatre <sup>(82)</sup>                                       |
| • | Educational Establishment <sup>(24)</sup>  | •                       | Parking station <sup>(58)</sup>                      | • | Tourist attraction <sup>(83)</sup>                            |
| • | Extractive industry <sup>(27)</sup>        | •                       | Permanent plantation <sup>(59)</sup>                 | 3 | Tourist park <sup>(84)</sup>                                  |
| • | Food and drink outlet <sup>(28)</sup> - if |                         | Port services <sup>(61)</sup>                        | • | Transport depot <sup>(85)</sup>                               |
|   | including a drive through                  | •                       | Relocatable home park <sup>(62)</sup>                | • | Warehouse <sup>(88)</sup>                                     |
| • | Function facility <sup>(29)</sup>          | •                       | Renewable energy facility <sup>(63)</sup>            | • | Winery <sup>(90)</sup>  |
| • | Health care services <sup>(33)</sup>       | •                       | Research and technology industry <sup>(64)</sup>     |   |   |
| • | High impact industry <sup>(34)</sup>       |                         |  |   |   |
| • | Home based business <sup>(35)</sup>        | •                       | Residential care facility <sup>(65)</sup>            |   |   |
|   | Hospital <sup>(36)</sup>                   | $\langle \cdot \rangle$ |  |   |   |
|   |  |                         |  |   |   |

o. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the zone.

### 7.2.3.2.9.2 Criteria for assessment

#### Part L - Criteria for assessable development - Specialised centre sub-precinct

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part L, Table 7.2.3.2.9.1.

Where development is impact assessable, the assessment criteria become the whole of the planning scheme.

#### Table 7.2.3.2.9.1 Assessable development - Specialised centre sub-precinct

| Performance outcomes        | Acceptable outcomes |  |
|-----------------------------|---------------------|--|
| General criteria            |                     |  |
| Centre network and function |                     |  |

| PO1   | No acceptable outcome provided.   |
|---|---|
|   |   |
| Development in the Specialised centre sub-precinct:   |   |
| a. is of a size, scale, range of services and location commensurate with the role and function of this sub-precinct in the centres network; |   |
| b. provides for bulky retail and commercial activities.   |   |
| Note - Refer to Table 7.2.3.3 Caboolture West - centres network.  |   |
| Active frontage   |   |
| PO2   | No acceptable outcome provided.   |
| Buildings and individual tenancies address street frontages and other areas of pedestrian movement.   | C ersi  |
| Setbacks  |   |
| PO3   | No acceptable outcome provided.   |
| Side and rear setbacks are of a dimension to:   |   |
| a. cater for required openings, the location of loading docks and landscaped buffers etc.;  |   |
| b. protect the amenity of adjoining sensitive land uses.  | 50  |
| Site area   |   |
| PO4   | No acceptable outcome provided.   |
| The development has sufficient area and dimensions to   |   |
| accommodate required buildings and structures, vehicular access, manoeuvring and parking and landscaping.                                   |   |
| Building height   |   |
| P05   | A05   |
| The height of buildings reflect the individual character of the centre.   | Building heights do not to exceed that mapped on Neighbourhood development plan map - Building heights. |
| Built form  |   |
| PO6   | A06   |
| Awnings are provided at the ground level fronting   | Buildings incorporate an awning that:   |
| pedestrian footpaths. Awnings:  | a. is cantilevered;   |
| a. provide adequate protection for pedestrians from solar exposure and inclement weather;   | b. extends from the face of the building;   |
| b. are integrated with the design of the building and the form and function of the street;  | c. has a minimum height of 3.2m and not more than 4.2m above pavement level;                            |

| c. do not compromise the pr<br>signage;  | ovision of street trees and  | d. does not extend past a vertical plane of 1.5m inside the kerb line to allow for street trees; |
|--|--|--|
| d. ensure the safety of pede   | estrians and vehicles.   | e. aligns with adjoining buildings to provide continuous shelter where possible.                 |
|  |  | Figure - Awning requirements   |
|  |  | Consistent height with<br>adjoining properties.  |
| P07  |  | No acceptable outcome provided.  |
| All buildings exhibit a high star construction, which:                                       | ndard of design and  | en   |
| in materials, patterns, tex  | lank walls that are visible<br>ated to not negatively                            | SCREE  |
| b. contributes to a safe envir<br>use of lighting and not re-<br>recesses or potential entir |  |  |
| c. incorporates architectura building facade at the struscular scale.                        | I features within the<br>eet level to create human                               |  |
| P08  |  | No acceptable outcome provided.  |
| Building entrances:  |  |  |
| a. are readily identifiable fro  | om the road frontage;  |  |
| b. add visual interest to the  | streetscape;   |  |
| c. are designed to limit oppo  | rtunities for concealment;   |  |
| transport usage by conne   | o favour active and public<br>acting to pedestrian<br>ntage and adjoining sites; |  |

| e. Include footpaths that connect with adjoining sites;  |  |
|--|--|
| f. provide a dedicated, sealed pedestrian footpath between the street frontage and the building entrance.  |  |
| Note - The design provisions for footpaths outlined in Planning scheme policy - Integrated design may assist in demonstrating compliance with this Performance Outcome.    |  |
| Car parking  |  |
| PO9  | A09  |
| <ul> <li>The provision of car parking spaces is:</li> <li>a. appropriate for the use;</li> <li>b. avoids an oversupply of car parking spaces.</li> </ul>                   | Car parking is provided in accordance with Schedule 7<br>- Car parking.  |
| Note - Refer to Planning scheme policy - Integrated transport<br>assessment for guidance on how to achieve compliance with this<br>outcome.                                | Note - The above rates exclude car parking spaces for people with<br>a disability required by Disability Discrimination Act 1992 or the<br>relevant disability discrimination legislation and standards. |
| <b>PO10</b><br>Car parking is designed to avoid the visual impact of large areas of surface car parking on the streetscape.  | No acceptable outcome provided.  |
| P011   | No acceptable outcome provided.  |
| Car parking design includes innovative solutions including on-street parking and shared parking areas.   |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples of on-street parking.  |  |
| P012   | A012   |
| The design of car parking areas:<br>a. does not impact on the safety of the external road<br>network;  | All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1.  |
| b. ensures the safety of pedestrians at all times;   |  |
| c. ensures the safe movement of vehicles within the site;  |  |
| d. interconnects with car parking areas on adjoining sites wherever possible.  |  |
| P013   | No acceptable outcome provided.  |
| The safety and efficiency of pedestrian movement is<br>prioritised in the design of car parking areas through<br>providing pedestrian paths in car parking areas that are: |  |


| a.  | located along the most direct pedestrian routes<br>between building entrances, car parks and adjoining<br>uses;   |  |
|---|---|--|
| b.  | protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);   |  |
| C.  | are of a width to allow safe and efficient access for prams and wheelchairs.  |  |
| Loa   | ding and servicing  |  |
| PO1   | 4   | No acceptable outcome provided.  |
| Load  | ling and servicing areas:   |  |
| a.  | are not visible from any street frontage;   | 6  |
| b.  | are integrated into the design of the building;   |  |
| c.  | include screening and buffers to reduce negative impacts on adjoining sensitive land uses;  |  |
| d.  | are consolidated and shared with adjoining sites where possible.  | enne   |
| Note<br>hub   | e - Refer to Planning scheme policy - Centre and neighbourhood design.  |  |
|   |   |  |
| Was   | te  | <u> </u>   |
| Was<br>PO1  |   | A015   |
| PO1<br>Bins   |   | AO15<br>Bins and bin storage areas are provided, designed and<br>managed in accordance with Planning scheme policy -<br>Waste. |
| PO1<br>Bins<br>man                                  | 5<br>and bin storage areas are designed, located and  | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy -                      |
| PO1<br>Bins<br>man                                  | 5<br>and bin storage areas are designed, located and<br>aged to prevent amenity impacts on the locality.<br>dscaping and fencing  | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy -                      |
| PO1<br>Bins<br>man                                  | 5<br>and bin storage areas are designed, located and<br>aged to prevent amenity impacts on the locality.<br>dscaping and fencing  | Bins and bin storage areas are provided, designed and<br>managed in accordance with Planning scheme policy -<br>Waste.         |
| PO1<br>Bins<br>man                                  | 5<br>and bin storage areas are designed, located and<br>aged to prevent amenity impacts on the locality.<br>dscaping and fencing<br>6   | Bins and bin storage areas are provided, designed and<br>managed in accordance with Planning scheme policy -<br>Waste.         |
| PO1<br>Bins<br>man<br>Lan<br>PO1<br>On-s            | 5<br>and bin storage areas are designed, located and<br>aged to prevent amenity impacts on the locality.<br>dscaping and fencing<br>6<br>site landscaping:  | Bins and bin storage areas are provided, designed and<br>managed in accordance with Planning scheme policy -<br>Waste.         |
| PO1<br>Bins<br>man<br>Lan<br>PO1<br>On-s<br>a.      | <ul> <li>5</li> <li>and bin storage areas are designed, located and aged to prevent amenity impacts on the locality.</li> <li>dscaping and fencing</li> <li>6</li> <li>site landscaping:</li> <li>is incorporated into the design of the development; reduces the dominance of car parking and servicing</li> </ul>   | Bins and bin storage areas are provided, designed and<br>managed in accordance with Planning scheme policy -<br>Waste.         |
| PO1<br>Bins<br>man<br>Lan<br>On-s<br>a.<br>b.       | <ul> <li>5</li> <li>and bin storage areas are designed, located and aged to prevent amenity impacts on the locality.</li> <li>dscaping and fencing</li> <li>6</li> <li>site landscaping:</li> <li>is incorporated into the design of the development;</li> <li>reduces the dominance of car parking and servicing areas from the street frontage;</li> </ul>  | Bins and bin storage areas are provided, designed and<br>managed in accordance with Planning scheme policy -<br>Waste.         |
| PO1<br>Bins<br>man<br>Lan<br>On-s<br>a.<br>b.<br>c. | <ul> <li>5</li> <li>and bin storage areas are designed, located and aged to prevent amenity impacts on the locality.</li> <li>dscaping and fencing</li> <li>6</li> <li>site landscaping:</li> <li>is incorporated into the design of the development; reduces the dominance of car parking and servicing areas from the street frontage;</li> <li>incorporates shade trees in car parking areas;</li> </ul> | Bins and bin storage areas are provided, designed and<br>managed in accordance with Planning scheme policy -<br>Waste.         |

| Note - All landscaping is to accord with Planning scheme policy -<br>Integrated design.  |   |
|--|---|
| P017   | No acceptable outcome is provided.  |
| Surveillance and overlooking are maintained between the road frontage and the main building line.  |   |
| Lighting   |   |
| PO18   | No acceptable solution provided.  |
| Lighting is designed to provide adequate levels of illumination to public and communal spaces to maximise safety while minimising adverse impacts on residential and other sensitive land uses.  | S sion  |
| Amenity  | 0   |
| P019   | No acceptable solution provided.  |
| The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, chemicals<br>and other nuisance.  | ene   |
| Noise  |   |
| PO20   | No acceptable outcome provided.   |
| Noise generating uses do not adversely affect existing<br>or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise. |   |
| P021   | AO21.1  |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:   | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.  |
| <ul> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> </ul>  | AO21.2<br>Noise attenuation structures (e.g. walls, barriers or<br>fences):<br>a. are not visible from an adjoining road or public area                     |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.  | unless:<br>i. adjoining a motorway or rail line; or<br>ii. adjoining part of an arterial road that does not<br>serve an existing or future active transport |

| Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.   | purpose (e.g. pedestrian paths or cycle lanes)<br>or where attenuation through building location<br>and materials is not possible.   |
|--|--|
|  | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy -</li> </ul>          |
|  | Integrated design.<br>Note - Refer to Planning scheme policy – Integrated design for<br>details and examples of noise attenuation structures.<br>Note - Refer to Overlay map – Active transport for future active<br>transport routes. |
| <b>14</b> /  | 5  |
| Works  | criteria   |
| Utilities  |  |
| PO22   | A022   |
| The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant<br>energy regulating authority) and the infrastructure does<br>not negatively impact the streetscape. | The development is connected to underground electricity.   |
| PO23   | No acceptable outcome provided.  |
| The development has access to telecommunications and broadband services in accordance with current standards.  |  |
| P024   | No acceptable outcome provided.  |
| Where available the development is to safely connect to reticulated gas.   |  |
| PO25   | AO25.1   |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.                                       | Where in a sewered area, the development is connected to a reticulated sewerage system.  |
|  | AO25.2   |
|  | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.  |
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.  |
| PO26   | AO26.1   |

| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards.<br><b>AO26.2</b><br>Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development. |
|--|--|
| P027   | No acceptable outcome provided.  |
| The development is provided with dedicated and   |  |
| constructed road access.   |  |
|  |  |
| Access   | (O)  |
| PO28   | No acceptable outcome provided.  |
| Development provides functional and integrated car parking and vehicle access, that:   | 50   |
| <ul> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> |  |
| PO29   | No acceptable outcome provided.  |
| Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design.  |  |
| PO30   | AO30.1   |

| The layout of the development does not compromise:   | Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a  |
|--|--|
| <ul><li>a. the development of the road network in the area;</li><li>b. the function or safety of the road network;</li></ul>                       | motorway.  |
| c. the capacity of the road network.   | Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.             |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). |  |
|  | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). |
|  |  |
|  | AO30.2   |
|  | The development provides for the extension of the road<br>network in the area in accordance with Council's road                                    |
|  | network planning.  |
|  | AO30.3   |
|  | The development does not compromise future road widening of frontage roads in accordance with the  |
|  | relevant standard and Council's road planning.   |
|  | AO30.4   |
|  | The lot layout allows forward access to and from the site.   |
| P031   | AO31.1   |
| Safe access facilities are provided for all vehicles required to access the site.  | Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a  |
|  | motorway.  |
|  | Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.             |
|  | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). |
|  | A031.2   |
|  | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking  |
|  | Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.                                      |
|  | Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.                           |
|  | AO31.3   |

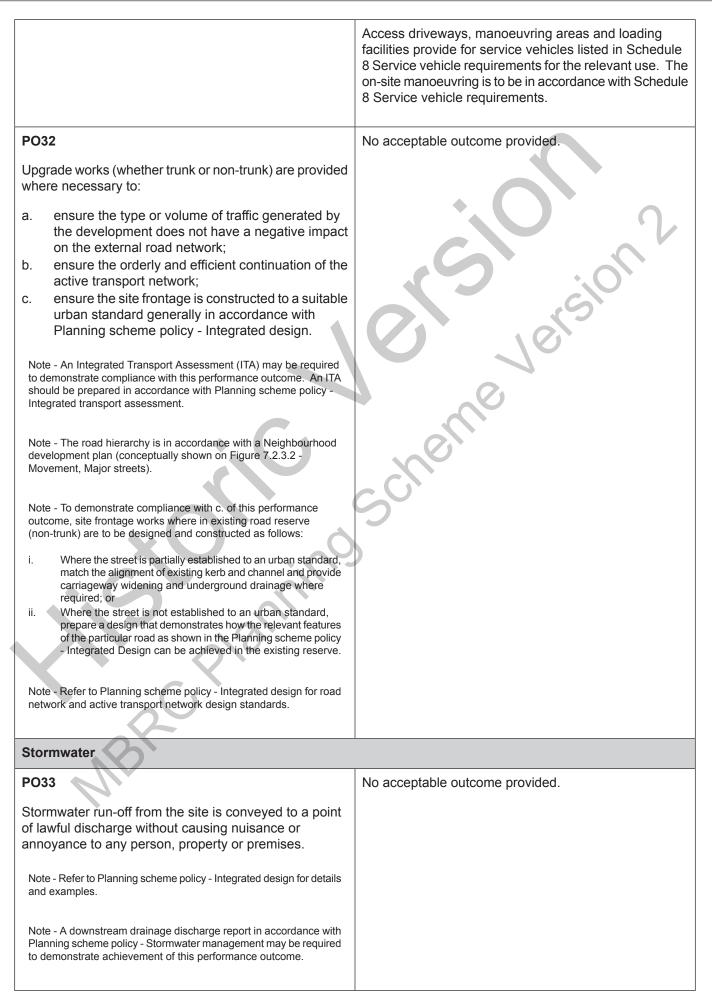


| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. |   |
|--|---|
| PO34   | No acceptable outcome provided.   |
| Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.   | 2   |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate compliance with this performance outcome.   | Sion  |
| PO35   | No acceptable outcome provided.   |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.  | ne  |
| Note - A site-based stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.   | cher  |
| P036   | No acceptable outcome provided.   |
| Easements for drainage purposes are provided over:   |   |
| <ul><li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li><li>b. overland flow paths where they cross more than one property boundary.</li></ul>  |   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |   |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.  |   |
| Site works and construction management   |   |
| PO37   | No acceptable outcome provided.   |
| The site and any existing structures are maintained in a tidy and safe condition.  |   |
| PO38   | AO38.1  |
| All works on-site are managed to:  | Works incorporate temporary stormwater run-off, erosion<br>and sediment controls and trash traps designed in<br>accordance with the Urban Stormwater Quality Planning |


| or<br>to<br>ar      | inimise as far as practicable, impacts on adjoining<br>adjacent premises and the streetscape in regard<br>erosion and sedimentation, dust, noise, safety<br>nd light; | Guidelines, Planning scheme policy - Stormwater<br>management and Planning scheme policy - Integrated<br>design, including but not limited to the following:    |
|---------------------|---|---|
| er                  | inimise as far as possible, impacts on the natural nvironment;  | <ul> <li>a. stormwater is not discharged to adjacent properties<br/>in a manner that differs significantly from<br/>pro existing conditions;</li> </ul>         |
| m<br>to             | nsure stormwater discharge is managed in a<br>anner that does not cause nuisance or annoyance<br>any person or premises;  | <ul> <li>pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and<br/>downstream properties does not cause scour and<br/>erosion;</li> </ul> |
|                     | avoid adverse impacts on street streets and their critical root zone.   | <ul> <li>stormwater discharge rates do not exceed<br/>pre-existing conditions;</li> </ul>   |
|                     |   | d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and  |
|                     |   | e. the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins.  |
|                     |   | AO38.2  |
|                     |   | Stormwater run-off, erosion and sediment controls are<br>constructed prior to commencement of any clearing work   |
|                     |   | or earthworks and are maintained and adjusted as  |
|                     |   | necessary at all times to ensure their ongoing effectiveness.   |
|                     | + C 1   | Note - The measures are adjusted on-site to maximise their effectiveness.   |
|                     |   |   |
|                     |   | AO38.3  |
|                     |   | The completed earthworks (fill or excavation) area is   |
|                     | XU  | stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and  |
|                     |   | sediment and dust from leaving the property.  |
| PO39                |   | No assessable outcome provided  |
|                     | uppression measures are implemented during  |   |
|                     | ction works to protect nearby premises from onable dust impacts.  |   |
|                     |   |   |
| PO40                |   | AO40.1  |
|                     | s on-site and the transportation of material to and e site are managed to not negatively impact the   | Construction traffic including contractor car parking is controlled in accordance with a traffic management plan,   |
| existing            | road network, the amenity of the surrounding  | prepared in accordance with the Manual of Uniform   |
|                     | the streetscape.  | Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.  |
| Note - V<br>a haula | Vhere the amount of imported material is greater than 50m <sup>3</sup> , ge route must be identified and approved by Council.   | AO40.2  |
|                     |   | All contractor car parking is either provided on the  |
|                     |   | development site, or on an alternative site in the general  |
|                     |   | locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.                                |
|                     |   |   |

| P041       A041         All disturbed areas are rehabilitated at the completion of construction.       A041         Note - Refer to Planning scheme policy - Integrated design for details and examples.       A completion of construction all disturbed areas of the site are to be: fitty (50) millimetres;         Note - Refer to Planning scheme policy - Integrated design for details and examples.       A completion of construction all disturbed areas of the site are to be: fitty (50) millimetres;         P042       AO42.1         The clearing of vegetation on-site:       AO42.1         All native vegetation to be retained on -site is temporar fenced or protected prior to and during development works.       Note - No parking of vehicles of storage of machinery or goods is to cour in these areas during development works.         Note - No burning of cleared vegetation is permitted.       AO42.2         Disposal of materials which are detrimental to the intended uses, curving these areas during development works.       AO42.2         Note - No burning of cleared vegetation is permitted.       AO42.2         Disposal of materials is managed in one or more of the following ways:       a. all cleared vegetation, declared weeds, stumps, rubbine, carbodies, carbo metal and full facility; or         b. all native vegetation with a diameter below 400m is to be chipped and stored on-site.       No acceptable outcome provided.         PO43       No acceptable outcome provided.       No acceptable outcome provided.   |   |   |
|---|---|---|
| Any material dropped, deposited or spilled on the roads a result of construction processes associated with the site are to be cleaned at all times.         PO41       A041         All disturbed areas are rehabilitated at the completion of construction.       At completion of construction all disturbed areas of the site are to be cleaned at all times.         Note - Nebric Planning scheme policy - Integrated design for details and examples.       At completion of construction all disturbed areas of the site are to be maintained during any maintenance period to maxime grass coverage from grass seeding of these areas.         PO42       A042.1         The clearing of vegetation on-site:       A042.1         All includes the removal of declared weeds and other materials which are detimentiat to the intended use of the land;       Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.         Note - No burning of cleared vegetation is permitted.       A042.2         Disposal of materials which are detimentiat to the intended use of the land;       Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.         Note - No burning of cleared vegetation is permitted.       a. al cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or         b.       in altive vegetation with a diameter below 400m is to be chipped and stored on-site.         PO43       No acceptable outcome provided. <td></td> <td>accordance with the Manual of Uniform Traffic Control Devices</td> |   | accordance with the Manual of Uniform Traffic Control Devices   |
| P041       A041         All disturbed areas are rehabilitated at the completion of construction.       A041         Note - Refer to Planning scheme policy - Integrated design for details and examples.       A completion of construction all disturbed areas of the site are to be: fitty (50) millimetres;         Note - Refer to Planning scheme policy - Integrated design for details and examples.       A completion of construction all disturbed areas of the site are to be: fitty (50) millimetres;         P042       AO42.1         The clearing of vegetation on-site:       AO42.1         All native vegetation to be retained on -site is temporar fenced or protected prior to and during development works.       Note - No parking of vehicles of storage of machinery or goods is to cour in these areas during development works.         Note - No burning of cleared vegetation is permitted.       AO42.2         Disposal of materials which are detrimental to the intended uses, curving these areas during development works.       AO42.2         Note - No burning of cleared vegetation is permitted.       AO42.2         Disposal of materials is managed in one or more of the following ways:       a. all cleared vegetation, declared weeds, stumps, rubbine, carbodies, carbo metal and full facility; or         b. all native vegetation with a diameter below 400m is to be chipped and stored on-site.       No acceptable outcome provided.         PO43       No acceptable outcome provided.       No acceptable outcome provided.   |   | AO40.3  |
| All disturbed areas are rehabilitated at the completion of construction.       At completion of construction all disturbed areas of th site are to be:         Note-Refer to Planning scheme policy-Integrated design for details and examples.       At completion of construction all disturbed areas of th site are to be:         a.       to be These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.         PO42       A042.1         The clearing of vegetation on-site:       All antive vegetation to be retained on-site is temporar fenced or portocted prior to and during development works; buildings areas and other necessary areas for the works;         b.       includes the removal of declared weeds and other maintaine and annoyance to existing premises.         Note - No burning of cleared vegetation is permitted.       A042.2         Disposal of materials which are detrimental to the intended use of the land;       A042.2         C.       is disposed of in a manner which miniprises nuisance and annoyance to existing premises.         Note - No burning of cleared vegetation is permitted.       a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or         PO43       Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the council or other person engaged in the provision of public utility services is to be carrined with the development and at no cost to Co  |   | Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.              |
| construction.       site are to be:         Note-Refer to Planning scheme policy-Integrated design for details<br>and examples.       site are to be:         Note-Refer to Planning scheme policy-Integrated design for details<br>and examples.       a. topsoiled with a minimum compacted thickness<br>fifty (50) millimetres;         PO42       A042.1         The clearing of vegetation on-site:       AI native vegetation to be retained on-site is temporar<br>fenced or, protected prior to and during development<br>works;         b. includes the removal of declared weeds and other<br>materials which are detrimental to the intended use<br>of the land;       A042.1         C. is disposed of in a manner which minimises<br>nuisance and annoyance to existing premises.       Note - No parking of vehicles of storage of machinery or goods is<br>to occur in these areas during development works.         Note - No burning of cleared vegetation is permitted.       A042.2         Disposal of materials is managed in one or more of the<br>following ways:       a. all cleared vegetation, declared weeds, stumps,<br>rubbish, car bodies, scrap metal and the like are<br>removed and disposed of in a Council land fill<br>facility; or         b. all native vegetation or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.       No acceptable outcome provided.                  | PO41  | A041  |
| FO42       A042.1         The clearing of vegetation on-site:       a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;       A042.1         A. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;       Note - No parking of venicles of storage of machinery or goods is to occur in these areas during development works.         b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;       A042.2         c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.       Note - No parking of vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or         b. all cleared vegetation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.       No acceptable outcome provided.   |   | At completion of construction all disturbed areas of the site are to be:  |
| <ul> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> <li>A042.2</li> <li>Disposal of materials is managed in one or more of the following ways:</li> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400m is to be chipped and stored on-site.</li> </ul>   |   | fifty (50) millimetres;<br>b. grassed.<br>Note - These areas are to be maintained during any maintenance<br>period to maximise grass coverage from grass seeding of these |
| <ul> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> <li>A042.2</li> <li>Disposal of materials is managed in one or more of the following ways:</li> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400m is to be chipped and stored on-site.</li> </ul> P043 No acceptable outcome provided. No acceptable outcome provided.   | PO42  | A042.1  |
| <ul> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400m is to be chipped and stored on-site.</li> </ul> PO43 Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.  | a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the  |   |
| <ul> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400m is to be chipped and stored on-site.</li> </ul> PO43 Not acceptable outcome provided. No acceptable outcome provided.   | b. includes the removal of declared weeds and other materials which are detrimental to the intended use   |   |
| Note - No burning of cleared vegetation is permitted.       Disposal of materials is managed in one or more of the following ways:         a.       all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or         b.       all native vegetation with a diameter below 400m is to be chipped and stored on-site.         PO43       No acceptable outcome provided.         Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.       No acceptable outcome provided.   | c. is disposed of in a manner which minimises   | AO42.2  |
| <ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400m is to be chipped and stored on-site.</li> </ul> PO43 No acceptable outcome provided. No acceptable outcome provided.   |   | Disposal of materials is managed in one or more of the following ways:  |
| PO43       No acceptable outcome provided.         Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.       No acceptable outcome provided.  | Note - No burning of cleared vegetation is permitted.   | rubbish, car bodies, scrap metal and the like are<br>removed and disposed of in a Council land fill   |
| Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.   | Br  | · · · · · · · · · · · · · · · · · · ·   |
| from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.   | PO43  | No acceptable outcome provided.   |
| Earthworks  | from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development |   |
|   | Earthworks  |   |

|   | -  |  |
|---|--|--|
| PO44  |  | AO44.1   |
| On-site<br>and an<br>a. th<br>b. sl<br>c. so<br>d. re<br>e. lo<br>f. e:<br>of<br>g. th<br>al<br>h. e:<br>of<br>Note - F | e earthworks are designed to consider the visual<br>henity impact as they relate to:<br>the natural topographical features of the site;<br>hort and long-term slope stability;<br>oft or compressible foundation soils;<br>eactive soils;<br>widensity or potentially collapsing soils;<br>kisting fills and soil contamination that may exist<br>n-site;<br>the stability and maintenance of steep rock slopes<br>ind batters;<br>kcavation (cut) and fill and impacts on the amenity<br>f adjoining lots (e.g. residential)<br>Filling or excavation works are to be completed within six (6)<br>of the commencement date. | <ul> <li>AO44.1</li> <li>All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary.</li> <li>AO44.2</li> <li>Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters.</li> <li>AO44.3</li> <li>All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.</li> <li>AO44.4</li> <li>All filling or excavation is contained within the site.</li> <li>AO44.5</li> <li>All fill placed on-site is: <ul> <li>a. limited to that required for the necessary approved use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).</li> </ul> </li> <li>AO44.6</li> <li>The site is prepared and the fill placed on-site in accordance with AS3798.</li> <li>Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.</li> </ul> |
| NBR   | AO44.7<br>Materials used for structural fill are in accordance with<br>AS3798.   |  |
|   |  | AO44.8   |
|   |  | Inspection and certification of steep rock slopes and batters may be required by a suitably qualified and experienced RPEQ.  |
| PO45  |  | AO45   |
|   |  | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.   |

| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | Figure - Embankment  |
|---|--|
|   | sooren 15m   |
| PO46  | AO46.1   |
| <ul> <li>On-site earthworks are undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> </ul> PO47 Filling or excavation does not result in land instability.                        | <ul> <li>No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.</li> <li>Note - Public sector entity as defined in the Sustainable Planning Act 2009.</li> <li>AO46.2</li> <li>Earthworks that would result in any of the following are not carried out on-site: <ul> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> </ul> </li> <li>Note - Public sector entity as defined in the Sustainable Planning Act 2009.</li> <li>No acceptable outcome provided.</li> </ul> |
| Note - A slope stability report prepared by an RPEQ may be required.  |  |
| PO48<br>Filling or excavation does not result in  | No acceptable outcome provided.  |
| <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements |  |

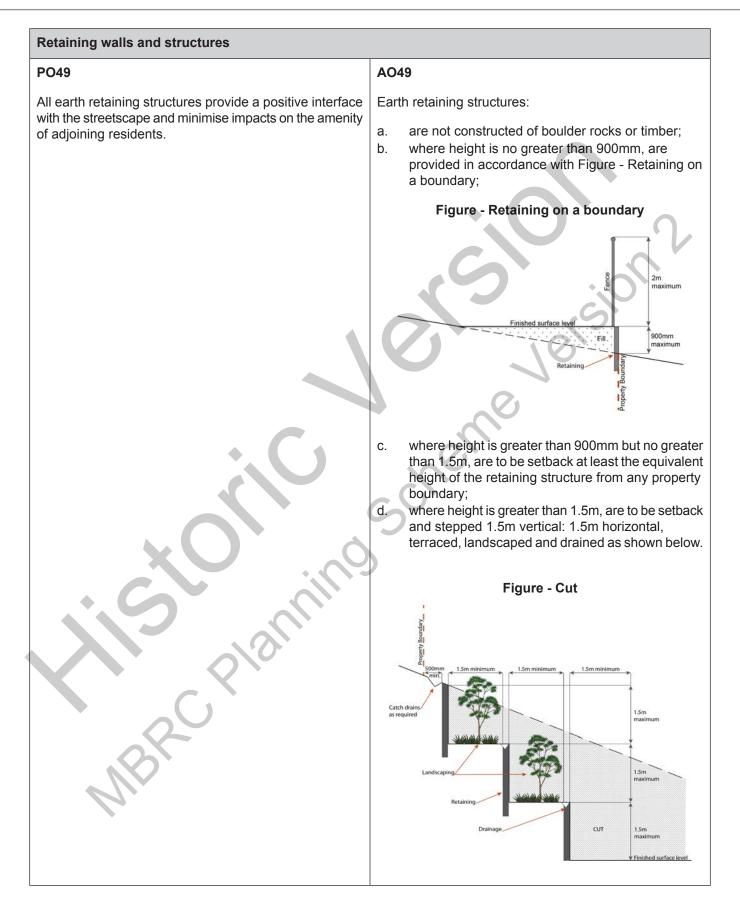

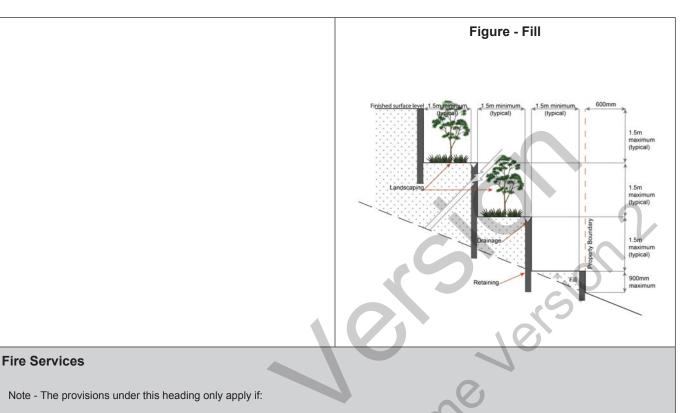

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.
  - iv

#### AND

b. none of the following exceptions apply:

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| PO50   | AO50.1   |
|--|--|
| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul> | <ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i>.</li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul> |

| <ul> <li>considers the fire hazard inherent in the surrounds to the development site;</li> <li>is maintained in effective operating order.</li> <li>Note - The Queensland Fire and Emergency Services is the entity outwards providing the file fighting function for the urban areas of the Moreon Bay Region.</li> <li>in regard to the provide of the control of the urban areas of the Moreon Bay Region.</li> <li>in regard to the provide of the control of the urban areas of the Moreon Bay Region.</li> <li>in regard to the provide of the control of the urban areas of the Moreon Bay Region.</li> <li>in the control of the control of the urban areas of the control of the</li></ul> |  |  |
|---|--|--|
| <ul> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:         <ul> <li>an unobstructed width of no less than 3.5m;</li> <li>an unobstructed height of no less than 4.8m;</li> <li>constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each rydrant booster point.</li> </ul> </li> <li>Actional access and the available fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.</li> <li>Actional to buildings, as the available fire fighting appliance access routes to those hydrants (and the vehicular entry point to the development site.</li> <li>a sign identifying the following is provided at the vehicular entry point to the site; or</li> <li>a sign identifying the following is provided at the vehicular entry point to the site:         <ul> <li>the overall layout of the development (to scale);</li> <li>in internal road names (where used);</li> <li>ii. all communal facilities (where provided);</li> <li>we the reception area and on-site manager's</li> </ul> </li> </ul>  | to the development site;<br>f. is maintained in effective operating order.<br>Note - The Queensland Fire and Emergency Services is the entity<br>currently providing the fire fighting function for the urban areas of | <ul> <li>hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as<br/>Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other<br/>facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:</li> <li>i. for dwellings and their associated outbuildings, hydrant<br/>coverage need only extend to the roof and external<br/>walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only<br/>extend to the roof of those tents and caravans;</li> <li>iii. for outdoor sales <sup>(54)</sup>, processing or storage facilities,<br/>hydrant coverage is required across the entire area of<br/>the outdoor sales <sup>(54)</sup>, outdoor processing and outdoor<br/>storage facilities;</li> <li>d. in regard to fire hydrant accessibility and clearance</li> </ul> |
| PO51       On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.         PO51       AO51         On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development to buildings:       a. those external hydrants can be seen from the vehicular entry point to the site; or         a. those external hydrants can be seen from the vehicular entry point to the site; or       b. a sign identifying the following is provided at the vehicular entry point to the site:         i. the overall layout of the development (to scale);       ii. internal road names (where used);         iii. all communal facilities (where provided);       iv. the reception area and on-site manager's  |  | <ul> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:</li> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of</li> </ul>   |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times<br>from, or at, the vehicular entry point to the development<br>site.For development that contains on-site fire hydrants<br>external to buildings:<br>a.a.those external hydrants can be seen from the<br>vehicular entry point to the site; orb.a sign identifying the following is provided at the<br>vehicular entry point to the site:<br>i.i.the overall layout of the development (to<br>scale);iii.internal road names (where used);<br>iii.iv.the reception area and on-site manager's   |  | On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire</i>   |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times<br>from, or at, the vehicular entry point to the development<br>site.For development that contains on-site fire hydrants<br>external to buildings:<br>a.a.those external hydrants can be seen from the<br>vehicular entry point to the site; orb.a sign identifying the following is provided at the<br>vehicular entry point to the site:<br>i.i.the overall layout of the development (to<br>scale);iii.internal road names (where used);<br>iii.iii.all communal facilities (where provided);<br>iv.iv.the reception area and on-site manager's   |  | 4054   |
| <ul> <li>from, or at, the vehicular entry point to the development site.</li> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>b. a sign identifying the following is provided at the vehicular entry point to the site: <ol> <li>the overall layout of the development (to scale);</li> <li>internal road names (where used);</li> <li>all communal facilities (where provided);</li> <li>the reception area and on-site manager's</li> </ol> </li> </ul>  | On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes   | For development that contains on-site fire hydrants  |
| <ul> <li>b. a sign identifying the following is provided at the vehicular entry point to the site:</li> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's</li> </ul>  | from, or at, the vehicular entry point to the development  |  |
| scale);<br>ii. internal road names (where used);<br>iii. all communal facilities (where provided);<br>iv. the reception area and on-site manager's  |  | b. a sign identifying the following is provided at the   |
| <ul><li>iii. all communal facilities (where provided);</li><li>iv. the reception area and on-site manager's</li></ul>   |  |  |
| iv. the reception area and on-site manager's  |  | ii. internal road names (where used);  |
|   |  | iii. all communal facilities (where provided);   |
|   |  |  |

|   | v. external hydrants and hydrant booster points;  |
|---|---|
|   | vi. physical constraints within the internal<br>roadway system which would restrict access<br>by fire fighting appliances to external hydrants<br>and hydrant booster points.   |
|   |   |
|   | Note - The sign prescribed above, and the graphics used are to be:  |
|   | a. in a form;   |
|   | b. of a size;   |
|   | c. illuminated to a level;  |
|   | which allows the information on the sign to be readily understood,<br>at all times, by a person in a fire fighting appliance up to 4.5m from<br>the sign.   |
| P052  | A052  |
| Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site. | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads.<br>Note - Technical note Fire hydrant indication system is available on<br>the website of the Queensland Department of Transport and Main<br>Roads. |
| Use speci   | fic criteria  |
| Caretaker's accommodation <sup>(10)</sup>   |   |
| P053  | No acceptable outcome provided.   |
| With the exception of caretaker's accommodation <sup>(10)</sup> , residential and other sensitive land uses do not establish within the Specialised centre sub-precinct.  |   |
| P054  | AO54  |
| Development of caretaker's accommodation <sup>(10)</sup> :  | Caretaker's accommodation <sup>(10)</sup> :   |
| a. does not compromise the productivity of the use  | a. has a maximum GFA of 80m <sup>2</sup> ;  |
| occurring on-site and in the surrounding area;  | b. does not gain access from a separate driveway to   |
| b. is domestic in scale;  | that of the industrial use;   |

| c. provides adequate car parking provisions exclusive of the primary use of the site;  | c. provides a minimum 16m <sup>2</sup> of private open space directly accessible from a habitable room;   |
|--|---|
| d. is safe for the residents;  | d. provides car parking in accordance with the car parking rates table.   |
| e. has regard to the open space and recreation needs of the residents.   |   |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and  | Utility installation <sup>(86)</sup>  |
| PO55   | A055.1  |
| <ul><li>The development does not have an adverse impact on the visual amenity of a locality and is:</li><li>a. high quality design and construction;</li></ul>   | Development is designed to minimise surrounding land<br>use conflicts by ensuring infrastructure, buildings,<br>structures and other equipment:   |
| <ul><li>b. visually integrated with the surrounding area;</li><li>c. not visually dominant or intrusive;</li></ul>   | <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>b. buy a similar baiett built and eacle to the</li> </ul>  |
| <ul> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and<br/>structures;</li> </ul>                       | <ul> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul>  |
| f. camouflaged through the use of colours and materials which blend into the landscape;  | A055.2  |
| <ul> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>                    | A minimum 3m wide strip of dense planting is provided<br>around the outside of the fenced area, between the<br>development and street frontage, side and rear<br>boundaries.  |
|  | 5   |
| PO56   | AO56  |
| Infrastructure does not have an impact on pedestrian health and safety.  | Access control arrangements:  |
|  | a. do not create dead-ends or dark alleyways adjacent to the infrastructure;  |
|  | b. minimise the number and width of crossovers and entry points;  |
|  | <ul><li>c. provide safe vehicular access to the site;</li><li>d. do not utilise barbed wire or razor wire.</li></ul>  |
| P057   | AO57  |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility:   | All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the |
| <ul><li>a. generates no audible sound at the site boundaries<br/>where in a residential setting; or</li><li>b. meet the objectives as set out in the Environmental<br/>Protection (Noise) Policy 2008.</li></ul> | Environmental Protection (Noise) Policy 2008.   |
| Telecommunications facility <sup>(81)</sup>  |   |
|  |   |

Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup>must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz.

| PO58   | AO58.1  |
|--|---|
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.  |
|  | A058.2  |
|  | If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.  |
| PO59   | AO59  |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.   | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.   |
| PO60   | AO60  |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.   | The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.         |
| <ul> <li>PO61</li> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>                                  | A061.1<br>Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.                                  |
| <ul><li>c. not visually dominant or intrusive;</li><li>d. located behind the main building line;</li></ul>   | AO61.2  |
| e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;  | In all other areas towers do not exceed 35m in height.  |
| f. camouflaged through the use of colours and  | AO61.3  |
| <ul> <li>materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>   | Towers, equipment shelters and associated structures are of a design, colour and material to:   |
|  | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>   |
|  | AO61.4  |
|  | All structures and buildings are setback behind the mair<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m. |
|  | Where there is no established building line the facility is located at the rear of the site.  |

|   | T1   |  |
|---|--|--|
|   | AO61.5   |  |
|   | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |  |
|   | AO61.6   |  |
|   | A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the<br>facility and street frontage and adjoining uses.  |  |
|   | Note - Landscaping is provided in accordance with Planning scheme<br>policy - Integrated design.<br>Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design.                   |  |
| PO62  | A062   |  |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.  | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |  |
| PO63  | A063   |  |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.  | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |  |
| Values and cor  | nstraints criteria   |  |
| Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.  |  |  |
| Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)   |  |  |
| Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.  |  |  |
| Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.  |  |  |
| Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and<br>landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural<br>heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning<br>scheme policy - Heritage and landscape character. |  |  |

| PO64   | AO64   |
|--|--|
| <ul> <li>PO64</li> <li>Development will: <ul> <li>a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;</li> <li>b. protect the fabric and setting of the heritage site, object or building;</li> <li>c. be consistent with the form, scale and style of the heritage site, object or building;</li> <li>d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;</li> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul> </li> </ul> | AO64<br>Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value.<br>Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object<br>or building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The<br>plan is sent to, and approved by Council prior to the commencement<br>of any preservation, maintenance, repair and restoration works. |
| <ul> <li>PO65</li> <li>Demolition and removal is only considered where: <ul> <li>a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or</li> <li>b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or</li> <li>c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic event which substantially destroys the building or object.</li> </ul> </li> </ul>  | No acceptable outcome provided.  |
| apply)<br>Note - The applicable river and creek flood planning levels associated<br>obtained by requesting a flood check property report from Council.   |  |
| PO67<br>Development:   | No acceptable outcome provided.  |

| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>   |  |
|--|--|
| PO68   | AO68   |
| Development:   | No acceptable outcome provided.  |
| <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> </ul>   |  |
| Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.   | C Jers   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.  |  |
| PO69   | No acceptable outcome provided.  |
| Development does not:  |  |
| <ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> </ul> |  |
| P070   | A070   |
| Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.   | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994<br>and the relevant building assessment provisions under the Building<br>Act 1975 for requirements related to the manufacture and storage<br>of hazardous substances. |
| P071   | A071   |
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.   | Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.   |

| PO72   | 4072.1   |  |
|--|--|--|
| P072   | A072.1   |  |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for a<br>fully developed upstream catchment and are able to be<br>easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises. | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>A072.2 |  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   | Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment.  |  |
| PO73   | No acceptable outcome provided.  |  |
| Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:   | e  |  |
| a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;   |  |  |
| <ul> <li>an overland flow path where it crosses more than<br/>one premises;</li> </ul>   |  |  |
| <ul> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul>   |  |  |
| Additional criteria for development for a Park <sup>(57)</sup>   |  |  |
| P074   | A074   |  |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:  | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design.   |  |
| a. public benefit and enjoyment is maximised;  |  |  |
| <ul> <li>b. impacts on the asset life and integrity of park<br/>structures is minimised;</li> </ul>  |  |  |
| c. maintenance and replacement costs are minimised.  |  |  |
| Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)  |  |  |
| P075   | A075   |  |
|  |  |  |

| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> </ul> | Except where located on an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer. |
|---|---|
|   | sion?   |
|   | eme   |
|   | Sche  |
| MBRORIAN  |   |
| NBK   |   |

### 7.2.3.3 Enterprise and employment precinct

#### 7.2.3.3.1 Purpose – Enterprise and employment precinct

Editor's note - A major enterprise and employment area is located on flat land in the north-east, near D'Aguilar Highway. Intended uses include a major concentration of employment-generating development, dominated by low and medium impact industries and a degree of large format retail (e.g. hardware) is also expected along the four lane main street between King Street (a major access point to Caboolture West) and Stern Road/Town centre. Each of these intended developments is assigned a sub-precinct.

The dedicated public transport right of way enters the sub-precinct passing behind industry land before turning south along the powerline corridor towards the Town centre. Two transit stops are proposed and neighbourhood hubs may also emerge at these locations to service workers with food and drink and other essential business activities.

A mix of lot sizes, from 2000m2 to 5ha, is expected. Low impact industry<sup>(42)</sup> is located close to surrounding residential areas to minimise amenity effects to nearby residents. A loose grid of streets is designed to maximise block regularity as well as access. Cul-de-sacs are not preferred due to turning and congestion difficulties. Street connections to surrounding areas are provided although through traffic must be carefully managed.

Open space is extensive due to the number of significant waterways as well as the north-south powerline corridor, also used for the dedicated public transport right of way and paths and potentially active open space uses. Open space corridors range in width from 50m to 200m wide.

- 1. The Enterprise and employment precinct is generally established in the north-east quadrant of the Caboolture West local plan area and is intersected by the Green network precinct.
- 2. The Enterprise and employment precinct is intended to be developed as the primary location for low to medium impact industry uses and industry employment within the Caboolture West local plan area, complementing the other Industry places throughout the Caboolture City area. The precinct primarily provides high quality, fully serviced, accessible land for a compatible mix of Low impact industry<sup>(42)</sup> and Medium impact industry<sup>(47)</sup> uses, a secondary function is to accommodate large format retail uses and Indoor sport and recreation<sup>(38)</sup> along the main street boulevard. The primary and secondary functions are supported and complemented by smaller scale business uses providing a local function.
- 3. The Enterprise and employment precinct comprises the following sub-precincts as identified on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.3.1 Enterprise and employment urban design framework. Each sub-precinct has a different primary function and focus as described below:
  - a. The General industry sub-precinct is developed as a high quality industry employment area west of Caboolture providing for low and medium impact industries and serving the general industry needs of the wider Caboolture City area. It also includes a neighbourhood hub providing a limited line supermarket, a limited range of speciality retail shops<sup>(75)</sup> and commercial premises, health services and community facilities to the business and employed persons within the Enterprise and employment precinct.
  - b. The Light industry sub-precinct will facilitate the long term viability of a range of low impact and low intensity industrial and business activities which are compatible with adjacent specialised centre, general industry and residential areas.
  - c. The Specialised centre sub-precinct comprises large bulky goods retail and commercial activities which serve a specific retail and business purpose. It also includes a neighbourhood hub located on the main street boulevard providing a limited line supermarket, a limited range of speciality retail shops<sup>(75)</sup> and commercial premises, health services and community facilities to the business and employed persons within the Enterprise and employment precinct.

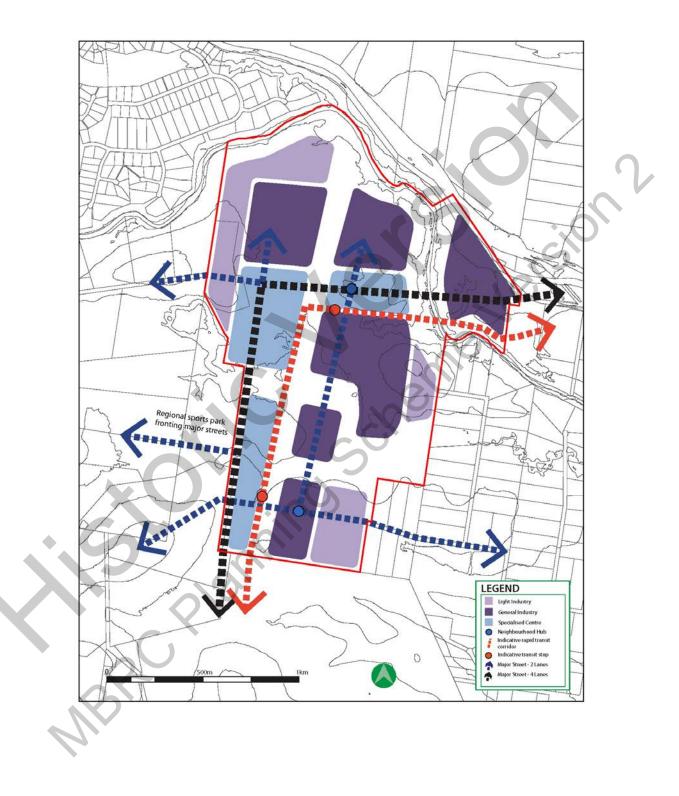


Figure 7.2.3.3.1 - Enterprise and employment urban design framework

### 7.2.3.3.1 General industry sub-precinct

#### 7.2.3.3.1.1 Purpose - General industry sub-precinct

- 1. The purpose of the General industry sub-precinct will be achieved through the following overall outcomes:
  - a. Land is developed for General industry purposes on lots identified as General industry sub-precinct on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.3.1 Enterprise and employment urban design framework.
  - b. The sub-precinct is the only location available for Medium impact industry<sup>(47)</sup> in the Caboolture West local plan area and only development that is compatible with the long term viability of the sub-precinct for a range of low-medium impact industry activities will be supported.
  - c. Development for a use that is ancillary to a low-medium impact industry activity on the same site that directly supports industry and workers may be accommodated.
  - d. The General industry sub-precinct includes a neighbourhood hub located on a major street providing convenience retail and commercial support functions to the businesses and employed persons within the Enterprise and employment precinct.
  - e. Neighbourhood hubs are located:
    - i. at the junction of main streets and public transport routes in accessible and visible locations;
    - ii. generally to the side of the intersection creating pedestrian focused main streets;
    - iii. where it will service the immediate convenience needs of the employment and industry workforce;
    - iv. in locations shown on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.3.1 Enterprise and employment urban design framework.
  - f. The operation and viability of low-medium impact industry activities is protected from the intrusion of incompatible uses.
  - g. Development provides for a range of lot sizes to cater for varying industrial and employment needs and user requirements as indicated on a Neighbourhood development plan.
  - h. The built form of development located adjoining the main street boulevard and at the intersection with the D'Aguilar Highway forms a gateway into the Enterprise and employment precinct and the Caboolture West local plan area having a high quality and distinctive design.
  - i. Uses provided within the sub-precinct do not compromise the purpose and outcomes sought for the nearby Town centre precinct, local centres and neighbourhood hubs which are the convenience hubs for adjacent residential neighbourhoods.
  - j. Non-industrial uses are of a scale that provides a convenience service or support role to industries and employees within the precinct only.
  - k. Retail or commercial uses are not established unless subordinate to and associated with the low-medium impact industry activities on site.
  - I. Development of a type, scale and intensity of development which may give rise to the possibility of adverse effects on sensitive receptors may be located within the precinct provided the location and activity is indicated on a Neighbourhood development plan and sufficiently buffered from surrounding activities by environmental management areas, open space, low impact industrial uses and non-industrial uses.
  - m. Low-medium impact industry activities are located, designed and managed to:
    - i. maintain the health and safety of people;

- ii. avoid significant adverse effects on the natural environment; and
- iii. minimise the possibility of adverse impacts on sensitive land uses.
- n. Development incorporates a range of building materials, vertically and horizontally articulated facades, landscaping, promotion of customer entry points, and safe and legible pedestrian access.
- o. The scale, character and built form of development and the resulting streetscape contribute to a high standard of visual and physical amenity and incorporates crime prevention through environmental design (CPTED) principles.
- p. Development is designed to incorporate sustainable practices where possible, including water sensitive design and energy efficient building design.
- q. Development is accessed by a network of industrial streets as shown on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.3.1 - Enterprise and employment urban design framework.
- r. Development does not compromise the integrity and efficiency of the identified public transport corridor.
- s. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
  - Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- u. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- v. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- w. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- x. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- y. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- z. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- aa. Development constraints:

- i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
  - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
  - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
  - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
  - D. ensuring effective and efficient disaster management response and recovery capabilities;
  - E. for overland flow path;
    - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
    - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
    - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
    - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- ab. Development in the General industry sub-precinct includes one or more of the following:

| • | Agricultural supplies store <sup>(2)</sup> | <ul> <li>Low impact industry<sup>(42)</sup></li> </ul>                  | • | Substation <sup>(80)</sup>                             |
|---|--|---|---|--|
|   | Bulk landscape supplies <sup>(9)</sup>     | Medium impact industry <sup>(47)</sup>                                  | • | Telecommunication facility <sup>(81)</sup>             |
|   | Caretakers                                 | <ul> <li>Research and technology<br/>industry<sup>(64)</sup></li> </ul> | • | Utility installation <sup>(86)</sup>                   |
|   | accommodation <sup>(10)</sup>              | Service industry <sup>(73)</sup>  | • | Warehouse <sup>(88)</sup>                              |
|   | Emergency services <sup>(25)</sup>         |   | • | Where in a neighbourhood hub:                          |
|   |  |   |   | • Food and drink outlet <sup>(28)</sup>                |
|   |  |   |   | • Office <sup>(53)</sup>                               |
|   | 20   |   |   | <ul> <li>Shop<sup>(75)</sup></li> </ul>                |
|   |  |   |   | <ul> <li>Veterinary services<sup>(87)</sup></li> </ul> |
|   |  |   |   |  |

ac. Development in the General industry sub-precinct does not include any of the following:

| ٠ | Adult store <sup>(1)</sup>      | • | Hardware and trade<br>supplies <sup>(32)</sup> | • | Permanent plantation <sup>(59)</sup>      |
|---|---------------------------------|---|--|---|---|
| • | Air services <sup>(3)</sup>     |   |  | • | Place of worship <sup>(60)</sup>          |
| • | Animal husbandry <sup>(4)</sup> | • | Health care services <sup>(33)</sup>           | • | Port services <sup>(61)</sup>             |
| • | Animal keeping <sup>(5)</sup>   | • | Home based business <sup>(35)</sup>            | • | Relocatable home park <sup>(62)</sup>     |
| • | Aquaculture <sup>(6)</sup>      | • | Hospital <sup>(36)</sup>                       | • | Renewable energy facility <sup>(63)</sup> |
|   |                                 |   |  |   |   |

| • | Bar <sup>(7)</sup>                    | • | Hotel <sup>(37)</sup>                            | • | Residential care facility <sup>(65)</sup> |
|---|---------------------------------------|---|--|---|---|
| • | Brothel <sup>(8)</sup>                | • | Indoor sport and                                 | • | Resort complex <sup>(66)</sup>            |
| • | Cemetery <sup>(12)</sup>              |   | recreation <sup>(38)</sup>                       | • | Retirement facility <sup>(67)</sup>       |
| • | Child care centre <sup>(13)</sup>     | • | Intensive animal<br>industry <sup>(39)</sup>     | • | Roadside stall <sup>(68)</sup>            |
| • | Club <sup>(14)</sup>                  | • | Intensive horticulture <sup>(40)</sup>           | • | Rural industry <sup>(70)</sup>            |
| • | Community care centre <sup>(15)</sup> | • | Landing <sup>(41)</sup>                          | • | Rural workers                             |
| • | Community residence <sup>(16)</sup>   | • | Major electricity                                |   | accommodation <sup>(71)</sup>             |
| • | Community use <sup>(17)</sup>         |   | infrastructure <sup>(43)</sup>                   |   | Sales office <sup>(72)</sup>              |
| • | Cropping <sup>(19)</sup>              | • | Major sport, recreation<br>and entertainment     |   | Shopping centre <sup>(75)</sup>           |
| • | Detention facility <sup>(20)</sup>    |   | facility <sup>(44)</sup>                         | • | Short-term accommodation <sup>(77)</sup>  |
| • | Duel occupancy <sup>(21)</sup>        | • | Marine industry <sup>(45)</sup>                  | • | Showroom <sup>(78)</sup>                  |
| • | Dwelling house <sup>(22)</sup>        |   | Market <sup>(46)</sup>                           | • | Special industry <sup>(79)</sup>          |
| • | Dwelling unit <sup>(23)</sup>         | • | Multiple dwelling <sup>(49)</sup>                | Ø | Theatre <sup>(82)</sup>                   |
| • | Education (24)                        | • | Nature-based tourism <sup>(50)</sup>             |   | Tourist park <sup>(84)</sup>              |
|   | establishment <sup>(24)</sup>         | • | Nightclub entertainment facility <sup>(51)</sup> | • | Wholesale nursery <sup>(89)</sup>         |
| • | Environment facility <sup>(26)</sup>  | • | Non-resident workforce                           | • | Winery <sup>(90)</sup>                    |
| • | Extractive industry <sup>(27)</sup>   |   | accommodation <sup>(52)</sup>                    |   |   |
| • | Function facility <sup>(29)</sup>     | • | Outdoor sales <sup>(54)</sup>                    |   |   |
| • | Funeral parlour <sup>(30)</sup>       | Ň | Outdoor sport and recreation <sup>(55)</sup>     |   |   |
|   | Garden centre <sup>(31)</sup>         |   | Parking station <sup>(58)</sup>                  |   |   |
|   |                                       | _ |  |   |   |

ad. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the sub-precinct.

### 7.2.3.3.1.2 Criteria for assessment

### Part M - Criteria for assessable development - General industry sub-precinct

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part M, Table 7.2.3.3.1.1.

Where development is impact assessable, the assessment criteria become the whole of the planning scheme.

#### Table 7.2.3.3.1.1 Assessable development - General industry sub-precinct

| Performance outcomes | Acceptable outcomes |  |  |
|----------------------|---------------------|--|--|
| General criteria     |                     |  |  |
| Site cover           |                     |  |  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| P01   | No acceptable outcome provided.   |
| Building site cover allows for adequate on-site provision of:   |   |
| a. car parking;   |   |
| b. vehicle access and manoeuvring;  |   |
| c. setbacks to boundaries;  |   |
| d. landscaped areas.  |   |
| Building height   | ·0·   |
| P02   | AO2   |
| The height of buildings reflect the individual character of the precinct.   | Building heights do not to exceed that mapped on Neighbourhood development plan map - Building heights.   |
| Setbacks  | S C   |
| P03   | A03   |
| Street boundary setbacks:   | Buildings maintain a minimum setback of:  |
| <ul> <li>a. minimise building bulk and visual dominance from the street;</li> <li>b. provide areas for landscaping at the front of the site;</li> <li>c. allow for customer parking to be located at the front of the building.</li> <li>Note - The following diagram illustrates an acceptable design response to this outcome.</li> </ul> | <ul> <li>a. 6m to the street frontage;</li> <li>b. 3m to the secondary street frontage;</li> <li>c. 5m to land not included in the Enterprise and employment precinct.</li> </ul> |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| PO4<br>Side and rear boundary setbacks maintain views, privacy,<br>access to natural light and the visual amenity of adjoining<br>sensitive land uses.  | AO4<br>Where a development adjoins Urban living precinct or<br>Rural living precinct land, the building is setback a<br>minimum of 3m from the property boundary and includes<br>landscaping along the boundary appropriate for screening<br>with a mature height of at least 3m.<br>Note - Refer to Planning scheme policy - Integrated design for<br>determining acceptable levels of landscaping for screening purposes.            |
| Building appearance and design  |  |
| <text><text><text><image/></text></text></text>   | <ul> <li>AO5</li> <li>Where fronting a main street, or visible from a neighbourhood hub, buildings provide a high level of architectural design, by incorporating: <ul> <li>a. a range of building materials, colours and features;</li> <li>b. facade articulation along street frontages;</li> <li>c. design features to promote customer entry points;</li> <li>d. materials that are not highly reflective.</li> </ul> </li> </ul> |
| PO6   | No acceptable outcome provided.  |
| <ul> <li>Development provides an on-site recreation area for staff that:</li> <li>a. includes seating, tables and rubbish bins;</li> <li>b. is adequately protected from the weather;</li> <li>c. is safely accessible to all staff;</li> </ul> |  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| d. is separate and private from public areas;  |  |
| e. is located away from a noisy or odorous activity.   |  |
| Landscaping  |  |
| P07  | A07  |
| <ul> <li>Landscaping is provided on the site to:</li> <li>a. visually soften the built form, areas of hardstand, storage areas and mechanical plant associated with the on-site processes;</li> <li>b. complement the existing or desired streetscape;</li> <li>c. minimise the impact of industrial development on adjoining lots not within the Enterprise and employment precinct.</li> </ul> | Landscaping is provided and maintained in accordance<br>with Planning scheme policy - Integrated design.                       |
| Fencing  |  |
| P08  | A08  |
| <text><text></text></text>   | Where fencing is provided on the street frontage, it has<br>a minimum transparency of 70%.                                     |
| Public access PO9  | A09.1  |
| The use has a safe, clearly identifiable public access<br>separated from service and parking areas.<br>Note - The following diagram illustrates an acceptable design   | Pedestrian linkages are provided from the street and customer car parking areas directly to the main entrance of the building. |
| response to this outcome.  |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| Industrial Activity.   | The public access is separated from industrial service areas.   |
| Car parking  |   |
| PO10   | AO10  |
| Car parking is provided on-site to meet the anticipated<br>demands of employees and visitors and avoid adverse<br>impacts on the external road network.<br>Note - Refer to Planning scheme policy - Integrated transport<br>assessment for guidance on how to achieve compliance with this<br>outcome. | Car parking is provided in accordance with Schedule 7 -<br>Car parking.   |
| P011   | A011  |
| <ul> <li>The design of car parking areas:</li> <li>a. does not impact on the safety of the external road network;</li> <li>b. ensures the safety of pedestrians at all times;</li> <li>c. ensures the safe movement of vehicles within the site.</li> </ul>  | All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1.               |
| Bicycle parking and end of trip facilities   |   |
| Note - Building work to which this code applies constitutes Major Dev facilities prescribed in the Queensland Development Code MP 4.1.   | elopment for purposes of development requirements for end of trip   |
| PO12   | A012.1  |
| a. End of trip facilities are provided for employees or occupants, in the building or on-site within a   | Minimum bicycle parking facilities are provided at a rate of 1 bicycle parking space for every 3 vehicles parking |

spaces required by Schedule 7 – Car parking.

reasonable walking distance, and include:

| Per   | forma           | ince outcomes  | Acceptable outcomes   |
|---|-----------------|--|---|
|   | i.<br>          | adequate bicycle parking and storage facilities; and   | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable  |
|   | ii.             | adequate provision for securing belongings;<br>and   | outcome is a combination of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council.   |
|   | iii.            | change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.  | A012.2  |
|   |                 |  | Bicycle parking is:   |
| b.  | prov<br>unre    | withstanding a. there is no requirement to<br>ride end of trip facilities if it would be<br>easonable to provide these facilities having<br>ard to:  | a. provided in accordance with <i>Austroads (2008),</i><br><i>Guide to Traffic Management - Part 11: Parking</i> ;  |
|   | i.              | the projected population growth and forward<br>planning for road upgrading and development<br>of cycle paths; or   | <ul> <li>b. protected from the weather by its location or a dedicated roof structure;</li> <li>c. located within the building or in a dedicated, secure structure for residents and staff.</li> </ul>   |
|   | ii.             | whether it would be practical to commute to<br>and from the building on a bicycle, having<br>regard to the likely commute distances and<br>nature of the terrain; or   | <ul><li>structure for residents and staff;</li><li>d. adjacent to building entrances or in public areas for customers and visitors.</li></ul>   |
|   | iii.            | the condition of the road and the nature and<br>amount of traffic potentially affecting the safety<br>of commuters.  | Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.  |
|   | 4 <b>1</b>      |  | Note - Bicycle parking and end of trip facilities provided for residential<br>and non-residential activities may be pooled, provided they are within<br>100 metres of the entrance to the building.   |
| Editor's note - The intent of b above is to ensure the requirements<br>for bicycle parking and end of trip facilities are not applied in<br>unreasonable circumstances. For example these requirements<br>should not, and do not apply in the Rural zone or the Rural residential<br>zone etc.<br>Editor's note - This performance outcome is the same as the<br>Performance Requirement prescribed for end of trip facilities under<br>the Queensland Development Code. For development incorporating<br>building work, that Queensland Development Code performance |                 |  | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |
| has   | s been r        | nt cannot be altered by a local planning instrument and<br>eproduced here solely for information purposes. Council's<br>nt in its building work concurrence agency role for end of                                     | AO12.3  |
| trip  | facilitie       | is will be against the performance requirement in the<br>d Development Code. As it is subject to change at any   | For non-residential uses, storage lockers:  |
| ens<br>out  | sure that comes | cants for development incorporating building work should<br>t proposals that do not comply with the acceptable<br>under this heading meet the current performance<br>nt prescribed in the Queensland Development Code. | a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);   |
| icq   | unerne          |  | <ul> <li>b. have minimum dimensions of 900mm (height) x</li> <li>300mm (width) x 450mm (depth).</li> </ul>  |
|   |                 |  | Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.  |
|   |                 |  | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default  |

| Performance outcomes | Acceptable outcomes   |
|----------------------|---|
|                      | levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council.     |
|                      | A012.4  |
|                      | For non-residential uses, changing rooms:   |
|                      | a. are provided at a rate of 1 per 10 bicycle parking   |
|                      | <ul><li>spaces;</li><li>are fitted with a lockable door or otherwise screened</li></ul>   |
|                      | <ul><li>from public view;</li><li>are provided with shower(s), sanitary compartment(s) and wash basin(s) in accordance with the table below:</li></ul>  |
|                      | Bicycle<br>spaces<br>provided         Male/<br>Female         Change<br>rooms<br>required         Showers<br>required         Sanitary<br>compartments<br>required         Washbasins<br>required   |
|                      | 1-5 Male 1 unisex 1 1 closet pan 1<br>and change room 1   |
|                      | 6-19 Female 1 1 1 Closet pan 1  |
|                      | 20 or Male 1 1 1 closet pan 1   |
|                      | Female12, plus 1<br>for every<br>20 bicycle<br>spaces2 closet pans, plus<br>1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided thereafter1, plus 1 for<br>every 60<br>bicycle<br>parking spaces<br>provided thereafter |
| CIL                  | Male12, plus 1<br>for every<br>20 bicycle<br>spaces<br>   |
|                      | Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.  |
|                      | Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).  |
|                      | d. are provided with:   |
|                      | <ul> <li>a mirror located above each wash basin;</li> <li>a hook and bench seating within each shower compartment;</li> <li>a socket-outlet located adjacent to each wash basin.</li> </ul>   |
|                      | Note - Change rooms may be pooled across multiple sites, residential<br>and non-residential activities when within 100 metres of the entrance<br>to the building and within 50 metres of bicycle parking and storage<br>facilities                  |

| under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.       Air Quality Objectives, Environmental Protection (Air) Policy 2008.         Lighting       P016       A016         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard   | Performance outcomes   | Acceptable outcomes   |
|--|--|---|
| P013       No acceptable outcome provided.         Service areas and outdoor storage areas are screened from the direct view from public areas and land not included in the Enterprise and employment precinct.       No acceptable outcome provided.         Note - if landscaping is proposed for screening purposes, refer to Planning scheme policy - integrated design for determining acceptable levels.       No acceptable outcome provided.         Waste       P014       No acceptable outcome provided.         Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy - Waste.       No acceptable outcome provided.         Environmental impacts       A015         Where a use is not an environmentally relevant activity under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.       A015         Lighting       P016       A016         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       A016         Note - Curfewed hours' are taken to be those hours between 10pm and 7am on the following day.       Note - Curfewed hours' are taken to be those hours between 10pm  |  | prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional |
| Service areas including loading/unloading facilities, plant areas and outdoor storage areas are screened from the direct view from public areas and land not included in the Enterprise and employment precinct.         Note - If landscaping is proposed for screening purposes, refer to Planning scheme policy - Integrated design for determining acceptable levels.         Waste       PO14         Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy - Waste.       No acceptable outcome provided.         PO15       A015         Where a use is not an environmentally relevant activity under the Environmental Impacts       Development achieves the standard listed in Schedule 1 Air Quality Objectives, Environmental Protection (Air) Policy 2008.         PO16       A016         Lighting       A016         PO16       A016         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       A016         A116       Attificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.         Note - Curfiewed hours" are taken to be those hours between 10pm and 7am on the following day. | Loading and servicing  |   |
| areas and outdoor storage areas are screened from the direct view from public areas and land not included in the Enterprise and employment precinct.         Nea - If landscaping is proposed for screening purposes, refer to Planning scheme policy - Integrated design for determining acceptable levels.         Waste         PO14         Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy - Waste.         P015         Wohre a use is not an environmentally relevant activity under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.         Lighting         P016         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.         A016         Attrificial lighting on-site is directed and shielded in such arannes for the control of obtrusive Effects of Outdoor Lighting.         Note -: "Curfiewed hours" are taken to be those hours between 10pm and 7am on the following day.   | PO13   | No acceptable outcome provided.   |
| P014       No acceptable outcome provided.         Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.       No acceptable outcome provided.         Environmental impacts       A015         P015       A015         Where a use is not an environmentally relevant activity under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.       Development achieves the standard listed in Schedule 1 Air Quality Objectives, Environmental Protection (Air) Policy 2008.         Lighting       P016         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       A016         Avtificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.         Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.   | areas and outdoor storage areas are screened from the<br>direct view from public areas and land not included in<br>the Enterprise and employment precinct.<br>Note - If landscaping is proposed for screening purposes, refer to<br>Planning scheme policy - Integrated design for determining | ersion .  |
| Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.       Image: Constraint of the policy – Waste.         Environmental impacts       A015         P015       A015         Where a use is not an environmentally relevant activity under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.       Development achieves the standard listed in Schedule 1 Air Quality Objectives, Environmental Protection (Air) Policy 2008.         Lighting       P016         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       A016         A1fficial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.         Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.  | Waste  |   |
| managed in accordance with Planning scheme policy –       Waste.         Environmental impacts       A015         P015       A015         Where a use is not an environmentally relevant activity under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.       Development achieves the standard listed in Schedule 1 Air Quality Objectives, Environmental Protection (Air) Policy 2008.         Lighting       P016         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       A016         Avtificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.         Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.  | P014   | No acceptable outcome provided.   |
| PO15       AO15         Where a use is not an environmentally relevant activity under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.       Development achieves the standard listed in Schedule 1 Air Quality Objectives, Environmental Protection (Air) Policy 2008.         Lighting       AO16         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       AO16         Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.       Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.   | managed in accordance with Planning scheme policy –  | sche  |
| Where a use is not an environmentally relevant activity under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.       Development achieves the standard listed in Schedule 1 Air Quality Objectives, Environmental Protection (Air) Policy 2008.         Lighting       AO16         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       AO16         Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.       Note - "Curfewed hours" are taken to be those hours between 10pm   | Environmental impacts  |   |
| under the Environmental Protection Act, the release of any containment that may cause environmental harm is mitigated to an acceptable level.       Air Quality Objectives, Environmental Protection (Air) Policy 2008.         Lighting       PO16         Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       AO16         Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.         Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.   | P015   | AO15  |
| PO16       Lighting is directed and shielded to not cause unreasonable disturbance to any person on adjoining land.       Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.         Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.   | under the Environmental Protection Act, the release of any containment that may cause environmental harm is  |   |
| Lighting is directed and shielded to not cause<br>unreasonable disturbance to any person on adjoining<br>land.<br>Artificial lighting on-site is directed and shielded in such<br>a manner as not to exceed the recommended maximum<br>values of light technical parameters for the control of<br>obtrusive light given in Table 2.1 of Australian Standard<br>AS 4282 (1997) Control of Obtrusive Effects of Outdoor<br>Lighting.<br>Note - "Curfewed hours" are taken to be those hours between 10pm<br>and 7am on the following day.  | Lighting   |   |
| unreasonable disturbance to any person on adjoining<br>land.   | P016   | AO16  |
| and 7am on the following day.  | unreasonable disturbance to any person on adjoining  | a manner as not to exceed the recommended maximum<br>values of light technical parameters for the control of<br>obtrusive light given in Table 2.1 of Australian Standard<br>AS 4282 (1997) Control of Obtrusive Effects of Outdoor   |
| Hazardous Chemicals  |  |   |
|  | Hazardous Chemicals  |   |

| Performance outcomes   | Acceptable outcomes   |  |  |  |  |
|--|---|--|--|--|--|
| Note - To assist in demonstrating compliance with the following performance outcomes, a Hazard Assessment Report may be required to be prepared and submitted by a suitably qualified person in accordance with 'State Planning Policy Guideline - Guidance on development involving hazardous chemicals'. |   |  |  |  |  |
| Terms used in this section are defined in 'State Planning Policy Guide   | eline - Guidance on development involving hazardous chemicals'.   |  |  |  |  |
|  |   |  |  |  |  |
| PO17   | A017.1  |  |  |  |  |
| Off sites risks from foreseeable hazard scenarios<br>involving hazardous chemicals are commensurate with<br>the sensitivity of the surrounding land use zones.   | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land uses as described below: |  |  |  |  |
|  | Dangerous Dose  |  |  |  |  |
|  | a. For any hazard scenario involving the release of gases or vapours:   |  |  |  |  |
|  | i. AEGL2 (60minutes) or if not available ERPG2;   |  |  |  |  |
|  | ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.   |  |  |  |  |
| • ( )  | b. For any hazard scenario involving fire or explosion:   |  |  |  |  |
|  | i. 7kPa overpressure;   |  |  |  |  |
|  | ii. 4.7kW/m2 heat radiation.  |  |  |  |  |
| is nime  | If criteria AO18.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 0.5 x 10-6/year.                 |  |  |  |  |
|  | A017.2  |  |  |  |  |
|  | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below: |  |  |  |  |
|  | Dangerous Dose  |  |  |  |  |
|  | a. For any hazard scenario involving the release of gases or vapours:   |  |  |  |  |
|  | i. AEGL2 (60minutes) or if not available ERPG2;   |  |  |  |  |
|  | <li>ii. An oxygen content in air &lt;19.5% or &gt;23.5% at<br/>normal atmospheric pressure.</li>  |  |  |  |  |
|  | b. For any hazard scenario involving fire or explosion:   |  |  |  |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | i. 7kPa overpressure;   |
|  | ii. 4.7kW/m2 heat radiation.  |
|  | If criteria AO18.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.   |
|  | AO17.3<br>Off site impacts or risks from any foreseeable hazard<br>scenario does not exceed the dangerous dose at the<br>boundary of an industrial land use zone as described<br>below:<br>Dangerous Dose<br>a. For any hazard scenario involving the release of<br>gases or vapours:   |
|  | <ul> <li>i. AEGL2 (60minutes) or if not available ERPG2;</li> <li>ii. An oxygen content in air &lt;19.5% or &gt;23.5% at normal atmospheric pressure.</li> </ul>  |
|  | <ul> <li>b. For any hazard scenario involving fire or explosion:</li> <li>i. 14kPa overpressure;</li> <li>ii. 12.6kW/m2 heat radiation.</li> </ul>  |
|  | If criteria AO18.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.  |
| P018   | AO18  |
| Buildings and package stores containing fire-risk<br>hazardous chemicals are designed to detect the early<br>stages of a fire situation and notify a designated person.  | Buildings and package stores containing fire-risk<br>hazardous chemicals are provided with 24 hour monitored<br>fire detection system for early detection of a fire event.  |
| PO19   | AO19  |
| Common storage areas containing packages of<br>flammable and toxic hazardous chemicals are designed<br>with spill containment system(s) that are adequate to<br>contain releases, including fire fighting media. | Storage areas containing packages of flammable and<br>toxic hazardous chemicals are designed with spill<br>containment system(s) capable of containing a minimum<br>of the total aggregate capacity of all packages plus the<br>maximum operating capacity of any fire protection system<br>for the storage area(s) over a minimum of 60 minutes. |
| PO20   | AO20.1  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| Storage and handling areas, including manufacturing<br>areas, containing hazardous chemicals in quantities<br>greater than 2,500L or kg within a Local Government<br>"flood hazard area" are located and designed in a manner<br>to minimise the likelihood of inundation of flood waters<br>from creeks, rivers, lakes or estuaries.  | <ul> <li>The base of any tank with a WC &gt;2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively:</li> <li>a. bulk tanks are anchored so they cannot float if submerged or inundated by water; and</li> <li>b. tank openings not provided with a liquid tight seal, i.e. an atmospheric vent, are extended above the relevant flood height level.</li> </ul> AO20.2 The lowest point of any storage area for packages >2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively, package stores are provided with impervious bund walls or racking systems higher than the relevant flood height level. |
| Naine  | 01  |
| Noise  |   |
| P021   | No acceptable outcome provided.   |
| or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise. | SCI   |
| P022   | A022.1  |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:   | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.  |
| <ul> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> </ul>  | <ul> <li>AO22.2</li> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public area unless:</li> </ul>  |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.<br>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.  | <ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not<br/>serve an existing or future active transport<br/>purpose (e.g. pedestrian paths or cycle lanes)<br/>or where attenuation through building location<br/>and materials is not possible.</li> </ul>   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul> |
|  | criteria   |
| Utilities  | <b>S</b> .   |
| <b>PO23</b><br>The development is connected to an existing reticulated electricity supply system (approved by the relevant energy regulating authority) and the infrastructure does not negatively impact the streetscape. | A023<br>The development is connected to underground electricity.   |
| PO24<br>The development has access to telecommunications and<br>broadband services in accordance with current standards.   | No acceptable outcome provided.  |
| PO25<br>Where available the development is to safely connect to<br>reticulated gas.  | No acceptable outcome provided.  |
| PO26   | AO26.1   |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.   | Where in a sewered area, the development is connected to a reticulated sewerage system.  |
| MBR  | AO26.2<br>Where not in a sewered area, the development is serviced<br>by an appropriate on-site sewerage facility.<br>Note - A site and soil evaluation report is generally required to<br>demonstrate compliance with this outcome. Reports are to be<br>prepared in accordance with The Plumbing and Drainage Act 2002.  |
| PO27   | AO27.1   |
| The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards.   |
|  | AO27.2<br>Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way of<br>on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development. |
| PO28<br>The development is provided with dedicated and<br>constructed road access.   | No acceptable outcome provided.  |
| Access   |  |
| <ul> <li>PO29</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> | No acceptable outcome provided.  |
| <b>PO30</b><br>Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.   | No acceptable outcome provided.  |
| PO31   | AO31.1   |
| <ul><li>The layout of the development does not compromise:</li><li>a. the development of the road network in the area;</li></ul>   | Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a motorway.   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| <ul><li>b. the function or safety of the road network;</li><li>c. the capacity of the road network.</li></ul>                                      | Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway.   |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |
|  | AO31.2<br>The development provides for the extension of the road<br>network in the area in accordance with Council's road<br>network planning.   |
|  | AO31.3<br>The development does not compromise future road<br>widening of frontage roads in accordance with the relevant<br>standard and Council's road planning.   |
|  | AO31.4<br>The lot layout allows forward access to and from the site.   |
| PO32   | AO32.1   |
| Safe access facilities are provided for all vehicles required to access the site.  | Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a motorway.<br>Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.         |
| Plain  | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |
|  | AO32.2   |
| NBK  | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.  |
|  | Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.   |
|  | AO32.3   |
|  | Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in Schedule 8<br>Service vehicle requirements for the relevant use. The<br>on-site manoeuvring is to be in accordance with Schedule<br>8 Service vehicle requirements. |

| Performance outcomes   | Acceptable outcomes                       |
|--|---|
| PO33   | No acceptable outcome provided.           |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:  |   |
| <ul><li>a. ensure the type or volume of traffic generated by<br/>the development does not have a negative impact<br/>on the external road network;</li><li>b. ensure the orderly and efficient continuation of the</li></ul>   |   |
| <ul> <li>active transport network;</li> <li>ensure the site frontage is constructed to a suitable<br/>urban standard generally in accordance with<br/>Planning scheme policy - Integrated design.</li> </ul>   |   |
| Note - An Integrated Transport Assessment (ITA) may be required<br>to demonstrate compliance with this performance outcome. An ITA<br>should be prepared in accordance with Planning scheme policy -<br>Integrated transport assessment.   | C, S, |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |   |
| Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:  | len'                                      |
| <ul> <li>Where the street is partially established to an urban standard,<br/>match the alignment of existing kerb and channel and provide<br/>carriageway widening and underground drainage where<br/>required; or</li> </ul>  | SCI                                       |
| ii. Where the street is not established to an urban standard,<br>prepare a design that demonstrates how the relevant features<br>of the particular road as shown in the Planning scheme policy<br>- Integrated Design can be achieved in the existing reserve.   |   |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.   |   |
|  |   |
| Stormwater   |   |
| PO34   | No acceptable outcome provided.           |
| Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or  |   |
| annoyance to any person, property or premises.   |   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |   |
| Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate achievement of this performance outcome.  |   |
| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No |   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.   |   |
| PO35  | No acceptable outcome provided.   |
| Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.  |   |
| Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.  |   |
| PO36  | No acceptable outcome provided.   |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP. | C Jel   |
| Note - A site-based stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.  | north 1   |
| 2007  |   |
| PO37<br>Easements for drainage purposes are provided over:  | No acceptable outcome provided.   |
|   |   |
| pipe diameter exceeds 300mm;  |   |
| b. overland flow paths where they cross more than one property boundary.  |   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |   |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   |   |
| Site works and construction management  |   |
| PO38  | No acceptable outcome provided.   |
| The site and any existing structures are maintained in a tidy and safe condition.   |   |
| PO39  | AO39.1  |
| All works on-site are managed to:   | Works incorporate temporary stormwater run-off, erosion   |
| a. minimise as far as practicable, impacts on adjoining<br>or adjacent premises and the streetscape in regard   | and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning |


| Perf          | ormance outcomes  | Acceptable outcomes  |
|---------------|---|--|
| cons          | to erosion and sedimentation, dust, noise, safety<br>and light;<br>minimise as far as possible, impacts on the natural<br>environment;<br>ensure stormwater discharge is managed in a<br>manner that does not cause nuisance or annoyance<br>to any person or premises;<br>avoid adverse impacts on street streets and their<br>critical root zone. | <ul> <li>Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins.</li> </ul> A039.2 Stormwater run-off, erosion and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness. Note - The measures are adjusted on-site to maximise their effectiveness. A039.3 The completed earthworks (fill or excavation) area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property. A039.4 Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a qualified arborist which demonstrates and ensures that no permanent damage is caused to the tree. A040 No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works. |
|               |   |  |
| PO4           |   | AO41.1   |
| from<br>exist | rorks on-site and the transportation of material to and<br>the site are managed to not negatively impact the<br>ting road network, the amenity of the surrounding<br>or the streetscape.  | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform Traffic<br>Control Devices (MUTCD) to ensure all traffic movements<br>to and from the site are safe.   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Note - Where the amount of imported material is greater than 50m <sup>3</sup> , a haulage route must be identified and approved by Council.   | AO41.2<br>All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.<br>Note - A Traffic Management Plan may be required for the site in<br>accordance with the Manual of Uniform Traffic Control Devices<br>(MUTCD).<br>AO41.3<br>Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times. |
| PO42<br>All disturbed areas are rehabilitated at the completion of construction.  | AO42<br>At completion of construction all disturbed areas of the<br>site are to be:   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  | <ul> <li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li> <li>b. grassed.</li> <li>Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.</li> </ul>  |
| <ul> <li>PO43</li> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use</li> </ul> | AO43.1<br>All native vegetation to be retained on-site is temporarily<br>fenced or protected prior to and during development<br>works.<br>Note - No parking of vehicles of storage of machinery or goods is to<br>occur in these areas during development works.  |
| of the land;<br>c. is disposed of in a manner which minimises<br>nuisance and annoyance to existing premises.<br>Note - No burning of cleared vegetation is permitted.  | <ul> <li>AO43.2</li> <li>Disposal of materials is managed in one or more of the following ways:</li> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.</li> </ul>   |
| PO44  | No acceptable outcome provided.   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.  |  |
| Earthworks   |  |
| PO45   | AO45.1   |
| <ul> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to:</li> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes and batters;</li> <li>h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)</li> </ul> Note - Filling or excavation works are to be completed within six (6) months of the commencement date. | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains<br>as necessary.<br>AO45.2<br>Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.<br>AO45.3<br>All filling or excavation is contained within the site.<br>AO45.4<br>All fill placed on-site is:<br>a. limited to that required for the necessary approved<br>use;<br>b. clean and uncontaminated (i.e. no building waste,<br>concrete, green waste or contaminated material etc.<br>is used as fill).<br>AO45.5<br>The site is prepared and the fill placed on-site in<br>accordance with AS3798.<br>Note - The fill is to be inspected and tested in accordance with<br>Planning scheme policy - Operational works inspection, maintenance<br>and bonding procedures. |
|  | batters may be required by a suitably qualified and experienced RPEQ.  |
| PO46   | AO46   |

| Performance outcomes  | Acceptable outcomes   |  |
|---|---|--|
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |  |
|   | Figure - Embankment   |  |
|   | 500mm<br>10m<br>10m<br>10m<br>10m<br>10m<br>10m<br>10m  |  |
| PO47  | AO47.1  |  |
| <ul> <li>On-site earthworks are undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> </ul>   | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.<br>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .  |  |
| b. does not preclude reasonable access to a Council<br>or public sector entity maintained infrastructure or   |   |  |
| any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.   | AO47.2  |  |
| Note - Public sector entity as defined in the Sustainable Planning  | Earthworks that would result in any of the following are not carried out on-site:   |  |
| Act 2009.   | <ul> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> </ul> |  |
| PO48  | No acceptable outcome provided.   |  |
| Filling or excavation does not result in land instability.<br>Note - A slope stability report prepared by an RPEQ may be required.  |   |  |
| PO49  |   |  |
| Filling or excavation does not result in  |   |  |
| <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> |   |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| Note - To demonstrate compliance with this outcome, Planning<br>scheme policy - Stormwater management provides guidance on the<br>preparation of a site based stormwater management plan by a<br>suitably qualified professional. Refer to Planning scheme policy -<br>Integrated design for guidance on infrastructure design and modelling<br>requirements |   |
| Retaining walls and structures   |   |
| PO50   | AO50  |
| All earth retaining structures provide a positive interface<br>with the streetscape and minimise impacts on the amenity<br>of adjoining residents.   | <ul> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> </ul>  |
|  | Figure - Retaining on a boundary  |
| Plannino,  | <ul> <li>c. where height is greater than 900mm but no greater than 1.5m, are to be setback at least the equivalent height of the retaining structure from any property boundary;</li> <li>d. where height is greater than 1.5m, are to be setback and stepped 1.5m vertical: 1.5m horizontal, terraced, landscaped and drained as shown below.</li> </ul> |
| NBR  |   |

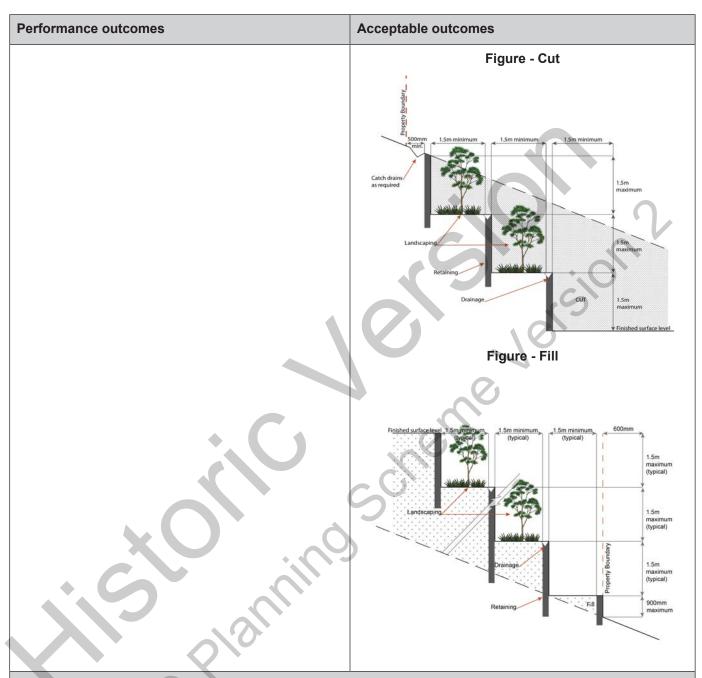

#### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole occurring rot more stocking rot more stocking rot more sole occurring rot more sole occurre sole occurring rot more sole occurring r ii.
  - iii.
  - iv.

#### AND

- b. none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Note - The provisions under this heading do not apply to buildings tha system complying with Australian Standard AS 2419.1 (2005) – Fire Hy protection.   | t are required by the Building Code of Australia to have a fire hydrant drant Installations or other fire fighting facilities which provide equivalent  |
| PO51  | A051.1  |
| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> </ul> Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region. | <ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.</i></li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable: <ul> <li>a. in regard to the form of any fire hydrant - Part 8,5 and Part 32.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signosted in-ground hydrants would be an acceptable alternative;</li> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (b), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:</li> <li>i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>d. in regard to fire hydrant accessing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> </ul> </li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul> AO51.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land: <ul> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>C. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance;</li></ul> |

| <b>PO52</b><br>On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times | A052   |  |
|---|--|--|
| well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times  |  |  |
| from, or at, the vehicular entry point to the development site.   | <ul> <li>For development that contains on-site fire hydrants external to buildings: <ul> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>b. a sign identifying the following is provided at the vehicular entry point to the site: <ul> <li>i. the overall layout of the development (to scale)</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrants and hydrant booster points.</li> </ul> </li> <li>Note - The sign prescribed above, and the graphics used are to be: <ul> <li>a. in a form;</li> <li>b. of a size;</li> <li>c. illuminated to a level;</li> </ul> </li> <li>which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.</li> </ul> </li> <li>AO53</li> <li>For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.</li> </ul> |  |
|   | Roads.   |  |
| Use specific criteria   |  |  |

| Per        | formance outcomes   | Acceptable outcomes   |  |
|------------|---|---|--|
| PO5        | 54  | A054  |  |
| and<br>the | illary Office <sup>(53)</sup> , administration functions, retail sales<br>customer service components do not compromise<br>primary use of the site or industrial activities in the<br>sinct.                      | The combined area of ancillary non-industrial activities, including but not limited to Offices <sup>(53)</sup> and administration functions, does not exceed 10% of the GFA or 200m <sup>2</sup> , whichever is the lesser. |  |
| PO5        | 55  | A055  |  |
| the prec   | illary retail or showroom areas do not compromise<br>primary use of the site or industrial activities in the<br>cinct and does not affect the viability, role or function<br>he region's activity centre network. | The combined area for the display and retail sale of commodities, articles or goods resulting from the industrial processes on the site does not exceed 5% of the GFA or 100m <sup>2</sup> , whichever is the lesser.       |  |
| PO5        | 56  | No acceptable outcome provided.   |  |
|            | dings directly adjoining non-Enterprise and<br>ployment precinct land:  | 6   |  |
| a.         | are compatible with the character of the adjoining area;  | J. C  |  |
| b.         | minimise overlooking and overshadowing;   |   |  |
| C.         | maintain privacy;   |   |  |
| d.         | do not cause significant loss of amenity to<br>neighbouring residents by way of noise, vibration,<br>odour, lighting, traffic generation and hours of<br>operation.   | SCI   |  |
| PO5        | 57  | No acceptable outcome provided.   |  |
| Low        | impact and service industry <sup>(73)</sup> activities:   |   |  |
| a.         | do not constrain the function or viability of future Medium impact industry <sup>(47)</sup> in the sub-precinct;  |   |  |
| b.         | do not generate excessive non-industrial traffic;   |   |  |
| C.         | do not adversely affect the amenity, health or safety of employees and visitors of the surrounding uses;  |   |  |
| d.         | do not adversely affect the amenity, health or safety of nearby sensitive land uses.  |   |  |
| PO         | 58  | No acceptable outcome provided.   |  |
| Med        | lium impact industry <sup>(47)</sup> uses:  |   |  |
| a.         | are located at least 250m from a sensitive land use or sensitive zone or precinct;  |   |  |
| b.         | do not constrain the function or viability of future uses in the sub-precinct;  |   |  |

| Performance outcomes   | Acceptable outcomes   |  |
|--|---|--|
| c. do not adversely affect the amenity, health or safety of employees and visitors of the surrounding uses;  |   |  |
| d. do not adversely affect the amenity, health or safety of nearby sensitive land uses.  |   |  |
| PO59   | No acceptable outcome provided.   |  |
| Non-industrial components of buildings (including Offices <sup>(53)</sup> and retail areas) are designed as high quality architectural features and incorporate entry area elements such as forecourts, awnings and the architectural treatment of roof lines and fascias. |   |  |
| Non-industrial uses  |   |  |
| <b>PO60</b><br>With the exception of Caretaker's accommodation <sup>(10)</sup> , residential and other sensitive land uses do not establish within the precinct.   | No acceptable outcome provided.   |  |
| P061   | No acceptable outcome provided.   |  |
| Non-industrial uses:   |   |  |
| a. are consolidated with existing non-industrial uses in the precinct;   | S   |  |
| b. do not compromise the viability, role or function of the region's activity centre network;  |   |  |
| c. are not subject to adverse amenity impacts, or risk to health from industrial activities;   |   |  |
| d. do not constrain the function or viability of existing or future industrial activities in the surrounding area;   |   |  |
| e. are not located on local streets.   |   |  |
| PO62   | No acceptable outcome provided.   |  |
| Traffic generated by non-industrial uses does not<br>detrimentally impact upon the operation and functionality<br>of the external road network.  |   |  |
| PO63   | AO63  |  |
| Development of Caretaker's accommodation <sup>(10)</sup> :   | Caretaker's accommodation <sup>(10)</sup> :   |  |
| <ul><li>a. does not compromise the productivity of the use occurring on-site and in the surrounding area;</li><li>b. is domestic in scale;</li></ul>   | <ul> <li>a. has a maximum GFA of 80m<sup>2</sup>;</li> <li>b. does not gain access from a separate driveway to that of the industrial use;</li> </ul> |  |
|  |   |  |

| <ul> <li>the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and<br/>structures;</li> <li>f. camouflaged through the use of colours and<br/>materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character<br/>of the zone and surrounding area.</li> </ul> PO66 Infrastructure does not have an impact on pedestrian<br>health and safety. <ul> <li>use conflicts by ensuring infrastructure, buildings, structures;</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the<br/>surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to<br/>all exterior walls. AO65.2 A minimum 3m wide strip of dense planting is provided<br/>around the outside of the fenced area, between the<br/>development and street frontage, side and rear<br/>boundaries. PO66 Infrastructure does not have an impact on pedestrian<br/>health and safety. AO66 ACcess control arrangements: a. do not create dead-ends or dark alleyways adjacer<br/>to the infrastructure;</li></ul>   | Performance outcomes  | Acceptable outcomes   |  |
|---|---|---|--|
| <ul> <li>has regard to the open space and recreation needs of the residents.</li> <li>Retail and commercial activities</li> <li>PO64</li> <li>Retail and commercial uses within a neighbourhood hub consists of no more than:         <ul> <li>a. 1 small format supermarket with a maximum gfa of 1000m<sup>2</sup>;</li> <li>b. 10 small format retail or commercial tenancies with a maximum gfa of 1000m<sup>2</sup> each.</li> </ul> </li> <li>Major electricity infrastructure<sup>(43)</sup>, Substation<sup>(80)</sup> and Utility installation<sup>(86)</sup></li> <li>PO65</li> <li>The development does not have an adverse impact on the visual amenity of a locality and is:</li></ul>   | of the primary use of the site;   | <ul><li>directly accessible from a habitable room;</li><li>d. provides car parking in accordance with the car</li></ul>   |  |
| P064       No acceptable outcome provided.         Retail and commercial uses within a neighbourhood hub consists of no more than:       a. 1 small format supermarket with a maximum gfa of 1000m <sup>2</sup> ;         b. 10 small format retail or commercial tenancies with a maximum gfa of 1000m <sup>2</sup> each.       Access tenancies with a maximum gfa of 100m <sup>2</sup> each.         Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(60)</sup> and Utility installation <sup>(66)</sup> Access.         P065       Access conflicts by ensuring infrastructure, buildings, structures and other equipment:         a. high quality design and construction;       b. visually dominant or intrusive;         d. located behind the main building line;       a. are enclosed within buildings or structures;         d. located behind the main building line;       a. are enclosed within building sor structures;         d. located behind the main building line;       b. are located behind the main building line;         e. the object the surrounding buildings and structures;       c. have a similar height, bulk and scale to the surrounding land use conflicts behind the main building line;         g. treated to eliminate glare and reflectivity;       handscaped;         i. otherwise consistent with the amenity and character of the zone and surrounding area.       Access         P066       Access control arrangements:         Infrastructure does not have an impact on pedestrian health and safety.       Access control arrangements:         a. do not create dea   |   |   |  |
| Retail and commercial uses within a neighbourhood hub consists of no more than:       a. 1 small format supermarket with a maximum gfa of 1000m <sup>2</sup> ;         b. 10 small format retail or commercial tenancies with a maximum gfa of 100m <sup>2</sup> ;       a. 1 small format retail or commercial tenancies with a maximum gfa of 100m <sup>2</sup> each.         Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(60)</sup> and Utility installation <sup>(66)</sup> AC65.1         PO65       AC65.1         The development does not have an adverse impact on the visual amenity of a locality and is:       Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:         a. high quality design and construction;       b. visually integrated with the surrounding area;         c. not visually dominant or intrusive;       a. are enclosed within buildings or structures;         d. located behind the main building line;       a. are enclosed within buildings or structures;         e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;       d. have horizontal and vertical articulation applied to all exterior walls.         f. camouflaged through the use of colours and materials which blend into the lendscape; of the zone and surrounding area.       AO65.2         PO66       AC66         Infrastructure does not have an impact on pedestrian health and safety.       AC66         Noterate dead-ends or dark alleyways adjacer to the infrastructure;       a. do not create dead-ends or d | Retail and commercial activities  |   |  |
| consists of no more than:         a.       1 small format supermarket with a maximum gfa of 1000m <sup>2</sup> ;         b.       10 small format retail or commercial tenancies with a maximum gfa of 100m <sup>2</sup> each.         Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and Utility installation <sup>(86)</sup> PO65         The development does not have an adverse impact on the visual amenity of a locality and is:         a.       high quality design and construction;         b.       visually integrated with the surrounding area;         c.       not visually dominant or intrusive;         d.       located behind the main building line;         e.       below the level of the surrounding buildings and structures;         f.       camouflaged through the use of colours and materials which blend into the landscape;         g.       treated to eliminate glare and reflectivity;         h.       landscaped;         i.       ofthe-zone and surrounding area.         PO66       AO65.2         A       Aminimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.         PO66       AC66         Infrastructure does not have an impact on pedestrian health and safety.       A066   | PO64  | No acceptable outcome provided.   |  |
| 1000m <sup>2</sup> ;  | consists of no more than:   |   |  |
| a maximum gfa of 100m <sup>2</sup> each.         Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and Utility installation <sup>(86)</sup> PO65         The development does not have an adverse impact on the visual amenity of a locality and is:         a. high quality design and construction;         b. visually integrated with the surrounding area;         c. not visually dominant or intrusive;         d. located behind the main building line;         e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;         f. camouflaged through the use of colours and materials which blend into the landscape;         g. treated to eliminate glare and reflectivity;         h. landscaped;         i. otherwise consistent with the amenity and character of the zone and surrounding area.         PO66         Infrastructure does not have an impact on pedestrian health and safety.         A do not create dead-ends or dark alleyways adjacer to the infrastructure;         b. minimise the number and width of crossovers and entry points;   | 1000m²;   | C ets   |  |
| <ul> <li>PO65</li> <li>The development does not have an adverse impact on the visual amenity of a locality and is: <ul> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> </li> <li>PO66</li> <li>Infrastructure does not have an impact on pedestrian health and safety.</li> <li>A065.1</li> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> PO66 A066 A066 Access control arrangements: <ul> <li>a. do not create dead-ends or dark alleyways adjacer to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> </ul>  | a maximum gfa of 100m <sup>2</sup> each.  |   |  |
| The development does not have an adverse impact on the visual amenity of a locality and is:       Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:         a.       high quality design and construction;       a.         b.       visually integrated with the surrounding area;       c.         c.       not visually dominant or intrusive;       a.         d.       located behind the main building line;       e.         e.       below the level of the predominant tree canopy or the level of the surrounding buildings and structures;       f.         f.       camouflaged through the use of colours and materials which blend into the landscape;       d.         g.       treated to eliminate glare and reflectivity;       h.         h.       landscaped;       i.         i.       otherwise consistent with the amenity and character of the zone and surrounding area.       Ao665.2         PO66       AC66         Infrastructure does not have an impact on pedestrian health and safety.       a.       do not create dead-ends or dark alleyways adjacer to the infrastructure;         b.       minimise the number and width of crossovers and entry points;  | Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and   | Utility installation <sup>(86)</sup>  |  |
| <ul> <li>the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> PO66 PO66 Infrastructure does not have an impact on pedestrian health and safety. a. do not create dead-ends or dark alleyways adjacer to the infrastructure; b. minimise the number and width of crossovers and entry points;   | PO65  | AO65.1  |  |
| <ul> <li>materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> <li>PO66</li> <li>Infrastructure does not have an impact on pedestrian health and safety.</li> <li>AO65.2</li> <li>A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.</li> <li>PO66</li> <li>AO66</li> <li>Access control arrangements:         <ul> <li>a. do not create dead-ends or dark alleyways adjacer to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> </ul> </li> </ul>   | <ul> <li>the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> </ul> | <ul> <li>structures and other equipment:</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to</li> </ul> |  |
| <ul> <li>Infrastructure does not have an impact on pedestrian health and safety.</li> <li>Access control arrangements: <ul> <li>a. do not create dead-ends or dark alleyways adjacer to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> </ul> </li> </ul>  | <ul> <li>materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character</li> </ul>  | A minimum 3m wide strip of dense planting is provided<br>around the outside of the fenced area, between the<br>development and street frontage, side and rear   |  |
| <ul> <li>health and safety.</li> <li>a. do not create dead-ends or dark alleyways adjacer to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> </ul>   | PO66  | AO66  |  |
| d. do not utilise barbed wire or razor wire.  | · · · ·   | <ul> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> </ul>   |  |
| PO67 AO67   | PO67  | AO67  |  |

| Performance outcomes  | Acceptable outcomes  |  |
|---|--|--|
| <ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul> | All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the<br>Environmental Protection (Noise) Policy 2008. |  |
| Telecommunications facility <sup>(81)</sup>   |  |  |
| Editor's note - In accordance with the Federal legislation Telecommur<br>that will not cause human exposure to electromagnetic radiation beyo<br>Radiation - Human Exposure) Standard 2003 and Radio Protection St<br>to 300Ghz.  | nications facilities <sup>(81)</sup> must be constructed and operated in a manner<br>ond the limits outlined in the Radiocommunications (Electromagnetic<br>standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz   |  |
| PO68  | A068.1   |  |
| Telecommunications facilities <sup>(81)</sup> are co-located with<br>existing telecommunications facilities <sup>(81)</sup> , Utility<br>installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or<br>Substation <sup>(80)</sup> if there is already a facility in the same<br>coverage area.                                    | New telecommunication facilities <sup>(81)</sup> are co-located on<br>existing towers with new equipment shelter and associated<br>structures positioned adjacent to the existing shelters and<br>structures.  |  |
|   | If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.   |  |
| PO69  | AO69   |  |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.  | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.  |  |
| P070  | A070   |  |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.  | Il The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.   |  |
| P071  | A071.1   |  |
| <ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>   | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.   |  |
| <ul><li>c. not visually dominant or intrusive;</li><li>d. located behind the main building line;</li></ul>  | A071.2   |  |

| Performance outcomes   | Acceptable outcomes  |  |
|--|--|--|
| e. below the level of the predominant tree canopy or the level of the surrounding buildings and  | In all other areas towers do not exceed 35m in height.   |  |
| structures;<br>f. camouflaged through the use of colours and   | A071.3   |  |
| <ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li><li>h. landscaped;</li></ul>   | Towers, equipment shelters and associated structures are of a design, colour and material to:  |  |
| <ul> <li>otherwise consistent with the amenity and character<br/>of the zone and surrounding area.</li> </ul>  | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>  |  |
|  | A071.4   |  |
|  | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is 3m.   |  |
|  | Where there is no established building line the facility is located at the rear of the site.   |  |
|  | A071.5   |  |
|  | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |  |
|  | A071.6   |  |
| ×O   | A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the<br>facility and street frontage and adjoining uses.  |  |
|  | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |  |
| Plan.  | Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.   |  |
| P072   | A072   |  |
| Lawful access is maintained to the site at all times that<br>does not alter the amenity of the landscape or<br>surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |  |
| P073   | A073   |  |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting. | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |  |
| Values and con   | straints criteria  |  |

| Performance outcomes | Acceptable outcomes |
|----------------------|---------------------|
|----------------------|---------------------|

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

## Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

| P07 | <sup>7</sup> 4   | A074       |   |
|-----|--|------------|---|
|     | elopment avoids disturbing acid sulfate soils. Where elopment disturbs acid sulfate soils, development:  |            | ment does not involve:  |
| a.  | is managed to avoid or minimise the release of<br>surface or groundwater flows containing acid and<br>metal contaminants into the environment; | 100<br>Aus | Om <sup>3</sup> of soil or sediment where below than 5m stralian Height datum AHD; or ng of land of more than 500m <sup>3</sup> of material with an |
| b.  | protects the environmental and ecological values<br>and health of receiving waters;  | ave        | erage depth of 0.5m or greater where below the<br>Australian Height datum AHD.  |
| C.  | protects buildings and infrastructure from the effects of acid sulfate soils.  |            | 0   |

# Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

| P075  | A075   |
|---|--|
| Development will:   | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural                |
| a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and   | heritage value.  |
| <ul><li>associated with a heritage site, object or building</li><li>b. protect the fabric and setting of the heritage site,</li></ul>                   | preservation, maintenance, repair and restoration of a site, object or   |
| <ul><li>object or building;</li><li>c. be consistent with the form, scale and style of th</li></ul>   | building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The |
| heritage site, object or building;  | of any preservation, maintenance, repair and restoration works.  |
| <ul> <li>utilise similar materials to those existing, or when<br/>this is not reasonable or practicable, neutral<br/>materials and finishes;</li> </ul> | e  |

| Performance outcomes  | Acceptable outcomes  |  |  |  |
|---|--|--|--|--|
| <ul> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul>  |  |  |  |  |
| P076  | No acceptable outcome provided.  |  |  |  |
| Demolition and removal is only considered where:  |  |  |  |  |
| <ul> <li>a. a report prepared by a suitably qualified<br/>conservation architect or conservation engineer<br/>demonstrates that the building is structurally<br/>unsound and is not reasonably capable of economic<br/>repair; or</li> <li>b. demolition is confined to the removal of<br/>outbuildings, extensions and alterations that are<br/>not part of the original structure; or</li> <li>c. limited demolition is performed in the course of<br/>repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic<br/>event which substantially destroys the building or<br/>object.</li> </ul> | ersion?  |  |  |  |
| P077<br>Where development is occurring on land adjoining a site<br>of cultural heritage value, the development is to be<br>sympathetic to and consistent with the cultural heritage<br>values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view.  | No acceptable outcome provided.  |  |  |  |
| P078  | A078   |  |  |  |
| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> </ul>   | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer. |  |  |  |
| Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)   |  |  |  |  |
| Note - The applicable river and creek flood planning levels associated v<br>by requesting a flood check property report from Council.   | vith defined flood event (DFE) within the inundation area can be obtained  |  |  |  |
| P079  | No acceptable outcome provided.  |  |  |  |
| Development:  |  |  |  |  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>  |  |
| PO80  | AO80   |
| Development:  | No acceptable outcome provided.  |
| <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> </ul> | ersion?  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.   | NON'   |
| PO81  | No acceptable outcome provided.  |
| Development does not:   | 2  |
| <ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> </ul>  |  |
| PO82  | AO82   |
| Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.  | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994<br>and the relevant building assessment provisions under the Building<br>Act 1975 for requirements related to the manufacture and storage of<br>hazardous substances. |
| PO83  | AO83   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.   | Development which is not in a Rural zone that an overland<br>flow paths and drainage infrastructure is provided to<br>convey overland flow from a road or public open space<br>area away from a private lot.   |
| PO84   | A084.1   |
| <ul> <li>Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow</li> <li>PO85</li> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul> | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – Level III;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>AO84.2<br>Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment.<br>No acceptable outcome provided. |
| Additional criteria for development for a Park <sup>(57)</sup>   |  |
| P086   | A086   |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:  | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design.   |
| a. public benefit and enjoyment is maximised:  |  |

a. public benefit and enjoyment is maximised;

ersi

-neme

sè

| Ре | rformance outcomes   | Acceptable outcomes |
|----|--|---------------------|
| b. | impacts on the asset life and integrity of park structures is minimised; |                     |
| C. | maintenance and replacement costs are minimised.                         |                     |

### 7.2.3.3.2 Light industry sub-precinct

#### 7.2.3.3.2.1 Purpose - Light industry sub-precinct

- 1. The purpose of the Light industry sub-precinct will be achieved through the following overall outcomes:
  - a. Land is developed for Light industry purposes on lots identified as Light industry sub-precinct on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.3.1 Enterprise and employment urban design framework.
  - b. Development for a use that is ancillary to a low impact industry<sup>(42)</sup> activity on the same site which directly supports industry and workers may be accommodated.
  - c. Where the Light industry sub-precinct provides a buffer between the adjacent General industry sub-precinct and other non-industrial uses as indicated on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.3.1 Enterprise and employment urban design framework a range of Low impact industry<sup>(42)</sup> activities which are of a low intensity and scale are established in the buffer.
  - d. The operation and viability of low impact industry<sup>(42)</sup> activities is protected from the intrusion of incompatible uses.
  - e. Medium impact industry<sup>(47)</sup> purposes and Specialised centre uses are not established in the Light industry sub-precinct.
  - f. Development provides a range of lot sizes to cater for industrial and employment needs and user requirements as indicated on a Neighbourhood development plan.
  - g. Low impact industry<sup>(42)</sup> activities are located, design and managed to:
    - i. maintain the health and safety of people;
    - ii. avoid significant adverse effects on the natural environment;
    - iii. minimise the possibility of adverse impacts on surrounding non-industrial uses.
  - h. Development incorporates a range of building materials, vertically and horizontally articulated facades, landscaping, promotion of customer entry points, and safe and legible pedestrian access.
  - i. Development encourages public transport patronage and active transport choices through the increased provision of appropriate end of trip facilities.
    - Low impact industry<sup>(42)</sup> activities which involve a high level of contact with the general public are located along a main street and provide a high quality built form and landscaped environment to the street.
  - k. General works associated with the development achieves the following:
    - new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
    - ii. the development manages stormwater to:

i.

- A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
- B. prevent stormwater contamination and the release of pollutants;
- C. maintain or improve the structure and condition of drainage lines and riparian areas;
- D. avoid off-site adverse impacts from stormwater.
- iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.

- I. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- m. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- n. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- o. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- p. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- q. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- r. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- s. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- t. Development in the Light industry sub-precinct includes one or more of the following:

| • | Agricultural supplies store <sup>(2)</sup> | • | Emergency services <sup>(25)</sup>                                    | • | Research and technology industry <sup>(64)</sup> |
|---|--|---|---|---|--|
| • | Animal husbandry <sup>(4)</sup>            | • | Food and drink  |   |  |
| • | Aquaculture <sup>(6)</sup> (where in a     |   | outlet <sup>(28)</sup> (where not<br>exceeding 100m <sup>2</sup> GFA) | • | Service industry <sup>(73)</sup>                 |
|   | building)                                  |   | <b>C</b> ,  | • | Service station <sup>(74)</sup>                  |
| • | Bulk landscape supplies <sup>(9)</sup>     | • | Hardware and trade<br>supplies <sup>(32)</sup>                        | • | Substation <sup>(80)</sup>                       |

|  | <ul> <li>Indoor sport and recreation<sup>(38)</sup></li> <li>Low impact industry<sup>(42)</sup></li> </ul> | <ul> <li>Transport depot<sup>(85)</sup></li> <li>Utility installation<sup>(86)</sup></li> </ul> |
|--|--|---|
| <ul> <li>Child care centre<sup>(13)</sup></li> <li>Educational<br/>establishment<sup>(24)</sup> (where<br/>technical and trade related<br/>education)</li> </ul> | <ul> <li>Outdoor sales<sup>(54)</sup></li> </ul>   | • Warehouse <sup>(88)</sup>   |

u. Development in the Light industry sub-precinct does not include any of the following:

|   | •   | Adult store <sup>(1)</sup>  | • | Hardware and trade supplies <sup>(32)</sup>                        | •  | Parking station <sup>(58)</sup>                |
|---|-----|---|---|--|----|--|
|   | •   | Agricultural supplies store <sup>(2)</sup>                              |   | Health care services <sup>(33)</sup>                               | •  | Permanent plantation <sup>(59)</sup>           |
|   | •   | Air services <sup>(3)</sup>   | • |  | •  | Port services <sup>(61)</sup>                  |
|   | •   | Animal husbandry <sup>(4)</sup>   | • | High impact industry <sup>(34)</sup>                               | •0 | Relocatable home park <sup>(62)</sup>          |
|   | •   | Animal keeping <sup>(5)</sup>   |   | Home based business <sup>(35)</sup>                                |    | Renewable energy facility <sup>(63)</sup>      |
|   | •   | Aquaculture <sup>(6)</sup>  |   | Hospital <sup>(36)</sup>   | •  | Residential care facility <sup>(65)</sup>      |
|   | •   | Bar <sup>(7)</sup>  |   | Hotel <sup>(37)</sup>  | •  | Resort complex <sup>(66)</sup>                 |
|   | •   | Brothel <sup>(8)</sup>  | • | Intensive animal industry <sup>(39)</sup>                          | •  | Retirement facility <sup>(67)</sup>            |
|   | •   | Cemetery <sup>(12)</sup>  | • | Intensive horticulture <sup>(40)</sup>                             | •  | Roadside stall <sup>(68)</sup>                 |
|   | •   | Club <sup>(14)</sup>  | • | Landing <sup>(41)</sup>  | •  | Rural industry <sup>(70)</sup>                 |
|   | • • | Community care centre <sup>(15)</sup>                                   |   | Major electricity<br>infrastructure <sup>(43)</sup>                | •  | Rural workers<br>accommodation <sup>(71)</sup> |
|   | •   | Community residence <sup>(16)</sup>                                     |   | Major sport, recreation and entertainment facility <sup>(44)</sup> | •  | Sales office <sup>(72)</sup>                   |
|   | •   | Community use <sup>(17)</sup>   | • | Marine industry <sup>(45)</sup>                                    | •  | Shop <sup>(75)</sup>                           |
|   |     | Crematorium <sup>(18)</sup>   | • | Market <sup>(46)</sup>   | •  | Shopping centre <sup>(76)</sup>                |
|   | •   | Cropping <sup>(19)</sup>  | • | Medium impact industry <sup>(47)</sup>                             | •  | Short-term accommodation <sup>(77)</sup>       |
|   | •   | Detention facility <sup>(20)</sup>                                      | • | Multiple dwelling <sup>(49)</sup>                                  | •  | Special industry <sup>(79)</sup>               |
|   | • < | Dual occupancy <sup>(21)</sup>  | • | Nature-based tourism <sup>(50)</sup>                               | •  | Theatre <sup>(82)</sup>                        |
|   | •   | Dwelling house <sup>(22)</sup>  | • | Nightclub entertainment  | •  | Tourist park <sup>(84)</sup>                   |
|   | •   | Dwelling unit <sup>(23)</sup>   |   | facility <sup>(51)</sup>   | •  | Veterinary services <sup>(87)</sup>            |
|   | •   | Education establishment <sup>(24)</sup><br>(where not for technical and | • | Non-resident workforce<br>accommodation <sup>(52)</sup>            | •  | Wholesale nursery <sup>(89)</sup>              |
|   |     | trade related education)  | • | Outdoor sales <sup>(54)</sup>                                      | •  | Winery <sup>(90)</sup>                         |
|   | •   | Environment facility <sup>(26)</sup>                                    |   |  | _  |  |
|   | •   | Extractive industry <sup>(27)</sup>                                     | • | Outdoor sport and recreation <sup>(55)</sup>                       |    |  |
| Į |     |   |   |  |    |  |

| <ul> <li>Function facility<sup>(29)</sup></li> </ul> |
|--|
| • Funeral parlour <sup>(30)</sup>                    |
| • Garden centre <sup>(31)</sup>                      |

v. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the sub-precinct.

#### 7.2.3.3.2.2 Criteria for assessment

#### Part N - Criteria for assessable development - Light industry sub-precinct

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part N, Table 7.2.3.3.2.1.

Where development is impact assessable, the assessment criteria become the whole of the planning scheme.

#### Table 7.2.3.3.2.1 Assessable development - Light industry sub-precinct

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| Genera  | I criteria   |
| Site cover  | C C  |
| <ul> <li>PO1</li> <li>Building site cover allows for adequate on-site provision of:</li> <li>a. car parking;</li> <li>b. vehicle access and manoeuvring;</li> <li>c. setbacks to boundaries;</li> <li>d. landscaped areas.</li> </ul> | No acceptable outcome provided.  |
| Building height   |  |
| PO2<br>The height of buildings reflect the individual character of<br>the precinct.   | AO2<br>Building heights do not to exceed that mapped on<br>Neighbourhood development plan map - Building<br>heights. |
| Setbacks  |  |
| PO3   | AO3  |
| <ul> <li>Street boundary setbacks:</li> <li>a. minimise building bulk and visual dominance from the street;</li> </ul>  | Buildings maintain a minimum setback of:<br>a. 6m to the street frontage;  |

| Per            | ormance outcomes   | Acceptable outcomes   |
|----------------|--|---|
| b.             | provide areas for landscaping at the front of the site;  | b. 3m to the secondary street frontage;   |
| C.             | allow for customer parking to be located at the front of the building.   | c. 5m to land not included Enterprise and employment precinct.  |
|                | e - The following diagram illustrates an acceptable design<br>bonse to this outcome.   | 2   |
|                | Industrial Activity.   | S sion  |
|                | Parking.   |   |
|                | Driveway.  | Schern  |
| PO4            |  | A04   |
| Side<br>acce   | e and rear boundary setbacks maintain views, privacy,<br>ess to natural light and the visual amenity of adjoining<br>sitive land uses.   | Where a development adjoins the Urban living<br>precinct, the building is setback a minimum of 3m from<br>the property boundary and includes landscaping along<br>the boundary appropriate for screening with a mature<br>height of at least 3m.                |
|                | G  | Note - Refer to Planning scheme policy - Integrated design for determining acceptable levels of landscaping for screening purposes.   |
| Des            | ign and sitting  |   |
| PO             |  | A05   |
| of in<br>inter | ding on highly visible sites incorporate a high standard<br>dustrial design and construction, which adds visual<br>rest to the streetscape and reduces the perceived<br>of the building from the street. | <ul><li>Where fronting a main street, or visible from a park,<br/>Neighbourhood hub or Local centre lot, buildings provide<br/>a high level of architectural design, by incorporating:</li><li>a. a range of building materials, colours and features</li></ul> |
|                | e - The following example illustrates an acceptable design<br>ponse to this outcome.   | <ul><li>b. facade articulation along street frontages;</li></ul>  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | <ul> <li>c. design features to promote customer entry points;</li> <li>d. materials that are not highly reflective.</li> </ul> |
|  | or Jersion   |
| PO6  | No acceptable outcome provided.  |
| Buildings on highly visible corner allotments:   |  |
| a. address both street frontages;  |  |
| <ul> <li>b. contain building openings facing both street<br/>frontages;</li> </ul>   | S  |
| <ul> <li>c. do not present blank unarticulated walls to either frontage.</li> <li>Note - The following example illustrates an acceptable design</li> </ul> |  |
| response to this outcome.  |  |
| Staff recreation area  |  |
| P07  | No acceptable outcome provided.  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| <ul> <li>Development provides an on-site recreation area for staff that:</li> <li>a. includes seating, tables and rubbish bins;</li> <li>b. is adequately protected from the weather;</li> <li>c. is safely accessible to all staff;</li> <li>d. is separate and private from public areas;</li> <li>e. is located away from a noisy or odorous activity.</li> </ul>   | Acceptable outcomes   |
| Landscaping  |   |
| <ul> <li>PO8</li> <li>Landscaping is provided on the site to:</li> <li>a. visually soften the built form, areas of hardstand, storage areas and mechanical plant associated with the on-site activities;</li> <li>b. complement the existing or desired streetscape;</li> <li>c. minimise the impact of industrial development on adjoining lots not within an industrial precinct or sub-precinct.</li> </ul> | A08<br>Landscaping is provided and maintained in accordance<br>with Planning scheme policy - Integrated design. |
| Fencing  |   |
| <text><text><text><image/></text></text></text>  | AO9<br>Where fencing is provided on the street frontage, it has<br>a minimum transparency of 70%.               |
| Public access  |   |
|  |   |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| <text></text>   | Pedestrian linkages are provided from the street and<br>customer car parking areas directly to the main entrance<br>of the building.<br>AO10.2<br>The public access is separated from industrial service<br>areas. |
|   |  |
| Car parking   | CU.  |
| PO11<br>Car parking is provided on-site to meet the anticipated<br>demand of employees and visitors and avoid adverse<br>impacts on the external road network.<br>Note - Refer to Planning scheme policy - Integrated transport<br>assessment for guidance on how to achieve compliance with this<br>outcome. | A011<br>Car parking is provided in accordance with Schedule 7<br>Car parking.  |
|   | 4012   |
| <ul> <li>PO12</li> <li>The design of car parking areas:</li> <li>a. does not impact on the safety of the external road network;</li> <li>b. ensures the safety of pedestrians at all times;</li> <li>c. ensures the safe movement of vehicles within the site.</li> </ul>                                     | AO12<br>All car parking areas are designed and constructed in<br>accordance with Australian Standard AS2890.1.   |
| <b>Bicycle parking and end of trip facilities</b><br>Note - Building work to which this code applies constitutes Major De<br>facilities prescribed in the Queensland Development Code MP 4.1.   | evelopment for purposes of development requirements for end of trip  |

| Per   | forma   | ance outcomes  | Acceptable outcomes  |
|---|---|--|--|
| PO  | 13  |  | AO13.1   |
| a.  | occi  | of trip facilities are provided for employees or<br>upants, in the building or on-site within a<br>sonable walking distance, and include:  | Minimum bicycle parking facilities are provided at a rate<br>of 1 bicycle parking space for every 3 vehicles parking<br>spaces required by Schedule 7 – Car parking.   |
|   | i.  | adequate bicycle parking and storage facilities; and   | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default   |
|   | ii.   | adequate provision for securing belongings;<br>and   | levels identified in those acceptable solutions. This acceptable<br>outcome is a combination of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional   |
|   | iii.  | change rooms that include adequate showers, sanitary compartments, wash basins and mirrors.  | facilities required by Council.  |
| b.  | prov<br>unre  | withstanding a. there is no requirement to<br>vide end of trip facilities if it would be<br>easonable to provide these facilities having<br>and to:<br>the projected population growth and forward<br>planning for road upgrading and development<br>of cycle paths; or  | <ul> <li>Bicycle parking is:</li> <li>a. provided in accordance with Austroads (2008),<br/>Guide to Traffic Management - Part 11: Parking;</li> <li>b. protected from the weather by its location or a<br/>dedicated roof structure;</li> <li>c. located within the building or in a dedicated, secure<br/>structure for residents and staff;</li> </ul>   |
|   | ii.   | whether it would be practical to commute to<br>and from the building on a bicycle, having<br>regard to the likely commute distances and<br>nature of the terrain; or   | <ul> <li>adjacent to building entrances or in public areas for customers and visitors.</li> </ul>  |
|   | iii.  | the condition of the road and the nature and<br>amount of traffic potentially affecting the safety<br>of commuters.  | Note - Bicycle parking structures are to be constructed to the standards prescribed in AS2890.3.<br>Note - Bicycle parking and end of trip facilities provided for residential and non-residential activities may be pooled, provided they are within  |
| Editor's note - The intent of b above is to ensure the requirements<br>for bicycle parking and end of trip facilities are not applied in<br>unreasonable circumstances. For example these requirements<br>should not, and do not apply in the Rural zone or the Rural residential<br>zone etc.<br>Editor's note - This performance outcome is the same as the<br>Performance Requirement prescribed for end of trip facilities under<br>the Queensland Development Code. For development incorporating<br>building work, that Queensland Development Code performance<br>requirement cannot be altered by a local planning instrument and |   | parking and end of trip facilities are not applied in<br>ble circumstances. For example these requirements<br>and do not apply in the Rural zone or the Rural residential<br>the - This performance outcome is the same as the<br>rece Requirement prescribed for end of trip facilities under<br>sland Development Code. For development incorporating<br>ork, that Queensland Development Code performance   | 100 metres of the entrance to the building.<br>Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |
| has<br>ass<br>trip<br>Qu<br>tim<br>ens<br>out   | s been r<br>sessme<br>facilitie<br>eenslar<br>e, applie<br>sure that<br>comes | nt cannot be altered by a local planning instrument and<br>eproduced here solely for information purposes. Council's<br>nt in its building work concurrence agency role for end of<br>is will be against the performance requirement in the<br>nd Development Code. As it is subject to change at any<br>cants for development incorporating building work should<br>it proposals that do not comply with the acceptable<br>under this heading meet the current performance<br>nt prescribed in the Queensland Development Code. | <ul> <li>AO13.3</li> <li>For non-residential uses, storage lockers:</li> <li>a. are provide at a rate of 1.6 per bicycle parking space (rounded up to the nearest whole number);</li> <li>b. have minimum dimensions of 900mm (height) x 300mm (width) x 450mm (depth).</li> </ul>   |

| Performance outcomes | Accept  | able ou   | utcome                            | 5  |  |   |
|----------------------|---|---|-----------------------------------|--|--|---|
|                      | Note - Storage lockers may be pooled across multiple sites and activities when within 100 metres of the entrance to the building and within 50 metres of bicycle parking and storage facilities.  |   |                                   |  |  |   |
|                      | Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |   |                                   |  |  |   |
|                      | AO13.4<br>For non-residential uses, changing rooms:   |   |                                   |  |  |   |
|                      | b. ar<br>frc<br>c. ar<br>cc   | aces;<br>e fitted<br>om publ<br>e provid<br>ompartn | with a lo<br>ic view;<br>ded with | ckable dc<br>shower(<br>and wash   | per 10 bicycle<br>or or otherwise<br>s), sanitary<br>basin(s) in ac  | e screened  |
|                      | Bicycle<br>spaces<br>provided   | Male/<br>Female                                     | Change<br>rooms<br>required       | Showers required   | Sanitary<br>compartments<br>required   | Washbasins<br>required  |
|                      | 1-5   | Male<br>and<br>female                               | 1 unisex<br>change<br>room        | 1  | 1 closet pan   | 1   |
|                      | 6-19  | Female  | 1                                 | 1  | 1 closet pan   | 1   |
|                      | 20 or   | Male  | 1                                 | 1  | 1 closet pan   | 1   |
| MBRORIAN             | more  | Female  | 1                                 | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 2 closet pans, plus<br>1 sanitary<br>compartment for<br>every 60 bicycle<br>parking spaces<br>provided thereafter  | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|                      |   | Male  | 1                                 | 2, plus 1<br>for every<br>20 bicycle<br>spaces<br>provided<br>thereafter | 1 urinal and 1<br>closet pans, plus 1<br>sanitary<br>compartment at<br>the rate of 1 closet<br>pan or 1 urinal for<br>every 60 bicycle<br>space provided<br>thereafter | 1, plus 1 for<br>every 60<br>bicycle<br>parking<br>spaces<br>provided<br>thereafter |
|                      | Note - All showers have a minimum 3-star Water Efficiency Labelling and Standards (WELS) rating shower head.  |   |                                   |  |  |   |
|                      | Note - All sanitary compartments are constructed in compliance with F2.3 (e) and F2.5 of BCA (Volume 1).  |   |                                   |  |  |   |
|                      |   |   | ded with                          |  |  |   |
|                      | i.  | a m   | irror loca                        | ated abov  | ve each wash   | basin;  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | <ul> <li>ii. a hook and bench seating within each shower compartment;</li> <li>iii. a socket-outlet located adjacent to each wash basin.</li> </ul>   |
| Loading and servicing   | Note - Change rooms may be pooled across multiple sites, residential<br>and non-residential activities when within 100 metres of the entrance<br>to the building and within 50 metres of bicycle parking and storage<br>facilities<br>Editor's note - The acceptable solutions for end of trip facilities<br>prescribed under the Queensland Development Code permit a local<br>planning instrument to prescribe facility levels higher than the default<br>levels identified in those acceptable solutions. This acceptable<br>outcome is an amalgamation of the default levels set for end of trip<br>facilities in the Queensland Development Code and the additional<br>facilities required by Council. |
| PO14  | No acceptable outcome provided.   |
| Service areas including loading/unloading facilities, plant<br>areas and outdoor storage areas are screened from the<br>direct view from public areas and land not included in<br>the Enterprise and employment precinct.<br>Note - If landscaping is proposed for screening purposes, refer to<br>Planning scheme policy - Integrated design for determining<br>acceptable levels. | scheme  |
| Waste   |   |
| PO15<br>Bins and bin storage areas are provided, designed and<br>managed in accordance with Planning scheme policy –  | No acceptable outcome provided.   |
| Waste.  |   |
| Environmental impacts   |   |
| PO16  | AO16  |
| Where a use is not an environmentally relevant activity<br>under the Environmental Protection Act, the release of<br>any containment that may cause environmental harm is<br>mitigated to an acceptable level.  | Development achieves the standard listed in Schedule 1<br>Air Quality Objectives, Environmental Protection (Air)<br>Policy 2008.  |
| Lighting  |   |
| P017  | A017  |
| Lighting is directed and shielded to not cause<br>unreasonable disturbance to any person on adjoining<br>land.  | Artificial lighting on-site is directed and shielded in such<br>a manner as not to exceed the recommended maximum<br>values of light technical parameters for the control of  |

| Performance outcomes   | Acceptable outcomes   |  |
|--|---|--|
|  | obtrusive light given in Table 2.1 of Australian Standard<br>AS 4282 (1997) Control of Obtrusive Effects of Outdoor<br>Lighting.  |  |
|  | Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day   |  |
| Hazardous Chemicals  |   |  |
| Note - To assist in demonstrating compliance with the following performance outcomes, a Hazard Assessment Report may be required to be prepared and submitted by a suitably qualified person in accordance with 'State Planning Policy Guideline - Guidance on development involving hazardous chemicals'. |   |  |
|  |   |  |
| Terms used in this section are defined in 'State Planning Policy Guid  | eline - Guidance on development involving hazardous chemicals'.   |  |
| Terms used in this section are defined in 'State Planning Policy Guid  | eline - Guidance on development involving hazardous chemicals'.   |  |
| Terms used in this section are defined in 'State Planning Policy Guid  | eline - Guidance on development involving hazardous chemicals'. AO18.1  |  |
| PO18<br>Off sites risks from foreseeable hazard scenarios<br>involving hazardous chemicals are commensurate with   | S   |  |
| PO18   | A018.1<br>Off site impacts or risks from any foreseeable hazard<br>scenario does not exceed the dangerous dose at the<br>boundary of land zoned for vulnerable or sensitive land  |  |
| PO18<br>Off sites risks from foreseeable hazard scenarios<br>involving hazardous chemicals are commensurate with   | AO18.1<br>Off site impacts or risks from any foreseeable hazard<br>scenario does not exceed the dangerous dose at the<br>boundary of land zoned for vulnerable or sensitive land<br>uses as described below:  |  |
| PO18<br>Off sites risks from foreseeable hazard scenarios<br>involving hazardous chemicals are commensurate with   | AO18.1<br>Off site impacts or risks from any foreseeable hazard<br>scenario does not exceed the dangerous dose at the<br>boundary of land zoned for vulnerable or sensitive land<br>uses as described below:<br>Dangerous Dose<br>a. For any hazard scenario involving the release of |  |

- b. For any hazard scenario involving fire or explosion:
  - i. 7kPa overpressure;
  - ii. 4.7kW/m2 heat radiation.

If criteria AO19.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of  $0.5 \times 10^{-6}$ /year.

#### AO18.2

Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below:

Dangerous Dose

a. For any hazard scenario involving the release of gases or vapours:

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| Performance outcomes  | <ul> <li>Acceptable outcomes <ul> <li>AEGL2 (60minutes) or if not available ERPG2;</li> <li>An oxygen content in air &lt;19.5% or &gt;23.5% at normal atmospheric pressure.</li> </ul> </li> <li>b. For any hazard scenario involving fire or explosion: <ul> <li>7kPa overpressure;</li> <li>4.7kW/m2 heat radiation.</li> </ul> </li> <li>If criteria AO19.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.</li> </ul> AO18.3 Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below: Dangerous Dose <ul> <li>a. For any hazard scenario involving the release of gases or vapours:</li> <li>AEGL2 (60minutes) or if not available ERPG2;</li> <li>An oxygen content in air &lt;19.5% or &gt;23.5% at normal atmospheric pressure.</li> </ul> b. For any hazard scenario involving the release of gases or vapours: <ul> <li>1. AEGL2 (60minutes) or if not available ERPG2;</li> <li>II. An oxygen content in air &lt;19.5% or &gt;23.5% at normal atmospheric pressure.</li> </ul> b. For any hazard scenario involving fire or explosion: <ul> <li>I. 14kPa overpressure;</li> <li>II. 12.6kW/m2 heat radiation.</li> </ul> If criteria AO19.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year. |
| PO19 Buildings and package stores containing fire-risk  | AO19   |
| Buildings and package stores containing fire-risk<br>hazardous chemicals are designed to detect the early<br>stages of a fire situation and notify a designated person. | Buildings and package stores containing fire-risk<br>hazardous chemicals are provided with 24 hour monitored<br>fire detection system for early detection of a fire event.   |
| PO20  | AO20<br>Storage areas containing packages of flammable and<br>toxic hazardous chemicals are designed with spill<br>containment system(s) capable of containing a minimum   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Common storage areas containing packages of<br>flammable and toxic hazardous chemicals are designed<br>with spill containment system(s) that are adequate to<br>contain releases, including fire fighting media.  | of the total aggregate capacity of all packages plus the<br>maximum operating capacity of any fire protection system<br>for the storage area(s) over a minimum of 60 minutes.   |
| PO21<br>Storage and handling areas, including manufacturing<br>areas, containing hazardous chemicals in quantities<br>greater than 2,500L or kg within a Local Government<br>"flood hazard area" are located and designed in a manner<br>to minimise the likelihood of inundation of flood waters<br>from creeks, rivers, lakes or estuaries.   | <ul> <li>AO21.1</li> <li>The base of any tank with a WC &gt;2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively:</li> <li>a. bulk tanks are anchored so they cannot float if submerged or inundated by water; and</li> <li>b. tank openings not provided with a liquid tight seal, i.e. an atmospheric vent, are extended above the relevant flood height level.</li> <li>AO21.2</li> <li>The lowest point of any storage area for packages</li> </ul> |
|   | <ul> <li>&gt;2,500L or kg is higher than any relevant flood height<br/>level identified in an area's flood hazard area.</li> <li>Alternatively, package stores are provided with impervious<br/>bund walls or racking systems higher than the relevant<br/>flood height level.</li> </ul>   |
| Noise   |   |
| <ul> <li>PO22</li> <li>Noise generating uses do not adversely affect existing or potential noise sensitive uses.</li> <li>Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> </ul> | No acceptable outcome provided.   |
| PO23  | AO23.1  |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:  | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.  |
| a. contributing to safe and usable public spaces,   | AO23.2  |
| through maintaining high levels of surveillance of parks, streets and roads that serve active transport   | Noise attenuation structures (e.g. walls, barriers or fences):  |
|   |   |

| Performance outcomes  | Acceptable outcomes   |  |  |
|---|---|--|--|
| <ul> <li>purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>maintaining the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> </ul> | <ul> <li>a. are not visible from an adjoining road or public area unless: <ol> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> </ol> </li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul> |  |  |
|   | criteria  |  |  |
| Utilities   |   |  |  |
| <b>PO24</b><br>The development is connected to an existing reticulated electricity supply system (approved by the relevant energy regulating authority) and the infrastructure does not negatively impact the streetscape.  | AO24<br>The development is connected to underground electricity.  |  |  |
| PO25<br>The development has access to telecommunications and<br>broadband services in accordance with current standards.  | No acceptable outcome provided.   |  |  |
| PO26<br>Where available the development is to safely connect to<br>reticulated gas.   | No acceptable outcome provided.   |  |  |
| P027  | AO27.1  |  |  |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.  | Where in a sewered area, the development is connected to a reticulated sewerage system.   |  |  |
|   | A027.2  |  |  |
|   | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.   |  |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.   |
| PO28<br>The development is provided with an adequate and<br>sustainable supply of potable (drinking and general use<br>e.g. gardening, washing, fire fighting) water.  | AO28.1<br>Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards.<br>AO28.2<br>Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way of<br>on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development. |
| PO29<br>The development is provided with dedicated and<br>constructed road access.   | No acceptable outcome provided.   |
| Access   |   |
| <ul> <li>PO30</li> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> <li>Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.</li> </ul> | No acceptable outcome provided.   |
| PO31   | No acceptable outcome provided.   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design.   |   |
| PO32  | A032.1  |
| PO32 The layout of the development does not compromise: a. the development of the road network in the area; b. the function or safety of the road network; c. the capacity of the road network. Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). PO33 Safe access facilities are provided for all vehicles required to access the site. | Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a motorway.<br>Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.<br>Note - The road hierarchy is in accordance with a Neighbourhood<br>development plan (conceptually shown on Figure 7.2.3.2 - Movement,<br>Major streets).<br><b>AO32.2</b><br>The development provides for the extension of the road<br>network in the area in accordance with Council's road<br>network planning.<br><b>AO32.3</b><br>The development does not compromise future road<br>widening of frontage roads in accordance with the relevant<br>standard and Council's road planning.<br><b>AO32.4</b><br>The lot layout allows forward access to and from the site.<br><b>AO33.1</b><br>Site access and driveways are designed and located in<br>accordance with:<br>a. Where for a Council-controlled road, AS/NZS2890.1<br>section 3; or<br>b. Where for a State-Controlled road, the Safe<br>Intersection Sight Distance requirements in<br>AustRoads and the appropriate IPWEAQ standard<br>drawings, or a copy of a Transport Infrastructure Act<br>1994, section 62 approval. |
|   | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.   |
|  | AO33.3   |
|  | Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in Schedule 8<br>Service vehicle requirements for the relevant use. The<br>on-site manoeuvring is to be in accordance with Schedule<br>8 Service vehicle requirements. |
| P034   | A034   |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:  | No acceptable outcome provided.  |
| a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;   | 0 10   |
| <ul> <li>ensure the orderly and efficient continuation of the active transport network;</li> </ul>   | S C  |
| c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.   | ner i  |
| Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.  | SC   |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |  |
|  |  |
| Note - To demonstrate compliance with c. of this performance<br>outcome, site frontage works where in existing road reserve<br>(non-trunk) are to be designed and constructed as follows:  |  |
| <ul> <li>Where the street is partially established to an urban standard,<br/>match the alignment of existing kerb and channel and provide<br/>carriageway widening and underground drainage where<br/>required; or</li> </ul>  |  |
| <ul> <li>Where the street is not established to an urban standard,<br/>prepare a design that demonstrates how the relevant features<br/>of the particular road as shown in the Planning scheme policy</li> <li>Integrated Design can be achieved in the existing reserve.</li> </ul> |  |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.   |  |
| Stormwater   |  |
| PO35   | No acceptable outcome provided.  |
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.   |  |

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |
| Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.  |                                 |
| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. |                                 |
| <b>PO36</b><br>Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.  | No acceptable outcome provided. |
| Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.   | ene                             |
| P037   | No acceptable outcome provided. |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by a<br>suitably qualified professional will be required in accordance with<br>Planning scheme policy - Stormwater management.            |                                 |
|  |                                 |
| <ul><li>PO38</li><li>Easements for drainage purposes are provided over:</li><li>a. stormwater pipes located within freehold land if the</li></ul>  | No acceptable outcome provided. |
| <ul><li>b. overland flow paths where they cross more than one property boundary.</li></ul>   |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |                                 |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.  |                                 |
| Site works and construction management   |                                 |
| PO39   | No acceptable outcome provided. |
|  |                                 |


| Performance outcomes  | Acceptable outcomes  |
|---|--|
| The site and any existing structures are maintained in a tidy and safe condition.   |  |
| PO40  | AO40.1   |
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following: <ul> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.</li> </ul> </li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>AO40.3</li> <li>The completed earthworks (fill or excavation) area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.</li> </ul> |
| PO41  | AO41   |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.  | No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| PO42   | AO42.1   |
| All works on-site and the transportation of material to and<br>from the site are managed to not negatively impact the<br>existing road network, the amenity of the surrounding<br>area or the streetscape. | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform Traffic<br>Control Devices (MUTCD) to ensure all traffic movements<br>to and from the site are safe. |
| Note - Where the amount of imported material is greater than 50m <sup>3</sup> , a haulage route must be identified and approved by Council.  | AO42.2   |
|  | All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.                         |
|  | (MUTCD).   |
|  | A042.3   |
|  | Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.   |
| PO43   | A043   |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | <ul><li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li><li>b. grassed.</li></ul>   |
| Ria  | Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.  |
| PO44   | AO44.1   |
| <ul><li>The clearing of vegetation on-site:</li><li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the</li></ul>   | All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.   |
| <ul><li>works;</li><li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use</li></ul>   | Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.  |
| of the land;<br>c. is disposed of in a manner which minimises<br>nuisance and annoyance to existing premises.  | AO44.2<br>Disposal of materials is managed in one or more of the   |
| Note - No burning of cleared vegetation is permitted.  | following ways:  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | <ul> <li>a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or</li> <li>b. all native vegetation with a diameter below 400mm</li> </ul>   |
|  | is to be chipped and stored on-site.   |
| <b>PO45</b><br>Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.   | No acceptable outcome provided.  |
| Earthworks   |  |
| PO46   | AO46.1   |
| <ul> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to:</li> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes and batters;</li> <li>h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)</li> </ul> Note - Filling or excavation works are to be completed within six (6) months of the commencement date. | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains<br>as necessary.<br>AO46.2<br>Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.<br>AO46.3<br>All filling or excavation is contained within the site.<br>AO46.4<br>All fill placed on-site is:<br>a. limited to that required for the necessary approved<br>use;<br>b. clean and uncontaminated (i.e. no building waste,<br>concrete, green waste or contaminated material etc.<br>is used as fill).<br>AO46.5<br>The site is prepared and the fill placed on-site in<br>accordance with AS3798.<br>Note - The fill is to be inspected and tested in accordance with<br>Planning scheme policy - Operational works inspection, maintenance<br>and bonding procedures. |

|   | AO46.6<br>Inspection and certification of steep rock slopes and  |
|---|--|
|   |  |
|   | batters may be required by a suitably qualified and experienced RPEQ.  |
| PO47  | AO47   |
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.   |
|   | Figure - Embankment  |
| PO48  | AO48.1   |
| On-site earthworks are undertaken in a manner that:   | No earthworks are undertaken in an easement issued in  |
| <ul> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council</li> </ul> | favour of Council or a public sector entity.<br>Note - Public sector entity as defined in the <i>Sustainable Planning Act</i> 2009.  |
| or public sector entity maintained infrastructure or<br>any drainage feature on, or adjacent to the land for  | AO48.2   |
| monitoring, maintenance or replacement purposes.<br>Note - Public sector entity as defined in the <i>Sustainable Planning</i>   | Earthworks that would result in any of the following are not carried out on-site:  |
| Act 2009.   | <ul> <li>a. a reduction in cover over the Council or public sector<br/>entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within<br/>1.5m on each side of, the Council or public sector</li> </ul> |
|   | entity maintained infrastructure above that which existed prior to the earthworks being undertaken.  |
|   | Note - Public sector entity as defined in the <i>Sustainable Planning Act</i> 2009.  |
| PO49  | No acceptable outcome provided.  |
| Filling or excavation does not result in land instability.  |  |
| Note - A slope stability report prepared by an RPEQ may be required.  |  |
| PO50  | No acceptable outcome provided.  |
| Filling or excavation does not result in  |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> <li>Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements</li> </ul> |   |
| P051<br>All earth retaining structures provide a positive interface<br>with the streetscape and minimise impacts on the amenity<br>of adjoining residents.   | <ul> <li>A051</li> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> <li>Figure - Retaining on a boundary</li> <li>Finished surface level</li> <li>Environment</li> <li>Event</li> <li>Event<!--</td--></li></ul> |

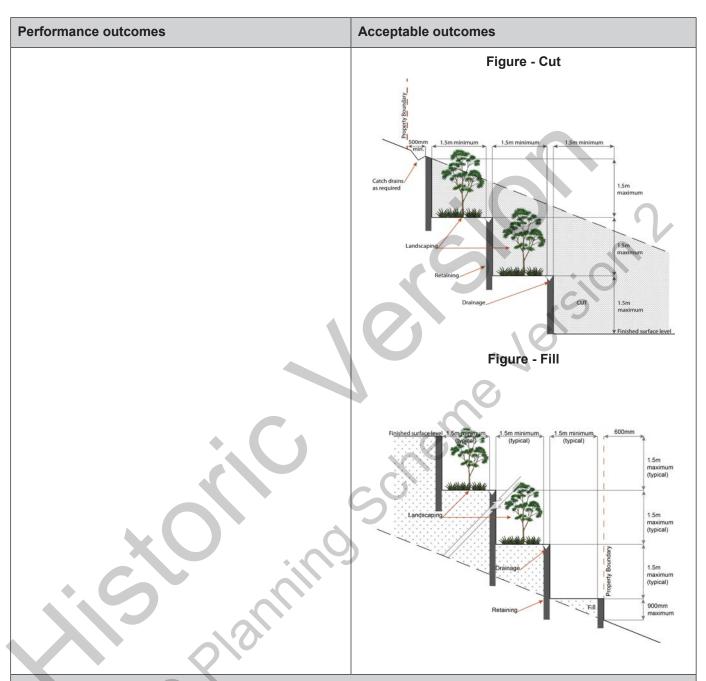

### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole occurring rot more stocking rot more stocking rot more sole occurring rot more sole occurre sole occurring rot more sole occurring r ii.
  - iii.
  - iv.

#### AND

- b. none of the following exceptions apply:
  - the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
  - ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | at are required by the Building Code of Australia to have a fire hydrant<br>rdrant Installations or other fire fighting facilities which provide equivalent   |
| PO52  | AO52.1  |
| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> <li>e. considers the fire hazard inherent in the surrounds to the development site;</li> <li>f. is maintained in effective operating order.</li> </ul> Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region. | <ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.</i></li> <li>Note - For this acceptable outcome, the following are the relevant parts of <i>AS 2419.1 (2005)</i> that may be applicable: <ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2 2.1, with the exception that for Tourist parks<sup>164</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signosted in ground hydrants would be an acceptable alternative:</li> <li>b. in regard to the general locational requirements for fire hydrant - Part 3.2.2.2 (a), (b), (f) (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:</li> <li>i. for dwellings and their associated outbuildings, hydrant overage need only extend to the roof and external walls of those buildings;</li> <li>ii. for outdoor sales<sup>(64)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(64)</sup>, outdoor processing and outdoor storage facilities;</li> <li>d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6.</li> </ul> </li> <li>Acost2.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land: <ul> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an area for a fire brigade pumping appliance;</li> <li>d. area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point. Accessing and fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) – Routi</li></ul></li></ul> |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| PO53   | AO53   |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times   | For development that contains on-site fire hydrants external to buildings:   |
| from, or at, the vehicular entry point to the development site.  | a. those external hydrants can be seen from the vehicular entry point to the site; or  |
|  | b. a sign identifying the following is provided at the vehicular entry point to the site:  |
|  | i. the overall layout of the development (to scale);   |
|  | ii. internal road names (where used);  |
|  | iii. all communal facilities (where provided);   |
|  | iv. the reception area and on-site manager's office (where provided);  |
|  | v. external hydrants and hydrant booster points;   |
|  | vi. physical constraints within the internal roadway<br>system which would restrict access by fire<br>fighting appliances to external hydrants and<br>hydrant booster points.  |
|  | C C  |
|  | Note - The sign prescribed above, and the graphics used are to be:   |
| XU O   | <ul><li>a. in a form;</li><li>b. of a size;</li></ul>  |
|  | c. illuminated to a level;   |
|  |  |
| Plai   | which allows the information on the sign to be readily understood, at<br>all times, by a person in a fire fighting appliance up to 4.5m from the<br>sign.  |
| P054   | AO54   |
| Each on-site fire hydrant that is external to a building is<br>signposted in a way that enables it to be readily identified<br>at all times by the occupants of any firefighting appliance<br>traversing the development site. | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by way<br>of marker posts and raised reflective pavement markers<br>in the manner prescribed in the technical note <i>Fire hydrant</i><br><i>indication system</i> produced by the Queensland<br>Department of Transport and Main Roads. |
|  | Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.   |
| Use spec   | ific criteria  |
| Industrial uses  |  |
|  |  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| PO55  | AO55   |
| Ancillary Office <sup>(53)</sup> , administration functions, retail sales<br>and customer service components do not compromise<br>the primary use of the site for industrial purposes or<br>compromise the viability, role or function of the<br>Caboolture West centres network. | The combined area of ancillary non-industrial activities, including but not limited to Offices $^{(53)}$ , administration functions, display and retail sale of commodities, articles or goods resulting from the industrial processes on-site, does not exceed 30% of the GFA or 500m <sup>2</sup> , whichever is the lesser. |
| PO56  | No acceptable outcome provided.  |
| Buildings directly adjoining non-Enterprise and employment precinct land:   |  |
| a. are compatible with the character of the adjoining area;   | S  |
| b. minimise overlooking and overshadowing;  |  |
| c. maintain privacy;  |  |
| d. do not cause significant loss of amenity to<br>neighbouring residents by way of noise, vibration,<br>odour, lighting, traffic generation and hours of<br>operation.  | neme   |
| P057  | No acceptable outcome provided.  |
| Non-industrial components of buildings (including offices<br>and retail areas) are designed as high quality architectural<br>features and incorporate entry area elements such as<br>forecourts, awnings and the architectural treatment of<br>roof lines and fascias.            |  |
| Non-industrial land uses  |  |
|   |  |
| <b>PO58</b><br>With the exception of Caretaker's accommodation <sup>(10)</sup><br>and Child care centre <sup>(13)</sup> , residential and other sensitive<br>land uses do not establish within the precinct.  | No acceptable outcome provided.  |
| PO59  | No acceptable outcome provided.  |
| Non-industrial uses:  |  |
| a. are consolidated with existing non-industrial uses in the sub-precinct;  |  |
| b. do not compromise the viability, role or function of the Caboolture West centres network;  |  |

| Perf        | formance outcomes  | Acceptable outcomes  |
|-------------|--|--|
| C.          | are not subject to adverse amenity impacts or risk to health from industrial activities;   |  |
| d.          | do not constrain the function or viability of future<br>industrial activities in Enterprise and employment<br>precinct.  |  |
| Nuis        | e - The submission of a Economic Impact Report or Hazard and sance Mitigation Plan may be required to justify compliance with outcome.   | 2  |
| den<br>to P | e - An Economic Impact Assessment may be required to<br>nonstrate compliance with part of the outcome/s above. Refer<br>lanning scheme policy - Economic impact assessment for<br>rmation required.  | S sion   |
| PO6         | 60   | No acceptable outcome provided.  |
| uses        | ere located on a Collector or Local road, non-industrial<br>s provide only direct convenience retail or services<br>le industrial workforce.   |  |
| PO6         | 31   | No acceptable outcome provided.  |
| detri       | fic generated by non-industrial uses does not<br>imentally impact the operation and functionality of<br>external road network.   | SCREE  |
| PO6         | 2  | No acceptable outcome provided.  |
| The         | design of non-industrial buildings in the precinct:  |  |
| a.          | adds visual interest to the streetscape (e.g. variation<br>in materials, patterns, textures and colours, a<br>consistent building line, blank walls that are visible<br>from public places are treated to not negatively<br>impact the surrounding amenity); |  |
| b.          | contributes to a safe environment (e.g. through the use of lighting and not resulting in concealed recesses or potential entrapment areas);  |  |
| C.          | incorporates architectural features within the<br>building facade at the street level to create human<br>scale (e.g. awnings).   |  |
| PO6         | 33   | AO63.1   |
| Build       | ding entrances:  | The main entrance to the building is clearly visible from and addresses the primary street frontage. |
| a.          | are readily identifiable from the road frontage;   |  |
| b.          | add visual interest to the streetscape;  | AO63.2   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| <ul> <li>c. are designed to limit opportunities for concealment;</li> <li>d. are located and oriented to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites.</li> <li>Note - The design provisions for footpaths outlined in Planning scheme policy - Integrated design may assist in demonstrating compliance with this outcome.</li> </ul>  | Where the building does not adjoin the street frontage, a dedicated and sealed pedestrian footpath is provided between the street frontage and the building entrance.  |
| PO64   | AO64   |
| Development of Caretaker's accommodation <sup>(10)</sup> :   | Caretaker's accommodation <sup>(10)</sup> :  |
| <ul><li>a. does not compromise the productivity of the use occurring on-site and in the surrounding area;</li><li>b. is domestic in scale;</li></ul>   | <ul> <li>a. has a maximum GFA is 80m<sup>2</sup>;</li> <li>b. does not gain access from a separate driveway to that of the industrial use;</li> </ul>  |
| c. provides adequate car parking provisions exclusive on the primary use of the site;  | c. provides a minimum 16m <sup>2</sup> of private open space directly accessible from a habitable room;  |
| <ul><li>d. is safe for the residents;</li><li>e. has regard to the open space and recreation needs of the residents.</li></ul>   | d. provides car parking in accordance with the car parking rates table.  |
| Major electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and  | Utility installation <sup>(86)</sup>   |
| P065   | AO65.1   |
| <ul> <li>The development does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | <ul> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> AO65.2 A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries. |
| PO66   | AO66   |
| Infrastructure does not have an impact on pedestrian health and safety.  | <ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> </ul>   |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
|   | <ul> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>  |
| PO67  | A067   |
| <ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul> | All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the<br>Environmental Protection (Noise) Policy 2008. |
| Telecommunications facility <sup>(81)</sup>   | 0  |
| Editor's note - In accordance with the Federal legislation Telecommun<br>that will not cause human exposure to electromagnetic radiation beyo<br>Radiation - Human Exposure) Standard 2003 and Radio Protection Sta<br>to 300Ghz.   | ications facilities <sup>(81)</sup> must be constructed and operated in a manner<br>nd the limits outlined in the Radiocommunications (Electromagnetic<br>andard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz   |
| PO68  | AO68.1   |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area.  | New telecommunication facilities <sup>(81)</sup> are co-located on<br>existing towers with new equipment shelter and associated<br>structures positioned adjacent to the existing shelters and<br>structures.  |
|   | AO68.2   |
|   | If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.   |
| PO69  | AO69   |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.  | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.  |
| P070  | A070   |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.  | The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval.                                |
| P071  | A071.1   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| The Telecommunications facility <sup>(81)</sup> does not have an<br>adverse impact on the visual amenity of a locality and is:<br>a. high quality design and construction;<br>b. visually integrated with the surrounding area; | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |
| <ul> <li>not visually dominant or intrusive;</li> <li>located behind the main building line;</li> <li>below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and</li> </ul>               | AO71.2<br>In all other areas towers do not exceed 35m in height.  |
| <ul> <li>structures;</li> <li>camouflaged through the use of colours and<br/>materials which blend into the landscape;</li> </ul>   | A071.3  |
| <ul> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> </ul>   | Towers, equipment shelters and associated structures are of a design, colour and material to:   |
| . otherwise consistent with the amenity and character of the zone and surrounding area.   | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>   |
|   | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is 3m.<br>Where there is no established building line the facility is<br>located at the rear of the site. |
|   | A071.5  |
|   | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.   |
|   | AO71.6  |
| Plan.   | A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the<br>facility and street frontage and adjoining uses.   |
|   | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.   |
| NB  | Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.  |
| 2072  | A072  |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.  | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.   |
| P073  | A073  |

| Performance outcomes  | Acceptable outcomes   |  |
|---|---|--|
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.  | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.  |  |
| Values and cor  | nstraints criteria  |  |
| Reconfiguring a lot or Material change of use or Operational work, wh   | e the development is consistent with a current Development permit for<br>here that approval has considered and addressed (e.g. through a<br>) or conditions of approval) the identified value or constraint under this  |  |
| · · · · · ·   | soils to determine if the following assessment criteria   |  |
| apply)  |   |  |
|   | Acid sulfate soils (ASS) investigation report and soil management plan<br>SS investigation report and soil management plan is provided in Planning  |  |
|   |   |  |
| P074  | A074  |  |
| <ul> <li>Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:</li> <li>a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;</li> <li>b. protects the environmental and ecological values and health of receiving waters;</li> <li>c. protects buildings and infrastructure from the effects of acid sulfate soils.</li> </ul> | <ul> <li>Development does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.</li> </ul> |  |
| Heritage and landscape character (refer Overlay map following assessment criteria apply)  | - Heritage and landscape character to determine if the  |  |
| Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared<br>by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.   |   |  |
| accordance with Planning scheme policy – Heritage and landscape c<br>adopted in accordance with AS 4970-2009 Protection of trees on dev   | elopment sites.<br>Iral heritage significance, are identified on Overlay map - Heritage and<br>icy - Heritage and landscape character. Places also having cultural  |  |
| P075  | A075  |  |
|   |   |  |
| Development will:   | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value.  |  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| <ul> <li>a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;</li> <li>b. protect the fabric and setting of the heritage site, object or building;</li> <li>c. be consistent with the form, scale and style of the heritage site, object or building;</li> <li>d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;</li> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul> <b>P076</b> Demolition and removal is only considered where: <ul> <li>a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li></ul> | Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object or<br>building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The<br>plan is sent to, and approved by Council prior to the commencement<br>of any preservation, maintenance, repair and restoration works. |
| object.<br><b>PO77</b><br>Where development is occurring on land adjoining a site<br>of cultural heritage value, the development is to be<br>sympathetic to and consistent with the cultural heritage<br>values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view.  | No acceptable outcome provided.  |
| Infrastructure buffer areas (refer Overlay map – Infrast<br>criteria apply)   | ructure buffers to determine if the following assessment   |
| P078  | A078   |
| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> </ul>  | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer.   |

| Per  | formance outcomes   | Acceptable outcomes   |  |
|--|---|---|--|
| Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment crite apply) |   |   |  |
|  | te - The applicable river and creek flood planning levels associated v requesting a flood check property report from Council.   | with defined flood event (DFE) within the inundation area can be obtained                             |  |
| PO   | 79  | No acceptable outcome provided.   |  |
| Dev  | velopment:  |   |  |
| a.<br>b.   | minimises the risk to persons from overland flow;<br>does not increase the potential for damage from<br>overland flow either on the premises or other<br>premises, public land, watercourses, roads or<br>infrastructure.   | Sion  |  |
| PO   | 80  | AO80  |  |
| Dev  | velopment:  | No acceptable outcome provided.   |  |
| a.<br>b.   | maintains the conveyance of overland flow<br>predominantly unimpeded through the premises for<br>any event up to and including the 1% AEP for the<br>fully developed upstream catchment;<br>does not concentrate, intensify or divert overland<br>flow onto an upstream, downstream or surrounding<br>property. | ccheme  |  |
| Enę<br>doe   | te - A report from a suitably qualified Registered Professional<br>gineer Queensland is required certifying that the development<br>es not increase the potential for significant adverse impacts on<br>upstream, downstream or surrounding premises.   |   |  |
|  | te - Reporting to be prepared in accordance with Planning scheme<br>icy – Flood hazard, Coastal hazard and Overland flow.   |   |  |
| <b>PO</b>  | B1<br>velopment does not:   | No acceptable outcome provided.   |  |
| a.<br>b.   | directly, indirectly or cumulatively cause any<br>increase in overland flow velocity or level;<br>increase the potential for flood damage from<br>overland flow either on the premises or other<br>premises, public lands, watercourses, roads or<br>infrastructure.  |   |  |
| acc  | te - Open concrete drains greater than 1m in width are not an<br>eptable outcome, nor are any other design options that may<br>rease scouring.  |   |  |
| PO   | 82  | AO82  |  |
|  |   | Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. |  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.                                     | Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994<br>and the relevant building assessment provisions under the Building<br>Act 1975 for requirements related to the manufacture and storage of<br>hazardous substances. |
| PO83   | AO83   |
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.   | Development which is not in a Rural zone that an overland<br>flow paths and drainage infrastructure is provided to<br>convey overland flow from a road or public open space<br>area away from a private lot.   |
| P084   | A084.1   |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for a<br>fully developed upstream catchment and are able to be<br>easily maintained. | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;   |
| Note - A report from a suitably qualified Registered Professional  | <ul> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> </ul>  |
| Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.  | d. Commercial area – Level V.<br>AO84.2  |
|  |  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   | Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment.  |
| P085   | No acceptable outcome provided.  |
| Development protects the conveyance of overland flow<br>such that an easement for drainage purposes is provided<br>over:   |  |
| a. a stormwater pipe if the nominal pipe diameter<br>exceeds 300mm;  |  |
| b. an overland flow path where it crosses more than one premises;  |  |
| c. inter-allotment drainage infrastructure.  |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |  |
| Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.  |  |
| Additional criteria for development for a Park <sup>(57)</sup>   |  |
|  |  |

| Per   | formance outcomes  | Acceptable outcomes  |
|---|--|--|
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that: |  | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design. |
| a.  | public benefit and enjoyment is maximised;                               |  |
| b.  | impacts on the asset life and integrity of park structures is minimised; |  |
| C.  | maintenance and replacement costs are minimised.                         |  |
|   |  |  |

55

10.

### Minimum class of service vehicle

| Land use   | Minimum service vehicle class |
|--|-------------------------------|
| Agricultural supplies store <sup>(2)</sup>       | Small rigid vehicle           |
| Bulk landscape supplies <sup>(9)</sup>           | Articulated vehicle           |
| Garden centre <sup>(31)</sup>                    | Heavy rigid vehicle           |
| Hardware and trade supplies <sup>(32)</sup>      | Articulated vehicle           |
| High impact industry <sup>(34)</sup>             | Articulated vehicle           |
| Low impact industry <sup>(42)</sup>              | Heavy rigid vehicle           |
| Marine industry <sup>(45)</sup>                  | Articulated vehicle           |
| Medium impact industry <sup>(47)</sup>           | Articulated vehicle           |
| Outdoor sales <sup>(54)</sup>                    | Articulated vehicle           |
| Research and technology industry <sup>(64)</sup> | Heavy rigid vehicle           |
| Sales office <sup>(72)</sup>                     | Small rigid vehicle           |
| Service industry <sup>(73)</sup>                 | Small rigid vehicle           |
| Service station <sup>(74)</sup>                  | Articulated vehicle           |
| Showroom <sup>(78)</sup>                         | Articulated vehicle           |
| Utility installation <sup>(86)</sup>             | Heavy rigid vehicle           |
| Warehouse <sup>(88)</sup> (where self-storage)   | Medium rigid vehicle          |
| Warehouse <sup>(88)</sup> (other)                | Articulated vehicle           |
| Wholesale nursery <sup>(89)</sup>                | Heavy rigid vehicle           |

Note - Service vehicle classes are defined in AS2890.2 - Offstreet parking, Part 2: Commercial vehicles

## Service vehicle requirements

| Site area                     | Service vehicle requirement   |
|-------------------------------|---|
| Less than 1,000m <sup>2</sup> | a. Demonstrate that the development can accommodate the particular design vehicle but a separate service bay and associated manoeuvring area is not required. |

| Site area                                 | Service vehicle requirement   |
|---|---|
|   | b. Where is can be demonstrated that loading and unloading can take place within the road reserve consistent with MUTCD bay requirements.                                     |
|   | c. Otherwise service vehicle requirements for a 1,000m <sup>2</sup> - 2,000m <sup>2</sup> site applies.   |
| 1,000m <sup>2</sup> - 2,000m <sup>2</sup> | a. Service bay for heavy rigid vehicle is required on-site, where a heavy rigid vehicle is identified in the design service vehicle in Table X.                               |
|   | b. Restricted manoeuvring allowed on-site for heavy rigid vehicle and articulated vehicle.  |
|   | c. Full on-site manoeuvring for all other classes of service vehicle is required.   |
| 2,001m <sup>2</sup> - 4,000m <sup>2</sup> | a. A service bay is required for the design service vehicles identified in Table X.   |
|   | <ul> <li>Restricted manoeuvring permitted on-site for articulated vehicles.<br/>Full on-site manoeuvring is required for all other classes of<br/>service vehicle.</li> </ul> |
| Greater than 4,000m <sup>2</sup>          | Service bays and full on-site manoeuvring is required for all classes of service vehicles identified in Table X.  |

Note -

- a. Restricted manoeuvring is defined as a single point reverse manoeuvre in order to access a service loading bay on-site. This manoeuvre may be performed from the kerbside lane on a minor road where it is clearly demonstrated that the design vehicle can achieve such a manoeuvre to access the service loading bay.
- b. Minor road is a cul-de-sac or road carrying predominately local traffic.

20

c. MUTCD: Transport and Main Roads - Manual of Uniform Traffic Control Devices.

## 7.2.3.3.3 Specialised centre sub-precinct

### 7.2.3.3.3.1 Purpose - Specialised centre sub-precinct

- 1. The purpose of the Specialised centre sub-precinct will be achieved through the following overall outcomes:
  - a. Land is developed for Specialised centre purposes on lots identified as Specialised centre sub-precinct on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.3.1 Enterprise and employment urban design framework.
  - b. Development of uses that support and complement the role and function of the Specialised centre and provide a local function may be accommodated.
  - c. Bulky retail and commercial activities are consolidated along the main street boulevard of the Enterprise and employment precinct.
  - d. The Specialised centre sub-precinct includes a neighbourhood hub located on the main street boulevard providing convenience retail and commercial support functions to the businesses and employed persons within the Enterprise and employment precinct.
  - e. Neighbourhood hubs are located:
    - i. at the junction of main streets and public transport routes in accessible and visible locations;
    - ii. generally to the side of the intersection creating pedestrian focused main streets;
    - iii. where it will service the immediate convenience needs of the employment and industry workforce;
    - iv. in locations shown on a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.3.1 Enterprise and employment urban design framework.
  - f. The operation and viability of the Specialised centre are protected from the intrusion of incompatible uses.
  - g. Development does not constrain the operation or viability of low impact industry<sup>(42)</sup> activities or low to medium impact industry<sup>(47)</sup> activities in the Enterprise and employment precinct.
  - h. Where the Specialised centre sub-precinct provides a buffer between the adjacent General industry sub-precinct and other non-industrial uses as indicated on a Neighbourhood development plan a range of uses which will have reverse amenity impacts on the General industry sub-precinct or adverse impacts on the non-industrial uses are established in the buffer.
  - i. Low impact industry<sup>(42)</sup> and Medium impact industry<sup>(47)</sup> are not established in the sub-precinct.
  - j. Development provides a range of lot sizes to cater for business and employment needs and user requirements as indicated on a Neighbourhood development plan.
  - The design, siting and construction of buildings for large footprint bulky goods retail, Hardware and trade supplies<sup>(32)</sup> and complementary activities:
    - i. adjoins the main street boulevard;
    - ii. provides attractive frontages that address internal and external public spaces and adjoining main streets;
    - iii. improves pedestrian connectivity and walkability between key destination s within and external to the site through public realm improvements;
    - iv. ensures the safety, comfort and enjoyment of residents, visitors and workers;

- v. provides for active and passive surveillance of the public spaces and road frontages;
- vi. ensure parking, manoeuvring and servicing areas are designed, located and aesthetically treated to not be visually dominant features from the streetscape and public spaces
- I. General works associated with the development achieves the following:
  - i. new development is provided with a high standard of services to meet and support the current and future needs of users of the site, including roads, street lighting services, telecommunications and reticulated electricity, water and sewerage (where available);
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- m. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- n. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- p. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- q. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- r. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.
- s. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- t. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;


- I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
- II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
- III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
- IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- u. Development in the Specialised centre sub-precinct includes one or more of the following:

| • | Caretaker's accommodation <sup>(10)</sup> | Outdoor sales <sup>(54)</sup> Where in a neighbourhood     hub:                                     |
|---|---|---|
|   | Car wash <sup>(11)</sup>                  | Service station <sup>(74)</sup> Food and drink outlet <sup>(21)</sup>                               |
| • | Emergency services <sup>(25)</sup>        | Showroom <sup>(78)</sup>  |
| • | Food and drink outlet <sup>(28)</sup>     | • Substation <sup>(80)</sup> • Office <sup>(53)</sup>   |
| • | Garden centre <sup>(31)</sup>             | • Telecommunication facility <sup>(81)</sup> (87)   |
| • | Hardware and trade                        | <ul> <li>Utility installation<sup>(86)</sup></li> <li>Veterinary services<sup>(87)</sup></li> </ul> |
|   | supplies <sup>(32)</sup>                  |   |

( )

v. Development in the Specialised centre sub-precinct does not include any of the following:

|   | •       | Agricultural supplies store <sup>(2)</sup> | •            | High impact industry <sup>(34)</sup>                         | • | Permanent plantation <sup>(59)</sup>                |
|---|---------|--|--------------|--|---|---|
|   |         |  | •            | Home based business <sup>(35)</sup>                          | • | Place of worship <sup>(60)</sup>                    |
|   | •       | Air services <sup>(3)</sup>                | •            | Hospital <sup>(36)</sup>                                     | • | Port services <sup>(61)</sup>                       |
| • |         | Animal husbandry <sup>(4)</sup>            | $\mathbf{C}$ | Hotel <sup>(37)</sup>  | • | Relocatable home park <sup>(62)</sup>               |
|   |         | Animal keeping <sup>(5)</sup>              |              |  |   |   |
|   | •       | Aquaculture <sup>(6)</sup>                 | •            | Intensive animal<br>industry <sup>(39)</sup>                 | • | Renewable energy facility <sup>(63)</sup>           |
|   | •       | Bar <sup>(7)</sup>                         | •            | Intensive horticulture <sup>(40)</sup>                       | • | Research and technology<br>industry <sup>(64)</sup> |
|   | •       | Brothel <sup>(7)</sup>                     | •            | Landing <sup>(41)</sup>                                      | • | Residential care facility <sup>(65)</sup>           |
|   | • <     | Bulk landscape supplies <sup>(9)</sup>     | •            | Low impact industry <sup>(42)</sup>                          | • | Resort complex <sup>(66)</sup>                      |
|   | $\cdot$ | Cemetery <sup>(12)</sup>                   | •            | Major electricity  | • | Retirement facility <sup>(67)</sup>                 |
|   |         | Child care centre <sup>(13)</sup>          |              | infrastructure <sup>(43)</sup>                               | • | Roadside stall <sup>(68)</sup>                      |
|   | •       | Club <sup>(14)</sup>                       | •            | Major sport, recreation<br>and entertainment <sup>(44)</sup> | • | Rural industry <sup>(70)</sup>                      |
|   | •       | Community care centre <sup>(15)</sup>      |              | facility   | • | Rural workers                                       |
|   | •       | Community residence <sup>(16)</sup>        | •            | Marine industry <sup>(45)</sup>                              |   | accommodation <sup>(71)</sup>                       |
|   |         |  | •            | Market <sup>(46)</sup>                                       | • | Sales office <sup>(72)</sup>                        |
|   | •       | Community use <sup>(17)</sup>              |              |  |   | Comisso industry (73)                               |
|   | •       | Crematorium <sup>(18)</sup>                | •            | Medium impact industry <sup>(47)</sup>                       | • | Service industry <sup>(73)</sup>                    |
|   | -       |  | •            | Multiple dwelling <sup>(49)</sup>                            | • | Shopping centre <sup>(76)</sup>                     |
|   |         |  |              |  |   |   |

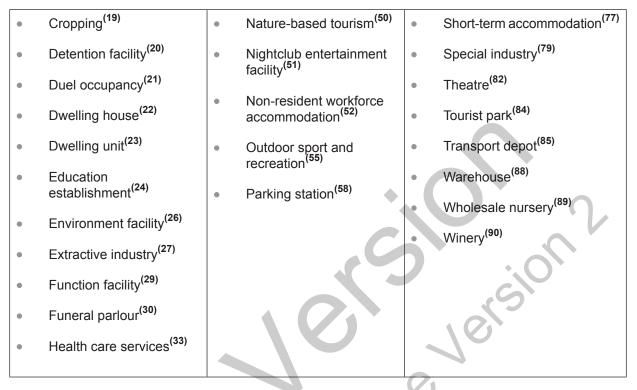

w. Development not listed in the tables above may be considered on its merits where it reflects and supports the outcomes of the sub-precinct.

#### 7.2.3.3.3.2 Criteria for assessment

## Part O - Criteria for assessable development - Specialised centre sub-precinct

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part O, Table 7.2.3.3.3.1.

Where development is impact assessable, the assessment criteria become the whole of the planning scheme.

### Table 7.2.3.3.3.1 Assessable development - Specialised centre precinct

| Perf                    | formance outcomes   | Acceptable outcomes             |  |  |  |  |  |
|-------------------------|---|---------------------------------|--|--|--|--|--|
|                         | General criteria  |                                 |  |  |  |  |  |
| Cen                     | tre network and function  |                                 |  |  |  |  |  |
| PO1<br>Uses<br>a.<br>b. | s and activities:<br>provide large bulky goods retail to the general<br>public;<br>provide a convenience and support role to the local<br>industrial workforce in the form of a neighbourhood<br>hub. | No acceptable outcome provided. |  |  |  |  |  |
| Active frontage         |   |                                 |  |  |  |  |  |
| PO2                     |   | No acceptable outcome provided. |  |  |  |  |  |

| Buildings and individual tenancies address street frontages and other areas of pedestrian movement.  |   |  |  |  |
|--|---|--|--|--|
| Setbacks   |   |  |  |  |
| <b>PO3</b><br>Side and rear setbacks are of a dimension to:  | No acceptable outcome provided.   |  |  |  |
| <ul> <li>a. cater for required openings, the location of loading docks and landscaped buffers etc.;</li> <li>b. protect the amonity of adjoining consitive land upon</li> </ul>  |   |  |  |  |
| <ul> <li>b. protect the amenity of adjoining sensitive land uses.</li> <li>Site area</li> </ul>  |   |  |  |  |
| <b>PO4</b><br>The development has sufficient area and dimensions to accommodate required buildings and structures, vehicular access, manoeuvring and parking and landscaping.  | No acceptable outcome provided.   |  |  |  |
| Building height  |   |  |  |  |
| PO5<br>The height of buildings reflect the individual character of<br>the precinct.  | AO5<br>Building heights do not to exceed that mapped on<br>Neighbourhood development plan map - Building<br>heights.  |  |  |  |
| PO6  | AO6   |  |  |  |
| <ul> <li>Awnings are provided at the ground level fronting pedestrian footpaths. Awnings:</li> <li>a. provide adequate protection for pedestrians from solar exposure and inclement weather;</li> <li>b. are integrated with the design of the building and the form and function of the street;</li> <li>c. do not compromise the provision of street trees and signage;</li> </ul> | <ul> <li>Buildings incorporate an awning that:</li> <li>a. is cantilevered;</li> <li>b. extends from the face of the building;</li> <li>c. has a minimum height of 3.2m and not more than 4.2m above pavement level;</li> <li>d. does not extend past a vertical plane of 1.5m inside the kerb line to allow for street trees and regulatory</li> </ul> |  |  |  |
| <ul> <li>ensure the safety of pedestrians and vehicles (e.g. no support poles).</li> </ul>   | signage;<br>e. aligns with adjoining buildings to provide continuou<br>shelter where possible.  |  |  |  |

|   | Figure - Awning requirements                   |
|---|--|
|   | Consistent height with<br>Bigoning properties. |
| P07   | No acceptable outcome provided.                |
| All buildings exhibit a high standard of design and construction, which:  | C let  |
| a. adds visual interest to the streetscape (e.g. variation in materials, patterns, textures and colours, a consistent building line, blank walls that are visible from public places are treated to not negatively impact the surrounding amenity); | ene  |
| <ul> <li>contributes to a safe environment (e.g. through the<br/>use of lighting and not resulting in concealed<br/>recesses or potential entrapment areas);</li> </ul>   | SCI  |
| c. incorporates architectural features within the building facade at the street level to create human scale.  |  |
| PO8   | No acceptable outcome provided.                |
| Building entrances:   |  |
| a. are readily identifiable from the road frontage;   |  |
| b. add visual interest to the streetscape;  |  |
| c. are designed to limit opportunities for concealment;   |  |
| d. are located and oriented to favour active and public transport usage by connecting to pedestrian footpaths on the street frontage and adjoining sites;   |  |
| e. include footpaths that connect with adjoining sites;   |  |
| f. provide a dedicated, seal pedestrian footpath between the street frontage and the building entrance.   |  |
| Note - The design provisions for footpaths outlined in Planning scheme policy - Integrated design may assist in demonstrating compliance with this Performance Outcome.   |  |

| Car parking   |   |
|---|---|
| PO9   | AO9   |
| <ul> <li>The provision of car parking spaces is:</li> <li>a. appropriate for the use;</li> <li>b. avoids an oversupply of car parking spaces.</li> <li>Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.</li> </ul>   | Car parking is provided in accordance with Schedule 7<br>- Car parking.<br>Note - The above rates exclude car parking spaces for people with<br>a disability required by Disability Discrimination Act 1992 or the<br>relevant disability discrimination legislation and standards. |
| PO10<br>Car parking is designed to avoid the visual impact of<br>large areas of surface car parking.  | No acceptable outcome provided.   |
| PO11<br>Car parking design includes innovative solutions,<br>including on-street parking and shared parking areas on<br>the streetscape.<br>Note - Refer to Planning scheme policy - Integrated design for details<br>and examples of on-street parking.  | No acceptable outcome provided.   |
| <ul> <li>PO12</li> <li>The design of car parking areas: <ul> <li>a. does not impact on the safety of the external road network;</li> </ul> </li> <li>b. ensures the safe movement of vehicles within the site;</li> <li>c. interconnects with car parking areas on adjoining sites wherever possible.</li> </ul>  | AO12<br>All car parking areas are designed and constructed in<br>accordance with Australian Standard AS2890.1.  |
| <ul> <li>PO13</li> <li>The safety and efficiency of pedestrian movement is prioritised in the design of car parking areas through providing pedestrian paths in car parking areas that are: <ul> <li>a. located along the most direct pedestrian routes between building entrances, car parks and adjoining uses;</li> <li>b. protected from vehicle intrusion through the use of physical and visual separation (e.g. wheel stops, trees etc);</li> <li>c. are of a width to allow safe and efficient access for prams and wheelchairs.</li> </ul> </li> </ul> | No acceptable outcome provided.   |


| Loading and servicing   |  |
|---|--|
| PO14  | No acceptable outcome provided.  |
| Loading and servicing areas:  |  |
| a. are not visible from any street frontage;  |  |
| b. are integrated into the design of the building;  |  |
| <li>c. include screening and buffers to reduce negative<br/>impacts on adjoining sensitive land uses;</li>  |  |
| d. are consolidated and shared with adjoining sites where possible.   |  |
| Note - Refer to Planning scheme policy - Centre and neighbourhood hub design.   | C S S S S S S S S S S S S S S S S S S S  |
| Waste   |  |
| PO15  | A015   |
| Bins and bin storage areas are designed, located and managed to prevent amenity impacts on the locality.  | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.   |
| Landscaping and fencing   | C C  |
| PO16  | AO16.1   |
| <ul> <li>On-site landscaping:</li> <li>a. is incorporated into the design of the development;</li> <li>b. reduces the dominance of car parking and servicing areas from the street frontage;</li> </ul> | Where adjoining land is contained within the Urban living precinct a 3m deep landscaping strip is provided for the length of the boundary. Landscaping must have a mature height of at least 3m.<br>Note - Refer to Planning scheme policy - Integrated design for |
| c. incorporates shade trees in car parking areas;   | species, details and examples.   |
| d. retains mature trees wherever possible;  | AO16.2   |
| e. contributes to quality public spaces and the microclimate by providing shelter and shade;  | Trees are provided in car paring areas at a rate of 1 tree per 10 car parking spaces.  |
| f. maintains the achievement of active frontages and sightlines for casual surveillance.  | Note - Refer to Planning scheme policy - Integrated design for species, details and examples.  |
| Note - All landscaping is to accord with Planning scheme policy -<br>Integrated design.   | AO16.3   |
|   | Development includes the provision of street trees.  |
|   |  |
|   | Note - Refer to Planning scheme policy - Integrated design for species, details and examples.  |

| Lighting   |  |
|--|--|
| PO18   | AO18   |
| Lighting is directed and shielded to not cause<br>unreasonable disturbance to any person on adjoining<br>land.   | Artificial lighting on-site is directed and shielded in such<br>a manner as not to exceed the recommended maximum<br>values of light technical parameters for the control of<br>obtrusive light given in Table 2.1 of Australian Standard<br>AS 4282 (1997) Control of Obtrusive Effects of Outdoo<br>Lighting.<br>Note - "Curfewed hours" are taken to be those hours between 10pm<br>and 7am on the following day. |
| Amenity  |  |
| PO19   | No acceptable solution provided.   |
| The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, chemicals<br>and other nuisance.  |  |
| Noise  | No.  |
| Noise generating uses do not adversely affect existing<br>or potential noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line.<br>Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise. |  |
| P021   | AO21.1   |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:   | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.   |
| a. contributing to safe and usable public spaces,  | AO21.2   |
| <ul> <li>through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>maintaining the amenity of the streetscape.</li> </ul>   | Noise attenuation structures (e.g. walls, barriers or<br>fences):<br>a. are not visible from an adjoining road or public area<br>unless:   |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.  | <ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does no<br/>serve an existing or future active transport<br/>purpose (e.g. pedestrian paths or cycle lanes)</li> </ul>   |

|  | 1   |
|--|---|
| Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.   | or where attenuation through building location and materials is not possible.   |
|  | b. do not remove existing or prevent future active transport routes or connections to the street  |
|  | network;  |
|  | c. are located, constructed and landscaped in<br>accordance with Planning scheme policy -   |
|  | Integrated design.  |
|  | integrated design.  |
|  | Note - Refer to Planning scheme policy – Integrated design for  |
|  | details and examples of noise attenuation structures.   |
|  | Note - Refer to Overlay map – Active transport for future active transport routes.  |
| N/orko   | criteria  |
| Works  | criteria  |
| Utilities  | 0 0   |
| P022   | A022  |
| The development is connected to an existing reticulated electricity supply system (approved by the relevant  | The development is connected to underground electricity   |
| energy regulating authority) and the infrastructure does   |   |
| not negatively impact the streetscape.   |   |
|  |   |
| PO23   | No acceptable outcome provided.   |
| The development has appear to tale communications and  | 5   |
| The development has access to telecommunications and broadband services in accordance with current standards.  |   |
| broadbarra sci vices in accordance with current standards.   |   |
|  |   |
| P024   | No acceptable outcome provided.   |
| Where available the development is to safely connect to  |   |
| reticulated gas.   |   |
|  |   |
| PO25   | AO25.1  |
| The development provides for the treatment and disposal  | Where in a sewered area, the development is connected   |
| of sewage and other waste water in a way that will not cause environmental harm or pose a risk to public health.   | to a reticulated sewerage system.   |
|  | A025.2  |
| 0.   | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.   |
|  |   |
|  |   |
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be   |
|  | Note - A site and soil evaluation report is generally required to   |
| PO26   | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be   |
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002. |
| <b>PO26</b><br>The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water. | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002. |

| PO27       No acceptable outcome provided.         PO27       No acceptable outcome provided.         The development is provided with dedicated and constructed road access.       No acceptable outcome provided.         PO28       No acceptable outcome provided.         Development provides functional and integrated car parking and vehicle access, that:       No acceptable outcome provided.         PO28       No acceptable outcome provided.         Development provides subjer of the setter and neighbourhood the feature state and state and three state.       No acceptable outcome provided.         PO29       No acceptable outcome provided.       No acceptable outcome provided.         PO29       No acceptable outcome provided.       No acceptable outcome provided.         PO29       No acceptable outcome provided.       No acceptable outcome provided.         PO29       No acceptable outcome provided.       No acceptable outcome provided.         PO29       No acceptable outcome provided.       No acceptable outcome provided.         PO29       No acceptable outcome provided.       No acceptable outcome provided.         PO29       No acceptable outcome provided.       No acceptable outcome provided.         PO30       A030.1       No acceptable outcome provided.       No acceptable outcome provided.   |  |  |
|--|--|--|
| Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of at least 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development is provided with dedicated and constructed road access.         PO27       No acceptable outcome provided.         Access       PO28         Development provides functional and integrated car parking and vehicle access, that:       No acceptable outcome provided.         a. prioritises the movement and safety of pedestrians between car parking and security of people and property at all times;       No acceptable outcome provided.         between car parking and security of people and property at all times;       does not impact on the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement of traffic external to the safe and efficient movement server external to the safe and efficient movement server external to the safe and external to the safe and efficient movement server external to reaces and exampl |  | South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and  |
| The development is provided with dedicated and constructed road access.         Access         PO28         Development provides functional and integrated car parking and vehicle access, that:         a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g., Rear entry, arcade etc.);       No acceptable outcome provided.         b. provides safety and security of people and property at all times;       e. where possible vehicle access points are consolidated and shared with adjoining sites.         Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.       No acceptable outcome provided.         PO29       Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.       No acceptable outcome provided.   |  | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the |
| PO28       No acceptable outcome provided.         Development provides functional and integrated car parking and vehicle access, that:       a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);       b. provides safety and security of people and property at all times;         c. does not impede active transport options;       does not impede active transport options;         d. does not impede active transport options are consolidated and shared with adjoining sites.         Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.         PO29         Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.  | The development is provided with dedicated and   | No acceptable outcome provided.  |
| Development provides functional and integrated car parking and vehicle access, that:       a.       prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);         b.       provides safety and security of people and property at all times;         c.       does not impede active transport options;         d.       does not impact on the safe and efficient movement of traffic external to the site;         e.       where possible vehicle access points are consolidated and shared with adjoining sites.         Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples.         PO29         Where required access easements contain a driveway and provision for services constructed to suit the user's needs. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.  | Access   |  |
| Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design.  | <ul> <li>Development provides functional and integrated car parking and vehicle access, that:</li> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> </ul> | No acceptable outcome provided.  |
| PO30 AO30.1  | Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy  | No acceptable outcome provided.  |
|  | PO30   | AO30.1   |
| The layout of the development does not compromise:Direct vehicle access for residential development does<br>not occur from arterial or sub-arterial roads or a<br>motorway.  |  | not occur from arterial or sub-arterial roads or a   |

| <ul><li>b. the function or safety of the road network;</li><li>c. the capacity of the road network.</li></ul>                                      | Editor's note - Residential developments should consider<br>amalgamation with the lot to the rear and gaining access via a<br>laneway.  |
|--|---|
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). | Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  |
|  | AO30.2  |
|  | The development provides for the extension of the road network in the area in accordance with Council's road network planning.  |
|  | AO30.3  |
|  | The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.  |
|  | AO30.4  |
|  | The lot layout allows forward access to and from the site.  |
| P031   | A031.1  |
| Safe access facilities are provided for all vehicles required to access the site.  | Site access and driveways are designed and located in accordance with:  |
|  | <ul> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul> |
|  | AO31.2  |
| RC   | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.   |
|  | Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.  |
|  | AO31.3  |
|  | Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in Schedule<br>8 Service vehicle requirements for the relevant use. The<br>on-site manoeuvring is to be in accordance with Schedule<br>8 Service vehicle requirements.  |
| PO32   | No acceptable outcome provided.   |

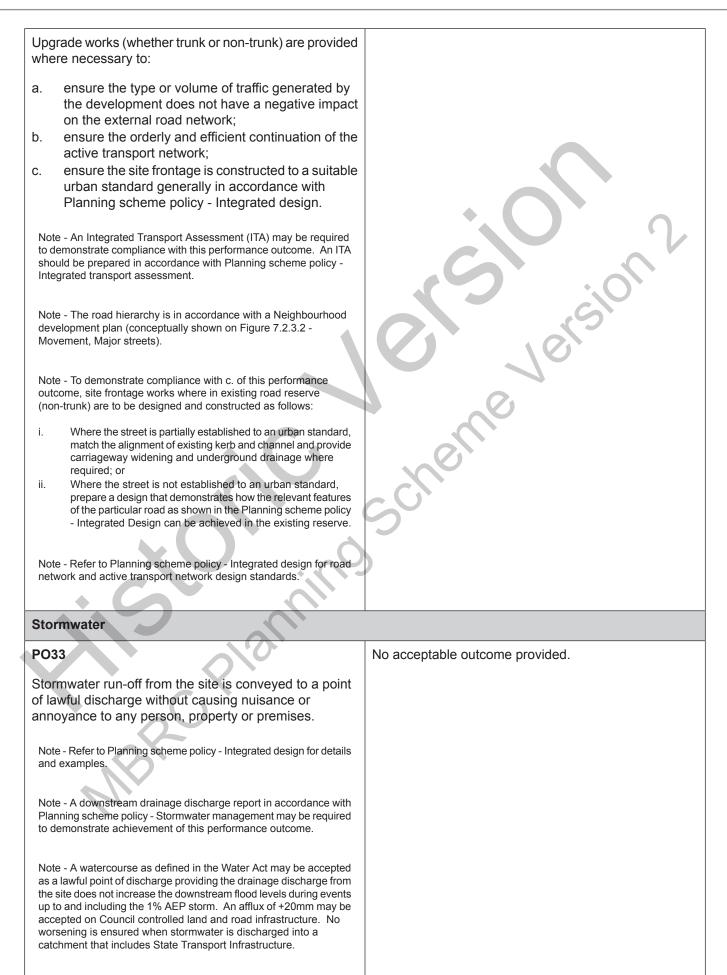


| PO34  | No acceptable outcome provided.   |
|---|---|
| Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.  |   |
| PO35  | No acceptable outcome provided.   |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by a<br>suitably qualified professional will be required in accordance with<br>Planning scheme policy - Stormwater management. | ersion?   |
| PO36  | No acceptable outcome provided.   |
| Easements for drainage purposes are provided over:  |   |
| <ul><li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li><li>b. overland flow paths where they cross more than one property boundary.</li></ul>   | sche  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |   |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   |   |
| Site works and construction management  |   |
| PO37<br>The site and any existing structures are maintained in a<br>tidy and safe condition.  | No acceptable outcome provided.   |
| PO38  | AO38.1  |
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> </ul>   | <ul> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> </ul> |


| <ul> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sedimentation basins.</li> </ul> |
|--|---|
|  | Stormwater run-off, erosion and sediment controls are<br>constructed prior to commencement of any clearing work<br>or earthworks and are maintained and adjusted as<br>necessary at all times to ensure their ongoing<br>effectiveness.   |
|  | AO38.3  |
|  |   |
|  | The completed earthworks (fill or excavation) area is<br>stabilised using turf, established grass seeding, mulch<br>or sprayed stabilisation techniques to control erosion and<br>sediment and dust from leaving the property.  |
|  | AO38.4  |
|  | Where works are proposed in proximity to an existing<br>street tree, an inspection and a root management plan<br>is undertaken by a qualified arborist which demonstrates<br>and ensures that no permanent damage is caused to the<br>tree.   |
| PO39   | AO39  |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.   | No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.   |
| PO40   | AO40.1  |
| All works on-site and the transportation of material to and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.                                | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic<br>movements to and from the site are safe.  |
| a haulage route must be identified and approved by Council.  | AO40.2  |
|  | 4   |

|  | All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.<br>Note - A Traffic Management Plan may be required for the site in<br>accordance with the Manual of Uniform Traffic Control Devices<br>(MUTCD). |
|--|---|
|  | AO40.3<br>Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.  |
| PO41   | A041  |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | <ul><li>a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;</li><li>b. grassed.</li></ul>  |
|  | Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.   |
| PO42   | AO42.1  |
| <ul><li>The clearing of vegetation on-site:</li><li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the</li></ul>                   | All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.  |
| <ul> <li>works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> </ul>                             | Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.   |
| c. is disposed of in a manner which minimises  | AO42.2  |
| nuisance and annoyance to existing premises.<br>Note - No burning of cleared vegetation is permitted.  | Disposal of materials is managed in one or more of the following ways:  |
| MP.  | <ul> <li>all cleared vegetation, declared weeds, stumps,<br/>rubbish, car bodies, scrap metal and the like are<br/>removed and disposed of in a Council land fill<br/>facility; or</li> </ul>   |
|  | b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.   |
| PO43   | No acceptable outcome provided.   |
| Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control |   |

| of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.   |   |
|---|---|
| Earthworks  |   |
| PO44  | AO44.1  |
| On-site earthworks are designed to consider the visual<br>and amenity impact as they relate to: a. the natural topographical features of the site;<br>b. short and long-term slope stability;<br>c. soft or compressible foundation soils;<br>d. reactive soils;<br>e. low density or potentially collapsing soils;<br>f. existing fills and soil contamination that may exist<br>on-site;<br>g. the stability and maintenance of steep rock slopes<br>and batters;<br>h. excavation (cut) and fill and impacts on the amenity<br>of adjoining lots (e.g. residential)<br>Note - Filling or excavation works are to be completed within six (6)<br>months of the commencement date. | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains<br>as necessary.<br>AO44.2<br>Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.<br>AO44.3<br>All filling or excavation is contained within the site.<br>AO44.4<br>All fill placed on-site is:<br>a. limited to that required for the necessary approved<br>use;<br>b. clean and uncontaminated (i.e. no building waste,<br>concrete, green waste or contaminated material<br>etc. is used as fill).<br>AO44.5<br>The site is prepared and the fill placed on-site in<br>accordance with AS3798.<br>Note - The fill is to be inspected and tested in accordance with<br>Planning scheme policy - Operational works inspection, maintenance<br>and bonding procedures.<br>AO44.6<br>Inspection and certification of steep rock slopes and<br>batters may be required by a suitably qualified and<br>experienced RPEQ. |
| PO45<br>Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | AO45<br>Any embankments more than 1.5 metres in height are<br>stepped, terraced and landscaped.   |

|   | Figure - Embankment   |
|---|---|
|   | 500mm<br>min<br>1.5m<br>1.5m<br>1.5m<br>1.5m<br>1.5m<br>1.5m<br>1.5m<br>1.5m  |
| PO46  | AO46.1  |
| <ul> <li>On-site earthworks are undertaken in a manner that:</li> <li>a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li> <li>b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> </ul>  | <ul> <li>No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.</li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> <li>AO46.2</li> <li>Earthworks that would result in any of the following are not carried out on-site: <ul> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> </ul> </li> <li>Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i>.</li> </ul> |
| Filling or excavation does not result in land instability.<br>Note - A slope stability report prepared by an RPEQ may be required.  |   |
| PO48  | No acceptable outcome provided.   |
| <ul> <li>Filling or excavation does not result in</li> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> <li>Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements.</li> </ul> |   |

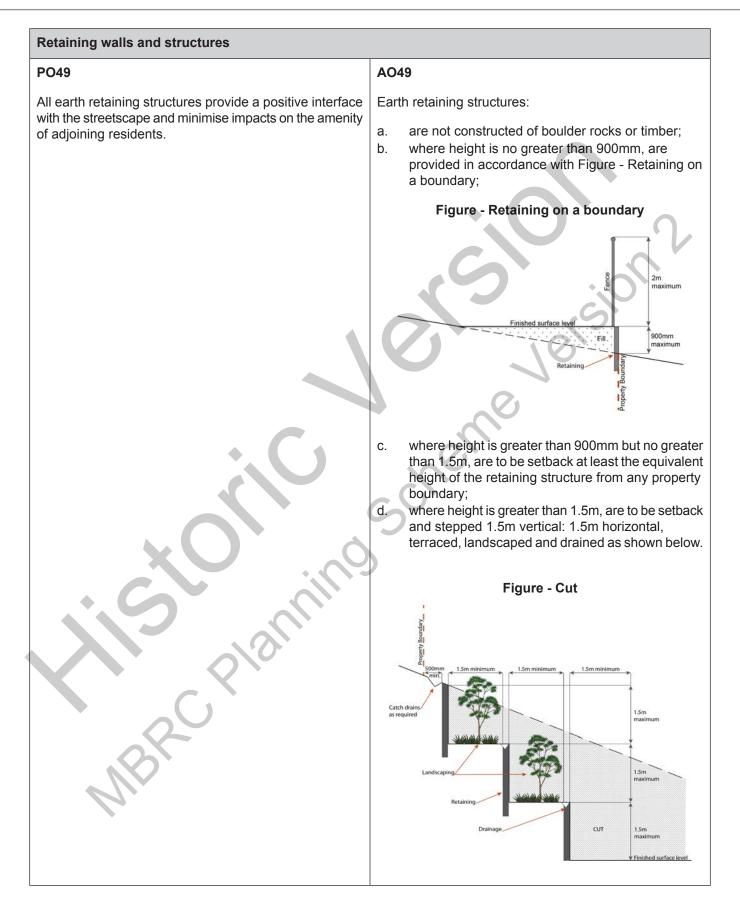

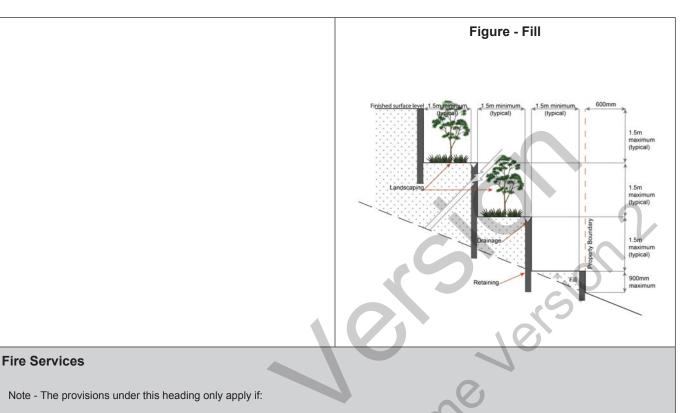

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii.
  - iii.
  - iv

#### AND

b. none of the following exceptions apply:

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
  - every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| PO50   | AO50.1   |
|--|--|
| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> </ul> | <ul> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i>.</li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(64)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul> |

| <ul> <li>considers the fire hazard inherent in the surrounds to the development site;</li> <li>is maintained in effective operating order.</li> <li>Note - The Queensland Fire and Emergency Services is the entity outwards providing the file fighting function for the urban areas of the Moreon Bay Region.</li> <li>in regard to the provide of the control of the urban areas of the Moreon Bay Region.</li> <li>in regard to the provide of the control of the urban areas of the Moreon Bay Region.</li> <li>in regard to the provide of the control of the urban areas of the Moreon Bay Region.</li> <li>in the control of the control of the urban areas of the control of the</li></ul> |  |  |
|---|--|--|
| <ul> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:         <ul> <li>an unobstructed width of no less than 3.5m;</li> <li>an unobstructed height of no less than 4.8m;</li> <li>constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each rydrant booster point.</li> </ul> </li> <li>Actional access and the available fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development site.</li> <li>Actional to buildings, as the available fire fighting appliance access routes to those hydrants (and the vehicular entry point to the development site.</li> <li>a sign identifying the following is provided at the vehicular entry point to the site; or</li> <li>a sign identifying the following is provided at the vehicular entry point to the site:         <ul> <li>the overall layout of the development (to scale);</li> <li>in internal road names (where used);</li> <li>ii. all communal facilities (where provided);</li> <li>we the reception area and on-site manager's</li> </ul> </li> </ul>  | to the development site;<br>f. is maintained in effective operating order.<br>Note - The Queensland Fire and Emergency Services is the entity<br>currently providing the fire fighting function for the urban areas of | <ul> <li>hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as<br/>Appendix B of AS 2419.1 (2005);</li> <li>c. in regard to the proximity of hydrants to buildings and other<br/>facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:</li> <li>i. for dwellings and their associated outbuildings, hydrant<br/>coverage need only extend to the roof and external<br/>walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only<br/>extend to the roof of those tents and caravans;</li> <li>iii. for outdoor sales <sup>(54)</sup>, processing or storage facilities,<br/>hydrant coverage is required across the entire area of<br/>the outdoor sales <sup>(54)</sup>, outdoor processing and outdoor<br/>storage facilities;</li> <li>d. in regard to fire hydrant accessibility and clearance</li> </ul> |
| PO51       On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.         PO51       AO51         On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes to those hydrants, can be readily identified at all times from, or at, the vehicular entry point to the development to buildings:       a. those external hydrants can be seen from the vehicular entry point to the site; or         a. those external hydrants can be seen from the vehicular entry point to the site; or       b. a sign identifying the following is provided at the vehicular entry point to the site:         i. the overall layout of the development (to scale);       ii. internal road names (where used);         iii. all communal facilities (where provided);       iv. the reception area and on-site manager's  |  | <ul> <li>A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:</li> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of</li> </ul>   |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times<br>from, or at, the vehicular entry point to the development<br>site.For development that contains on-site fire hydrants<br>external to buildings:<br>a.a.those external hydrants can be seen from the<br>vehicular entry point to the site; orb.a sign identifying the following is provided at the<br>vehicular entry point to the site:<br>i.i.the overall layout of the development (to<br>scale);iii.internal road names (where used);<br>iii.iv.the reception area and on-site manager's   |  | On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire</i>   |
| On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times<br>from, or at, the vehicular entry point to the development<br>site.For development that contains on-site fire hydrants<br>external to buildings:<br>a.a.those external hydrants can be seen from the<br>vehicular entry point to the site; orb.a sign identifying the following is provided at the<br>vehicular entry point to the site:<br>i.i.the overall layout of the development (to<br>scale);iii.internal road names (where used);<br>iii.iii.all communal facilities (where provided);<br>iv.iv.the reception area and on-site manager's   |  | 4054   |
| <ul> <li>from, or at, the vehicular entry point to the development site.</li> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>b. a sign identifying the following is provided at the vehicular entry point to the site: <ol> <li>the overall layout of the development (to scale);</li> <li>internal road names (where used);</li> <li>all communal facilities (where provided);</li> <li>the reception area and on-site manager's</li> </ol> </li> </ul>  | On-site fire hydrants that are external to buildings, as well as the available fire fighting appliance access routes   | For development that contains on-site fire hydrants  |
| <ul> <li>b. a sign identifying the following is provided at the vehicular entry point to the site:</li> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's</li> </ul>  | from, or at, the vehicular entry point to the development  |  |
| scale);<br>ii. internal road names (where used);<br>iii. all communal facilities (where provided);<br>iv. the reception area and on-site manager's  |  | b. a sign identifying the following is provided at the   |
| <ul><li>iii. all communal facilities (where provided);</li><li>iv. the reception area and on-site manager's</li></ul>   |  |  |
| iv. the reception area and on-site manager's  |  | ii. internal road names (where used);  |
|   |  | iii. all communal facilities (where provided);   |
|   |  |  |

|  | <ul><li>v. external hydrants and hydrant booster points;</li><li>vi. physical constraints within the internal</li></ul>  |
|--|--|
|  | vi. physical constraints within the internal   |
|  | roadway system which would restrict access<br>by fire fighting appliances to external hydrants<br>and hydrant booster points.  |
| Note   | - The sign prescribed above, and the graphics used are to be:  |
| a.   | in a form;   |
| b.<br>c.   | of a size;<br>illuminated to a level;  |
| whic   | h allows the information on the sign to be readily understood,<br>times, by a person in a fire fighting appliance up to 4.5m from  |
| P052 A05   | 2  |
| Each on-site fire hydrant that is external to a building is<br>signposted in a way that enables it to be readily identified<br>at all times by the occupants of any firefighting appliance<br>traversing the development site. | levelopment that contains on-site fire hydrants<br>mal to buildings, those hydrants are identified by<br>of marker posts and raised reflective pavement<br>ers in the manner prescribed in the technical note<br><i>hydrant indication system</i> produced by the<br>ensland Department of Transport and Main Roads. |
|  |  |
| Use specific cri   | teria  |
| Retail and commercial activities   |  |
| PO53 No a  | cceptable outcome provided.  |
| Retail and commercial uses within a neighbourhood hub consists of no more than:  |  |
| <ul> <li>a. 1 small format supermarket with a maximum gfa of 1000m<sup>2</sup>;</li> </ul>   |  |
| b. 10 small format retail or commercial tenancies with a maximum gfa of 100m <sup>2</sup> each.  |  |
| Caretaker's accommodation <sup>(10)</sup>  |  |
| P054 No a  | cceptable outcome provided.  |
| With the exception of Caretaker's accommodation <sup>(10)</sup> , residential and other sensitive land uses do not establish within the sub-precinct.  |  |

| PO   | 55  | AO55  |
|--|---|---|
| Dev  | velopment of Caretaker's accommodation <sup>(10)</sup> :  | Caretaker's accommodation <sup>(10)</sup> :   |
| a.   | does not compromise the productivity of the use occurring on-site and in the surrounding area;  | a. has a maximum GFA of 80m <sup>2</sup> ;  |
| b.   | is domestic in scale;   | b. does not gain access from a separate driveway to that of the industrial use;   |
| C.   | provides adequate car parking provisions exclusive of the primary use of the site;  | c. provides a minimum 16m <sup>2</sup> of private open space directly accessible from a habitable room;   |
| d.   | is safe for the residents;  | d. provides car parking in accordance with the car parking rates table.   |
| e.   | has regard to the open space and recreation needs of the residents.   |   |
| Мај  | or electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and  | Utility installation <sup>(86)</sup>  |
| PO   | 56  | AO56.1  |
| the<br>a.<br>b.<br>c.<br>d.<br>e.<br>f.<br>f.<br>g.<br>h.<br>i.<br><b>PO</b> ! | <ul> <li>development does not have an adverse impact on visual amenity of a locality and is:</li> <li>high quality design and construction; visually integrated with the surrounding area; not visually dominant or intrusive;</li> <li>located behind the main building line;</li> <li>below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>camouflaged through the use of colours and materials which blend into the landscape; treated to eliminate glare and reflectivity; landscaped;</li> <li>otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | <ul> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment: <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> </li> <li>AO56.2 <ul> <li>A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.</li> </ul> </li> <li>AO57 <ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> </ul> </li> </ul> |
| an e   | <b>58</b><br>activities associated with the development occur within<br>environment incorporating sufficient controls to ensure<br>facility:  | <ul> <li>d. do not utilise barbed wire or razor wire.</li> <li>AO58</li> <li>All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>  |

|   | 1   |  |
|---|---|--|
| a. generates no audible sound at the site boundaries where in a residential setting; or   |   |  |
| b. meet the objectives as set out in the Environmental  |   |  |
| Protection (Noise) Policy 2008.   |   |  |
| Telecommunications facility <sup>(81)</sup>   |   |  |
| Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz. |   |  |
| PO59  | AO59.1  |  |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area.  | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.  |  |
| 5   | A059.2  |  |
|   | If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.  |  |
| PO60  | A060  |  |
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.  | A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the proposed<br>facility.   |  |
| P061  | AO61  |  |
| Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.  | The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval. |  |
| P062  | AO62.1  |  |
| <ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>   | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |  |
| c. not visually dominant or intrusive;  | AO62.2  |  |
| <ul> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and<br/>attractions;</li> </ul>   | In all other areas towers do not exceed 35m in height.  |  |
| f. camouflaged through the use of colours and   | AO62.3  |  |
| <ul><li>materials which blend into the landscape;</li><li>g. treated to eliminate glare and reflectivity;</li></ul>   | Towers, equipment shelters and associated structures are of a design, colour and material to:   |  |

| <ul> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character</li> <li>of the zone and surrounding area</li> </ul>   | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>  |
|--|--|
| of the zone and surrounding area.  | AO62.4   |
|  | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m.  |
|  | Where there is no established building line the facility is located at the rear of the site.   |
|  | AO62.5   |
|  | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |
|  | A062.6   |
|  | A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the<br>facility and street frontage and adjoining uses.  |
|  | Note - Landscaping is provided in accordance with Planning scheme<br>policy - Integrated design.   |
|  | Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design.   |
| PO63   | AO63   |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |
| PO64   | A064   |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.   | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |
| Values and con   | estraints criteria   |
| Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a |  |

Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

# Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

#### PO65

Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:

- a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;
- b. protects the environmental and ecological values and health of receiving waters;
- c. protects buildings and infrastructure from the effects of acid sulfate soils.

#### AO65

Development does not involve:

- excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or
- b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.

# Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)


Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

| PO6 | 36  | AO66  |
|-----|---|---|
| Dev | elopment will:  | Development is for the preservation, maintenance, repair  |
| a.  | not diminish or cause irreversible damage to the cultural heritage values present on the site, and                                  | and restoration of a site, object or building of cultural heritage value.   |
| b.  | associated with a heritage site, object or building;<br>protect the fabric and setting of the heritage site,<br>object or building; | Note - A cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object<br>or building of cultural heritage value is prepared in accordance with |
| C.  | be consistent with the form, scale and style of the heritage site, object or building;  | Planning scheme policy - Heritage and landscape character. The<br>plan is sent to, and approved by Council prior to the commencement<br>of any preservation, maintenance, repair and restoration works.         |
| d.  | utilise similar materials to those existing, or where<br>this is not reasonable or practicable, neutral<br>materials and finishes;  |   |
| e.  | incorporate complementary elements, detailing and<br>ornamentation to those present on the heritage site,<br>object or building;    |   |
| f.  | retain public access where this is currently provided.  |   |
| PO6 | 57  | No acceptable outcome provided.   |
| Dem | nolition and removal is only considered where:  |   |

|   | I  |  |
|---|--|--|
| <ul> <li>a. a report prepared by a suitably qualified<br/>conservation architect or conservation engineer<br/>demonstrates that the building is structurally<br/>unsound and is not reasonably capable of economic<br/>repair; or</li> <li>b. demolition is confined to the removal of<br/>outbuildings, extensions and alterations that are<br/>not part of the original structure; or</li> <li>c. limited demolition is performed in the course of<br/>repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic<br/>event which substantially destroys the building or<br/>object.</li> </ul> |  |  |
| PO68  | No acceptable outcome provided.  |  |
| Where development is occurring on land adjoining a site<br>of cultural heritage value, the development is to be<br>sympathetic to and consistent with the cultural heritage<br>values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view.  | Jersio   |  |
| Infrastructure buffer areas (refer Overlay map – Infrastr<br>criteria apply)  | ucture buffers to determine if the following assessment  |  |
| <ul> <li>PO69</li> <li>Development within a High voltage electricity line buffer: <ul> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> </ul> </li> </ul>   | AO69<br>Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer. |  |
| Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)<br>Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.   |  |  |
| P070  | No acceptable outcome provided.  |  |
| Development:  |  |  |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>  |  |  |
| P071  | A071   |  |
| Development:  | No acceptable outcome provided.  |  |

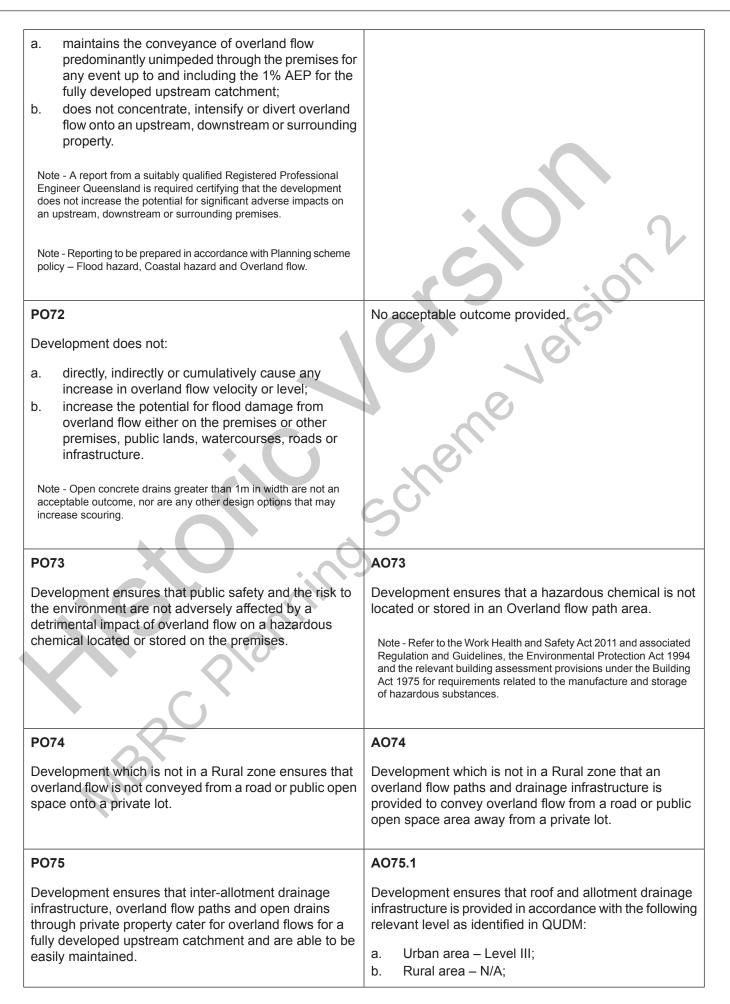

| Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on | <ul> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul>  |
|--|---|
| an upstream, downstream or surrounding premises.   | A075.2  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   | Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment. |
| PO76   | No acceptable outcome provided.   |
| Development protects the conveyance of overland flow<br>such that an easement for drainage purposes is provided<br>over:   |   |
| a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;   | 5   |
| b. an overland flow path where it crosses more than one premises;  | V JOI   |
| c. inter-allotment drainage infrastructure.  | C C   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | NON'  |
| Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.  | SCI   |
| Additional criteria for development for a Park <sup>(57)</sup>   |   |
| P077   | P077  |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:  | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design.      |
| a. public benefit and enjoyment is maximised;  |   |
| b. impacts on the asset life and integrity of park structures is minimised;  |   |
| c. maintenance and replacement costs are minimised.  |   |
|  |   |

### Minimum class of service vehicle

| Land use                                    | Minimum service vehicle class |
|---|-------------------------------|
| Agricultural supplies store <sup>(2)</sup>  | Small rigid vehicle           |
| Bulk landscape supplies <sup>(9)</sup>      | Articulated vehicle           |
| Garden centre <sup>(31)</sup>               | Heavy rigid vehicle           |
| Hardware and trade supplies <sup>(32)</sup> | Articulated vehicle           |
| High impact industry <sup>(34)</sup>        | Articulated vehicle           |

| Land use   | Minimum service vehicle class |
|--|-------------------------------|
| Low impact industry <sup>(42)</sup>              | Heavy rigid vehicle           |
| Marine industry <sup>(45)</sup>                  | Articulated vehicle           |
| Medium impact industry <sup>(47)</sup>           | Articulated vehicle           |
| Outdoor sales <sup>(54)</sup>                    | Articulated vehicle           |
| Research and technology industry <sup>(64)</sup> | Heavy rigid vehicle           |
| Sales office <sup>(72)</sup>                     | Small rigid vehicle           |
| Service industry <sup>(73)</sup>                 | Small rigid vehicle           |
| Service station <sup>(74)</sup>                  | Articulated vehicle           |
| Showroom <sup>(78)</sup>                         | Articulated vehicle           |
| Utility installation <sup>(86)</sup>             | Heavy rigid vehicle           |
| Warehouse <sup>(88)</sup> (where self-storage)   | Medium rigid vehicle          |
| Warehouse <sup>(88)</sup> (other)                | Articulated vehicle           |
| Wholesale nursery <sup>(89)</sup>                | Heavy rigid vehicle           |

Note - Service vehicle classes are defined in AS2890.2 - Offstreet parking, Part 2: Commercial vehicles

| Service vehicle requirements              |   |
|---|---|
| Site area                                 | Service vehicle requirement   |
| Less than 1,000m <sup>2</sup>             | <ul> <li>a. Demonstrate that the development can accommodate the particular design vehicle but a separate service bay and associated manoeuvring area is not required.</li> <li>b. Where is can be demonstrated that loading and unloading can take place within the road reserve consistent with MUTCD bay requirements.</li> <li>c. Otherwise service vehicle requirements for a 1,000m<sup>2</sup> - 2,000m<sup>2</sup> site applies.</li> <li>a. Service bay for heavy rigid vehicle is required on-site, where a heavy rigid vehicle is identified in the design service vehicle in Table X.</li> <li>b. Restricted manoeuvring allowed on-site for heavy rigid vehicle and articulated vehicle.</li> <li>c. Full on-site manoeuvring for all other classes of service vehicle is required.</li> </ul> |
| 2,001m <sup>2</sup> - 4,000m <sup>2</sup> | <ul> <li>a. A service bay is required for the design service vehicles identified<br/>in Table X.</li> <li>b. Restricted manoeuvring permitted on-site for articulated vehicles.<br/>Full on-site manoeuvring is required for all other classes of<br/>service vehicle.</li> </ul>   |
| Greater than 4,000m <sup>2</sup>          | Service bays and full on-site manoeuvring is required for all classes of service vehicles identified in Table X.  |

#### Note -

a. Restricted manoeuvring is defined as a single point reverse manoeuvre in order to access a service loading bay on-site. This manoeuvre may be performed from the kerbside lane on a minor road where it is clearly demonstrated that the design vehicle can achieve such a manoeuvre to access the service loading bay.

erc

- b. Minor road is a cul-de-sac or road carrying predominately local traffic.
- c. MUTCD: Transport and Main Roads Manual of Uniform Traffic Control Devices.

#### 7.2.3.4 Green network precinct

#### 7.2.3.4.1 Purpose - Green network precinct

Note - The Green Network is a key feature of the Caboolture West Local Plan and central to a long term vision to develop green network that provides urban as well as environmental sustainability. The green network and vision was devised with both local and regional dimensions in mind. The Green Network is:

- i. An area designed around flood risk; current and future environmental values; steep slopes; property boundaries; and sensibly designed land use boundaries. Its design suggests a practical 'no-development' area that can be linked to levels of assessment and other regulations (it is not the result of a 'sieving' exercise.) Conversely, land outside the green network can be made relatively easy to develop, as it has been assessed as having no or only minor constraints.
- ii. Multi-purpose environmental protection, waterways, stormwater conveyance and treatment, recreation and urban infrastructure are suitable uses.
- iii. Designed to function as the receive site for environmental offsets as development occurs within the Local Plan area.
- iv. Frames neighbourhoods and provides significant amenity value, buffering and for active transport.
- v. Supplemented by minor environmental corridors. These are narrow linear green spaces of 30-50m wide. It is not possible to designate precise boundaries of these corridors at this stage. Instead this is to be resolved in Neighbourhood Development Plans. Minor environmental corridors typically follow minor gullies; a few exist as green links or as buffers to the enterprise and employment area.
- 1. The purpose of the Green network precinct is to provide for the protection and management of land having significant recreation and environmental values within the local plan area. The Green network precinct seeks to consolidate and rehabilitate fragmented land, through development offsetting, and create a strong and connected network of quality environmental landscape areas having significant recreation, conservation, biodiversity and habitat values. The precinct seeks to implement the policy direction as set out in Part 3, Strategic Framework.
- 2. The purpose of the code will be achieved through the following overall outcomes:
  - a. Development proceeds in accordance with the Caboolture West structure plan (Figure 7.2.3.1 Caboolture West structure plan) and any Neighbourhood development plan.
  - b. Development achieves a multi-functioning network system comprising natural areas, recreational areas, infrastructure and services and utilities. Semi-natural and engineered components, such as wildlife movement infrastructure, stormwater management (bio-retention) systems, revegetation projects and recreation uses are established.
  - c. Development maintains and enhances environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values through revegetation projects and landscaping and facilitating safe wildlife movement and habitat connectivity through the environment.
  - d. Quality environmental linkages to significant environmental areas are established, including Sheep Station Creek Conservation Park and the D'Aguilar Mountain Range.
  - e. A range of formal and informal, active and passive sports and recreation opportunities are provided to meet community needs in locations identified in a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.1 Caboolture West structure plan and Figure 7.2.3.4 Green network and open space.
  - f. Development:
    - i. does not adversely affect the flood-storage capacity or flood-carrying capacity of a waterway;
    - ii. protects the hydraulic characteristics of the floodplain.
  - g. Development does not result in vegetation clearing within the precinct, except for the purpose of:
    - i. infrastructure and services associated with reconfiguring a lot and land development;

- ii. utilities;
- iii. parks<sup>(57)</sup> and open space areas;
- iv. environmental and recreational facilities;
- v. revegetation projects.
- h. Development offsets, provided by way of development levy for urban development in the Urban living precinct, are:
  - i. provided in suitable locations within the precinct;
  - ii. contribute to the maintenance and rehabilitation of land and vegetation within the geomorphic stream channel;
  - iii. to result in increase patch size, more regular patch boundaries and strategic linkages between habitat patches;
  - iv. strategically located and managed in order to link areas of retained and established habitat to increase koala population size and connectivity.
- i. General works associated with the development achieves the following:
  - i. a high standard of electricity, telecommunications, roads, sewerage, water supply and street lighting services are provided to new development to meet the current and future needs of users of the site;
  - ii. the development manages stormwater to:
    - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
    - B. prevent stormwater contamination and the release of pollutants;
    - C. Maintain or improve the structure and condition of drainage lines and riparian areas;
    - D. avoid off-site adverse impacts from stormwater.
  - iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- j. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- k. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- I. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- m. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
- n. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- o. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- p. Facilities, infrastructure and public realm improvements are provided to support active transport usage and contribute to improved pedestrian connectivity and walkability between key destinations.

- q. Pedestrian connections are provided to integrate the development with the surrounding area as well as the street and public spaces.
- r. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- s. Development in the Green network precinct includes one or more of the following :

| Environment facility <sup>(26)</sup><br>Outdoor sport and<br>recreation <sup>(55)</sup><br>Permanent plantation <sup>(59)</sup> | <ul> <li>Telecommunication<br/>facility<sup>(81)</sup></li> </ul> |
|---|---|
|---|---|

Development in the Green network precinct does not include any of the following:

| •       | Adult store <sup>(1)</sup>                       | • | Hardware and trade<br>supplies <sup>(32)</sup> | • | Port services <sup>(61)</sup>   |
|---------|--|---|--|---|---|
| •       | Agricultural supplies store <sup>(2)</sup>       | • | Health care services <sup>(33)</sup>           | • | Relocatable home park <sup>(62)</sup>                                 |
| $\odot$ | Air services <sup>(3)</sup>                      | • | High Impact industry <sup>(34)</sup>           | • | Renewable energy<br>facility <sup>(63)</sup>                          |
| •       | Animal keeping <sup>(5)</sup>                    | • | Home based business <sup>(35)</sup>            | • | Research and technology   |
| •       | Aquaculture <sup>(6)</sup><br>Bar <sup>(7)</sup> | • | Hospital <sup>(36)</sup>                       | • | industry <sup>(64)</sup><br>Residential care facility <sup>(65)</sup> |
| •       | Brothel <sup>(8)</sup>                           | • | Hotel <sup>(37)</sup>                          | • | Resort complex <sup>(66)</sup>  |
| •       | Bulk landscape supplies <sup>(9)</sup>           | • | Indoor sport and<br>recreation <sup>(38)</sup> | • | Retirement facility <sup>(67)</sup>                                   |
| •       | Caretaker's<br>accommodation <sup>(10)</sup>     | • | Intensive animal industry <sup>(39)</sup>      | • | Roadside stall <sup>(68)</sup>  |

| • | Car wash <sup>(11)</sup>                  | • | Intensive horticulture <sup>(40)</sup>       | • | Rooming<br>accommodation <sup>(69)</sup>     |
|---|---|---|--|---|--|
| • | Cemetery <sup>(12)</sup>                  | • | Landing <sup>(41)</sup>                      |   |  |
| • | Child care centre <sup>(13)</sup>         | • | Low impact industry <sup>(42)</sup>          | • | Rural industry <sup>(70)</sup>               |
| • | Club <sup>(14)</sup>                      | • | Major electricity                            | • | Rural workers' accommodation <sup>(71)</sup> |
| • | Community care centre <sup>(15)</sup>     |   | infrastructure <sup>(43)</sup>               | • | Sales office <sup>(72)</sup>                 |
|   |   | • | Major sport, recreation and                  |   |  |
| • | Community residence <sup>(16)</sup>       |   | entertainment facility <sup>(44)</sup>       |   | Service industry <sup>(73)</sup>             |
| • | Community use <sup>(17)</sup>             | • | Marine industry <sup>(45)</sup>              | • | Service station <sup>(74)</sup>              |
| • | Crematorium <sup>(18)</sup>               | • | Market <sup>(46)</sup>                       |   | Shop <sup>(75)</sup>                         |
| • | Cropping <sup>(19)</sup>                  | • | Medium impact industry <sup>(47)</sup>       | • | Shopping centre <sup>(76)</sup>              |
| • | Detention facility <sup>(20)</sup>        | • | Motor sport facility <sup>(48)</sup>         | • | Short-term (77)                              |
| • | Dual occupancy <sup>(21)</sup>            | • | Multiple dwelling <sup>(49)</sup>            |   | accommodation <sup>(77)</sup>                |
|   | Dwelling house <sup>(22)</sup>            |   | Nightclub entertainment                      |   | Showroom <sup>(78)</sup>                     |
|   | Dwelling unit <sup>(23)</sup>             |   | facility <sup>(51)</sup>                     | > | Special industry <sup>(79)</sup>             |
| • | Dweining unit                             |   | Non-resident workforce                       | • | Theatre <sup>(82)</sup>                      |
| • | Educational establishment <sup>(24)</sup> |   | accommodation <sup>(52)</sup>                |   |  |
|   |   |   | Office <sup>(53)</sup>                       | • | Tourist attraction <sup>(83)</sup>           |
| • | Emergency services <sup>(25)</sup>        |   | Outdoor sales <sup>(54)</sup>                | ٠ | Tourist park <sup>(84)</sup>                 |
| • | Extractive industry <sup>(27)</sup>       | • |  | • | Transport depot <sup>(85)</sup>              |
| • | Food and drink outlet <sup>(28)</sup>     | • | Outdoor sport and recreation <sup>(55)</sup> | • | Veterinary services <sup>(87)</sup>          |
| • | Function facility <sup>(29)</sup>         |   | Parking station <sup>(58)</sup>              | • | Warehouse <sup>(88)</sup>                    |
|   | Funeral parlour <sup>(30)</sup>           |   | Place of worship <sup>(60)</sup>             | • | Wholesale nursery <sup>(89)</sup>            |
|   | Garden centre <sup>(31)</sup>             |   |  | • | Winery <sup>(90)</sup>                       |
|   |   |   |  |   |  |
|   |   |   |  |   |  |

u. Development not listed in the tables above above may be considered on its merits and where it reflects and supports the outcomes of the precinct.

#### 7.2.3.4.2 Criteria for assessment

To determine if development is self-assessable, development is to comply with the self-assessable acceptable outcomes set out in Part P, Table 7.2.3.4.1. Where development does not meet an acceptable outcome (SAO) of the relevant criteria Part P, Table 7.2.3.4.1, assessment is against the corresponding performance outcomes (PO) identified in the table below. This only occurs wherever a self-assessable SAO is not met, and is therefore limited to the subject matter of the self-assessable SAO's that are not complied with. To remove any doubt, for those SAO's that are complied with, there is no need for assessment against the corresponding PO.

| Self-assessable acceptable | Corresponding performance |
|----------------------------|---------------------------|
| outcomes (SAO)             | outcomes (PO)             |
| SAO1                       | PO5                       |

| Self-assessable acceptable outcomes (SAO) | Corresponding performance<br>outcomes (PO) |
|---|--|
| SAO2                                      | PO6  |
| SAO3                                      | PO7  |
| SAO4                                      | PO8  |
| SAO5                                      | PO8  |
| SAO6                                      | PO8  |
| SAO7                                      | PO11-PO15                                  |
| SAO8                                      | PO18                                       |
| SAO9                                      | PO18                                       |
| SAO10                                     | PO21                                       |
| SAO11                                     | PO24                                       |
| SAO12                                     | PO25                                       |
| SAO13                                     | P027                                       |
| SAO14                                     | PO29                                       |
| SAO15                                     | PO30                                       |
| SAO16                                     | P027                                       |
| SAO17                                     | P031                                       |
| SAO18                                     | PO31-PO36                                  |
| SAO19                                     | P035                                       |
| SAO20                                     | P037                                       |
| SAO21                                     | P037                                       |
| SAO22                                     | P037                                       |
| SAO23                                     | P038                                       |
| SAO24                                     | PO39                                       |
| SAO25                                     | PO40                                       |
| SAO26                                     | PO40                                       |
| SA027                                     | PO44                                       |
| SAO28                                     | PO44                                       |
| SAO29                                     | PO44                                       |
| SAO30                                     | PO45                                       |
| SAO31                                     | PO44                                       |
| SAO32                                     | PO46                                       |
| SAO33                                     | PO48                                       |
| SAO34                                     | PO49                                       |
| SAO35                                     | PO50                                       |

| Self-assessable acceptable outcomes (SAO) | Corresponding performance<br>outcomes (PO) |
|---|--|
| SAO36                                     | PO50                                       |
| SAO37                                     | PO50                                       |
| SAO38                                     | PO50                                       |
| SAO39                                     | P052                                       |
| SAO40                                     | PO53                                       |
| SAO41                                     | PO54                                       |
| SAO42                                     | PO55                                       |
| SAO43                                     | PO56                                       |
| SAO44                                     | P057                                       |
| SAO45                                     | PO58-PO59                                  |
| SAO46                                     | PO58-PO59                                  |
| SAO47                                     | PO61                                       |
| SAO48                                     | PO62                                       |
| SAO49                                     | PO64-PO66, PO68-PO70                       |
| SAO50                                     | PO64-PO66, PO68-PO70                       |
| SAO51                                     | PO64-PO66, PO68-PO70                       |
| SAO52                                     | P067                                       |
| SAO53                                     | P071                                       |

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part Q, Table 7.2.3.4.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

#### Part P — Criteria for self-assessable acceptable outcomes - Green network precinct

Table 7.2.3.4.1 Self-assessable development - Green network precinct

| Self-as | sessal  | ole acceptable outcomes   |
|---------|---------|---|
|         |         | General criteria  |
| Structu | ire pla | n and Neighbourhood development plan  |
| SAO1    | 4       | Development occurs in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.1 - Caboolture West structure plan and Figure 7.2.3.4 - Green network and open space: |
|         |         | a. the provision of infrastructure and services associated with reconfiguring a lot and land development;   |
|         |         | b. utilities;   |
|         |         | c. parks <sup>(57)</sup> and open space;  |
|         |         | d. environmental and recreational facilities.   |

| Lighting     |  |
|--------------|--|
| SAO2         | Artificial lighting on-site is directed and shielded in such a manner as not to exceed the   |
|              | recommended maximum values of light technical parameters for the control of obtrusive light given<br>in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting.  |
|              | Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.   |
| Car parkin   | g  |
| SAO3         | On-site car parking is provided in accordance with Schedule 7 - Car parking.   |
| Vegetation   | clearing and environmental offset  |
| SAO4         | No vegetation clearing is permitted except for:  |
|              | a. the provision of infrastructure and services associated with reconfiguring a lot and land development;  |
|              | b. utilities;  |
|              | c. Parks <sup>(57)</sup> and open space;   |
|              | d. environmental and recreational facilities.  |
| SAO5         | Vegetation clearance in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.1 - Caboolture West structure plan and Figure 7.2.3.4 - Green network and open space.  |
| SAO6         | Any vegetation clearing is to be offset and that offset is located within the Green network precinct.  |
|              | Works criteria   |
| Utilities    |  |
| SAO7         | Each use or tenancy is connected to:   |
| $\checkmark$ | a. an existing reticulated electricity supply (where an electricity supply is required as part of the operation of the use or tenancy);  |
|              | b. telecommunications and broadband (where telecommunications and broadband are required as part of the operation of the use or tenancy);  |
|              | c. reticulated sewerage (if available);  |
|              | d. reticulated water (if available).   |
| Access       |  |
| SAO8         | Site access and driveways are designed and located in accordance with:   |
|              | <ul> <li>a. Where for a Council-controlled road, AS/NZS2890.1, section 3; or</li> <li>b. Where for a State-controlled road, the Safe Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport<br/>Infrastructure Act 1994, section 62 approval.</li> </ul> |

| SAO9         | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1<br>Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy -<br>Integrated design.   |
|--------------|---|
| Stormwater   |   |
| SAO10        | Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy - Integrated design.  |
| Site works a | ind construction management   |
| SAO11        | The site and any existing structures are maintained in a tidy and safe condition.   |
| SAO12        | Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines and Planning scheme policy - Integrated design.  |
| SAO13        | Construction traffic, including contractor car parking, is controlled in accordance with a traffic management plan prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).   |
| SAO14        | All vegetation to be retained on-site is clearly identified and fenced or protected prior to development works commencing. Note - Refer to value and constraint self-assessable acceptable outcomes in this table for classes of vegetation to be retained for self assessable development.   |
|              |   |
| SAO15        | Any damage to council land or infrastructure is to be repaired or replaced, with the same materials prior to plan sealing or final building classification.   |
| SAO16        | Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.  |
| Earthworks   |   |
| SAO17        | The site is prepared and the fill placed on-site in accordance with AS3798.   |
| SAO18        | The total of all cut and fill on-site does not exceed 900mm in height.<br>Figure - Cut and fill<br>Let Boundaries<br>Finished surface level<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source<br>Source |
| SAO19        | Earthworks do not result in:  |

|                   | a. a reduction in cover over any Council or public sector entity infrastructure of less than 600mm;   |
|-------------------|---|
|                   | b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken.  |
|                   | Note - Public sector entity as defined in the Sustainable Planning Act 2009.  |
| Fire services     |   |
| Note - The provi  | sions under this heading only apply if:   |
| a. the devel      | opment is for, or incorporates:   |
| ii. ma<br>iii. ma | configuring a lot for a community title scheme creating 1 or more vacant lots; or<br>aterial change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or<br>aterial change of use for a Tourist park <sup>(84)</sup> with accommodation in the form of caravans or tents; or<br>aterial change of use for outdoor sales <sup>(54)</sup> , outdoor processing or outdoor storage where involving combustible materials. |
| AND               |   |
|                   | ne following exceptions apply:  |
| wa                | e distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated iter supply; or   |
|                   | ery part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated<br>iter supply network, measured around all obstructions, either on or adjacent to the site.  |
|                   |   |
|                   | sions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant is with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent  |
| SAO20             | External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.   |
|                   | Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):   |
| $\mathbf{N}$      | <ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul>  |
|                   | b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);  |
|                   | c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:   |
|                   | i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;   |
|                   | ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;   |
|                   | <ul> <li>iii for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities; and</li> </ul>   |
|                   | d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.  |
|                   |   |

| fire fighting appliances to external hydrants and hydrant booster points.         Note - The sign prescribed above, and the graphics used are to be:         a. in a form;         b. of a size;         c. illuminated to a level;         which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.         SA024         For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads. |         | <ul> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>a sign identifying the following is provided at the vehicular entry point to the site:</li> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> </ul> |
|---|---------|--|
| Note - The sign prescribed above, and the graphics used are to be:         a. in a form;         b. of a size;         c. illuminated to a level;         which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.         SAO24         For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.   |         | <ul> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by</li> </ul>  |
| <ul> <li>b. of a size;</li> <li>c. illuminated to a level;</li> <li>which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.</li> </ul> SAO24 For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.  |         |  |
| SAO24       For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.   |         | b. of a size;  |
| by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.  |         |  |
|   | b<br>tr | by way of marker posts and raised reflective pavements markers in the manner prescribed in the echnical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.  |
| Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.  |         | Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.   |

| Outdoor spo                            | ort and recreation <sup>(55)</sup>  |
|--|---|
| SAO27                                  | Site cover of all buildings and structures does not exceed 10%.   |
| SAO28                                  | All buildings and structures are setback a minimum of 10m from all property boundaries.   |
| SAO29                                  | The maximum height of all buildings and structures is 8.5m.   |
| SAO30                                  | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  |
| SAO31                                  | Outdoor storage areas are screened from adjoining sites and roads by either planting, wall(s), fence(s) or a combination thereof at least 1.8m in height along the length of the storage area.  |
| Permanent p                            | plantation <sup>(59)</sup>  |
| SAO32                                  | Planting only comprises native species endemic to the area.   |
| Editor's note - I<br>that will not cau | n accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner<br>use human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic<br>nan Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz |
| SAO33                                  | A minimum of 45m <sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.  |
| SAO34                                  | The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.   |
| SAO35                                  | <ul><li>Equipment shelters and associated structures are located:</li><li>a. directly beside the existing equipment shelter and associated structures;</li><li>b. behind the main building line;</li></ul>  |
| $\langle \rangle$                      | <ul><li>c. further away from the frontage than the existing equipment shelter and associated structures;</li><li>d. a minimum of 10m from side and rear boundaries.</li></ul>   |
| SAO36                                  | Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.  |
| SAO37                                  | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.   |
| SAO38                                  | A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.<br>Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.   |
|  | Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with Planning scheme policy - Integrated design.   |
| SAO39                                  | All equipment comprising the telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.  |

#### Values and constraints criteria


Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

# Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - Planning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid sulfate soils i.e. development involving filling or excavation works below the thresholds of 100m<sup>3</sup> and 500m<sup>3</sup> respectively.

SAO40 Development does not involve:

- a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below 5m Australian Height Datum AHD, or
  - b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m AHD.

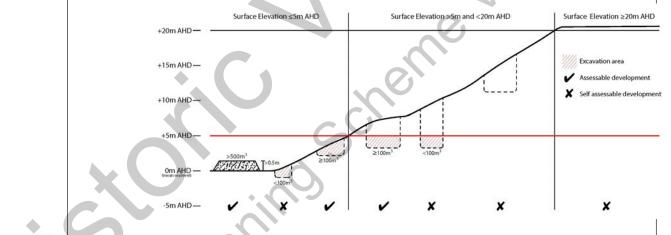

# Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - For the purposes of section 12 of the Building Regulation 2006, land identified as very high potential bushfire intensity, high potential bushfire intensity, medium potential bushfire intensity or potential impact buffer on the Bushfire hazard area overlay map is the 'designated bushfire hazard area'. AS 3959-2009 Construction of buildings in bushfire hazard area applies within these areas.

Note - The bushfire hazard area provisions do not apply where a development envelope recognising and responding to this constraint has been identified and approved by Council as part of a reconfiguration of lot, development approval or approved Bush Fire Management Plan in this and previous planning schemes.

| SAO41 | Building and structures have contained within the site:  |
|-------|--|
|       | a. a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;                |
|       | <ul> <li>a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roof structure or fire fighting water supply of no more than 29, whichever is the greater;</li> </ul> |
|       | c. a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures;  |

|   | d. an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and  |  |  |
|---|--|--|--|
|   | e. an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%;   |  |  |
|   | i. to, and around, each building and other roofed structures; and  |  |  |
|   | ii. to each fire fighting water supply extraction point.   |  |  |
|   | Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS3959.   |  |  |
| SAO42   | The length of driveway:  |  |  |
|   | <ul> <li>a. to a public road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road;</li> <li>b. has a maximum gradient no greater than 12.5%;</li> <li>c. have a minimum width of 3.5m;</li> </ul>  |  |  |
|   | d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and<br>Emergency Services' Fire Hydrant and Vehicle Access Guideline.  |  |  |
| SAO43   | a. A reticulated water supply is provided by a distributer retailer for the area or, where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10,000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m of buildings and structures. |  |  |
|   | b. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.  |  |  |
|   | <ul> <li>c. Where a tank is the nominated on-site fire fighting water storage source, it includes:</li> <li>i. a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;</li> </ul>   |  |  |
| Ń   | ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.   |  |  |
| SAO44   | Development does not involve the manufacture or storage of hazardous chemicals.  |  |  |
| Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply) |  |  |  |
| SAO45   | Development is for the preservation, maintenance, repair and restoration of the building, item or object of cultural heritage value.   |  |  |
| SAO46   | Any maintenance, repair and restoration works are in accordance with Council approval. A cultural heritage construction management plan for maintenance, repair and restoration is prepared in accordance with Planning scheme policy - Heritage and landscape character.  |  |  |
| Infrastructure<br>criteria apply  | buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment<br>)   |  |  |
| SAO47   | Except where located on Figure 7.2.3.1 - Caboolture West structure plan or an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer.   |  |  |

| SAO48                  | Except where located on an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a bulk water supply infrastructure buffer.  |  |
|------------------------|---|--|
| Overland flo<br>apply) | w path (refer Overlay map - Overland flow path to determine if the following assessment criteria  |  |
| SAO49                  | Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.   |  |
| SAO50                  | Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.   |  |
|                        | Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. |  |
|                        | Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow  |  |
| SAO51                  | Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.   |  |
| SAO52                  | Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area.  |  |
| SAO53                  | Development for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.                       |  |

### Part Q - Criteria for assessable development - Green network precinct

#### Table 7.2.3.4.2 Assessable development - Green network precinct

| Performance outcomes   | Acceptable outcomes             |  |  |
|--|---------------------------------|--|--|
| General criteria   |                                 |  |  |
| Effects of development   |                                 |  |  |
| P01  | No acceptable outcome provided. |  |  |
| The natural, ecological and biological values present in<br>the environment are protected. Development avoids<br>adverse impacts on natural, ecological and biological<br>values particularly in terms of the following: |                                 |  |  |
| a. physical change;  |                                 |  |  |
| b. vegetation damage or removal;   |                                 |  |  |
| c. wildlife connectivity and accessibility;  |                                 |  |  |
| d. land fragmentation;   |                                 |  |  |
| e. land and vegetation degradation;  |                                 |  |  |
| f. visual detraction;  |                                 |  |  |
| g. soil stability and erosion;   |                                 |  |  |

| h. water quality;   |                                 |
|---|---------------------------------|
|   |                                 |
| i. habitat protection.  |                                 |
| Form and nature of development  |                                 |
| P02   | No acceptable outcome provided. |
| The form and nature of development :  |                                 |
| <ul> <li>a. is of a minor size and scale, low intensity and<br/>compatible with the physical characteristics and<br/>values;</li> </ul>   | 2                               |
| b. responds appropriately to the natural values and characteristics and constraints present such as slope and stability, visual prominence, landscape character, water courses, flooding, existing vegetation and surrounding land uses.  | C ersion                        |
| PO3   | No acceptable outcome provided. |
| The visual impacts of development are minimised through<br>the use of lightweight construction and the use of colours<br>and materials compatible with the natural setting and<br>surrounds.  | neme                            |
| P04   | No acceptable outcome provided. |
| Development is limited to Environment facilities <sup>(26)</sup> , nature<br>based recreation and facilities, Parks <sup>(57)</sup> , Outdoor sports<br>and recreation <sup>(55)</sup> , small scale Utility installation <sup>(86)</sup> ,<br>infrastructure and services. Development is in appropriate<br>locations that are allied to, and compatible with, the<br>significant conservation values of the area. |                                 |
| Structure plan and Neighbourhood development plan   |                                 |
| P05   | No acceptable outcome provided  |
| Development occurs in accordance with a Neighbourhood<br>development plan that reflects the urban structure concept<br>shown indicatively on Figure 7.2.3.1 - Caboolture West<br>structure plan and Figure 7.2.3.4 - Green network and open<br>space.   |                                 |
| Amenity   |                                 |
| PO6   | No acceptable outcome provided. |
| The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, noise, light,<br>chemicals and other environmental nuisances   |                                 |
| Car parking   |                                 |
|   |                                 |

| On-site car parking associated with an activity provides<br>safe and convenient on-site parking and manoeuvring to<br>meet anticipated parking demand.  |  | convenient on-site parking and manoeuvring to  | On-site car parking is provided in accordance with Schedule 7 - Car parking. |  |
|---|--|--|--|--|
| Veg   | Vegetation clearing and environmental offset |  |  |  |
| PO8   |  |  | No acceptable outcome provided.  |  |
| Dev   | elopn  | nent resulting in the clearing of vegetation is:   |  |  |
| a.  | limit  | ed to the provision of the following:  |  |  |
|   | i.   | infrastructure and services associated with reconfiguring a lot and land development;  |  |  |
|   | ii.  | utilities;   |  |  |
|   | iii.   | Parks <sup>(57)</sup> and open space;  | 5  |  |
|   | iv.  | environmental and recreational facilities.   |  |  |
| b.  |  | vided with appropriate environmental offsetting to ocated within the Green network precinct;   | J. C   |  |
| C.  | plan<br>Gre<br>Gre                           | ccordance with the Caboolture West structure<br>(Figure 7.2.3.1 - Caboolture West structure plan),<br>en network and open space (Figure 7.2.3.4 -<br>en network and open space), and any<br>ghbourhood development plan.   | schen  |  |
| Nois  | se   |  |  |  |
| PO9   | )  |  | No acceptable outcome provided.  |  |
|   |  | nerating uses do not adversely affect existing uses.   |  |  |
| Note - The use of walls, barriers or fences that are visible from or<br>adjoin a road or public area are not appropriate noise attenuation<br>measures unless adjoining a motorway, arterial road or rail line. |  |  |  |  |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.                         |  |  |  |  |
|   |  |  |  |  |
| P01   | 0  |  | No acceptable outcome provided.  |  |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:  |  | environment within designated external private   |  |  |
| a.<br>b.  | mai<br>stre<br>(e.g<br>etc)                  | tributing to safe and usable public spaces, through<br>ntaining high levels of surveillance of parks,<br>ets and roads that serve active transport purposes<br>. existing or future pedestrian paths or cycle lanes<br>;<br>ntaining the amenity of the streetscape. |  |  |

| Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise.<br>Note - Refer to Planning Scheme Policy – Integrated design for details<br>and examples of noise attenuation structures. |   |
|--|---|
| Works c  | riteria   |
| Utilities  |   |
| <b>PO11</b><br>The development is connected to an existing reticulated electricity supply system approved by the relevant energy regulating authority.   | No acceptable outcome provided.   |
| PO12<br>The development has access to telecommunications and<br>broadband services in accordance with current standards.   | No acceptable outcome provided.   |
| PO13<br>Where available the development is to safely connect to<br>reticulated gas.  | No acceptable outcome provided.   |
| PO14<br>The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.   | <ul> <li>AO14.1</li> <li>Where in a sewered area, the development is connected to a reticulated sewerage network.</li> <li>AO14.2</li> <li>Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.</li> <li>Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater Code.</li> <li>AO14.3</li> <li>Trade waste is pre-treated on-site prior to discharging into the sewerage network.</li> </ul> |
| <b>PO15</b><br>The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.   | AO15.1<br>Where in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is connected to<br>the reticulated water supply system in accordance with<br>the South East Queensland Water Supply and  |

|  | <b>_</b>  |
|--|---|
|  | Sewerage Design and Construction Code and the relevant Water Service Association of Australia (WSAA) codes and standards.   |
|  | AO15.2  |
|  | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with<br>an adequate water supply of 45,000 litres by way of<br>on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development. |
| Access   |   |
| PO16   | No acceptable outcome provided.   |
| Where required, access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with the<br>access in accordance with Planning scheme policy -<br>Integrated design. | ne jei  |
| P017   | A017.1  |
| The layout of the development does not compromise:   | The development provides for the extension of the road  |
| a. the development of the road network in the area;  | network in the area in accordance with Council's road network planning.   |
| b. the function or safety of the road network;   | A017.2  |
| c. the capacity of the road network.   | The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.  |
|  | A017.3  |
| C X  | The lot layout allows forward access to and from the site.  |
| P018   | AO18.1  |
| Safe access is provided for all vehicles required to access the site.  | Site access and driveways are designed and located in accordance with:  |
|  | <ul> <li>a. Where for a Council-controlled road,<br/>AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe<br/>Intersection Sight Distance requirements in<br/>AustRoads and the appropriate IPWEAQ standard<br/>drawings, or a copy of a Transport Infrastructure<br/>Act 1994, section 62 approval.</li> </ul>               |
|  |   |

|  | Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking  |
|--|--|
|  | Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.  |
|  | Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.   |
|  | AO18.3   |
|  | Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in Schedule<br>8 Service vehicle requirements for the relevant use.<br>The on-site manoeuvring is to be in accordance with<br>Schedule 8 Service vehicle requirements. |
| PO19   | No acceptable outcome provided.  |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:  |  |
| a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;   | ne   |
| b. ensure the orderly and efficient continuation of the active transport network;  | No.  |
| c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.   |  |
| Note - An Integrated Transport Assessment (ITA) may be required to demonstrate compliance with this performance outcome. An ITA should be prepared in accordance with Planning scheme policy - Integrated transport assessment.  |  |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).   |  |
| Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:  |  |
| <ul> <li>Where the street is partially established to an urban standard,<br/>match the alignment of existing kerb and channel and provide<br/>carriageway widening and underground drainage where<br/>required; or</li> </ul>  |  |
| <ul> <li>Where the street is not established to an urban standard,<br/>prepare a design that demonstrates how the relevant features<br/>of the particular road as shown in the Planning scheme policy</li> <li>Integrated Design can be achieved in the existing reserve.</li> </ul> |  |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.   |  |
| PO20   | No acceptable outcome provided.  |

| The development is provided with dedicated and constructed road access.  |   |
|--|---|
| Stormwater   | 1   |
| P021   | No acceptable outcome provided.   |
| Stormwater run-off from the site is conveyed to a point of<br>lawful discharge without causing nuisance or annoyance<br>to any person, property or premises.   |   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |   |
| Note - a downstream drainage discharge report may be required to demonstrate achievement of this performance outcome.  |   |
| Note - A watercourse as defined in the Water Act is accepted as a lawful point of discharge providing the drainage discharge from the site does not increase downstream flood levels during the 1% AEP storm by more than 20mm and any flooding of downstream allotments which are not able to be further subdivided is not increased.   | C Jeres   |
| P022   | No acceptable outcome provided.   |
| Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report may be required to<br>demonstrate compliance with this performance outcome.  | scher   |
| PO23<br>Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact of<br>stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives in<br>Tables A and B in Appendix 3 of the SPP.<br>Note - A stormwater management plan prepared by a suitably qualified<br>professional will be required in accordance with Planning scheme<br>policy - Stormwater management. | No acceptable outcome provided.   |
| Site works and construction management   |   |
| P024   | No acceptable outcome provided.   |
| The site and any existing structures are maintained in a tidy and safe condition.  |   |
| PO25   | AO25.1  |
| <ul><li>All works on-site are managed to:</li><li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard</li></ul>   | Works incorporate temporary stormwater run-off,<br>erosion and sediment controls and trash traps designe<br>in accordance with the Urban Stormwater Quality |

Planning Guidelines, Planning scheme policy -


Stormwater management and Planning scheme policy light; - Integrated design, including but not limited to the b. minimise as far as possible, impacts on the natural following: environment: ensure stormwater discharge is managed in a manner C. stormwater is not discharged to adjacent a. that does not cause nuisance or annoyance to any properties in a manner that differs significantly person or premises; from pre-existing conditions; d. avoid adverse impacts on street streets and their b. stormwater discharged to adjoining and critical root zone. downstream properties does not cause scour and erosion; stormwater discharge rates do not exceed c. pre-existing conditions; the 10% AEP storm event is the minimum design d. storm for all temporary diversion drains; and the 50% AEP storm event is the minimum design e. storm for all silt barriers and sedimentation basins. AO25.2 Stormwater run-off, erosion and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness. Note - The measures are adjusted on-site to maximise their effectiveness. AO25.3 The completed earthworks (fill or excavation) area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property. AO25.4 Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a gualified arborist which demonstrates and ensures that no permanent damage is caused to the tree. **PO26** AO26 Dust suppression measures are implemented during No dust emissions extend beyond the boundaries of construction works to protect nearby premises from the site during soil disturbances and construction works. unreasonable dust impacts. **PO27** AO27.1 All works on-site and the transportation of material to and Construction traffic including contractor car parking is from the site are managed to not negatively impact the controlled in accordance with a traffic management existing road network, the amenity of the surrounding area plan, prepared in accordance with the Manual of or the streetscape. Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.


to erosion and sedimentation, dust, noise, safety and

| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | A027.2  |
|--|---|
|  | All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads. |
|  | Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).   |
|  | A027.3  |
|  | Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with<br>the site are to be cleaned at all times.  |
| PO28   | A028  |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | a. topsoiled with a minimum compacted thickness of 50 millimetres;  |
|  | b. grassed.   |
|  | Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.   |
| P029   | AO29.1  |
| The clearing of vegetation on-site:<br>a. is limited to the area of infrastructure works, buildings  | All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.  |
| <ul> <li>areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> </ul> | Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.   |
| c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.   | AO29.2  |
| Note - No burning of cleared vegetation is permitted.  | Disposal of materials is managed in one or more of the following ways:  |
|  | a. all cleared vegetation, declared weeds, stumps,<br>rubbish, car bodies, scrap metal and the like are<br>removed and disposed of in a Council land fill<br>facility; or   |
|  | <ul> <li>all native vegetation with a diameter below<br/>400mm is to be chipped and stored on-site.</li> </ul>  |
| PO30   | No acceptable outcome provided.   |

| Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council.  |  |
|--|--|
|  |  |
| <ul> <li>PO31</li> <li>On-site earthworks are designed to consider the visual and amenity impact as they relate to: <ul> <li>a. the natural topographical features of the site;</li> <li>b. short and long-term slope stability;</li> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> </ul> </li> <li>g. the stability and maintenance of steep rock slopes and batters;</li> <li>h. the visual impact of the cut and fill and impacts on the amenity of adjoining lots (e.g. residential).</li> </ul> Note - Filling or excavation works are to be completed within six(6) months of the commencement date. | <ul> <li>AO31.1 All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary. </li> <li>AO31.2 Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep rock slopes and batters. </li> <li>AO31.3 All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion. </li> <li>AO31.4 All fill placed on-site is: <ul> <li>a. limited to that required for the necessary approved use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill). </li> <li>AO31.6 The site is prepared and the fill placed on-site in accordance with AS3798.</li></ul></li></ul> |
|  | Note - The fill is to be inspected and tested in accordance with<br>Planning scheme policy - Operational works inspection,<br>maintenance and bonding procedures.  |

|  | T   |
|--|---|
|  | Inspection and certification of steep rock slopes and<br>batters may be required by a suitably qualified and<br>experienced RPEQ.   |
| PO32   | AO32  |
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.  | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.  |
|  | Figure - Embankment   |
| PO33   | A033.1  |
| On-site earthworks are undertaken in a manner that:  | No earthworks are undertaken in an easement issued  |
| a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;   | in favour of Council or a public sector entity.<br>Note - Public sector entity as defined in the <i>Sustainable Planning</i><br><i>Act 2009.</i>  |
| <ul> <li>b. does not preclude reasonable access to a Council<br/>or public sector entity maintained infrastructure or<br/>any drainage feature on, or adjacent to the land for<br/>monitoring, maintenance or replacement purposes.</li> </ul> | AO33.2<br>Earthworks that would result in any of the following are<br>not carried out on-site:  |
| Note - Public sector entity as defined in the Sustainable Planning Act 2009.   | a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;   |
| CPIQI  | b. an increase in finished surface grade over, or<br>within 1.5m on each side of, the Council or public<br>sector entity maintained infrastructure above that<br>which existed prior to the earthworks being<br>undertaken. |
| B  | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .  |
| PO34   | No acceptable outcome provided.   |
| Filling or excavation does not result in land instability.   |   |
| Note - A slope stability report prepared by an RPEQ may be required.   |   |
| PO35   | No acceptable outcome provided.   |
| Filling or excavation does not result in   |   |
|  |   |

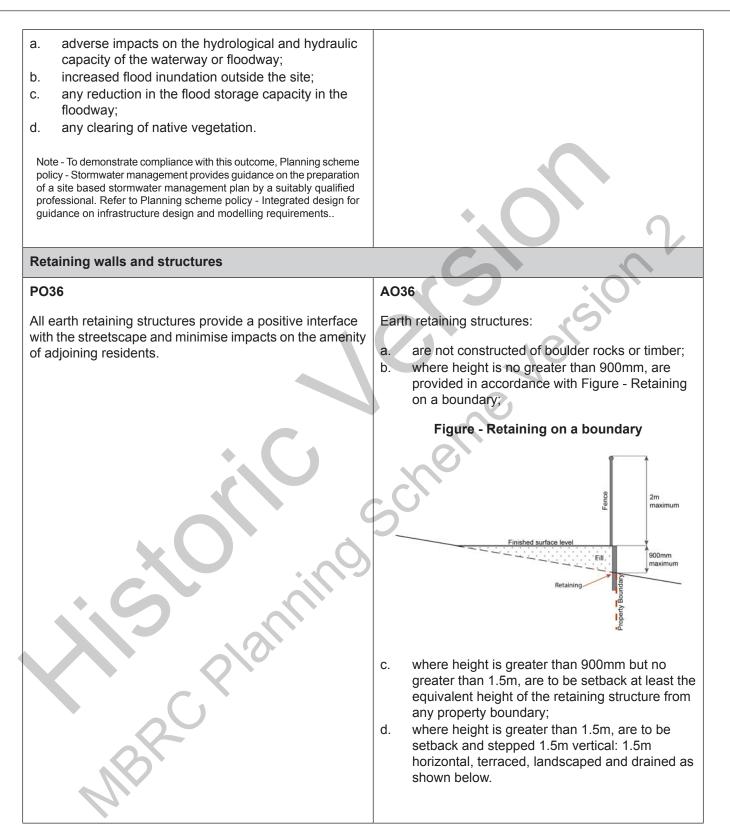

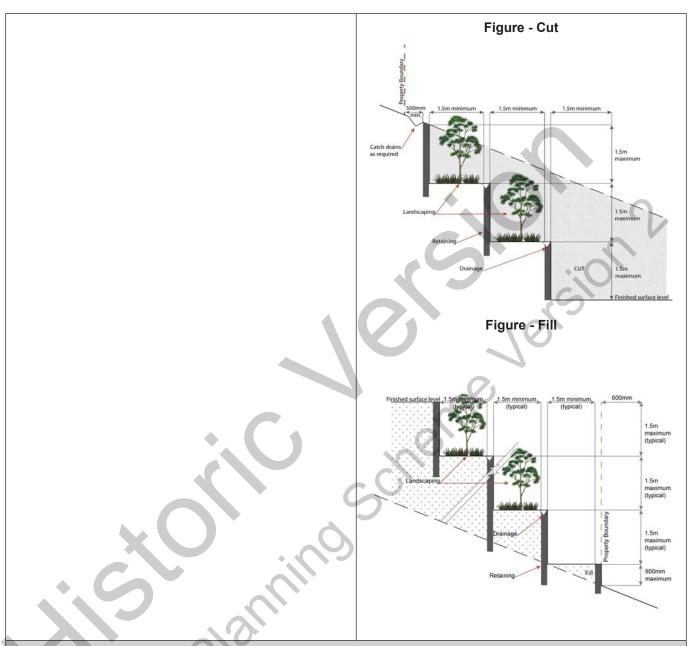

#### **Fire Services**

Note - The provisions under this heading only apply if:

- the development is for, or incorporates: a.
  - reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
  - material change of use for 2 or more sole control park <sup>(84)</sup> with accommodation in the form of caravans or tents; or material change of use for a Tourist park <sup>(84)</sup>, with accommodation in the form of caravans or tents; or material change of use for outdoor sales <sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. ii. iii.
  - iv.

#### AND

none of the following exceptions apply: b

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated i. water supply; or
- ii every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

#### PO37

Development incorporates a fire fighting system that:

- a. satisfies the reasonable needs of the fire fighting entity for the area;
- b. is appropriate for the size, shape and topography of the development and its surrounds;
- c. is compatible with the operational equipment available to the fire fighting entity for the area;
- d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;
- e. considers the fire hazard inherent in the surrounds to the development site;
- f. is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

#### AO37.1

h

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of *Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.* 

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:

- a. in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
  - in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
- c. in regard to the proximity of hydrants to buildings and other facilities Part 3.2.2.2 (b), (c) and (d), with the exception that:
  - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
  - for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans; for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;
- d. in regard to fire hydrant accessibility and clearance requirements Part 3.5 and, where applicable, Part 3.6.

#### AO37.2

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- a. an unobstructed width of no less than 3.5m;
- b. an unobstructed height of no less than 4.8m;
- c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

#### AO37.3

On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in *Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.* 

| PO38  | AO38   |
|---|--|
| On-site fire hydrants that are external to buildings, as well<br>as the available fire fighting appliance access routes to<br>those hydrants, can be readily identified at all times from,<br>or at, the vehicular entry point to the development site. | <ul> <li>For development that contains on-site fire hydrants external to buildings:</li> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>b. a sign identifying the following is provided at the vehicular entry point to the site: <ul> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.</li> </ul> </li> <li>Note - The sign prescribed above, and the graphics used are to be: <ul> <li>a. in a form;</li> <li>b. of a size;</li> <li>c. illuminated to a level;</li> </ul> </li> </ul> |
| PO39  | AO39   |
| Each on-site fire hydrant that is external to a building is<br>signposted in a way that enables it to be readily identified<br>at all times by the occupants of any firefighting appliance<br>traversing the development site.                          | For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads.<br>Note - Technical note Fire hydrant indication system is available<br>on the website of the Queensland Department of Transport and<br>Main Roads.  |
| Use specifi   | c criteria   |

| Environment facility <sup>(26)</sup>   |  |
|--|--|
| PO40   | AO40.1   |
| <ul> <li>Development will:</li> <li>a. ensure that buildings and structures are not overbearing, visually dominant or out of character with the surrounding natural, ecological, open space and recreational values associated with the Green network precinct;</li> <li>b. ensure buildings and structures do not result in overlooking of private areas when adjoining residential areas, or block or impinge upon the receipt of natural sunlight and outlook.</li> </ul>   | All buildings and structures associated with an<br>Environment facility <sup>(26)</sup> are setback 10m from all<br>property boundaries.<br>AO40.2<br>The maximum height of any building and structure<br>associated with an Environmental facility <sup>(26)</sup> is 5m.   |
|  |  |
| <ul> <li>PO41</li> <li>The development does not have an adverse impact on the visual amenity of a locality and is: <ul> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> </li> </ul> | <ul> <li>AO41.1</li> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment: <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> </li> <li>AO41.2 <ul> <li>A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.</li> </ul> </li> </ul> |
| PO42<br>Infrastructure does not have an impact on pedestrian health<br>and safety.   | <ul> <li>AO42</li> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>  |
| <b>PO43</b><br>All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility:  | AO43<br>All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to<br>ensure noise emissions meet the objectives as set out<br>in the Environmental Protection (Noise) Policy 2008.   |

| <ul> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>            |   |
|--|---|
| Outdoor sport and recreation <sup>(55)</sup>   |   |
| PO44   | A044.1  |
| Development will:  | Site cover of all buildings and structures does not exceed 10%.   |
| a. maintain the open and unbuilt character of a site,<br>uncluttered by building and maintaining the availability<br>of a site for unobstructed outdoor recreational use;  | A044.2  |
| <ul> <li>ensure that buildings and structures are not<br/>overbearing, visually dominant or out of character<br/>with the surrounding built environment nor detract<br/>from the amenity of adjoining land;</li> </ul> | All buildings and structures are setback a minimum of 10m from all property boundaries.   |
| c. ensure buildings and structures do not result in overlooking of private areas when adjoining residential areas, or block or impinge upon the receipt of natural sunlight and outlook;                               | The maximum height of all buildings and structures is 8.5m.   |
| <ul> <li>be designed in accordance with the principles of<br/>Crime Prevention Through Environment Design<br/>(CPTED) to achieve a high level of safety,<br/>surveillance and security;</li> </ul>                     | AO44.4<br>Outdoor storage areas are screened from adjoining<br>sites and roads by either planting, wall(s), fence(s) or<br>a combination thereof at least 1.8m in height along the<br>length of the storage area. |
| e. incorporate appropriate design response, relative to size and function of buildings, that acknowledge and reflect the region's sub-tropical climate;  |   |
| <ul><li>f. reduce the visual appearance of building bulk through:</li><li>i. design measures such as the provision of</li></ul>  |   |
| meaningful recesses and projections through the horizontal and vertical plane;   |   |
| <ul><li>ii. use of a variety of building materials and colours;</li><li>iii. use of landscaping and screening.</li></ul>   |   |
| <ul> <li>achieves the design principles outlined in Planning scheme policy - Integrated design.</li> </ul>   |   |
| PO45   | No acceptable outcome provided.   |
| Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy –Waste.  |   |
| Permanent plantation <sup>(59)</sup>   |   |
| PO46   | AO46  |

| <ul> <li>Planting for Permanent plantation<sup>(59)</sup> purposes:</li> <li>a. only comprises native species endemic to the area;</li> </ul>   | Planting only comprises native species endemic to the area.   |
|---|---|
| b. is sufficiently set back from property boundaries to avoid adverse impacts on adjoining properties such as shading, fire risk, health and safety.  |   |
| <b>Telecommunications facility</b> <sup>(81)</sup><br>Editor's note - In accordance with the Federal legislation Telecommunic<br>that will not cause human exposure to electromagnetic radiation beyon<br>Radiation - Human Exposure) Standard 2003 and Radio Protection Star<br>to 300Ghz.   | d the limits outlined in the Radiocommunications (Electromagnetic   |
| PO47<br>Telecommunications facilities <sup>(81)</sup> are co-located with<br>existing telecommunications facilities <sup>(81)</sup> , Utility<br>installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or<br>Substation <sup>(80)</sup> if there is already a facility in the same<br>coverage area.              | AO47.1<br>New telecommunication facilities <sup>(81)</sup> are co-located on<br>existing towers with new equipment shelter and<br>associated structures positioned adjacent to the existing<br>shelters and structures.<br>AO47.2<br>If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully<br>exhausted within a 2km radius of the site. |
| <b>PO48</b><br>A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.   | A048<br>A minimum of 45m <sup>2</sup> is available at ground level to allow<br>for additional equipment shelters and associated<br>structures for the purpose of co-locating on the<br>proposed facility.   |
| PO49<br>Telecommunications facilities <sup>(81)</sup> do not conflict with lawful<br>existing land uses both on and adjoining the site.   | AO49<br>The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces<br>required under the planning scheme or under an<br>existing development approval.   |
| <ul> <li>PO50</li> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>   | AO50.1<br>Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |
| <ul> <li>c. not visually dominant or intrusive;</li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials<br/>which blend into the landscape;</li> </ul> | AO50.2<br>In all other areas towers do not exceed 35m in height.<br>AO50.3  |

| <ul> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the emerity and character.</li> </ul>   | Towers, equipment shelters and associated structures are of a design, colour and material to:  |
|--|--|
| i. otherwise consistent with the amenity and character of the zone and surrounding area.   | <ul><li>a. reduce recognition in the landscape;</li><li>b. reduce glare and reflectivity.</li></ul>  |
|  | AO50.4   |
|  | All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is<br>3m.  |
|  | Where there is no established building line the facility is located at the rear of the site.   |
|  | AO50.5   |
|  | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.  |
|  | AO50.6   |
|  | A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the<br>facility and street frontage and adjoining uses.  |
|  | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |
|  | Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design.   |
| P051   | A051   |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.  |
| P052   | AO52   |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting.   | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |
| Values and cons  | traints criteria   |
| Note - The relevant values and constraints criteria do not apply where the Reconfiguring a lot or Material change of use or Operational work, when development footprint plan (or similar in the case of Landslide hazard) of the case of Landslide hazard) of the case of Landslide hazard. | re that approval has considered and addressed (e.g. through a  |

planning scheme.

# Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.

#### PO53

Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:

- a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;
- b. protects the environmental and ecological values and health of receiving waters;
- c. protects buildings and infrastructure from the effects of acid sulfate soils.

#### AO53

Development does not involve:

- a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or
- b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.

# Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - To demonstrate achievement of the performance outcomes, a bushfire management plan is prepared by a suitably qualified person. Guidance for the preparation of a bushfire management plan is provided in Planning scheme policy – Bushfire prone areas.

#### PO54

Development:

- a. minimises the number of buildings and people working and living on a site exposed to bushfire risk;
- ensures the protection of life during the passage of a fire front;
- c. is located and designed to increase the chance of survival of buildings and structures during a bushfire;
- d. minimises bushfire risk from build up of fuels around buildings and structures.

### AO54

Buildings and structures have contained within the site:

- a. a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- A separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;
- A separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures;
- d. An area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and
- e. An access path suitable for use by a standard fire fighting applicant having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%:

| <ul> <li>PO55</li> <li>Development and associated driveways and access ways: <ul> <li>a. avoid potential for entrapment during a bushfire;</li> <li>b. ensure safe and effective access for emergency services during a bushfire;</li> <li>c. enable safe evacuation for occupants of a site during a bushfire.</li> </ul> </li> </ul> | <ul> <li>i. To, and around, each building and other roofed structure; and</li> <li>ii. To each fire fighting water supply extraction point.</li> <li>Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attach level are as described in Australian Standard AS 3959.</li> <li>A055 A length of driveway: <ul> <li>a. to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road; </li> <li>b. has a maximum gradient no greater than 12.5%;</li> <li>c. have a minimum width of 3.5m;</li> <li>d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.</li> </ul></li></ul>  |
|--|---|
| PO56<br>Development provides an adequate water supply for<br>fire-fighting purposes.   | <ul> <li>AO56</li> <li>a. A reticulated water supply is provided by a distributer retailer for the area or, where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10,000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m of buildings and structures.</li> <li>b. Where not connected to a reticulated water supply or a pressure and flow stated above is not available, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is located within 10m of buildings and structures.</li> <li>c. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access is provided to within 3m of that water storage source.</li> <li>d. Where a tank is the nominated on-site fire fighting water storage source, it includes: <ul> <li>i. a hardstand area allowing medium rigid vehicles (15 tonne fire appliance) access within 6m of the tank;</li> <li>ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.</li> </ul> </li> </ul> |
| PO57   | A057  |

| <ul> <li>Development:</li> <li>a. does not present unacceptable risk to people or<br/>environment due to the impact of bushfire on<br/>dangerous goods or combustible liquids;</li> <li>b. does not present danger or difficulty to emergency<br/>services for emergency response or evacuation.</li> </ul> | Development does not involve the manufacture or storage of hazardous chemicals. |
|---|---|
| Editor's note - Unacceptable risk is defined as a situation where people<br>or property are exposed to a predictable hazard event that may result<br>in serious injury, loss of life, failure of community infrastructure, or<br>property damage.   |   |
| Heritage and landscape character (refer Overlay map<br>the following assessment criteria apply)   | - Heritage and landscape character to determine if                              |
| Note - To assist in demonstrating achievement of heritage performance<br>by a suitably qualified person verifying the proposed development is in  |   |
| Note - To assist in demonstrating achievement of this performance out<br>accordance with Planning scheme policy – Heritage and landscape cha<br>adopted in accordance with AS 4970-2009 Protection of trees on devel  | aracter. The Tree assessment report will also detail the measures               |
|   | <i>Q</i> 1  |

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

| P058   | A058                            |
|--|---------------------------------|
| <ul> <li>Development will:</li> <li>a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;</li> <li>b. protect the fabric and setting of the heritage site, object or building;</li> <li>c. be consistent with the form, scale and style of the heritage site, object or building;</li> <li>d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes;</li> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul> |                                 |
| P059   | No acceptable outcome provided. |
| <ul> <li>Demolition and removal is only considered where:</li> <li>a. a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or</li> </ul>   |                                 |

| <ul> <li>b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or</li> <li>c. limited demolition is performed in the course of repairs, maintenance or restoration; or</li> <li>d. demolition is performed following a catastrophic event which substantially destroys the building or object.</li> </ul>   |   |
|---|---|
| PO60  | No acceptable outcome provided.   |
| Where development is occurring on land adjoining a site<br>of cultural heritage value, the development is to be<br>sympathetic to and consistent with the cultural heritage<br>values present on the site and not result in their values<br>being eroded, degraded or unreasonably obscured from<br>public view.  |   |
| Infrastructure buffer areas (refer Overlay map – Infrastruc<br>criteria apply)  | cture buffers to determine if the following assessment  |
| PO61  | AO61  |
| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> <li>PO62</li> <li>Development within a bulk water supply infrastructure buffer is located, designed and constructed to:</li> <li>a. protect the integrity of the bulk water supply infrastructure;</li> <li>b. Maintains adequate access for any required maintenance or upgrading work to the bulk water supply infrastructure.</li> </ul> | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer.<br>AO62<br>Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a bull<br>water supply infrastructure buffer. |
| PO63<br>Development is located and designed to maintain required<br>access to Bulk water supply infrastructure.   | <ul> <li>AO63</li> <li>Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):</li> <li>a. buildings or structures;</li> <li>b. gates and fences;</li> <li>c. storage of equipment or materials;</li> <li>d. landscaping or earthworks or stormwater or othe infrastructure.</li> </ul>  |

| Note - The applicable river and creek flood planning levels associated w<br>obtained by requesting a flood check property report from Council.   | vith defined flood event (DFE) within the inundation area can be   |
|--|--|
| PO64   | No acceptable outcome provided.  |
| Development:   |  |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>   |  |
| PO65   | AO65   |
| Development:   | No acceptable outcome provided.  |
| <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> </ul>                           | C Jers   |
| Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development does<br>not increase the potential for significant adverse impacts on an<br>upstream, downstream or surrounding premises.   | cher   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.  |  |
| PO66<br>Development does not:  | No acceptable outcome provided.  |
| a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;   |  |
| <ul> <li>b. increase the potential for flood damage from overland<br/>flow either on the premises or other premises, public<br/>lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an<br/>acceptable outcome, nor are any other design options that may<br/>increase scouring.</li> </ul> |  |
| P067   | AO67   |
| Development ensures that public safety and the risk to the<br>environment are not adversely affected by a detrimental<br>impact of overland flow on a hazardous chemical located<br>or stored on the premises.   | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and<br>associated Regulation and Guidelines, the Environmental<br>Protection Act 1994 and the relevant building assessment<br>provisions under the Building Act 1975 for requirements related<br>to the manufacture and storage of hazardous substances. |

| PO68  | AO68   |
|---|--|
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.  | Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.   |
| PO69  | AO69.1   |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains through<br>private property cater for overland flows for a fully<br>developed upstream catchment and are able to be easily<br>maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development does<br>not increase the potential for significant adverse impacts on an<br>upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme<br>policy – Flood hazard, Coastal hazard and Overland flow | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the<br>following relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br><b>AO69.2</b><br>Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event<br>up to and including the 1% AEP for the fully developed<br>upstream catchment. |
| P070  | No acceptable outcome provided.  |
| <ul> <li>Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul>   | SCI  |
| Additional criteria for development for a Park <sup>(57)</sup>  |  |
| P071  | A071   |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:   | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design.   |
|   |  |

V

Jersi

neme

5

| b. | impacts on the asset life and integrity of park structures is minimised; |
|----|--|
| C. | maintenance and replacement costs are minimised.                         |

### 7.2.3.5 Rural living precinct

#### 7.2.3.5.1 Purpose - Rural living precinct

Note - Rural living areas were identified during the planning process and have been applied to four areas on the edge of the Local Plan area. These areas are generally flat, subject to flooding and/or contain significant environmental values that constrain their redevelopment potential, not able to be serviced as efficiently with sewerage infrastructure and roads as the balance of the Local Plan area, currently used for rural residential style development, and function as significant environmental corridors around the edge of the Local Plan area.

- 1. The purpose of the Rural living precinct is to provide for residential development on large lots where water and sewerage infrastructure and services may not be provided. The precinct is generally located at the urban-rural fringe of the local plan area, comprising of single detached houses on semi-rural allotments. The opportunity and ability for rural uses to occur is retained, whilst allowing for future large-lot rural residential development to cater for a range of lifestyle choices while retaining the area as part of strategic environmental corridors around the Caboolture West local plan area.
- 2. The purpose of the code will be achieved through the following overall outcomes:
  - a. Development is consistent with the development concept shown indicatively on Figure 7.2.3.1 Structure plan.
  - b. Development has an established rural living character and provides strategic environmental corridors which are intended to be retained in this area.
  - c. The precinct provides a distinct and recognisable transition between more intensively urbanised areas of Caboolture West and its largely undeveloped rural hinterland.
  - d. Development does not adversely impact on the strategic environmental corridors and important vegetation within these corridors is retained.
  - e. Development does not detrimentally impact, undermine or degrade the low density, low intensity and open area character and amenity associated with the precinct.
  - f. Existing rural uses and primary production activities are retained where they do not adversely impact on the use, character and amenity values of adjoining properties.
  - g. New development opportunities are limited to larger lots (no smaller than 6000m<sup>2</sup> in size and an average lot size of 8000m<sup>2</sup>) and used primarily for residential (lifestyle) activities with limited provision of infrastructure.
  - h. Residential uses are limited to a single dwelling house<sup>(22)</sup> per allotment. A secondary dwelling is permitted provided it functions and appears subordinate to the principal dwelling house<sup>(22)</sup>.
  - i. Formal and informal, active and passive sport and recreation opportunities may be provided to meet community needs in accordance with the development concept shown indicatively on Figure 7.2.3.1 Caboolture West structure plan.
  - j. Home based business<sup>(35)</sup> establish where the scale and intensity of the activity does not detrimentally impact upon the low density, low intensity, open area character and amenity associated with the Rural living precinct.
  - k. Development generating high volumes of traffic or involving heavy vehicle traffic movements are located on roads of a standard and capacity to accommodate traffic demand.
  - I. Development has good access to existing and proposed transport infrastructure, public transport services, and bicycle and pedestrian networks and does not interfere with the safe and efficient operation of the surrounding road network.
  - m. General works associated with the development achieves the following:
    - i. a high standard of electricity, telecommunications, roads, sewerage, water supply and street lighting services are provided to new development to meet the current and future needs of users of the site;

- ii. the development manages stormwater to:
  - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
  - B. prevent stormwater contamination and the release of pollutants;
  - C. maintain or improve the structure and condition of drainage lines and riparian areas;
  - D. avoid off-site adverse impacts from stormwater.
- iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- n. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- o. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- p. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- q. Development does not result in the establishment of industrial activities.
- r. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - I. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- s. Development in the Rural living precinct includes one or more of the following:

| <ul> <li>Animal husbandry<sup>(4)</sup></li> </ul>                                 | • Cropping <sup>(19)</sup> , where not  | <ul> <li>Permanent plantation<sup>(59)</sup></li> </ul>             |
|--|---|---|
| <ul> <li>Animal keeping<sup>(5)</sup> (excluding catteries and kennels)</li> </ul> | <ul> <li>forestry for wood production</li> <li>Dwelling house<sup>(22)</sup></li> </ul> | <ul> <li>Roadside stall<sup>(68)</sup></li> </ul>                   |
|  |   | <ul> <li>Rural workers'<br/>accommodation<sup>(71)</sup></li> </ul> |

| • | Aquaculture <sup>(6)</sup> (if water area                         | • | Emergency services <sup>(25)</sup>                                     | • | Sales office <sup>(72)</sup>                                     |
|---|---|---|--|---|--|
|   | associated with ponds and dams are less than 200m <sup>2</sup> or | • | Environment facility <sup>(26)</sup>                                   | • | Telecommunications<br>facility <sup>(81)</sup>                   |
|   | housed tanks are less than 50m <sup>2</sup> )                     | • | Home based business <sup>(35)</sup>                                    |   |  |
| • | Community residence <sup>(16)</sup>                               | • | Intensive horticulture <sup>(40)</sup><br>(where on lots 1 ha or more) | • | Veterinary services <sup>(87)</sup> (where on lots 1 ha or more) |
|   |   |   | · · · · · · · · · · · · · · · · · · ·                                  | • | Wholesale nursery <sup>(89)</sup> (where                         |
|   |   | • | Outdoor sports and recreation <sup>(55)</sup> (where on                |   | on lots 1 ha or more)  |
|   |   |   | Council owned or controlled land)                                      | • | Winery <sup>(90)</sup>   |
|   |   |   | iana)  |   |  |

t. Development in the Rural living precinct does not include one or more of the following:

| • | Adult store <sup>(1)</sup>                                    | • | Hospital <sup>(36)</sup>                             | •        | Relocatable home park <sup>(62)</sup>            |
|---|---|---|--|----------|--|
| • | Agricultural supplies store <sup>(2)</sup>                    | • | Hotel <sup>(37)</sup>                                | •        | Renewable energy facility <sup>(63)</sup>        |
| • | Air services <sup>(3)</sup>                                   | • | Intensive animal industry <sup>(39)</sup>            | <b>^</b> | Research and technology industry <sup>(64)</sup> |
| • | Bar <sup>(7)</sup>  | • | Landing <sup>(41)</sup>                              |          | -  |
| • | Brothel <sup>(8)</sup>  | • | Low impact industry <sup>(42)</sup>                  | •        | Residential care facility <sup>(65)</sup>        |
|   | Bulk landscape supplies <sup>(9)</sup>                        |   | Major sport, recreation and                          | •        | Resort complex <sup>(66)</sup>                   |
|   | Car wash <sup>(11)</sup>                                      |   | entertainment facility <sup>(44)</sup>               | •        | Retirement facility <sup>(67)</sup>              |
|   |   | • | Marine industry <sup>(45)</sup>                      | •        | Rooming accommodation <sup>(69)</sup>            |
|   | Caretaker's accommodation <sup>(10)</sup>                     | • | Medium impact industry <sup>(47)</sup>               | •        | Service industry <sup>(73)</sup>                 |
| • | Cemetery <sup>(12)</sup>                                      |   | Motor sport facility <sup>(48)</sup>                 | •        | Service station <sup>(74)</sup>                  |
|   | Crematorium <sup>(18)</sup>                                   |   | Multiple dwelling <sup>(49)</sup>                    | •        | Shopping centre <sup>(76)</sup>                  |
| • | Cropping <sup>(19)</sup> , where forestry for wood production | • | Nature-based tourism <sup>(50)</sup>                 | •        | Shop <sup>(75)</sup>                             |
|   | Detention facility <sup>(20)</sup>                            | • | Nightclub entertainment<br>facility <sup>(51)</sup>  | •        | Showroom <sup>(78)</sup>                         |
|   |   |   | -  | •        | Special industry <sup>(79)</sup>                 |
| • | Dual occupancy <sup>(21)</sup>                                | • | Non-resident workforce accommodation <sup>(52)</sup> | •        | Theatre <sup>(82)</sup>                          |
| • | Dwelling unit <sup>(23)</sup>                                 | • | Office <sup>(53)</sup>                               | •        | Tourist attraction <sup>(83)</sup>               |
| • | Extractive industry <sup>(27)</sup>                           | • | Outdoor sales <sup>(54)</sup>                        | •        | Tourist park <sup>(84)</sup>                     |
| • | Food and drink outlet <sup>(28)</sup>                         | • | Parking station <sup>(58)</sup>                      | •        | Transport depot <sup>(85)</sup>                  |
| • | Funeral parlour <sup>(30)</sup>                               |   | Ū  |          | Warehouse <sup>(88)</sup>                        |
| • | Function facility <sup>(29)</sup>                             | • | Port services <sup>(61)</sup>                        |          | vvarenouse                                       |
| • | Hardware and trade supplies <sup>(32)</sup>                   |   |  |          |  |
| • | High Impact industry <sup>(34)</sup>                          |   |  |          |  |
|   |   |   |  |          |  |

u. Development not included in the tables above may be considered on its merits and where it reflects and supports the outcomes of the precinct.

#### 7.2.3.5.2 Criteria for assessment

To determine if development is self-assessable, development must comply with the self-assessable acceptable outcomes set out in Part R, Table 7.2.3.5.1. Where development does not meet a self-assessable acceptable outcome (SAO) of the relevant criteria Part R, Table 7.2.3.5.1, assessment is against the corresponding performance outcomes (PO) identified in the table below. This only occurs wherever a SAO is not met, and is therefore limited to the subject matter of the SAO's that are not complied with. To remove any doubt, for those SAO's that are complied with, there is no need for assessment against the corresponding PO.

| Self-assessable acceptable outcomes | Corresponding performance outcomes |
|-------------------------------------|------------------------------------|
| SAO1                                | PO2                                |
| SAO2                                | PO3                                |
| SAO3                                | PO4                                |
| SAO4                                | PO5                                |
| SAO5                                | PO6                                |
| SAO6                                | P07                                |
| SAO7                                | PO8                                |
| SAO8                                | P09                                |
| SAO9                                | PO12-PO15                          |
| SAO10                               | P012-P015                          |
| SAO11                               | P016                               |
| SA012                               | PO17-PO20                          |
| SA013                               | PO20                               |
| SAO14                               | P021                               |
| SAO15                               | P024                               |
| SAO16                               | PO24                               |
| SA017                               | PO26-PO28                          |
| SAO18                               | PO29                               |
| SAO19                               | PO30                               |
| SAO20                               | PO32                               |
| SAO21                               | PO34                               |
| SAO22                               | PO35                               |
| SAO23                               | PO32                               |
| SAO24                               | PO36                               |
| SAO25                               | PO36, PO39-PO40                    |
| SAO26                               | PO38                               |

| Self-assessable acceptable<br>outcomes | Corresponding performance outcomes |
|--|------------------------------------|
| SAO27                                  | PO42                               |
| SAO28                                  | PO42                               |
| SAO29                                  | PO42                               |
| SAO30                                  | PO43                               |
| SAO31                                  | PO44                               |
| SAO32                                  | PO46                               |
| SAO33                                  | PO47                               |
| SAO34                                  | PO48                               |
| SAO35                                  | PO49                               |
| SAO36                                  | PO51                               |
| SAO37                                  | PO51                               |
| SAO38                                  | P051                               |
| SAO39                                  | PO52                               |
| SAO40                                  | PO52                               |
| SAO41                                  | PO52                               |
| SAO42                                  | PO52                               |
| SAO43                                  | P052                               |
| SAO44                                  | PO53                               |
| SAO45                                  | P054                               |
| SAO46                                  | P054                               |
| SAO47                                  | P054                               |
| SAO48                                  | P054                               |
| SAO49                                  | PO55                               |
| SAO50                                  | P055                               |
| SAO51                                  | PO56                               |
| SAO52                                  | PO60                               |
| SAO53                                  | PO60                               |
| SA054                                  | PO60                               |
| SAO55                                  | PO61                               |
| SAO56                                  | PO61                               |
| SAO57                                  | PO62                               |
| SAO58                                  | PO63                               |
| SAO59                                  | PO63                               |
| SAO60                                  | PO63                               |

| Self-assessable acceptable outcomes | Corresponding performance<br>outcomes |
|-------------------------------------|---------------------------------------|
| SAO61                               | PO64                                  |
| SAO62                               | PO64                                  |
| SAO63                               | PO64                                  |
| SAO64                               | PO66                                  |
| SAO65                               | PO66                                  |
| SAO66                               | PO66                                  |
| SAO67                               | PO66                                  |
| SAO68                               | PO66                                  |
| SAO69                               | PO67                                  |
| SAO70                               | P070                                  |
| SA071                               | P071                                  |
| SA072                               | PO69, PO72                            |
| SAO73                               | P072                                  |
| SAO74                               | P072                                  |
| SA075                               | P072                                  |
| SAO76                               | P074                                  |
| SA077                               | P078                                  |
| SAO78                               | P079                                  |
| SAO79                               | P080                                  |
| SAO80                               | P081                                  |
| SA081                               | P082                                  |
| SAO82                               | P083-P084                             |
| SAO83                               | P083-P084                             |
| SAO84                               | P086                                  |
| SAO85                               | P087-P088                             |
| SAO86                               | PO88-PO91, PO93-PO95                  |
| SA087                               | PO88-PO91, PO93-PO95                  |
| SAO88                               | PO89-PO91                             |
| SAO89                               | PO92                                  |
|                                     | 1                                     |

Where development is code assessable development in the Table of Assessment, and located in a precinct, the assessment criteria for that development are set out in Part Q, Table 7.2.3.5.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

Part R — Criteria for self-assessable development - Rural living precinct

|              | General criteria  |
|--------------|---|
| Structur     | e plan  |
| SAO1         | Development is consistent with the development concept shown indicatively on Figure 7.2.3.1 - Caboolture West structure plan, with regards to:  |
|              | a. the provision of infrastructure and services associated with reconfiguring a lot and land development  |
|              | b. utilities;   |
|              | c. parks <sup>(57)</sup> and open space;  |
|              | d. the recognition and provision of minor green corridors.  |
| Develop      | ment footprint  |
| SAO2         | Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within the development footprint.   |
| Building     | height  |
| SAO3         | Unless otherwise specified in this code, the height of all buildings and structures does not exceed 5m.   |
| Setback      |   |
| SAO4         | Unless otherwise specified in this code, the minimum building setbacks from a property boundary are as follows:   |
|              | a. road boundary – 6m   |
|              | b. side boundary – 4.5m   |
|              | c. rear boundary – 4.5m.  |
| $\checkmark$ | Note - This provision does not apply where a development footprint exists for a lot.  |
| Lighting     |   |
| SAO5         | Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting. |
|              | Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day   |
| Waste tr     | eatment   |
| SAO6         | All concentrated animal use areas (eg sheds, pens, holding yards, stables, kennels) are provided with site drainage to ensure all stormwater run-off is directed to suitable detention basins, filtration or other treatment areas.   |

| SAO7       | The following uses and associated buildings and structures are setback from all property boundaries a follows:   |  |  |  |
|------------|--|--|--|--|
|            | a. Animal husbandry <sup>(4)</sup> (buildings and structures only) - 10m   |  |  |  |
|            | b. Animal keeping <sup>(5)</sup> , excluding catteries and kennels - 20m   |  |  |  |
|            | c. Aquaculture <sup>(6)</sup> involving ponds or water behind dams - 100m  |  |  |  |
|            | d. Aquaculture <sup>(6)</sup> involving the housing of tanks - 20m   |  |  |  |
|            | e. Cropping <sup>(19)</sup> - 10m  |  |  |  |
|            | f. Intensive horticulture <sup>(40)</sup> - 10m  |  |  |  |
|            | g. Permanent plantations <sup>(59)</sup> - 25m   |  |  |  |
|            | h. Rural Industry <sup>(70)</sup> - 20m  |  |  |  |
|            | i. Rural workers' accommodation <sup>(71)</sup> - 40m  |  |  |  |
|            | j. Short-term accommodation <sup>(77)</sup> - 40m  |  |  |  |
|            | k. Wholesale nursery <sup>(89)</sup> - 10m   |  |  |  |
|            | I. Veterinary services <sup>(87)</sup> - 10m.  |  |  |  |
| _          |  |  |  |  |
| Car park   | ng   |  |  |  |
| SAO8       | On-site car parking is provided in accordance with Schedule 7 - Car parking.   |  |  |  |
| Hazardo    | us Chemicals   |  |  |  |
| SAO9       | All development that involves the storage or handling of hazardous chemicals listed in Schedule 9, Table 9.0.1 Hazardous Chemicals Self-Assessable Thresholds complies with Schedule 9, Table 9.0.3: Hazardous Chemicals Self-Assessable Criteria. |  |  |  |
| SAO10      | Development does not involve the storage or handling of hazardous chemicals listed in Schedule 9, Table 9.0.2 Hazardous Chemicals Assessable Thresholds.   |  |  |  |
| Clearing   | of Habitat Trees   |  |  |  |
| Note - The | following development is exempt as noted in section 1.7.7 Exempt development:  |  |  |  |
| Where loc  | ated anywhere in the Caboolture West local plan area:  |  |  |  |
| • Cle      | Clearing of a habitat tree located within an approved development footprint;   |  |  |  |
|            | Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;  |  |  |  |
|            | Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;  |  |  |  |
| Cle        | aring of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width  |  |  |  |

- Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence;
- Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;

- Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suitably qualified person and submitted and accepted by Council;
- Clearing of a habitat tree associated with maintaining existing open pastures, windbreaks, lawns or created gardens.

Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from ground level is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning Scheme Policy – Environmental Areas and Corridors. Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.

| SAO11          | Clearing does not involve any habitat trees.   |  |  |  |
|----------------|--|--|--|--|
| Works criteria |  |  |  |  |
| Utilities      |  |  |  |  |
| SAO12          | <ul> <li>Where available, the development is connected to:</li> <li>a. an existing reticulated electricity supply;</li> <li>b. telecommunications and broadband;</li> <li>c. reticulated sewerage;</li> <li>d. reticulated water;</li> <li>e. constructed and dedicated road.</li> </ul>   |  |  |  |
| SAO13          | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.<br>Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be<br>prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater<br>Code.  |  |  |  |
| SAO14          | Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development.  |  |  |  |
| Access         |  |  |  |  |
| SAO15          | <ul> <li>Any new or changes to existing site access and driveways are designed and located in accordance with:</li> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul>                     |  |  |  |
| SAO16          | Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.   |  |  |  |
| Stormwater     |  |  |  |  |
| SAO17          | Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy – Integrated design.  |  |  |  |
|                | Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure. |  |  |  |

| Site works and construction management |   |  |  |  |
|--|---|--|--|--|
| SAO18                                  | The site and any existing structures are to be maintained in a tidy and safe condition.   |  |  |  |
| SAO19                                  | Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design.  |  |  |  |
| SAO20                                  | Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.  |  |  |  |
| SAO21                                  | All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.<br>Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.   |  |  |  |
| SAO22                                  | Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.  |  |  |  |
| SAO23                                  | Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.  |  |  |  |
| Earthwor                               | ks  |  |  |  |
| SAO24                                  | The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.<br>Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures   |  |  |  |
| SAO25                                  | The total of all cut and fill on-site does not exceed 900mm in height.<br>Figure - Cut and fill<br>Lot Boundaries<br>Strong Cut<br>Finished surface level<br>Strong Cut<br>Finished surface level<br>Strong Cut<br>Strong Cut |  |  |  |
| SAO26                                  | <ul> <li>Filling or excavation does not result in:</li> <li>a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.</li> <li>Note - Public sector entity is defined in the Sustainable Planning Act 2009.</li> </ul>   |  |  |  |

| Fire serv                | Ces  |  |  |  |  |
|--------------------------|--|--|--|--|--|
| Note - The               | provisions under this heading only apply if:   |  |  |  |  |
| a. the                   | development is for, or incorporates:   |  |  |  |  |
| i.<br>ii.<br>iii.<br>iv. | ii. material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park <sup>(84)</sup> with accommodation in the form of caravans or tents; or  |  |  |  |  |
| AND                      |  |  |  |  |  |
| b. non                   | e of the following exceptions apply:   |  |  |  |  |
| i.                       | the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or   |  |  |  |  |
| ii.                      | every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.   |  |  |  |  |
|                          | provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant oplying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent   |  |  |  |  |
| SAO27                    | External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .  |  |  |  |  |
|                          | Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):  |  |  |  |  |
|                          | <ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul> |  |  |  |  |
|                          | <ul> <li>b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> </ul>   |  |  |  |  |
|                          | c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:  |  |  |  |  |
|                          | i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;  |  |  |  |  |
|                          | ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;  |  |  |  |  |
|                          | iii for outdoor sales <sup>(54)</sup> , processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales <sup>(54)</sup> , outdoor processing and outdoor storage facilities; and  |  |  |  |  |
|                          | d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.   |  |  |  |  |
| 64000                    | A continuous noth of travel begins the following characteristics is provided between the vehicle second  |  |  |  |  |
| SAO28                    | A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:  |  |  |  |  |
|                          | a. an unobstructed width of no less than 3.5m;   |  |  |  |  |
|                          | b. an unobstructed height of no less than 4.8m;  |  |  |  |  |
|                          | c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;   |  |  |  |  |
|                          | d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.   |  |  |  |  |


| SAO29    | On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i> |  |  |
|----------|--|--|--|
| SAO30    | For development that contains on-site fire hydrants external to buildings:   |  |  |
|          | a. those external hydrants can be seen from the vehicular entry point to the site; or  |  |  |
|          | b. a sign identifying the following is provided at the vehicular entry point to the site:  |  |  |
|          | i the event levent of the development (to eacle):  |  |  |
|          | <ul><li>i. the overall layout of the development (to scale);</li><li>ii. internal road names (where used);</li></ul>   |  |  |
|          | iii. all communal facilities (where provided);   |  |  |
|          | iv. the reception area and on-site manager's office (where provided);  |  |  |
|          | v. external hydrants and hydrant booster points;   |  |  |
|          | vi. physical constraints within the internal roadway system which would restrict access by fire  |  |  |
|          | fighting appliances to external hydrants and hydrant booster points.   |  |  |
|          |  |  |  |
|          | Note - The sign prescribed above, and the graphics used are to be:   |  |  |
|          | a. in a form;  |  |  |
|          |  |  |  |
|          | b. of a size;  |  |  |
|          | c. illuminated to a level;   |  |  |
|          |  |  |  |
|          | which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.  |  |  |
|          | on nom the sign.   |  |  |
|          |  |  |  |
| SAO31    | For development that contains on-site fire hydrants external to buildings, those hydrants are identified   |  |  |
| UNUUT    | by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical   |  |  |
|          | note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main   |  |  |
|          | Roads.   |  |  |
|          | Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport   |  |  |
| •        | and Main Roads.  |  |  |
|          |  |  |  |
|          | Use specific criteria  |  |  |
| Dwelling | house <sup>(22)</sup>  |  |  |
| SAO32    | Residential density does not exceed one Dwelling house <sup>(22)</sup> per lot.  |  |  |
| SAO33    | Building height for a Dwelling house <sup>(22)</sup> does not exceed:  |  |  |
|          | a. 8.5m for dwelling houses <sup>(22)</sup> ; or   |  |  |
|          | b. for domestic outbuildings and free standing carports and garages, building height does not exceed   |  |  |
|          | 4m.  |  |  |
|          |  |  |  |
| SAO34    | Building setbacks are as follows:  |  |  |
|          | a. Where a Dwelling house <sup>(22)</sup> or domestic outbuildings is less than 3m in height:  |  |  |
|          | i. road boundary - 6m  |  |  |
|          |  |  |  |
|          |  |  |  |

|          |          | ii. side boundary - 1.5m  |
|----------|----------|---|
|          |          | iii. rear boundary - 1.5m.  |
|          |          |   |
|          |          | Where a Dwelling house <sup>(22)</sup> or domestic out buildings is greater than 3m and less than 8.5m or 5m in height respectively in height:                                      |
|          |          | i. road boundary - 6m   |
|          |          | ii. side boundary - 4.5m  |
|          |          | iii. rear boundary - 4.5m.  |
|          |          |   |
|          |          | - Where located in a bushfire hazard area (see Overlay map - Bushfire hazard) a greater setback may be required. See es and constraints criteria Bushfire hazard.                   |
|          | Note     | - this provision does not apply where a development footprint exists for a lot.   |
|          |          |   |
| SAO35    | The r    | maximum percentage of any lot covered by buildings and structures is as follows:  |
|          | a.       | on lots equal to or less than 1 ha, 15% of the site or 750m <sup>2</sup> , whichever is the lesser.   |
|          | b.       | on lots greater than 1 ha, 7.5% of the site or 1500m <sup>2</sup> , whichever is the lesser.  |
|          | <u> </u> | (22)  |
| Dwelling | house    | e <sup>(22)</sup> where including a secondary dwelling  |
| SAO36    | The r    | maximum GFA for a secondary dwelling is 100m <sup>2</sup> .   |
| SAO37    | The s    | secondary dwelling obtains access from the existing driveway giving access to the Dwelling house <sup>(22)</sup> .  |
| SAO38    | The s    | secondary dwelling is located within 50m of the Dwelling house <sup>(22)</sup> .  |
| Home ba  | sed bu   | usiness <sup>(35)</sup>   |
| SAO39    |          | Home based business(s) <sup>(35)</sup> , including any storage, are fully enclosed within a dwelling or on-site   |
|          | struc    | ture.   |
|          | Note     | -This provision does not apply to a home based child care facility.   |
|          |          |   |
| SAO40    |          | 2 additional non-resident , either employees or customers, are permitted on the site at any one except where involving the use of heavy vehicles, where no employees are permitted. |
|          | Note     | This provision does not apply to Bed and Breakfast or farmstay business.  |
|          | 6.       | · · · · · · · · · · · · · · · · · · ·   |
| SAO41    | The r    | maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:  |
|          | a.       | 1 heavy vehicle;  |
|          | b.       | 1 trailer;  |
|          | C.       | Up to 3 motor vehicles.   |
|          |          | (22)  |
|          | Note     | - The car parking provision associated with the Dwelling house <sup>(22)</sup> is in addition to this requirement.  |

|          | Note - The number of motor vehicles stated is in addition to motor vehicles associated with a Dwelling house <sup>(22)</sup> .   |  |  |  |
|----------|--|--|--|--|
| SAO42    | a. Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining lots by either planting, wall(s), non-transparent fence(s) or a combination at least 1.8m in height along the length of those areas. |  |  |  |
|          | b. Planting for screening is to have a minimum depth of 3m.  |  |  |  |
| SAO43    | Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.   |  |  |  |
| SAO44    | Hours of operation to be restricted to 8.00am to 6.00pm Monday to Saturday, except for:  |  |  |  |
|          | a. bed and breakfast or farm stay business which may operate on a 24 hour basis,   |  |  |  |
|          | b. office or administrative activities that do not generate non-residents visiting the site such as book keeping and computer work,  |  |  |  |
|          | c. starting and warming up of heavy vehicles, which can commence at 7.00am.  |  |  |  |
|          |  |  |  |  |
| SAO45    | The Home based business(s) <sup>(35)</sup> do not generate noise that is audible from the boundary of the site.  |  |  |  |
|          | Note - Guidance as acceptable noise is provided in the standards listed in the Environmental Protection (Noise) Policy 2008.   |  |  |  |
|          | Note - This provision does not apply to the use of heavy vehicles or motor vehicles.   |  |  |  |
|          | Note - This provision does not apply to the use of Theavy vehicles of motor vehicles.  |  |  |  |
| 0.1.0.40 |  |  |  |  |
| SAO46    | Activities associated with a use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.   |  |  |  |
|          |  |  |  |  |
|          | Note - Nuisance is defined in the Environmental Protection Act 1994.   |  |  |  |
| SAO47    | The Home based business <sup>(35)</sup> does not involve vehicle servicing or major repairs, including spray painting or panel beating.  |  |  |  |
| X        | Note - Vehicle servicing excludes general maintenance of a vehicle such as, but not limited to, changing of tyres, engine fluids, filters, and parts such as batteries and plugs.  |  |  |  |
|          |  |  |  |  |
| SAO48    | The Home based business <sup>(35)</sup> does not involve an environmentally relevant activity (ERA) as defined in the Environmental Protection Regulations 2008.   |  |  |  |
| SAO49    | Only goods grown, produced or manufactured on-site are sold from the site.   |  |  |  |
| SAO50    | Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from the boundary of the site.   |  |  |  |
| SAO51    | For bed and breakfast and farmstays:   |  |  |  |
|          | a. overnight accommodation is provided in the Dwelling house <sup>(22)</sup> of the accommodation operator;  |  |  |  |
|          | b. maximum 4 bedroom are provided for a maximum of 10 guests;  |  |  |  |
|          | c. meals are served to paying guests only;   |  |  |  |
|          | d. rooms do not contain food preparation facilities.   |  |  |  |
|          |  |  |  |  |

|              | (25)  |  |  |  |  |
|--------------|---|--|--|--|--|
| Outdoor      | sport and recreation <sup>(55)</sup>  |  |  |  |  |
| SAO52        | Site cover of all buildings and structures does not exceed 10%.   |  |  |  |  |
| SAO53        | All buildings and structures are setback a minimum of 10m from all property boundaries.   |  |  |  |  |
| SAO54        | The maximum height of all buildings and structures is 8.5m.   |  |  |  |  |
| SAO55        | Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.  |  |  |  |  |
| SAO56        | Outdoor storage areas are screened from adjoining sites and roads by either planting, wall(s), fence(s or a combination thereof at least 1.8m in height along the length of the storage area.   |  |  |  |  |
| Permane      | nt plantation <sup>(59)</sup>   |  |  |  |  |
| SAO57        | Planting only comprises native species endemic to the area.   |  |  |  |  |
| Roadside     | e stall <sup>(68)</sup><br>se provisions do not apply to a Home based business <sup>(35)</sup> .  |  |  |  |  |
| SAO58        | No more than one Roadside stall <sup>(68)</sup> per property.   |  |  |  |  |
| SAO59        | Goods offered for sale are only goods grown, produced or manufactured on the site   |  |  |  |  |
| SAO60        | The maximum area associated with a Roadside stall <sup>(68)</sup> , including any larger separate items displayed for sale, does not exceed 20m <sup>2</sup> .  |  |  |  |  |
| SAO61        | The Roadside stall <sup>(68)</sup> obtains vehicle access from a road classified as a major street (refer Figure 7.2.3.2 - Movement, major streets).  |  |  |  |  |
| SAO62        | Car parking for 2 vehicles is provided off the road carriage way and on the property.   |  |  |  |  |
| SAO63        | The Roadside stall <sup>(68)</sup> is located no closer than 100m from an intersection.   |  |  |  |  |
| Rural wo     | rkers' accommodation <sup>(71)</sup>  |  |  |  |  |
| SAO64        | No more than 1 Rural workers' accommodation <sup>(71)</sup> per lot.  |  |  |  |  |
| SAO65        | Rural workers' accommodation <sup>(71)</sup> is contained within 1 structure.   |  |  |  |  |
| SAO66        | No more than 12 rural workers are accommodated.   |  |  |  |  |
| SAO67        | Rural workers' accommodation <sup>(71)</sup> obtains access from the existing driveway giving access to the dwelling house <sup>(22)</sup> .  |  |  |  |  |
| SAO68        | Rural workers' accommodation <sup>(71)</sup> are located within 20m of the dwelling house <sup>(22)</sup> .   |  |  |  |  |
| Sales off    | ice <sup>(72)</sup>   |  |  |  |  |
| SAO69        | A Sales office <sup>(72)</sup> is located on the site for no longer than 2 years.   |  |  |  |  |
| Telecom      | nunications facility <sup>(81)</sup>  |  |  |  |  |
| that will no | te - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner<br>t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic<br>Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz |  |  |  |  |

| SAO70               | A minimum of 45m <sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.  |  |  |  |  |
|---------------------|---|--|--|--|--|
| SAO71               | The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.   |  |  |  |  |
| SA072               | Equipment shelters and associated structures are located:   |  |  |  |  |
|                     | a. directly beside the existing equipment shelter and associated structures;  |  |  |  |  |
|                     | b. behind the main building line;   |  |  |  |  |
|                     | c. further away from the frontage than the existing equipment shelter and associated structures;  |  |  |  |  |
|                     | d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.   |  |  |  |  |
| SAO73               | Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.  |  |  |  |  |
| SAO74               | The facility is enclosed by security fencing or by other means to ensure public access is prohibited.   |  |  |  |  |
| SAO75               | A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the development and street frontage and adjoining uses.  |  |  |  |  |
|                     | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.   |  |  |  |  |
|                     | Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure compliance with Planning scheme policy - Integrated design.   |  |  |  |  |
| SAO76               | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.  |  |  |  |  |
|                     | Values and constraints criteria   |  |  |  |  |
| Reconfigu           | relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for<br>ring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a<br>ent footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this<br>cheme. |  |  |  |  |
| Acid sulf<br>apply) | ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria   |  |  |  |  |
|                     | nning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid s i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.  |  |  |  |  |
| SA077               | Development does not involve:   |  |  |  |  |
|                     | a. excavation or otherwise removing of more than 100m <sup>3</sup> of soil or sediment where below 5m Australian Height Datum AHD, or   |  |  |  |  |
|                     | b. filling of land of more than 500m <sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m AHD.  |  |  |  |  |
|                     |   |  |  |  |  |

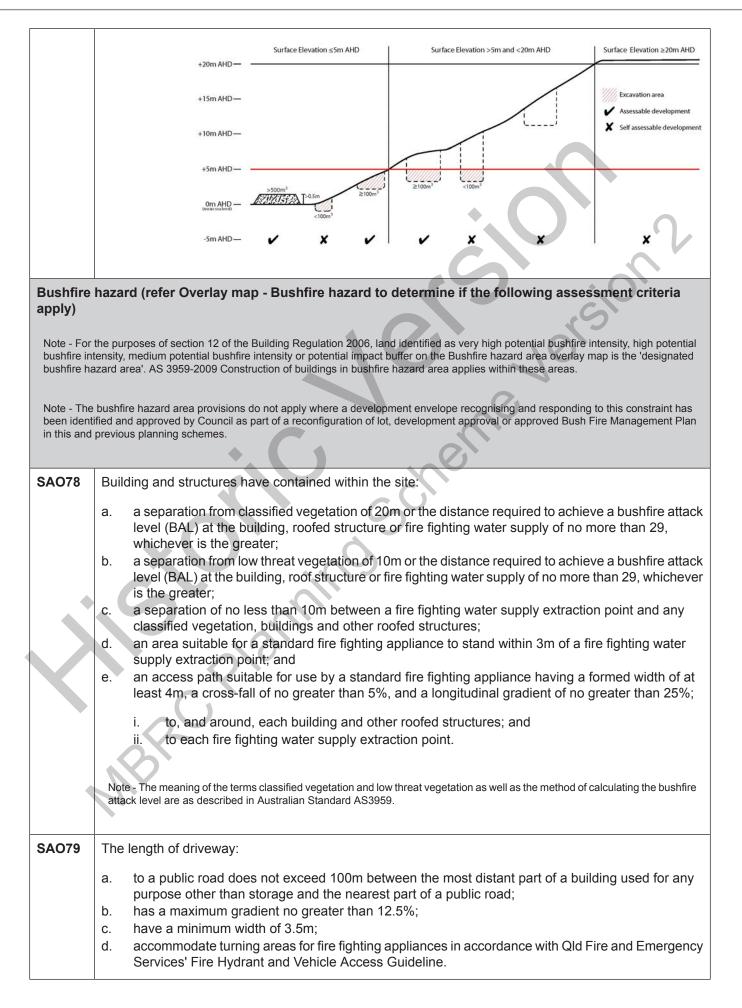

| <ul> <li>ba a reliculated water supply, on-site fire fighting water storage containing not less than 10,000 littires (tanks with fire bigade tank fittings, swimming pools) is provided and located within 10m of buildings and structures.</li> <li>b. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.</li> <li>c. Where a tank is the nominated on-site fire fighting water storage source, it includes:         <ol> <li>a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;</li> <li>fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.</li> </ol> </li> <li>SAO81 Development does not involve the manufacture or storage of hazardous chemicals.</li> <li>Heritage and landscape character (refer Overlay map - Heritage and landscape haracter to determine if the following assessment criteria apply)</li> <li>Note -Places, including sites, objects and buildings having local cultural heritage significance, are identified in Schedule 1 of Planning scheme poly Heritage and landscape character.</li> <li>SAO82</li> <li>Development is for the preservation, maintenance, repair and restoration of the site, object or building.</li> <li>This does not apply to Listed item 99. In Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.</li> <li>Note - Preservation, maintenance, repair and restoration of the site, object or building.</li> <li>This does not apply to Listed item 99. In Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.</li> <li>Note - Preservation, maintenance, repair and restoration w</li></ul>   |                           |   |  |  |  |
|---|---------------------------|---|--|--|--|
| <ul> <li>to within 3m of that water storage source is provided.</li> <li>where a tank is the nominated on-site fire fighting water storage source, it includes:         <ol> <li>a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;</li> <li>fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.</li> </ol> </li> <li>SAO81 Development does not involve the manufacture or storage of hazardous chemicals.</li> <li>Horitage and landscape character (refor Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)</li> <li>Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified in Schedule to Planning scheme policy - Heritage and landscape character. Places also having outlural heritage significance, are identified in Schedule to Planning scheme policy - Heritage and landscape character. Places also having outlural heritage significance, are identified in Schedule to Planning scheme policy - Heritage and landscape character. Places also having outlural heritage significance at a state level and being entered in the Queensland Heritage significance, are identified in Schedule to Planning scheme policy - Heritage and landscape character. Note - Places and andscape character.</li> <li>SAO82 Development is for the preservation, maintenance, repair and restoration of the site, object or buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.</li> <li>Note - Preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration w</li></ul>  | SAO80                     | to a reticulated water supply, on-site fire fighting water storage containing not less than 10,000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m of   |  |  |  |
| i. a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;     ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.     SAO81 Development does not involve the manufacture or storage of hazardous chemicals.     Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)     Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character. Flaces also having cultural heritage significance, are identified in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.     Note - Places, including sites, objects and buildings having local cultural heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.     Note - Preservation, maintenance, repair and restoration of the site, object or building this does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.     Note - Preservation, maintenance, repair and restoration orks. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration orks. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.     This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage a |                           |   |  |  |  |
| of the tank;       ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.         SA081       Development does not involve the manufacture or storage of hazardous chemicals.         Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)         Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.         SA082       Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions         SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical an   |                           | c. Where a tank is the nominated on-site fire fighting water storage source, it includes:   |  |  |  |
| underground, an access hole of 20mm (minimum) to accommodate suction lines.         SA081       Development does not involve the manufacture or storage of hazardous chemicals.         Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)         Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character. Places also having cultural heritage significance at a State level and being enfered in the Queensiand Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being enfered in the Queensiand Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.         SA082       Development is for the preservation, maintenance, (repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.         SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character.         SA084       A cultural heritage and landscape character repair and restoration owrks. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration vorks. Any preservation management plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical  |                           |   |  |  |  |
| Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)         Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.         SA082       Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions         SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation management plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.         SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings o  |                           |   |  |  |  |
| Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)         Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.         SA082       Development is for the preservation, maintenance, repair and restoration of the site, object or building. This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions         SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and   |                           |   |  |  |  |
| the following assessment criteria apply)         Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and<br>landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural<br>heritage significance at a State level and being entered in the Oueensland Heritage Register, are also identified in Schedule 1 of Planning<br>scheme policy - Heritage and landscape character.         SA082       Development is for the preservation, maintenance, repair and restoration of the site, object or building<br>This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant<br>historical and cultural value of Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions         SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme<br>policy - Heritage and landscape character and submitted to Council prior to the commencement of any<br>preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and<br>restoration works are in accordance with the Council approved cultural heritage conservation management<br>plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant<br>historical and cultural value of Planning scheme policy - Heritage and landscape character.         Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment<br>criteria apply)         SA084       Except where located on Figure 7.2.3.1 - Caboolture West structure plan   | SAO81                     | Development does not involve the manufacture or storage of hazardous chemicals.   |  |  |  |
| SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions         SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation management plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.         Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment criteria apply)         SA084       Except where located on Figure 7.2.3.1 - Caboolture West structure plan or an approved Neighbourhooc development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer.         SA085       All habitable rooms located within an Electricity supply substation buffer area: a. located a minimum of 10m from an electricity supply substation ( <sup>80</sup> ); and b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives  | landscape<br>heritage sig | character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural gnificance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning   |  |  |  |
| SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character.         Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions         SA083       A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy - Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation management plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.         Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment criteria apply)         SA084       Except where located on Figure 7.2.3.1 - Caboolture West structure plan or an approved Neighbourhooc development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer.         SA085       All habitable rooms located within an Electricity supply substation buffer area: a. located a minimum of 10m from an electricity supply substation ( <sup>80</sup> ); and b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives  | SAO82                     | Development is for the preservation, maintenance, repair and restoration of the site, object or building.   |  |  |  |
| policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.         This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.         Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment criteria apply)         SA084       Except where located on Figure 7.2.3.1 - Caboolture West structure plan or an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer.         SA085       All habitable rooms located within an Electricity supply substation f <sup>(80)</sup> ; and b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives   |                           | historical and cultural value of Planning scheme policy - Heritage and landscape character.   |  |  |  |
| criteria apply)SA084Except where located on Figure 7.2.3.1 - Caboolture West structure plan or an approved Neighbourhood<br>development plan, development does not involve the construction of any buildings or structures within<br>a high voltage electricity line buffer.SA085All habitable rooms located within an Electricity supply substation buffer are:<br>a. located a minimum of 10m from an electricity supply substation<br>( <sup>80)</sup> ; and<br>b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives  | SAO83                     | <ul> <li>policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.</li> <li>This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant</li> </ul> |  |  |  |
| <ul> <li>development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer.</li> <li>SAO85 All habitable rooms located within an Electricity supply substation buffer are:         <ul> <li>a. located a minimum of 10m from an electricity supply substation<sup>(80)</sup>; and</li> <li>b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives</li> </ul> </li> </ul>  |                           |   |  |  |  |
| <ul> <li>a. located a minimum of 10m from an electricity supply substation<sup>(80)</sup>; and</li> <li>b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives</li> </ul>  | SAO84                     | Except where located on Figure 7.2.3.1 - Caboolture West structure plan or an approved Neighbourhood development plan, development does not involve the construction of any buildings or structures within a high voltage electricity line buffer.  |  |  |  |
| b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives   | SAO85                     | All habitable rooms located within an Electricity supply substation buffer are:   |  |  |  |
|   |                           | b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives,  |  |  |  |

| Overland<br>apply) | I flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria   |
|--------------------|---|
| SAO86              | Development for a material change of use or building work does not involve the construction of a building or structure in an Overland flow path area.   |
| SA087              | Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises.   |
|                    | Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises. |
|                    | Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow  |
| SAO88              | Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.   |
| SAO89              | Development for a material change of use or building work that involves a hazardous chemical ensures the hazardous chemicals is not located within an overland flow path area.  |
| SAO90              | Development for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.                       |

Part S — Criteria for assessable development - Rural living precinct

| Table 7.2.3.5.2 Assessable of | developme | ent - Rural | living pre | cinct |
|-------------------------------|-----------|-------------|------------|-------|
|                               |           |             |            |       |
|                               |           |             |            |       |

|     | Performance Outcomes  | S                | Acceptable Outcomes |  |  |  |
|-----|---|------------------|---------------------|--|--|--|
|     | General criteria  |                  |                     |  |  |  |
| Gen | eral performance outcome for all developmen   | 2                |                     |  |  |  |
| PO1 |   | No acceptable ou | utcome provided.    |  |  |  |
| e.  | ensures adequate on-site stormwater and waste<br>disposal is provided to avoid adverse impacts<br>on water quality; |                  |                     |  |  |  |

| Performance Outcomes  | Acceptable Outcomes   |
|---|---|
| <ul> <li>requires minimal cutting, filling or excavating.</li> <li>Where this occurs, visual impacts are reduced through screening;</li> </ul>  |   |
| <ul> <li>avoids being obtrusive or visually dominant<br/>through on-site location, colours and materials<br/>of buildings and structures.</li> </ul>  |   |
| Structure plan  |   |
| PO2   | No acceptable outcome provided  |
| Development is in accordance with the Figure 7.2.3.1<br>- Caboolture West structure plan.   |   |
| Development footprint   |   |
| PO3   | A03   |
| All buildings, structures, associated facilities and<br>infrastructure are contained within an approved<br>development footprint. Development outside of an<br>approved development footprint must: | Where a development footprint has been identified as part<br>of a development approval for reconfiguring a lot, all<br>development occurs within the development footprint. |
| a. not be subject to a development constraint such as, but not limited to, flood, steep slope, waterway setbacks and significant vegetation;  | cono  |
| <ul> <li>b. development does not result in any instability,<br/>erosion or degradation of land, water, soil<br/>resource or loss of natural, ecological or<br/>biological values.</li> </ul>        |   |
| Building height   |   |
| P04   | AO4   |
| Building height:  | Unless otherwise specified in this code, the height of all  |
| a. is consistent with the low rise built form and open area character and amenity values anticipated in the Rural living precinct;  | buildings and structures does not exceed 5m.  |
| <li>b. does not unduly impact on access to sunlight,<br/>overshadowing or privacy experienced by<br/>adjoining properties;</li>   |   |
| c. is not visually dominant or overbearing in the context of establishing a low density, low rise built form and open area character.   |   |
| Setbacks  |   |
|   |   |

| Performance Outcomes   | Acceptable Outcomes   |
|--|---|
| Building setback:<br>a. is sufficient to minimise overlooking and maintain<br>privacy of adjoining properties;   | The minimum building setbacks from a property boundary are as follows:<br>a. road boundary - 6m   |
| <ul> <li>b. creates sufficient separation to ensure buildings<br/>are not visually dominant or overbearing on<br/>adjoining properties with respect to the low<br/>density character and amenity anticipated in the<br/>Rural living precinct.</li> </ul>  | <ul> <li>b. site boundary - 4.5m</li> <li>c. rear boundary - 4.5m.</li> </ul>   |
| Amenity  |   |
| <b>PO6</b><br>The amenity of the area and adjacent sensitive land uses are protected from the impacts of dust, odour, noise, light, chemicals and other environmental nuisances.   | No acceptable outcome provided.   |
| Waste treatment  |   |
| <b>PO7</b><br>Stormwater generated on-site is treated and disposed<br>of in an acceptable manner to mitigate any detrimental<br>effects on soil, surface water or ground water quality.<br>Development resulting in the degradation of soil,<br>surface water or ground water quality is avoided.  | AO7<br>All concentrated use area (eg sheds, pens, holding yards,<br>stables, kennels and other animal enclosures) are provided<br>with site drainage to ensure all run-off is directed to suitable<br>detention basins, filtration or other treatment areas.  |
| Rural uses setbacks  |   |
| <ul> <li>PO8</li> <li>Development ensures that: <ul> <li>a. chemical spray, fumes, odour, dust does not drift beyond the property boundary but is contained on-site;</li> </ul> </li> <li>b. unreasonable nuisance or annoyance resulting from -but not limited to - noise, storage of materials and rubbish does not adversely impact upon land users adjacent to, or within the general vicinity;</li> <li>c. buildings and other structures are consistent with the low density, low rise built form and open area environment anticipated in the Rural living precinct.</li> </ul> | AO8The following uses and associated buildings are setback<br>from property boundaries as follows:a.Animal husbandry <sup>(4)</sup> (buildings only) - 10mb.Animal husbandry <sup>(4)</sup> (buildings only) - 10mb.Animal keeping <sup>(5)</sup> , excluding catteries and kennels -<br>20mc.Aquaculture <sup>(6)</sup> involving ponds or water behind dams<br>- 100md.Aquaculture <sup>(6)</sup> involving the housing of tanks - 20me.Community residence <sup>(16)</sup> - 20mf.Cropping <sup>(19)</sup> (buildings only) - 10mg.Intensive horticulture <sup>(40)</sup> - 10mh.Permanent plantations <sup>(59)</sup> - 25mi.Rural Industry <sup>(70)</sup> - 20m |

| Performance Outcomes  | Acceptable Outcomes   |
|---|---|
|   | j. Rural workers' accommodation <sup>(71)</sup> - 40m   |
|   | k. Short-term accommodation <sup>(77)</sup> - 40m   |
|   | I. Wholesale nursery <sup>(89)</sup> - 10m  |
|   | m. Veterinary services <sup>(87)</sup> - 10m.   |
| Car parking   |   |
| PO9   | A09   |
| On-site car parking associated with an activity provides safe and convenient on-site parking and manoeuvring to meet anticipated parking demand.  | On-site car parking is provided in accordance with Schedule 7 - Car parking.  |
| Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.   | C Jer   |
| Noise   | N O   |
| PO10  | No acceptable outcome provided.   |
| Noise generating uses do not adversely affect existing<br>noise sensitive uses.<br>Note - The use of walls, barriers or fences that are visible from<br>or adjoin a road or public area are not appropriate noise<br>attenuation measures unless adjoining a motorway, arterial road<br>or rail line.<br>Note - A noise impact assessment may be required to<br>demonstrate compliance with this PO. Noise impact assessments<br>are to be prepared in accordance with Planning scheme policy<br>- Noise. | SCI   |
| P011  | AO11.1  |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:  | Development is designed to meet the criteria outlined in the<br>Planning Scheme Policy – Noise  |
| a. contributing to safe and usable public spaces, through maintaining high levels of surveillance   | AO11.2  |
| of parks, streets and roads that serve active   | Noise attenuation structures (e.g. walls, barriers or fences):  |
| <ul><li>transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li><li>maintaining the amenity of the streetscape.</li></ul>   | a. are not visible from an adjoining road or public area unless:  |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.   | <ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not<br/>serve an existing or future active transport<br/>purpose (e.g. pedestrian paths or cycle lanes)<br/>or where attenuation through building location<br/>and materials is not possible.</li> </ul> |

| Performance Outcomes  | Acceptable Outcomes  |
|---|--|
| Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.                                    | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrate design.</li> <li>Note - Refer to Planning scheme policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul> |
| lazardous Chemicals   |  |
|   | erformance outcomes, a Hazard Assessment Report may be required to rdance with ' <i>State Planning Policy Guideline - Guidance on development</i>  |
| Terms used in this section are defined in 'State Planning Policy G  | uideline - Guidance on development involving hazardous chemicals'.   |
| 2012  | A012.1   |
| Off sites risks from foreseeable hazard scenarios nvolving hazardous chemicals are commensurate vith the sensitivity of the surrounding land use zones. | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land use as described below:   |
|   | Dangerous Dose   |
|   | a. For any hazard scenario involving the release of gase or vapours:   |
|   | i. AEGL2 (60minutes) or if not available ERPG2   |
|   | <li>An oxygen content in air &lt;19.5% or &gt;23.5% at<br/>normal atmospheric pressure.</li>   |
|   | b. For any hazard scenario involving fire or explosion:  |
|   |  |
|   | i. 7kPa overpressure;  |

If criteria AO12.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of  $0.5 \times 10^{-6}$ /year.

### AO12.2

Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below:

| Performance Outcomes   | Acceptable Outcomes  |
|--|--|
|  | Dangerous Dose   |
|  | a. For any hazard scenario involving the release of gases or vapours:  |
|  | i. AEGL2 (60minutes) or if not available ERPG2;  |
|  | ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.  |
|  | b. For any hazard scenario involving fire or explosion:  |
|  | i. 7kPa overpressure;  |
|  | ii. 4.7kW/m2 heat radiation.   |
|  | If criteria AO12.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.    |
|  | A012.3   |
|  | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below:       |
|  | Dangerous Dose   |
| XO   | a. For any hazard scenario involving the release of gases or vapours:  |
|  | i. AEGL2 (60minutes) or if not available ERPG2;  |
|  | <li>An oxygen content in air &lt;19.5% or &gt;23.5% at<br/>normal atmospheric pressure.</li>   |
|  | b. For any hazard scenario involving fire or explosion:  |
|  | i. 14kPa overpressure;   |
|  | ii. 12.6kW/m2 heat radiation.  |
|  | If criteria AO12.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.   |
| PO13   | A013   |
| Buildings and package stores containing fire-risk<br>hazardous chemicals are designed to detect the early<br>stages of a fire situation and notify a designated<br>person. | Buildings and package stores containing fire-risk hazardous<br>chemicals are provided with 24 hour monitored fire detection<br>system for early detection of a fire event. |
|  |  |

| Performance Outcomes  | Acceptable Outcomes   |
|---|---|
| PO14  | A014  |
| Common storage areas containing packages of<br>flammable and toxic hazardous chemicals are<br>designed with spill containment system(s) that are<br>adequate to contain releases, including fire fighting<br>media.   | Storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) capable of containing a minimum of the total aggregate capacity of all packages plus the maximum operating capacity of any fire protection system for the storage area(s) over a minimum of 60 minutes.  |
| PO15  | A015.1  |
| Storage and handling areas, including manufacturing<br>areas, containing hazardous chemicals in quantities<br>greater than 2,500L or kg within a Local Government<br>"flood hazard area" are located and designed in a<br>manner to minimise the likelihood of inundation of<br>flood waters from creeks, rivers, lakes or estuaries. | <ul> <li>The base of any tank with a WC &gt;2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively:</li> <li>a. bulk tanks are anchored so they cannot float if submerged or inundated by water; and</li> <li>b. tank openings not provided with a liquid tight seal, i.e. an atmospheric vent, are extended above the relevant flood height level.</li> </ul> AO15.2 The lowest point of any storage area for packages >2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively, package stores are provided with impervious bund walls or racking systems higher than the relevant flood height level. |
| Clearing of Habitat Trees   | 2   |
| Note - The following development is exempt as noted in section 1.<br>Where located anywhere in the Caboolture West local plan area:   | 7.7 Exempt development:   |
| Clearing of a habitat tree located within an approved develo  | opment footprint;   |
| <ul> <li>Clearing of a habitat tree within 10m from a lawfully establis<br/>required in response to an accident or emergency;</li> </ul>  | hed building reasonably necessary for emergency access or immediately   |
| • Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;   |   |
| Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence;  |   |
| <ul> <li>Clearing of a habitat tree reasonably necessary for the purp<br/>infrastructure or drainage purposes;</li> </ul>   | bose of maintenance or works within a registered easement for public  |
| • Clearing of a habitat tree in accordance with an existing bus   | shfire management plan previously accepted by Council;  |
| <ul> <li>Clearing of a habitat tree associated with maintaining existing</li> </ul>   | ng open pastures, windbreaks, lawns or created gardens.   |
| Note - Definition for Native vegetation is located in Schedule 1 Definition   | finitions.  |

| Performance Outcomes   | Acceptable Outcomes             |  |
|--|---------------------------------|--|
| Editor's note - Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites – Appendix A   |                                 |  |
| Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from ground level is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning Scheme Policy – Environmental Areas and Corridors   |                                 |  |
| Habitat protection   |                                 |  |
| PO16   | No acceptable outcome provided. |  |
| a. Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.  |                                 |  |
| <ul> <li>Development does not result in the net loss of fauna habitat. Where development does result in the loss of habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees &gt; 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.</li> </ul> | e jersie                        |  |
| <ul> <li>c. Development does not result in soil erosion or<br/>land degradation or leave land exposed for an<br/>unreasonable period of time but is rehabilitated<br/>in a timely manner</li> <li>Note - Further guidance on habitat trees is provided in Planning<br/>scheme policy - Environmental areas</li> </ul>  | Scho                            |  |
| Wor  | ks criteria                     |  |
| Utilities  |                                 |  |
| PO17<br>The development is connected to an existing<br>reticulated electricity supply system approved by the<br>relevant energy regulating authority.  | No acceptable outcome provided. |  |
| PO18   | No acceptable outcome provided. |  |
| The development has access to telecommunications<br>and broadband services in accordance with current<br>standards.  |                                 |  |
| PO19   | No acceptable outcome provided. |  |
| Where available the development is to safely connect to reticulated gas.   |                                 |  |

| Performance Outcomes   | Acceptable Outcomes  |
|--|--|
| PO20   | AO20.1   |
| The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk   | Where in a sewered area, the development is connected to a reticulated sewerage system.  |
| to public health.  | AO20.2   |
|  | Where not in a sewered area, the development is serviced<br>by an appropriate on-site sewerage facility.<br>Note - A site and soil evaluation report is generally required to<br>demonstrate compliance with this outcome. Reports are to be prepared<br>in accordance with The Plumbing and Drainage Act 2002.  |
|  |  |
|  | A020.3   |
|  | Where not in a sewered area, the development is serviced<br>by an appropriate on-site sewerage facility.   |
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.  |
| PO21   | A021.1   |
| The development is provided with an adequate and<br>sustainable supply of potable (drinking and general<br>use e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the<br>South East Queensland Water Supply and Sewerage Design<br>and Construction Code and the relevant Water Service<br>Association of Australia (WSAA) codes and standards. |
|  | AO21.2   |
| RCRIO  | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater Connections<br>Policy, the development is provided with an adequate water<br>supply of at least 45,000 litres by way of on-site storage<br>which provides equivalent water quality and reliability to<br>support the use requirements of the development.  |
| Access   |  |
| PO22   | No acceptable outcome provided.  |
| Where required, access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated<br>with the access in accordance with Planning scheme<br>policy - Integrated design. |  |
| PO23   | AO23.1   |

| Performance Outcomes  | Acceptable Outcomes   |
|---|---|
| <ul><li>The layout of the development does not compromise:</li><li>a. the development of the road network in the area;</li><li>b. the function or safety of the road network;</li></ul>   | The development provides for the extension of the road<br>network in the area in accordance with Council's road<br>network planning.  |
| c. the capacity of the road network.  | AO23.2<br>The development does not compromise future road widening<br>of frontage roads in accordance with the relevant standard<br>and Council's road planning.<br>AO23.3<br>The lot layout allows forward access to and from the site.  |
| PO24<br>Safe access is provided for all vehicles required to<br>access the site.  | AO24.1<br>Site access and driveways are designed and located in accordance with:  |
|   | <ul> <li>a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or</li> <li>b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.</li> </ul>   |
|   | AO24.2<br>Internal driveways and access ways are designed and<br>constructed in accordance with AS/NZS2890.1 Parking<br>Facilities – Off street car parking and the relevant standards<br>in Planning scheme policy - Integrated design.<br>Note - This includes queue lengths (refer to Schedule 8 Service vehicle<br>requirements), pavement widths and construction. |
|   | AO24.3<br>Access driveways, manoeuvring areas and loading facilities<br>provide for service vehicles listed in Schedule 8 Service<br>vehicle requirements for the relevant use. The on-site<br>manoeuvring is to be in accordance with Schedule 8 Service<br>vehicle requirements.  |
| PO25  | No acceptable outcome provided.   |
| <ul> <li>Upgrade works (whether trunk or non-trunk) are provided where necessary to:</li> <li>a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;</li> </ul> |   |

| Performance Outcomes  | Acceptable Outcomes             |
|---|---------------------------------|
| <ul> <li>b. ensure the orderly and efficient continuation of<br/>the active transport network;</li> <li>c. ensure the site frontage is constructed to a<br/>suitable urban standard generally in accordance<br/>with Planning scheme policy - Integrated design.</li> </ul>   |                                 |
| Note - An Integrated Transport Assessment (ITA) may be<br>required to demonstrate compliance with this performance<br>outcome. An ITA should be prepared in accordance with<br>Planning scheme policy - Integrated transport assessment.  |                                 |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  |                                 |
| Note - To demonstrate compliance with c. of this performance outcome, site frontage works where in existing road reserve (non-trunk) are to be designed and constructed as follows:   | C ets.                          |
| <ul> <li>Where the street is partially established to an urban<br/>standard, match the alignment of existing kerb and<br/>channel and provide carriageway widening and<br/>underground drainage where required; or</li> </ul>   |                                 |
| ii. Where the street is not established to an urban standard,<br>prepare a design that demonstrates how the relevant<br>features of the particular road as shown in the Planning<br>scheme policy - Integrated Design can be achieved in the<br>existing reserve.   | ente                            |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.  | SCI                             |
| Stormwater  | <i>S</i>                        |
| PO26<br>Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or  | No acceptable outcome provided. |
| annoyance to any person, property or premises.  |                                 |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |                                 |
| Note - a downstream drainage discharge report may be required to demonstrate achievement of this performance outcome.   |                                 |
| Note -A watercourse as defined in the Water Act is accepted as<br>a lawful point of discharge providing the drainage discharge from<br>the site does not increase downstream flood levels during the<br>100 year 1% AEP storm by more than 20mm and any flooding<br>of downstream allotments which are not able to be further<br>subdivided is not increased. |                                 |
| PO27  | No acceptable outcome provided. |
| Stormwater generated from the development does<br>not compromise the capacity of existing stormwater<br>infrastructure downstream of the site.  |                                 |

| Performance Outcomes  | Acceptable Outcomes  |
|---|--|
| Note - A downstream drainage discharge report may be required to demonstrate compliance with this performance outcome.  |  |
| PO28  | No acceptable outcome provided.  |
| Stormwater quality management systems are<br>designed and constructed to minimise the<br>environmental impact of stormwater discharge on<br>surface and underground receiving water quality and<br>meet the design objectives in Tables A and B in<br>Appendix 3 of the SPP.<br>Note - A stormwater management plan prepared by a suitably<br>qualified professional will be required in accordance with Planning<br>scheme policy - Stormwater management.   | i cion2  |
| Site works and construction management  |  |
| PO29  | No acceptable outcome provided.  |
| The site and any existing structures are maintained in a tidy and safe condition.   |  |
| PO30  | AO30.1   |
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.</li> </ul> |
|   | effectiveness.   |
|   | AO30.3   |


| Performance Outcomes   | Acceptable Outcomes  |
|--|--|
|  | The completed earthworks (fill or excavation) area is<br>stabilised using turf, established grass seeding, mulch or<br>sprayed stabilisation techniques to control erosion and<br>sediment and dust from leaving the property.   |
|  | AO30.4<br>Where works are proposed in proximity to an existing street  |
|  | tree, an inspection and a root management plan is<br>undertaken by a qualified arborist which demonstrates and<br>ensures that no permanent damage is caused to the tree.  |
| PO31   | A031   |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.   | No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.  |
| P032   | A032.1   |
| All works on-site and the transportation of material to<br>and from the site are managed to not negatively<br>impact the existing road network, the amenity of the<br>surrounding area or the streetscape. | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan,<br>prepared in accordance with the Manual of Uniform Traffic<br>Control Devices (MUTCD) to ensure all traffic movements<br>to and from the site are safe. |
| details and examples.  | A032.2   |
| Planning<br>Planning   | All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors vehicles are generally not to be parked in<br>existing roads.                          |
|  | Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).  |
|  | AO32.3   |
| NBr  | Any material dropped, deposited or spilled on the roads as<br>a result of construction processes associated with the site<br>are to be cleaned at all times.   |
| PO33   | AO33   |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | a. topsoiled with a minimum compacted thickness of 50 millimetres;   |
|  | b. grassed.  |

| Performance Outcomes   | Acceptable Outcomes  |
|--|--|
|  | Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.  |
| PO34   | AO34.1   |
| <ul> <li>The clearing of vegetation on-site:</li> <li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the works;</li> <li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;</li> <li>c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.</li> <li>Note - No burning of cleared vegetation is permitted.</li> </ul> <b>PO35</b> Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and a no cost to Council. | All native vegetation to be retained on-site is temporarily<br>fenced or protected prior to and during development works.<br>Note - No parking of vehicles of storage of machinery or goods is to<br>occur in these areas during development works.<br><b>AO34.2</b><br>Disposal of materials is managed in one or more of the<br>following ways:<br>a. all cleared vegetation, declared weeds, stumps,<br>rubbish, car bodies, scrap metal and the like are<br>removed and disposed of in a Council land fill facility;<br>or<br>b. all native vegetation with a diameter below 400mm is<br>to be chipped and stored on-site. |
| Earthworks   |  |
| PO36   | AO36.1   |
| On-site earthworks are designed to consider the visua<br>and amenity impact as they relate to:<br>a. the natural topographical features of the site;   | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains as<br>necessary.  |
| b. short and long-term slope stability;  | AO36.2   |
| <ul> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> </ul>   | Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.   |
| f. existing fills and soil contamination that may exis   | t AO36.3   |
| on-site;   | All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.  |

# 7 Local plans

| Performance Outcomes |  | Acceptable Outcomes  |
|----------------------|--|--|
| g.<br>h.             | the stability and maintenance of steep rock<br>slopes and batters;<br>the visual impact of the cut (excavation) and fill   | AO36.4<br>All filling or excavation is contained within the site.  |
|                      | and impacts on the amenity of adjoining lots (e.g. residential).   | AO36.5<br>All fill placed on-site is:  |
|                      | e - Refer to Planning scheme policy - Integrated design for ails and examples.   | a. limited to that required for the necessary approved use;  |
|                      | e - Filling or excavation works are to be completed within six<br>nths of the commencement date.                           | <ul> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).</li> <li>AO36.6</li> </ul> |
|                      |  | The site is prepared and the fill placed on-site in accordance with AS3798.  |
|                      | +. C )   | Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.    |
|                      | ×O   | AO36.7<br>Inspection and certification of steep rock slopes and batters<br>may be required by a suitably qualified and experienced<br>RPEQ.                    |
| to n                 | 37<br>bankments are stepped, terraced and landscaped<br>ot adversely impact on the visual amenity of the<br>bounding area. | AO37<br>Any embankments more than 1.5 metres in height are<br>stepped, terraced and landscaped.  |
|                      |  | Figure - Embankment  |
|                      | NBRC   | 500mm<br>min<br>1.5m<br>min<br>1.5m<br>min<br>1.5m<br>min<br>1.5m<br>min<br>1.5m<br>min<br>1.5m<br>min<br>1.5m<br>min<br>1.5m<br>min<br>1.5m<br>min<br>1.5m    |
| PO                   | 38   | AO38.1   |
| On-                  | site earthworks are undertaken in a manner that:   | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.   |

| Performance Outcomes   | Acceptable Outcomes   |
|--|---|
| <ul> <li>does not adversely impact on a Council or public<br/>sector entity maintained infrastructure or any<br/>drainage feature on, or adjacent to the land;</li> </ul>  | Note - Public sector entity as defined in the <i>Sustainable Planning Act</i> 2009.   |
| <ul> <li>b. does not preclude reasonable access to a<br/>Council or public sector entity maintained<br/>infrastructure or any drainage feature on, or<br/>adjacent to the land for monitoring, maintenance<br/>or replacement purposes.</li> <li>Note - Public sector entity as defined in the Sustainable Planning<br/>Act 2009.</li> </ul>   | <ul> <li>AO38.2</li> <li>Earthworks that would result in any of the following are not carried out on-site:</li> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> <li>Note - Public sector entity as defined in the Sustainable Planning Act 2009.</li> </ul> |
| PO39   | No acceptable outcome provided.   |
| <ul> <li>Filling or excavation does not result in land instability</li> <li>Note - A slope stability report prepared by an RPEQ may be required.</li> <li>PO40</li> <li>Filling or excavation does not result in <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> </li> <li>Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements</li> </ul> | No acceptable outcome provided.   |
| Retaining walls and structures   |   |
| PO41   | AO41  |
| All earth retaining structures provide a positive<br>interface with the streetscape and minimise impacts<br>on the amenity of adjoining residents.   | <ul> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary</li> </ul>   |

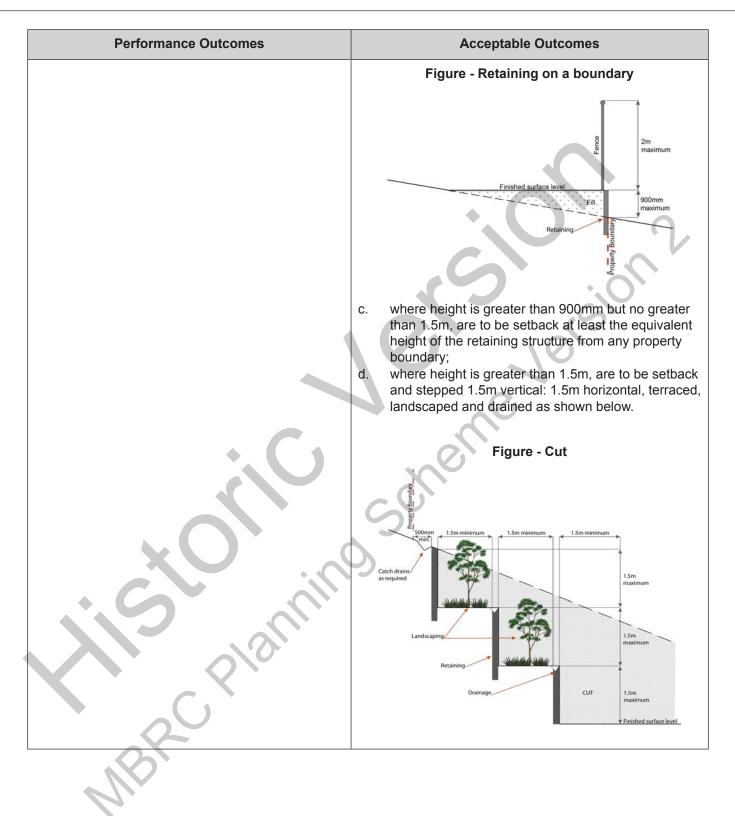

| Performance Outcomes | Acceptable Outcomes   |
|----------------------|---|
|                      | Figure - Fill   |
|                      |   |
|                      | Finished surface level 1.5m minimum 1.5m minimum 600mm (typical) 1.5m minimum (typical) 1.5m minimum (typical) 1.5m maximum (typical) |
|                      | Landscaping   |
|                      | Drainage 1.5m<br>maximum<br>(typical)   |
|                      | Retaining Fill 900mm maximum  |
| Fire Services        |   |

Note - The provisions under this heading only apply if:

the development is for, or incorporates: а.

- reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
- material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park<sup>(84)</sup> with accommodation in the form of caravans or tents; or ii.
- iii.
- material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials. iv.

#### AND

none of the following exceptions apply: b.

- the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) - Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

| <ul> <li>Development incorporates a fire fighting system that:</li> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;</li> <li>External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i>.</li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably</li> </ul> | PO42  | AO42.1   |
|--|---|--|
|  | <ul> <li>a. satisfies the reasonable needs of the fire fighting entity for the area;</li> <li>b. is appropriate for the size, shape and topography of the development and its surrounds;</li> <li>c. is compatible with the operational equipment available to the fire fighting entity for the area;</li> <li>d. considers the fire hazard inherent in the materials comprising the development and their</li> </ul> | <ul> <li>standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.</li> <li>Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:</li> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated</li> </ul> |

|        | Performance Outcomes   | Acceptable Outcomes  |
|--------|--|--|
| e.     | considers the fire hazard inherent in the surrounds to the development site;   | signposted in-ground hydrants would be an acceptable   |
| f.     | is maintained in effective operating order.  | <ul> <li>alternative;</li> <li>in regard to the general locational requirements for fire hydrants</li> <li>Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);</li> </ul>   |
| enti   | e - The Queensland Fire and Emergency Services is the<br>ity currently providing the fire fighting function for the urban<br>as of the Moreton Bay Region.     | c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:  |
|        |  | <ul> <li>i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;</li> <li>ii. for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;</li> <li>iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;</li> </ul> |
|        |  | <ul> <li>in regard to fire hydrant accessibility and clearance requirements</li> <li>Part 3.5 and, where applicable, Part 3.6.</li> </ul>  |
|        |  | AO42.2   |
|        | +. C )   | A continuous path of travel having the following<br>characteristics is provided between the vehicle access point<br>to the site and each external fire hydrant and hydrant booster<br>point on the land:   |
|        |  | <ul> <li>a. an unobstructed width of no less than 3.5m;</li> <li>b. an unobstructed height of no less than 4.8m;</li> <li>c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;</li> <li>d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.</li> </ul>  |
|        |  | AO42.3   |
|        | C P lai  | On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>   |
| PO4    | 43   | AO43   |
| well   | site fire hydrants that are external to buildings, as<br>as the available fire fighting appliance access<br>es to those hydrants, can be readily identified at | For development that contains on-site fire hydrants external to buildings:   |
| all ti | imes from, or at, the vehicular entry point to the elopment site.  | a. those external hydrants can be seen from the vehicular entry point to the site; or  |
|        |  | <ul> <li>a sign identifying the following is provided at the<br/>vehicular entry point to the site:</li> </ul>   |
|        |  | i. the overall layout of the development (to scale);   |
|        |  | ii. internal road names (where used);  |
|        |  | iii. all communal facilities (where provided);   |

| Performance Outcomes  | Acceptable Outcomes   |
|---|---|
|   | <ul> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.</li> </ul> Note - The sign prescribed above, and the graphics used are to be: <ul> <li>a. in a form;</li> <li>b. of a size;</li> <li>c. illuminated to a level;</li> </ul> which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign. |
| PO44  | A044  |
| Each on-site fire hydrant that is external to a building<br>is signposted in a way that enables it to be readily<br>identified at all times by the occupants of any<br>firefighting appliance traversing the development site.  | For development that contains on-site fire hydrants external<br>to buildings, those hydrants are identified by way of marker<br>posts and raised reflective pavement markers in the manner<br>prescribed in the technical note <i>Fire hydrant indication</i><br><i>system</i> produced by the Queensland Department of<br>Transport and Main Roads.<br>Note - Technical note Fire hydrant indication system is available on the<br>website of the Queensland Department of Transport and Main Roads.   |
| Use spe   | ecific criteria   |
| Animal keeping <sup>(5)</sup> for catteries and kennels   |   |
| <ul> <li>PO45</li> <li>Development for a cattery and kennel ensures that:</li> <li>a. it is a size, scale and design not visually dominant, overbearing or inconsistent with the low density, low rise built form character anticipated in the Rural living precinct;</li> <li>b. it is sufficiently landscaped, fenced and screened in a manner to reduce the visual appearance of buildings, structures, storage and parking areas;</li> <li>c. design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and</li> </ul> | No acceptable outcome provided.   |

| Performance Outcomes  | Acceptable Outcomes  |
|---|--|
| <ul> <li>d. all building, including runs, are located a minimum 400m from all property boundaries;</li> <li>e. fencing of sufficient height and depth, being a minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping.</li> </ul>  |  |
| Dwelling house <sup>(22)</sup>  |  |
| <b>PO46</b><br>Development does not result in residential density<br>exceeding more than one Dwelling house <sup>(22)</sup> per lot.  | AO46<br>Residential density does not exceed one Dwelling house <sup>(22)</sup><br>per lot.   |
| PO47  | AO47   |
| <ul> <li>Building height:</li> <li>a. is consistent with the low rise built form and open area character and amenity values anticipated in the Rural living precinct;</li> <li>b. does not unduly impact on access to sunlight, overshadowing or privacy experienced by adjoining properties;</li> <li>c. is not visually dominant or overbearing.</li> </ul> | <ul> <li>Building height for a Dwelling house<sup>(22)</sup> does not exceed:</li> <li>a. 8.5m building height for Dwelling houses<sup>(22)</sup>; or</li> <li>b. for domestic outbuildings and free standing carports and garages, building height does not exceed 4m.</li> </ul>   |
| PO48  | AO48   |
| <ul> <li>Building setback:</li> <li>a. is sufficient to minimise overlooking and maintain privacy of adjoining properties;</li> <li>b. creates sufficient separation to ensure buildings are not visually dominant or overbearing with respect to the low density character and amenity anticipated in the Rural living precinct.</li> </ul>                  | <ul> <li>Building setbacks are as follows:</li> <li>Where a Dwelling house<sup>(22)</sup> or domestic outbuildings is less than 3m in height:</li> <li>a. road boundary - 6m</li> <li>b. side boundary - 1.5m</li> <li>c. rear boundary - 1.5m.</li> <li>Where a Dwelling house<sup>(22)</sup> or domestic out buildings is greater than 3m and less than 8.5m and 5m respectively in height:</li> <li>a. road boundary - 6m</li> <li>b. side boundary - 4.5m</li> <li>c. rear boundary - 4.5m.</li> </ul> |
| PO49  | AO49   |
| Building on a site:   | Site cover of all buildings and structures does not exceed:  |

| Performance Outcomes   | Acceptable Outcomes  |
|--|--|
| <ul> <li>a. reflects the detached, low density, low rise built form and open area environment anticipated in the Rural living precinct;</li> <li>b. does not appear dominant or overbearing;</li> <li>c. provides generous open areas around buildings for useable private open space, and protects existing vegetation.</li> </ul> <b>PO50</b> All buildings, structures, associated facilities and infrastructure are contained within an approved | <ul> <li>a. on lots equal to or less than 1 ha, 15% of the site or 750m<sup>2</sup>, whichever is the lesser.</li> <li>b. on lots greater than 1 ha, 10% of the site or 1500m<sup>2</sup>, whichever is the lesser.</li> </ul> AO50 Where a development footprint has been identified as par of a development approval for reconfiguring a lot, all    |
| <ul> <li>development footprint. Development outside of an approved development footprint must:</li> <li>a. not be subject to a development constraint such as, but not limited to, bushfire, flood, waterway setbacks and significant vegetation;</li> <li>b. development does not result in any instability, erosion or degradation of land, water, soil resource or loss of natural, ecological or biological values.</li> </ul>                   | development occurs within a development footprint.   |
| Dwelling house <sup>(22)</sup> where including a secondary d   | welling  |
| <ul> <li>PO51</li> <li>Dwelling house<sup>(22)</sup> where including a secondary dwelling:</li> <li>a. remains subordinate to the principal dwelling;</li> <li>b. has a maximum GFA of 100m<sup>2</sup>.</li> <li>c. retains its connection with the principal dwelling by:</li> </ul>   | <ul> <li>AO51</li> <li>Dwelling house<sup>(22)</sup> where including a secondary dwelling:</li> <li>a. has a maximum GFA of 100m<sup>2</sup>.</li> <li>b. obtains access from the existing driveway giving access to the Dwelling house<sup>(22)</sup>.</li> <li>c. is located within 50m from the principal Dwelling house<sup>(22)</sup>.</li> </ul> |
| <ul> <li>i. avoiding the establishment of a separate access;</li> <li>ii. being located within 50m of the principal Dwelling house<sup>(22)</sup>.</li> <li>d. a size, scale and design that is not visually dominant, overbearing and inconsistent with the low density, low rise built form and open area character anticipated in a Rural residential area.</li> </ul>  |  |
| <ul> <li>access;</li> <li>ii. being located within 50m of the principal Dwelling house<sup>(22)</sup>.</li> <li>d. a size, scale and design that is not visually dominant, overbearing and inconsistent with the low density, low rise built form and open area</li> </ul>   |  |

| Performance Outcomes   | Acceptable Outcomes   |
|--|---|
| Home based business(s) <sup>(35)</sup> :<br>a. is subordinate in size and function to the primary  | The Home based business(s) <sup>(35)</sup> , including any storage, are fully enclosed within a dwelling or on-site structure.  |
| <ul> <li>use on the site being a permanent residence;</li> <li>are of a scale and intensity that does not result<br/>in adverse visual or nuisance impacts on the<br/>residents in adjoining or nearby dwellings;</li> <li>store no more heavy vehicles, trailer and motor<br/>vehicle on-site, as follows:</li> </ul> | AO52.2<br>Up to 2 additional non-resident , either employees or<br>customers, are permitted on the site at any one time, excep<br>where involving the use of heavy vehicles, where no<br>employees are permitted.   |
| <ul> <li>i. 1 heavy vehicle;</li> <li>ii. 1 trailer;</li> <li>iii. Up to 3 motor vehicles.</li> <li>d. results in a vehicular and pedestrian traffic</li> </ul>  | AO52.3<br>The maximum number of heavy vehicles, trailer and moto<br>vehicles stored on-site is as follows:<br>i. 1 heavy vehicle;<br>ii. 1 trailer;   |
| generation consistent with that reasonably<br>expected in the surrounding low density, low<br>built form and open area character and amenity<br>anticipated in the Rural living precinct;  | <ul><li>iii. Up to 3 motor vehicles.</li><li>AO52.4</li></ul>   |
| <ul> <li>e. are suitably screened to ensure adverse visual impacts on the residents in adjoining or nearby dwellings are minimised;</li> <li>f. sufficiently separated from adjoining properties so development does not result in adverse visual, noise, or nuisance impacts on adjoining residents.</li> </ul>       | Vehicle parking areas, vehicle standing areas and outdoo<br>storage areas of plant and equipment are screened from<br>adjoining lots by either planting, wall(s), fence(s) or a<br>combination at least 1.8m in height along the length of those<br>areas.<br>Planting for screening is to have a minimum depth of 3m.  |
| planni.  | AO52.5<br>Heavy vehicle storage buildings, parking areas and standing<br>areas are setback a minimum of 30m from all property<br>boundaries.  |
| PO53<br>The hours of operation for Home based business(s) <sup>(35)</sup><br>are managed so that the activity does not adversely<br>impact on the low intensity character and amenity<br>anticipated in the Rural living precinct.   | <ul> <li>AO53</li> <li>Hours of operation to be restricted to 8am to 6pm Monday to Friday, except for:</li> <li>a. bed and breakfast or farm stay business which may operate on a 24 hour basis,</li> <li>b. office or administrative activities that do not generate non-residents visiting the site such as book keeping and computer work, and</li> <li>c. starting and warming up of heavy vehicles, which car</li> </ul> |
| PO54   | commence at 7.00am. AO54.1  |

|                | Performance Outcomes   | Acceptable Outcomes   |
|----------------|--|---|
| Hon<br>a.      | ne based business <sup>(35)</sup> does not result in:<br>an adverse visual, odour, particle drift or noise   | The use does not involve heavy vehicle servicing or major repairs, including spray painting or panel.   |
| a.             | nuisance impact on the residents in adjoining or<br>nearby dwellings;  | AO54.2  |
| b.             | an adverse impact upon the low intensity and open area character and amenity anticipated in the locality;  | Home based business(s) <sup>(35)</sup> do not comprise an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection Regulation 2008.</i>                            |
| C.             | the establishment of vehicle servicing or major<br>repairs, spray painting, panel beating or any<br>environmentally relevant activity (ERA).             | AO54.3<br>Home based business(s) <sup>(35)</sup> do not generate noise that is<br>audible from the boundary of the site.  |
| POS            | 55   | A055.1  |
| activ          | site display and sales of goods is limited to the<br>vities being undertaken from the site and does not<br>ult in:                                       | Only goods grown, produced or manufactured on-site are sold from the site.  |
| a.             | the display and sale of goods being viewed from outside of the site;   | AO55.2<br>Display of goods grown, produced or manufactured on-site  |
| b.             | overall development on the site having a predominantly commercial appearance.  | are contained within a dwelling or on-site structure and the<br>display of goods is not visible from the boundary of the site   |
| <b>D</b> O     |  |   |
| PO5            |  | A056  |
|                | and breakfast and farmstays are of a size and e that:  | For bed and breakfast and farmstays-  |
| a.             | are consistent with the low intensity, open area character and amenity of the rural residential  | a. Short-term accommodation <sup>(77)</sup> is provided in the Dwelling house <sup>(22)</sup> of the accommodation operator.  |
| b.             | area;<br>ensures acceptable levels of privacy and amenity  | <ul> <li>maximum 4 bedrooms are provided for a maximum o<br/>10 guests.</li> </ul>  |
| D.             | for the residents in adjoining or nearby dwellings.  | c. meals are served to paying guests only   |
|                |  | d. rooms do not contain food preparation facilities.  |
| Maj            | or electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> a   | nd Utility installation <sup>(86)</sup>   |
| PO             | 57   | AO57.1  |
|                | development does not have an adverse impact<br>he visual amenity of a locality and is:   | Development is designed to minimise surrounding land use<br>conflicts by ensuring infrastructure, buildings, structures and<br>other equipment:   |
| a.<br>b.<br>c. | high quality design and construction;<br>visually integrated with the surrounding area;<br>not visually dominant or intrusive;                           | <ul> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding</li> </ul> |
| d.<br>e.       | located behind the main building line;<br>below the level of the predominant tree canopy<br>or the level of the surrounding buildings and<br>structures; | <ul> <li>d. have horizontal and vertical articulation applied to al exterior walls.</li> </ul>  |

| Performance Outcomes  | Acceptable Outcomes  |
|---|--|
| <ul> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>  | AO57.2<br>A minimum 3m wide strip of dense planting is provided<br>around the outside of the fenced area, between the<br>development and street frontage, side and rear boundaries.  |
| <b>PO58</b><br>Infrastructure does not have an impact on pedestrian health and safety.  | <ul> <li>AO58</li> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> </ul>   |
| PO59  | <ul> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul>  |
| <ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul> | All equipment which produces audible or non-audible sound<br>is housed within a fully enclosed building incorporating<br>sound control measures sufficient to ensure noise emissions<br>meet the objectives as set out in the Environmental<br>Protection (Noise) Policy 2008. |
| Outdoor sport and recreation <sup>(55)</sup>  |  |
| PO60<br>Development will:<br>a. maintain the open and unbuilt character of a  | AO60.1<br>Site cover of all buildings and structures does not exceed 10%.  |
| <ul> <li>site, uncluttered by building and maintaining the availability of a site for unobstructed outdoor recreational use;</li> <li>ensure that buildings and structures are not overbearing, visually dominant or out of character with the surrounding built environment</li> </ul>   | AO60.2<br>All buildings and structures are setback a minimum of 10m<br>from all property boundaries.   |
| <ul> <li>nor detract from the amenity of adjoining land;</li> <li>ensure buildings and structures do not result in overlooking of private areas when adjoining residential areas, or block or impinge upon the receipt of natural sunlight and outlook;</li> </ul>  | AO60.3<br>The maximum height of all buildings and structures is 8.5m.<br>AO60.4  |
| <ul> <li>be designed in accordance with the principles<br/>of Crime Prevention Through Environment<br/>Design (CPTED) to achieve a high level of<br/>safety, surveillance and security;</li> </ul>  | Outdoor storage areas are screened from adjoining sites<br>and roads by either planting, wall(s), fence(s) or a<br>combination thereof at least 1.8m in height along the length<br>of the storage area.  |

| <ul> <li>a. only comprises native species endemic to the area;</li> <li>b. is sufficiently set back from property boundaries to avoid adverse impacts on adjoining properties such as shading, fire risk, health and safety.</li> <li>Roadside stall <sup>(68)</sup></li> <li>PO63         <ul> <li>A Roadside stall <sup>(68)</sup>:</li> <li>a. comprises only one Roadside stall <sup>(68)</sup> per property;</li> <li>b. only offers goods grown, produced or manufactured on the site;</li> <li>c. the maximum area associated with a Roadside stall <sup>(68)</sup></li> </ul> </li> </ul>   | Performance Outcomes   | Acceptable Outcomes   |
|---|--|---|
| <ul> <li>through: Intervention of meaningful recesses and projections through the horizontal and vertical plane;</li> <li>ii. use of a variety of building materials and colours;</li> <li>iii. use of landscaping and screening.</li> <li>achieves the design principles outlined in Planning scheme policy - Integrated Design.</li> <li>PO61</li> <li>Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy - Waste.</li> <li>Poff2</li> <li>Poff2</li> <li>Planting for Permanent plantation<sup>(59)</sup> purposes;</li> <li>only comprises native species endemic to the area;</li> <li>only comprises only one Roadside stall<sup>(69)</sup> per property;</li> <li>only offers goods grown, produced or manufactured on the site;</li> <li>on yo offers goods grown, produced or manufactured on the site;</li> <li>is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining any larger separate items displayed for a does not exceed 20m<sup>-</sup>.</li> </ul> | to size and function of buildings, that acknowledge and reflect the region's sub-tropical  |   |
| Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.       A         Permanent plantation <sup>(59)</sup> AO62         Planting for Permanent plantation <sup>(59)</sup> purposes:       a. only comprises native species endemic to the area:         b. is sufficiently set back from property boundaries to avoid adverse impacts on adjoining properties such as shading, fire risk, health and safety.       Planting only comprises native species endemic to the area:         PO63       AO63         A Roadside stall <sup>(68)</sup> :       a. comprises only one Roadside stall <sup>(68)</sup> per property;         b. only offers goods grown, produced or manufactured on the site;       a. no more than one Roadside stall <sup>(68)</sup> per property;         b. only offers goods grown, produced or manufactured on the site;       a. no more than one Roadside stall <sup>(68)</sup> per property;         b. only offers goods grown, produced or manufactured on the site;       c. the maximum area associated with a Roadside stall <sup>(68)</sup> nor an adocine and averse impact on the amenity, for residents on adjoining and  | <ul> <li>through:</li> <li>i. design measures such as the provision of meaningful recesses and projections through the horizontal and vertical plane;</li> <li>ii. use of a variety of building materials and colours;</li> <li>iii. use of landscaping and screening.</li> <li>g. achieves the design principles outlined in Planning scheme policy - Integrated Design.</li> </ul> | No accentable outcome provided  |
| PO62       A062         Planting for Permanent plantation <sup>(59)</sup> purposes:       a. only comprises native species endemic to the area;         b. is sufficiently set back from property boundaries to avoid adverse impacts on adjoining properties such as shading, fire risk, health and safety.       Planting only comprises native species endemic to the area;         b. is sufficiently set back from property boundaries to avoid adverse impacts on adjoining properties such as shading, fire risk, health and safety.       Planting only comprises native species endemic to the area;         PO63       A063         A Roadside stall <sup>(68)</sup> :       a. comprises only one Roadside stall <sup>(68)</sup> per property;         b. only offers goods grown, produced or manufactured on the site;       a. no more than one Roadside stall <sup>(68)</sup> ; ea no more than one Roadside stall <sup>(68)</sup> per property;         b. only offers goods grown, produced or manufactured on the site;       c. is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the armenity, for residents on adjoining and       c. the maximum area associated with a Roadside stall <sup>(68)</sup>   | Bins and bin storage areas are provided, designed<br>and managed in accordance with Planning scheme<br>policy – Waste.   | No acceptable outcome provided.   |
| Planting for Permanent plantation <sup>(69)</sup> purposes:       Planting only comprises native species endemic to the area;         a.       only comprises native species endemic to the area;         b.       is sufficiently set back from property boundaries to avoid adverse impacts on adjoining properties such as shading, fire risk, health and safety. <b>Roadside stall</b> <sup>(68)</sup> <b>AO63 AO63</b> A Roadside stall <sup>(68)</sup> :         a.       comprises only one Roadside stall <sup>(68)</sup> per property;         b.       only offers goods grown, produced or manufactured on the site;         c.       is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and       Pole and the amenity, for residents on adjoining and  | Permanent plantation <sup>(59)</sup>   | 5   |
| <ul> <li>PO63 <ul> <li>A Roadside stall<sup>(68)</sup>:</li> <li>a. comprises only one Roadside stall<sup>(68)</sup> per property;</li> <li>b. only offers goods grown, produced or manufactured on the site;</li> <li>c. is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and</li> <li>AO63</li> <li>For a roadside stall<sup>(68)</sup>:</li> <li>a. no more than one Roadside stall<sup>(68)</sup> per property;</li> <li>b. goods offered for sale are only goods grown, produce or manufactured on the site;</li> <li>c. is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and</li> </ul> </li> </ul>   | <ul> <li>Planting for Permanent plantation<sup>(59)</sup> purposes:</li> <li>a. only comprises native species endemic to the area;</li> <li>b. is sufficiently set back from property boundaries to avoid adverse impacts on adjoining properties such as shading, fire risk, health and safety.</li> </ul>  | AO62<br>Planting only comprises native species endemic to the area.   |
| <ul> <li>A Roadside stall<sup>(68)</sup>:</li> <li>a. comprises only one Roadside stall<sup>(68)</sup> per property;</li> <li>b. only offers goods grown, produced or manufactured on the site;</li> <li>c. is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and</li> <li>For a roadside stall<sup>(68)</sup>:</li> <li>a. no more than one Roadside stall<sup>(68)</sup> per property;</li> <li>b. goods offered for sale are only goods grown, produce or manufactured on the site;</li> <li>c. is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and</li> </ul>   | Roadside stall <sup>(68)</sup>   |   |
| <ul> <li>property;</li> <li>only offers goods grown, produced or manufactured on the site;</li> <li>is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and</li> <li>goods offered for sale are only goods grown, produce or manufactured on the site;</li> <li>the maximum area associated with a Roadside stall<sup>(1)</sup></li> <li>the maximum area associated with a Roadside stall<sup>(1)</sup></li> </ul>  |  |   |
|   | <ul> <li>property;</li> <li>b. only offers goods grown, produced or<br/>manufactured on the site;</li> <li>c. is of a size and in a location that will not result<br/>in nuisance, or have a significant adverse impact<br/>on the amenity, for residents on adjoining and</li> </ul>  | <ul> <li>b. goods offered for sale are only goods grown, produced or manufactured on the site;</li> <li>c. the maximum area associated with a Roadside stall<sup>(68)</sup>, including any larger separate items displayed for sale,</li> </ul> |

# 7 Local plans

|      | Performance Outcomes  | Acceptable Outcomes   |
|------|---|---|
| PO6  | 4   | AO64  |
| A Ro | badside stall <sup>(68)</sup> is designed and located to:   | Roadside stall <sup>(68)</sup> :  |
| a.   | ensure safe and accessible access, egress and on-site parking;  | <ul> <li>obtains vehicle access from a road classified as a<br/>major street (refer Figure 7.2.3.2 - Movement, major<br/>streets);</li> </ul> |
| b.   | ensure safe and efficient functioning of roads.   | b. provide car parking for 2 vehicles off the road carriage and located on the property;  |
|      |   | c. is located no closer than 100m from an intersection.   |
| Rura | al industry <sup>(70)</sup>   |   |
| PO6  | 5   | No acceptable outcome provided  |
| Rura | al industry <sup>(70)</sup> :   |   |
| a.   | adopt construction materials and use of colour<br>for buildings and structures are visually<br>compatible with the rural residential character<br>and amenity;  |   |
| b.   | is of a size, scale and design that is not visually<br>dominant, overbearing and inconsistent with the<br>low intensity built form and open area character<br>and amenity of the rural residential environment. | Scher   |
| Rura | al workers' accommodation <sup>(71)</sup>   |   |
| PO66 |   | AO66  |
| Rura | al workers' accommodation <sup>(71)</sup> :   | Rural workers' accommodation <sup>(71)</sup> :  |
| a.   | provide quarters only for staff employed to work the land for rural purposes;   | <ul> <li>a. no more than 1 Rural workers' accommodation<sup>(71)</sup> per lot;</li> </ul>  |
| b.   | is of a size, scale and design not visually<br>dominant, overbearing and inconsistent with<br>detached, low density, open area character and  | <ul> <li>b. Rural workers' accommodation<sup>(71)</sup> are contained within 1 structure;</li> </ul>  |
|      | low intensity built form anticipated in the Rural living precinct;  | c. no more than 12 rural workers are accommodated;  |
| C.   | is screened and landscaped in a manner so it is<br>not visible from a road;   | <ul> <li>obtains access from the existing driveway giving access to the Dwelling house<sup>(22)</sup>;</li> </ul>                             |
| d.   | does not result in adverse visual or noise  | e. are located within 20m of the Dwelling house <sup>(22)</sup> .   |
|      | nuisance on the residents in adjoining or nearby dwellings.   |   |
| Sale | s office <sup>(72)</sup>  |   |
| PO6  | 7   | A067  |
|      |   |   |

| Performance Outcomes  | Acceptable Outcomes  |  |
|---|--|--|
| Sales office <sup>(72)</sup> remain temporary in duration and retain<br>a physical connection to land or building being<br>displayed or sold.   |  |  |
| Short-term accommodation <sup>(77)</sup>  |  |  |
| PO68  | No acceptable outcome provided.  |  |
| Development associated Short-term accommodation <sup>(77)</sup> :   |  |  |
| a. is not, or does not act, as a permanent place of residence for persons where a typical period of time does not exceed 3 consecutive months;  |  |  |
| <ul> <li>b. is of a size, scale, intensity and design that<br/>minimises the potential for adverse noise, visual,<br/>privacy and traffic impacts on adjoining or nearby<br/>residents;</li> </ul>  | C Jersi  |  |
| c. is of a size, scale, intensity and design that is consistent with the low intensity, low -set built form and open area character and amenity anticipated for the Rural living precinct;  |  |  |
| d. provides suitable open space, buildings and facilities that meet the recreational, social and amenity needs of people staying on-site;   | Sche   |  |
| e. provides landscape buffer along adjoining property boundaries to fully screen activities occurring on the site.  | 5  |  |
| <b>Telecommunications facility</b> <sup>(81)</sup><br>Editor's note - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner that will not cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz to 300Ghz. |  |  |
| PO69  | AO69.1   |  |
| Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area.  | New telecommunication facilities <sup>(81)</sup> are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures. |  |
|   | AO69.2   |  |
|   | If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.   |  |
| PO70  | A070   |  |

| Performance Outcomes  | Acceptable Outcomes  |
|---|--|
| A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.  | A minimum of 45m <sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.   |
| <b>PO71</b><br>Telecommunications facilities <sup>(81)</sup> do not conflict with lawful existing land uses both on and adjoining the site.   | A071<br>The development results in no net reduction in the minimum<br>quantity and standard of landscaping, private or communal<br>open space or car parking spaces required under the<br>planning scheme or under an existing development approval.   |
| <ul> <li>PO72</li> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is: <ul> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> <li>c. not visually dominant or intrusive;</li> </ul> </li> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or the level of the surrounding buildings and structures;</li> <li>f. camouflaged through the use of colours and materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul> | AO72.1<br>Where in an urban area, the development does not protrude<br>more than 5m above the level of the existing treeline,<br>prominent ridgeline or building rooftops in the surrounding<br>townscape.<br>AO72.2<br>In all other areas towers do not exceed 35m in height.<br>AO72.3<br>Towers, equipment shelters and associated structures are<br>of a design, colour and material to:<br>a. reduce recognition in the landscape;<br>b. reduce glare and reflectivity.<br>AO72.4<br>All structures and buildings are setback behind the main<br>building line and a minimum of 10m from side and rear<br>boundaries, except where in the Industry and Extractive<br>industry zones, the minimum side and rear setback is 3m.<br>Where there is no established building line the facility is<br>located at the rear of the site.<br>AO72.5<br>The facility is enclosed by security fencing or by other means<br>to ensure public access is prohibited.<br>AO72.6<br>A minimum 3m wide strip of dense planting is provided<br>around the perimeter of the fenced area, between the facility<br>and street frontage and adjoining uses.<br>Note - Landscaping is provided in accordance with Planning scheme<br>policy - Integrated design. |

| Performance Outcomes   | Acceptable Outcomes   |  |
|--|---|--|
|  | Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.  |  |
| PO73   | A073  |  |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hou vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context   |  |
| P074   | A074  |  |
| All activities associated with the development occur<br>within an environment incorporating sufficient controls<br>to ensure the facility generates no audible sound at<br>the site boundaries where in a residential setting.       | All equipment comprising the Telecommunications facility <sup>(81</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary. |  |
| Wholesale nursery <sup>(89)</sup>  |   |  |
| PO75   | No acceptable outcome identified  |  |
| Buildings and activities associated with a Wholesale nursery <sup>(89)</sup> :   |   |  |
| a. ensures the propagation of plants, whether or not in the open, occur without loss of amenity to adjacent properties;  | SCI   |  |
| b. do not result in any form of environmental degradation, including, but not limited to, soil degradation, pollution of natural water courses and introduction of exotic plant species into the natural on-site or adjoining flora; |   |  |
| c. are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;  |   |  |
| d. have vehicle access from a road classified as a major street (refer Figure 7.2.3.2 - Movement, major streets).  |   |  |
| Veterinary services <sup>(87)</sup>  |   |  |
| PO76   | No acceptable outcome identified  |  |
| Buildings and activities associated with Veterinary services <sup>(87)</sup> :   |   |  |
| <ul> <li>are for veterinary care, surgery and treatment<br/>of animals only; and</li> </ul>  |   |  |

### 7 Local plans

|   | Performance Outcomes Acceptable Outcomes  |   |  |
|---|---|---|--|
|   |   |   |  |
| b.  | are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;  |   |  |
| C.  | have vehicle access from a road classified as a major street (refer Figure 7.2.3.2 - Movement, major streets).  |   |  |
| Win   | ery <sup>(90)</sup>   |   |  |
| PO7   | 77  | No acceptable outcome identified  |  |
| Buil<br>a.  | dings and activities associated with Winery <sup>(90)</sup> :<br>are for a Winery <sup>(90)</sup> and ancillary activities only.<br>Uses not affiliated with Winery <sup>(90)</sup> activities, or<br>the sale of products produced or manufactured<br>on-site, are avoided;  | ersion .  |  |
| b.  | are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;  |   |  |
| C.  | have vehicle access from a road classified as a major street (refer Figure 7.2.3.2 - Movement, major streets).  | ner   |  |
|   | Values and c  | constraints criteria  |  |
| Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for<br>Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a<br>development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this<br>planning scheme.<br>Acid sulfate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria<br>apply)<br>Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan<br>is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in |   |   |  |
| Planning scheme policy - Acid sulfate soils.  |   |   |  |
| PO7   | 78  | A078  |  |
| Whe   | elopment avoids disturbing acid sulfate soils.<br>ere development disturbs acid sulfate soils,<br>elopment:   | <ul> <li>Development does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian</li> </ul>                         |  |
| a.<br>b.<br>c.  | is managed to avoid or minimise the release of<br>surface or groundwater flows containing acid<br>and metal contaminants into the environment;<br>protects the environmental and ecological values<br>and health of receiving waters;<br>protects buildings and infrastructure from the<br>effects of acid sulfate soils. | <ul> <li>Height datum AHD; or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.</li> </ul> |  |

| Performance Outcomes  | Acceptable Outcomes   |  |
|---|---|--|
| Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)   |   |  |
| Note - To demonstrate achievement of the performance outcome<br>Guidance for the preparation of a bushfire management plan is p   | s, a bushfire management plan is prepared by a suitably qualified person.<br>rovided in Planning scheme policy – Bushfire prone areas.  |  |
| P079  | A079  |  |
| Development:  | Buildings and structures have contained within the site:  |  |
| <ul> <li>a. minimises the number of buildings and people working and living on a site exposed to bushfire risk;</li> <li>b. ensures the protection of life during the passage of a fire front;</li> <li>c. is located and designed to increase the chance of survival of buildings and structures during a bushfire;</li> <li>d. minimises bushfire risk from build up of fuels around buildings and structures.</li> </ul> | <ul> <li>a. a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;</li> <li>b. A separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;</li> <li>c. A separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures;</li> <li>d. An area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and</li> <li>e. An access path suitable for use by a standard fire fighting applicant having a formed width of at least 4m, a cross-fall of no greater than 25%: <ul> <li>i. To, and around, each building and other roofed structure; and</li> <li>ii. To each fire fighting water supply extraction point.</li> </ul> </li> </ul> |  |
| PO80  | AO80  |  |
| Development and associated driveways and access   | A length of driveway:   |  |
| <ul><li>a. avoid potential for entrapment during a bushfire;</li></ul>  | a. to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road;  |  |

| Performance Outcomes   | Acceptable Outcomes   |
|--|---|
| <ul> <li>b. ensure safe and effective access for emergency services during a bushfire;</li> <li>c. enable safe evacuation for occupants of a site during a bushfire.</li> </ul>  | <ul> <li>b. has a maximum gradient no greater than 12.5%;</li> <li>c. have a minimum width of 3.5m;</li> <li>d. accommodate turning areas for fire fighting appliances<br/>in accordance with Qld Fire and Emergency Services'<br/>Fire Hydrant and Vehicle Access Guideline.</li> </ul>  |
| PO81   | A081  |
| Development provides an adequate water supply for fire-fighting purposes.  | <ul> <li>a. A reticulated water supply is provided by a distributer retailer for the area or, where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10,000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m of buildings and structures.</li> <li>b. Where not connected to a reticulated water supply or a pressure and flow stated above is not available, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is located within 10m of buildings and structures.</li> <li>c. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access is provided to within 3m of that water storage source.</li> <li>d. Where a tank is the nominated on-site fire fighting water storage source, it includes:</li> <li>i. a hardstand area allowing medium rigid vehicles (15 tonne fire appliance) access within 6m of the tank;</li> <li>ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.</li> </ul> |
| P082   | AO82  |
| <ul> <li>Development:</li> <li>a. does not present unacceptable risk to people or<br/>environment due to the impact of bushfire on<br/>dangerous goods or combustible liquids;</li> <li>b. does not present danger or difficulty to<br/>emergency services for emergency response or<br/>evacuation.</li> <li>Editor's note - Unacceptable risk is defined as a situation where</li> </ul> | Development does not involve the manufacture or storage<br>of hazardous chemicals.  |
| people or property are exposed to a predictable hazard event<br>that may result in serious injury, loss of life, failure of community<br>infrastructure, or property damage.<br>Heritage and landscape character (refer Overlay m<br>the following assessment criteria apply)  | ap - Heritage and landscape character to determine if<br>ance outcomes, a Cultural heritage impact assessment report is prepared<br>is in accordance with The Australia ICOMOS Burra Charter  |

| Performance Outcomes   | Acceptable Outcomes   |  |
|--|---|--|
| Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.   |   |  |
| Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage an<br>landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural<br>heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning<br>scheme policy - Heritage and landscape character. |   |  |
| PO83   | A083  |  |
| Development will:  | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural   |  |
| <ul> <li>not diminish or cause irreversible damage to the<br/>cultural heritage values present on the site, and<br/>associated with a heritage site, object or building;</li> </ul>  | heritage value.<br>Note - A cultural heritage conservation management plan for the  |  |
| b. protect the fabric and setting of the heritage site, object or building;  | preservation, maintenance, repair and restoration of a site, object or<br>building of cultural heritage value is prepared in accordance with<br>Planning scheme policy - Heritage and landscape character. The plan |  |
| <ul> <li>be consistent with the form, scale and style of<br/>the heritage site, object or building;</li> <li>utilise similar materials to those existing, or</li> </ul>  | is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.   |  |
| where this is not reasonable or practicable,<br>neutral materials and finishes;  | C   |  |
| e. incorporate complementary elements, detailing<br>and ornamentation to those present on the<br>beritage site, object or building:  | CC  |  |
| <ul> <li>heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul>  |   |  |
| PO84   | No acceptable outcome provided.   |  |
| Demolition and removal is only considered where:   |   |  |
| a. a report prepared by a suitably qualified conservation architect or conservation engineer   |   |  |
| demonstrates that the building is structurally unsound and is not reasonably capable of  |   |  |
| <ul><li>economic repair; or</li><li>demolition is confined to the removal of</li></ul>   |   |  |
| outbuildings, extensions and alterations that are<br>not part of the original structure; or<br>c. limited demolition is performed in the course of   |   |  |
| <ul> <li>repairs, maintenance or restoration; or</li> <li>demolition is performed following a catastrophic<br/>event which substantially destroys the building<br/>or object.</li> </ul>   |   |  |
| PO85   | No acceptable outcome provided.   |  |
| Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.  |   |  |

apply)

| Performance Outcomes   | Acceptable Outcomes   |  |  |
|--|---|--|--|
| Infrastructure buffer areas (refer Overlay map – Infrastructure buffers to determine if the following assessment criteria apply)   |   |  |  |
| PO86   | AO86  |  |  |
| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> </ul>  | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer.  |  |  |
| <ul> <li>PO87</li> <li>Habitable rooms within an Electricity supply substation buffer are located a sufficient distance from substations<sup>(80)</sup> to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields.</li> <li>Note - Habitable room is defined in the Building Code of Australia (Volume 1)</li> <li>PO88</li> <li>Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation<sup>(80)</sup> to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment.</li> <li>Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy – Noise.</li> <li>Note - Habitable room is defined in the Building Code of Australia (Volume 1)</li> </ul> | AO87<br>Habitable rooms:<br>a. are not located within an Electricity supply substation<br>buffer; and<br>b. proposed on a site subject to an Electricity supply<br>supply substation <sup>(80)</sup> are acoustically insulted to<br>achieve the noise levels listed in Schedule 1, Acoustic<br>Quality Objectives, Environmental Protection (Noise)<br>Policy 2008.<br>Note - Habitable room is defined in the Building Code of Australia<br>(Volume 1)<br>No acceptable outcome provided. |  |  |

Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.

| Performance Outcomes  | Acceptable Outcomes  |
|---|--|
| PO89  | No acceptable outcome provided.  |
| Development:  |  |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>  |  |
| PO90  | AO90   |
| Development:  | No acceptable outcome provided.  |
| <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> </ul>  | Jersion  |
| Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts<br>on an upstream, downstream or surrounding premises.  | cheme  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.   | S  |
| P091  | No acceptable outcome provided.  |
| <ul> <li>Development does not:</li> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> </ul> |  |
| PO92  | AO92   |
| Development ensures that public safety and the risk<br>to the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.  | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994 and<br>the relevant building assessment provisions under the Building Act 1975<br>for requirements related to the manufacture and storage of hazardous<br>substances. |

| Performance Outcomes   | Acceptable Outcomes  |
|--|--|
| PO93   | AO93   |
| Development which is not in a Rural zone ensures<br>that overland flow is not conveyed from a road or<br>public open space onto a private lot.   | Development which is not in a Rural zone that an overland<br>flow paths and drainage infrastructure is provided to convey<br>overland flow from a road or public open space area away<br>from a private lot.   |
| PO94   | A094.1   |
| <ul> <li>Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow such that an easement for drainage purposes is provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> <li>b. an overland flow path where it crosses more than one premises;</li> <li>c. inter-allotment drainage infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul> | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>AO94.2<br>Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up to<br>and including the 1% AEP for the fully developed upstream<br>catchment.<br>No acceptable outcome provided. |
| Additional criteria for development for a Park <sup>(57)</sup>   |  |
| PO96   | AO96   |
| Development for a Park <sup>(57)</sup> ensures that the design<br>and layout responds to the nature of the overland flow<br>affecting the premises such that:  | Development for a Park <sup>(57)</sup> ensures works are provided in accordance with the requirements set out in Appendix B o the Planning scheme policy - Integrated design.  |

a. public benefit and enjoyment is maximised;

|    | Performance Outcomes   | Acceptable Outcomes |
|----|--|---------------------|
| b. | impacts on the asset life and integrity of park structures is minimised; |                     |
| C. | maintenance and replacement costs are minimised.                         |                     |
|    |  | scheme lersion      |

#### 7.2.3.6 Interim uses code

#### 7.2.3.6.1 Application - Interim uses

- 1. This code applies to assessing development in the Caboolture West local plan area; Town Centre precinct, Urban living precinct and Enterprise and employment precinct, if:
  - a. self-assessable or assessable development where this code is an applicable code identified in the assessment criteria column of a table of assessment (Part 5);
  - b. impact assessable development (Part 5).
- 2. For development made self-assessable or assessable for this code in Part 5:
  - a. Part A of the code applies only to self-assessable development;
  - b. Part B of the code applies only to assessable development.

#### 7.2.3.6.2 Purpose - Interim uses

- 1. The purpose of the Interim uses code will be achieved through the following overall outcomes:
  - a. Development is to maintain a semi-rural character until such time as infrastructure is delivered and relevant site specific constraints are resolved.
  - b. Development will consist of interim uses on large lots.
  - c. Interim uses are appropriate where they:
    - i. would be compatible with the existing semi-rural character;
    - ii. would not prejudice or delay the development of the site and adjoining areas for urban purposes;
    - iii. are low intensity in nature and characterised by low investment in buildings and infrastructure relative to the value of the site.
  - d. Residential activities consist of detached Dwelling houses<sup>(22)</sup> or Caretaker's accommodation<sup>(10)</sup>, predominantly on large lots.
  - e. The character and scale of Dwelling houses<sup>(22)</sup> are compatible with the intended character for the area.
  - f. Secondary dwellings associated with a principal dwelling, remain subordinate and ancillary to the principal dwelling to retain the low density, low intensity, residential form of a Dwelling house<sup>(22)</sup>.
  - g. Garages, car ports and domestic outbuildings remain subordinate and ancillary to the principal dwelling and are located and designed to reduce amenity impacts on the streetscape and adjoining properties.
  - h. Dwelling houses<sup>(22)</sup> are designed to add visual interest and contribute to an attractive streetscape and public realm.
  - i. Dwelling houses<sup>(22)</sup> are provided with infrastructure and services at a level suitable for the area.
  - j. Dwelling houses<sup>(22)</sup> are responsive to the lot shape, dimensions and topographic features.
  - k. Non-residential uses do not result in adverse or nuisance impacts on adjoining properties or the wider environment. Any adverse or nuisance impacts are contained and internalised to the site through location, design, operation and on-site management practices.
  - I. General works associated with the development achieves the following:

- i. a high standard of electricity, telecommunications, roads, sewerage, water supply and street lighting services are provided to new development to meet the current and future needs of users of the site;
- ii. the development manages stormwater to:
  - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
  - B. prevent stormwater contamination and the release of pollutants;
  - C. maintain or improve the structure and condition of drainage lines and riparian areas;
  - D. avoid off-site adverse impacts from stormwater.
- iii. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- m. Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.
- n. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.
- o. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- p. Development ensures the safety, efficiency and useability of the street network, access ways and parking areas.
- q. Development does not result in unacceptable impacts on the capacity and safety of the external road network.
- r. Development constraints:
  - i. Development responds to overlay mapping with regards to Acid sulphate soils, Bushfire hazard, Infrastructure buffers (High voltage lines, bulk water supply), Overland flow path, and Heritage and landscape by:
    - A. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint to minimise the potential risk to people, property and the environment;
    - B. providing appropriate separation distances, buffers and mitigation measures along the high voltage transmission line and bulk water supply infrastructure as well as promoting the ongoing viability, operation, maintenance and safety of infrastructure;
    - C. protecting historic and cultural values of significant places and buildings of heritage and cultural significance;
    - D. ensuring effective and efficient disaster management response and recovery capabilities;
    - E. for overland flow path;
      - development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
      - II. development is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - III. development does not impact on the conveyance of overland flow up to and including the overland flow defined flood event;
      - IV. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- s. Interim development may involve one or more of the following:

| • | Animal husbandry <sup>(4)</sup> | •   | Dwelling house <sup>(22)</sup> | • | Roadside stall <sup>(68)</sup> |  |
|---|---------------------------------|-----|--------------------------------|---|--------------------------------|--|
|   |                                 | í i |                                |   |                                |  |

| Animal keeping <sup>(5)</sup> (ovaluding pattering and                                  | <ul> <li>Emergency services<sup>(25)</sup></li> </ul>                       | <ul> <li>Rural industry<sup>(70)</sup></li> </ul>                   |  |  |  |
|---|---|---|--|--|--|
| (excluding catteries and kennels)   | <ul> <li>Environment facility<sup>(26)</sup></li> </ul>                     | <ul> <li>Rural workers'<br/>accommodation<sup>(71)</sup></li> </ul> |  |  |  |
| <ul> <li>Aquaculture<sup>(6)</sup> (if water area associated with ponds and</li> </ul>  | <ul> <li>Home based business<sup>(35)</sup></li> </ul>                      | <ul> <li>Sales office<sup>(72)</sup></li> </ul>                     |  |  |  |
| dams are less than 200m <sup>2</sup><br>or housed tanks less than                       | <ul> <li>Intensive horticulture<sup>(40)</sup></li> </ul>                   | <ul> <li>Veterinary services<sup>(87)</sup></li> </ul>              |  |  |  |
| 50m <sup>2</sup> )  | <ul> <li>Non-resident workforce<br/>accommodation<sup>(52)</sup></li> </ul> | <ul> <li>Wholesale nursery<sup>(89)</sup></li> </ul>                |  |  |  |
| <ul> <li>Community residence<sup>(16)</sup></li> </ul>                                  | • Outdoor sport and   | • Winery <sup>(90)</sup>  |  |  |  |
| <ul> <li>Cropping<sup>(19)</sup>, where not<br/>forestry for wood production</li> </ul> | recreation <sup>(55)</sup> (if located on<br>Council owned or controlled    |   |  |  |  |
|   | land and in accordance with<br>a Council approved Master                    |   |  |  |  |
|   | Plan or Land Management<br>Plan)  | S   |  |  |  |
| Interim development does not involve one or more of the following:                      |   |   |  |  |  |

Interim development does not involve one or more of the following: t.

|   |          |  |   |   | _ |  |
|---|----------|--|---|---|---|--|
|   | •        | Adult store <sup>(1)</sup>                 | • | High impact industry <sup>(34)</sup>                | ~ | Port services <sup>(61)</sup>                    |
|   | •        | Agricultural supplies store <sup>(2)</sup> | • | Hospital <sup>(36)</sup>                            | • | Relocatable home park <sup>(62)</sup>            |
|   | •        | Bar <sup>(7)</sup>                         | • | Hotel <sup>(37)</sup>                               | • | Renewable energy<br>facility <sup>(63)</sup>     |
|   | •        | Brothel <sup>(8)</sup><br>Caretaker's      | • | Indoor sport and recreation <sup>(38)</sup>         | • | Research and technology industry <sup>(64)</sup> |
|   |          | accommodation <sup>(10)</sup>              | • | Intensive animal industry <sup>(39)</sup>           |   | Residential care facility <sup>(65)</sup>        |
|   | •        | Car wash <sup>(11)</sup>                   | • | Landing <sup>(41)</sup>                             | • |  |
|   |          | Child care centre <sup>(13)</sup>          |   | Low impact industry <sup>(42)</sup>                 | • | Resort complex <sup>(66)</sup>                   |
|   |          | Club <sup>(14)</sup>                       |   | Major sport, recreation and                         | • | Retirement facility <sup>(67)</sup>              |
|   |          | Community care centre <sup>(15)</sup>      |   | entertainment facility <sup>(44)</sup>              | • | Rooming<br>accommodation <sup>(69)</sup>         |
|   | •        | Crematorium <sup>(18)</sup>                | • | Marine industry <sup>(45)</sup>                     | • | Service industry <sup>(73)</sup>                 |
|   | •        | Detention facility <sup>(20)</sup>         | • | Medium impact industry <sup>(47)</sup>              | • | Service station <sup>(74)</sup>                  |
|   | •        | Dual occupancy <sup>(21)</sup>             | • | Motor sport facility <sup>(48)</sup>                | • | Shop <sup>(75)</sup>                             |
|   | $\cdot $ | Dwelling unit <sup>(23)</sup>              | • | Multiple dwelling <sup>(49)</sup>                   | • | Shopping centre <sup>(76)</sup>                  |
|   | ~        | Educational (24)                           | • | Nature-based tourism <sup>(50)</sup>                | • | Showroom <sup>(78)</sup>                         |
|   |          | establishment <sup>(24)</sup>              | • | Nightclub entertainment<br>facility <sup>(51)</sup> | • | Special industry <sup>(79)</sup>                 |
|   | •        | Food and drink outlet <sup>(28)</sup>      |   | Office <sup>(53)</sup>                              | • | Theatre <sup>(82)</sup>                          |
|   | •        | Function facility <sup>(29)</sup>          | • | Onice   |   |  |
| l |          |  |   |   |   |  |

| • | Funeral parlour <sup>(30)</sup>                | • | Outdoor sales <sup>(54)</sup>   | • | Tourist attraction <sup>(83)</sup> |
|---|--|---|---------------------------------|---|------------------------------------|
| • | Garden centre <sup>(31)</sup>                  | • | Parking station <sup>(58)</sup> | • | Tourist park <sup>(84)</sup>       |
| • | Hardware and trade<br>supplies <sup>(32)</sup> |   |                                 | • | Warehouse <sup>(88)</sup>          |
| • | Health care services <sup>(33)</sup>           |   |                                 |   | $\mathbf{}$                        |

u. Development not listed in the tables above may be considered on its merit and where it supports the outcomes of the code.

#### 7.2.3.6.3 Criteria for assessment

To determine if development is self-assessable, development must comply with the self-assessable acceptable outcomes set out in Part A, Table 7.2.3.6.1. Where development does not meet a self-assessable acceptable outcome (SAO) of the relevant criteria Part A Table 7.2.3.6.1, assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a SAO is not met, and is therefore limited to the subject matter of the SAOs that are not complied with. To remove any doubt, for those SAOs that are complied with, there is no need for assessment against the corresponding PO.

| Self-assessable SAO | Corresponding PO |  |
|---------------------|------------------|--|
| SAO1                | PO4              |  |
| SAO2                | P06              |  |
| SAO3                | PO5              |  |
| SAO4                | P07              |  |
| SAO5                | PO8              |  |
| SAO6                | P09              |  |
| SA07                | P010             |  |
| SAO8                | P011-P014        |  |
| SAO9                | P011-P014        |  |
| SAO10               | P015             |  |
| SAO11               | P018             |  |
| SA012               | P019-P024        |  |
| SAO13               | P022             |  |
| SAO14               | P023             |  |
| SAO15               | P028             |  |
| SAO16               | P028             |  |
| SAO17               | PO30             |  |
| SAO18               | P034             |  |
| SAO19               | PO35             |  |
| SAO20               | P037             |  |
| SAO21               | PO39             |  |

| Self-assessable SAO | Corresponding PO |
|---------------------|------------------|
| SAO22               | PO40             |
| SAO23               | PO37             |
| SAO24               | PO41, PO44-PO45  |
| SAO25               | PO41             |
| SAO26               | PO43             |
| SAO27               | PO47             |
| SAO28               | PO47             |
| SAO29               | PO47             |
| SAO30               | PO48             |
| SAO31               | PO49             |
| SAO32               | PO51             |
| SAO33               | PO51             |
| SAO34               | P051             |
| SAO35               | P052             |
| SAO36               | P054             |
| SAO37               | P054             |
| SAO38               | P054             |
| SAO39               | P055             |
| SAO40               | PO54             |
| SAO41               | PO54             |
| SAO42               | P054             |
| SAO43               | P056             |
|                     | P056             |
| SA044               |                  |
| SAO45               | P057             |
| SAO46               | PO57             |
| SAO47               | PO58             |
| SAO48               | PO63             |
| SAO49               | PO63             |
| SAO50               | PO63             |
| SAO51               | PO63             |
| SAO52               | PO63             |
| SAO53               | PO63             |
| SAO54               | PO65             |
| SAO55               | PO67             |
| SAO56               | PO68             |

| Self-assessable SAO | Corresponding PO     |
|---------------------|----------------------|
| SAO57               | PO66, PO69           |
| SAO58               | PO69                 |
| SAO59               | PO69                 |
| SAO60               | PO69                 |
| SAO61               | P071                 |
| SAO62               | P074                 |
| SAO63               | P074                 |
| SAO64               | P075                 |
| SAO65               | PO76                 |
| SAO66               | P077                 |
| SAO67               | P078                 |
| SAO68               | P079                 |
| SAO69               | PO80                 |
| SAO70               | PO80                 |
| SAO71               | P081                 |
| SAO72               | PO81                 |
| SA073               | P082-P084, P086-P088 |
| SA074               | PO82-PO84, PO86-PO88 |
| SAO75               | PO82-PO84            |
| SAO76               | P085                 |
| SA077               | PO89                 |

### Part A — Criteria for self-assessable development - Interim uses

### Table 7.2.3.6.1 Self-assessable development - Interim uses

| Self-assessable acceptable outcomes |   |  |  |  |  |
|-------------------------------------|---|--|--|--|--|
|                                     | General criteria  |  |  |  |  |
| Building h                          | leight  |  |  |  |  |
| SAO1                                | Building height and all structures do not exceed the height identified on Overlay map - Building heights.   |  |  |  |  |
| Setbacks                            |   |  |  |  |  |
| SAO2                                | Buildings and structures associated with the following uses are setback from all lot boundaries as follows: |  |  |  |  |
|                                     | a. Animal husbandry <sup>(4)</sup> (buildings only) - 10m;  |  |  |  |  |
|                                     | b. Cropping <sup>(19)</sup> (buildings only) - 10m;   |  |  |  |  |
|                                     | c. Animal keeping <sup>(5)</sup> , excluding catteries and kennels - 20m;                                   |  |  |  |  |
|                                     |   |  |  |  |  |

| Self-asses    | sable acceptable outcomes   |  |  |  |  |
|---------------|---|--|--|--|--|
|               | d. Cropping <sup>(19)</sup> (buildings only) - 10m;   |  |  |  |  |
|               | e. Intensive horticulture <sup>(40)</sup> - 10m;  |  |  |  |  |
|               | f. Non-resident workforce accommodation <sup>(52)</sup> - 40m;  |  |  |  |  |
|               | g. Rural Industry <sup>(70)</sup> - 20m;  |  |  |  |  |
|               | h. Wholesale nursery <sup>(89)</sup> - 10m;   |  |  |  |  |
|               | i. Winery <sup>(90)</sup> (buildings only) - 10m;   |  |  |  |  |
|               | j. Veterinary services <sup>(87)</sup> - 10m.   |  |  |  |  |
| SAO3          | Unless specified elsewhere in the code, all other buildings and structures are setback:   |  |  |  |  |
|               | a. Road frontage - 6m minimum;  |  |  |  |  |
|               | b. Side and Rear - 4.5m minimum.  |  |  |  |  |
|               | Note - For a Dwelling house <sup>(22)</sup> where located in a bushfire hazard area (see Overlay map - Bushfire hazard) a greater setback may be required. See values and constraints criteria Bushfire hazard.   |  |  |  |  |
|               | Note - This provision doe not apply where a development footprint exists for a lot.   |  |  |  |  |
| Developm      | ent footprint   |  |  |  |  |
| SAO4          | Where a development footprint has been identified as part of a development approval for reconfiguring   |  |  |  |  |
| Building      | a lot, all development occurs within that development footprint.  |  |  |  |  |
| SAO5          | on sloping land         Building and site design on slopes between 10% and 15%:   |  |  |  |  |
| 5405          | a. use split-level, multiple-slab, pier or pole construction;   |  |  |  |  |
|               | <ul> <li>avoid single-plane slabs and benching; and</li> </ul>  |  |  |  |  |
|               | c. ensure the height of any cut or fill, whether retained or not does not exceed 900mm.   |  |  |  |  |
| $\overline{}$ |   |  |  |  |  |
|               | Note - This does not apply to outbuildings or building work.  |  |  |  |  |
| Lighting      |   |  |  |  |  |
| SAO6          | Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting. |  |  |  |  |
|               | Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day.  |  |  |  |  |
| Car parkir    | Ig  |  |  |  |  |
| SAO7          | On-site car parking is provided in accordance with Schedule 7 - Car parking.  |  |  |  |  |
|               |   |  |  |  |  |

|               | ssable acceptable outcomes  |
|---------------|---|
| Hazardou      | s Chemicals   |
| SAO8          | All development that involves the storage or handling of hazardous chemicals listed in Schedule 9,<br>Table 9.0.1 Hazardous Chemicals Self-Assessable Thresholds complies with Schedule 9, Table 9.0.<br>Hazardous Chemicals Self-Assessable Criteria.  |
| SAO9          | Development does not involve the storage or handling of hazardous chemicals listed in Schedule 9, Table 9.0.2Hazardous Chemicals Assessable Thresholds.   |
| Waste tre     | atment  |
| SAO10         | All concentrated animal use areas (e.g. sheds, pens, holding yards, stables) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment areas  |
| Clearing      | of Habitat Trees  |
| Note - The    | following development is exempt as noted in section 1.7.7 Exempt development:   |
| Where loca    | ted anywhere in the Caboolture West local plan area:  |
|               | ring of habitat tree located within an approved development footprint;  |
| • Clea        | ring of habitat tree within 10m from a lawfully established building reasonably necessary for emergency access or immediately ired in response to an accident or emergency;   |
|               | ring of habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to structure;  |
|               | ring of habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either of the fence;   |
|               | ring of habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public structure or drainage purposes;   |
| Clea          | ring of habitat tree in accordance with an existing bushfire management plan previously accepted by Council;  |
| $\bullet$     | ring of habitat tree associated with maintaining existing open pastures, windbreaks, lawns or created gardens;  |
|               |   |
| tree'. For fu | e - A native tree measuring greater than 80cm in diameter when measured at 1.3m from ground level is recognised as a 'habitat<br>In ther information on habitat trees, refer to Planning Scheme Policy – Environmental Areas and Corridors. Information detailing<br>easurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix |
| SAO11         | Clearing does not involve any habitat trees.  |
|               | Works criteria  |
| Utilities     |   |
| SAO12         | Where available, the development is connected to:   |
|               | a. an existing reticulated electricity supply;  |
|               | b. telecommunications and broadband;  |
|               | c. reticulated sewerage;  |
|               |   |
|               | d. reticulated water;   |
|               | <ul> <li>d. reticulated water;</li> <li>e. constructed and dedicated road.</li> </ul>   |

| Self-asses | ssable acceptable outcomes  |
|------------|---|
|            | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater Code.  |
| SAO14      | Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development. |
| Access     |   |
| SAO15      | Site access and driveways are located and designed in accordance with AS/NZS2890.1 section 3.   |
| SAO16      | Internal driveways and access ways are designed and constructed in accordance with AS/NZ2890.1 Parking facilities - Off street car parking and the relevant standards in Planning scheme policy - Integrated design.  |
| Stormwat   | er  |
| SA017      | Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy - Integrated design.  |
| Site work  | s and construction management   |
| SAO18      | The site and any existing structures are to be maintained in a tidy and safe condition.   |
| SAO19      | Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines and Planning scheme policy - Integrated design.  |
| SAO20      | Construction traffic, including contractor car parking, is controlled in accordance with a traffic management plan prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD).   |
| SAO21      | All vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.<br>Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.  |
| SAO22      | Any damage to council land or infrastructure is to be repaired or replaced, with the same materials prior to plan sealing or final building classification.   |
| SAO23      | Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.  |
| Earthworl  | Ś   |
| SAO24      | The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.   |
|            | Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures.   |
| SAO25      | The total of all cut and fill on-site does not exceed 900mm in height.  |

| Self-assessable acceptable outcomes |   |  |  |  |
|-------------------------------------|---|--|--|--|
|                                     | Figure - Cut and fill   |  |  |  |
|                                     | Lot Boundaries  |  |  |  |
|                                     | Note - This is site earthworks not building work.   |  |  |  |
| SAO26                               | Earthworks do not result in:<br>a. a reduction in cover over any Council or public sector entity infrastructure of less than 600mm;   |  |  |  |
|                                     | <ul> <li>an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken.</li> </ul>   |  |  |  |
|                                     | Note - Public sector entity as defined in the Sustainable Planning Act 2009.  |  |  |  |
| Fire servic                         | ces Contraction of the second s |  |  |  |
| Note - The p                        | provisions under this heading only apply if:  |  |  |  |
| a. the d                            | evelopment is for, or incorporates:   |  |  |  |
| i.<br>ii.<br>iii.<br>iv.<br>AND     | reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or<br>material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or<br>material change of use for a Tourist park <sup>(84)</sup> with accommodation in the form of caravans or tents; or<br>material change of use for outdoor sales <sup>(54)</sup> , outdoor processing or outdoor storage where involving combustible materials.  |  |  |  |
| b. none                             | of the following exceptions apply:  |  |  |  |
| i.<br>II.                           | the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.   |  |  |  |
|                                     | provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant plying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent   |  |  |  |
| SAO27                               | External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .   |  |  |  |
|                                     | Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005):   |  |  |  |

| Self-asses   | sable acceptable outcomes  |  |  |
|--|--|--|--|
|  | <ul> <li>a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;</li> </ul>   |  |  |
|  | b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);   |  |  |
|  | c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:  |  |  |
|  | i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;  |  |  |
| <ul> <li>ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and cara</li> <li>iii for outdoor sales<sup>(54)</sup>, processing or storage facilities, hydrant coverage is required across the the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities; and</li> </ul> |  |  |  |
|  |  |  | d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6. |
| SAO28  | A continuous path of travel having the following characteristics is provided between the vehicle access  |  |  |
|  | point to the site and each external fire hydrant and hydrant booster point on the land:  |  |  |
|  | a. an unobstructed width of no less than 3.5m;   |  |  |
|  | b. an unobstructed height of no less than 4.8m;  |  |  |
|  | c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;   |  |  |
|  | d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.   |  |  |
| SAO29  | On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in<br>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.   |  |  |
| SAO30  | For development that contains on-site fire hydrants external to buildings:   |  |  |
| $\mathbf{\mathbf{N}}$  | <ul><li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li><li>b. a sign identifying the following is provided at the vehicular entry point to the site:</li></ul>  |  |  |
|  | <ul> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fighting appliances to external hydrants and hydrants booster points.</li> </ul> |  |  |
|  | Note - The sign prescribed above, and the graphics used are to be:   |  |  |
|  | a. in a form;  |  |  |
|  | b. of a size;  |  |  |
|  | c. illuminated to a level;   |  |  |

| Self-asse   | ssable acceptable outcomes  |  |  |
|---|---|--|--|
|   | which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.   |  |  |
| SAO31   | For development that contains on-site fire hydrants external to buildings, those hydrants are identified<br>by way of marker posts and raised reflective pavements markers in the manner prescribed in the<br>technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport<br>and Main Roads.<br>Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport<br>and Main Roads.   |  |  |
|   | Use specific criteria   |  |  |
| Dwelling  | house <sup>(22)</sup> - Secondary dwelling  |  |  |
| SAO32   | The siting and design of dwellings ensures that the secondary dwelling is:  |  |  |
|   | a. not located in front of the primary dwelling;  |  |  |
| <ul> <li>b. annexed to (adjoining, below or above) or located within 10.0m of the primary dw<br/>domestic outbuildings).</li> </ul> |   |  |  |
| SAO33   | No more than 1 secondary dwelling is located on an allotment.   |  |  |
| SAO34   | The GFA of the secondary dwelling does not exceed 100m <sup>2</sup> GFA.  |  |  |
| Dwelling  | house <sup>(22)</sup> - Domestic outbuildings   |  |  |
| SAO35   | Domestic outbuildings:         a.       have a maximum GFA as outlined below:         Size of lot       Max. GFA         Less than 600m <sup>2</sup> 50m <sup>2</sup> 600m <sup>2</sup> - 1000m <sup>2</sup> 50m <sup>2</sup> >1000m <sup>2</sup> - 2000m <sup>2</sup> 80m <sup>2</sup> Greater than 2000m <sup>2</sup> 150m <sup>2</sup> Note - Building Work is excluded from the GFA calculations.         b.       have a maximum building height of 4m;         c.       are located behind the main building line and not within primary or secondary frontage setbacks |  |  |
| Home bas  | sed business <sup>(35)</sup>  |  |  |
| SAO36   | Home based business(s) <sup>(35)</sup> are fully contained within a dwelling or on-site structure, except for a home based child care facility.   |  |  |
|   | The maximum total use area is 100m <sup>2</sup> .   |  |  |

| Self-asses   | ssable acceptable outcomes  |  |  |
|--|---|--|--|
| SAO38  | Up to 2 additional non-resident, either employees or customers, are permitted on the site at any one time, except where involving the use of heavy vehicles, where no employees are permitted.  |  |  |
|  | Note - This provision does not apply to bed and breakfast or farmstay business.   |  |  |
| SAO39  | Hours of operation to be restricted to 8:00am to 6:00pm Monday to Saturday, except for:   |  |  |
|  | a. bed and breakfast or farmstay business which may operate on a 24 hour basis;   |  |  |
|  | b. office or administrative activities that do not generate non-residents visiting the site, such as book keeping and computer work.  |  |  |
| SAO40 The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is a |   |  |  |
|  | <ul><li>a. 1 heavy vehicle;</li><li>b. 1 trailer;</li></ul>   |  |  |
|  | c. Up to 3 motor vehicles.  |  |  |
|  | Note - The car parking provision associated with the Dwelling house <sup>(22)</sup> is in addition to this requirement.   |  |  |
|  | Note - The number of motor vehicles stated is in addition to motor vehicles associated with a Dwelling house <sup>(22)</sup> .  |  |  |
| SAO41  | Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.<br>Note - Planting for screening is to have a minimum depth of 3m. |  |  |
|  |   |  |  |
| SAO42  | Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.  |  |  |
| SAO43  | The use does not involve vehicle servicing or major repairs, including spray painting or panel beating  |  |  |
|  | Note - Vehicle servicing excludes general maintenance of a vehicle such as, but not limited to, changing engine fluids, filters and parts such as batteries and plugs.  |  |  |
| SAO44  | The use is not an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection Regulation 2008.</i>  |  |  |
| SAO45  | Only goods grown, produced or manufactured on-site are sold from the site.  |  |  |
| SAO46  | Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from boundary of the site.  |  |  |
| SAO47  | For bed and breakfast and farmstays:  |  |  |
|  | a. overnight accommodation is provided in the Dwelling house <sup>(22)</sup> of the accommodation operator.   |  |  |
|  | b. maximum 4 bedrooms are provided for a maximum of 10 guests.  |  |  |

| Self-assessable acceptable outcomes  |   |  |  |
|--|---|--|--|
|  | c. meals are served to paying guests only.  |  |  |
| d. rooms do not contain food preparation facilities.                             |   |  |  |
| Note - SAO33 - SAO43 above do not apply to Home based business <sup>(35)</sup> . |   |  |  |
| Roadside stalls <sup>(68)</sup>  |   |  |  |
| SAO48  | No more than one Roadside stall <sup>(68)</sup> per property.   |  |  |
| SAO49  | Goods offered for sale are only goods grown, produced or manufactured on the site.  |  |  |
| SAO50  | The maximum area associated with a Roadside stall <sup>(68)</sup> , including any larger separate items displayed for sale, does not exceed 20m <sup>2</sup> .  |  |  |
| SAO51  | The Roadside stall <sup>(68)</sup> obtains vehicle access from a road classified as an arterial or sub-arterial.<br>Note - Refer to Overlay map - Road hierarchy for road classification.   |  |  |
| SAO52  | Car parking for 2 vehicles is provided off the road carriage and located on the property.   |  |  |
| SAO53  | The Roadside stall <sup>(68)</sup> is located no closer than 100m from an intersection.   |  |  |
| Sales offi   | ce <sup>(72)</sup>  |  |  |
| SAO54  | A Sales office <sup>(72)</sup> is located on the site for no longer than 2 years.   |  |  |
| Editor's not that will not   | nunications facility <sup>(81)</sup><br>e - In accordance with the Federal legislation Telecommunications facilities <sup>(81)</sup> must be constructed and operated in a manner<br>cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic<br>Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz  |  |  |
| SAO55  | A minimum of 45m <sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.  |  |  |
| SAO56  | 6 The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.   |  |  |
| SAO57  | <ul> <li>Equipment shelters and associated structures are located:</li> <li>a. directly beside the existing equipment shelter and associated structures;</li> <li>b. behind the main building line;</li> <li>c. further away from the frontage than the existing equipment shelter and associated structures;</li> <li>d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.</li> </ul> |  |  |
| SAO58  | Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.  |  |  |
| 3AU50  | match the surrounding locality.   |  |  |

| Self-asses   | ssable acceptable outcomes   |  |
|--|--|--|
| SAO60A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced a<br>the development and street frontage and adjoining uses.   |  |  |
|  | Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.  |  |
| Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person to ensure com<br>Planning scheme policy - Integrated design. |  |  |
| SAO61  | All equipment comprising the telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.   |  |
| Winery <sup>(90</sup>  |  |  |
| SAO62  | The maximum use area including all buildings, structures, driveways and parking areas is 1500m <sup>2</sup> .  |  |
| SAO63  | The Winery <sup>(90)</sup> is accessed from a road classified as a State Arterial, Arterial or Sub-Arterial (refer Overlay map - Road hierarchy for road classification).  |  |
|  | Values and constraints criteria  |  |
| Reconfiguri<br>developmer  | nt footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this  |  |
| developmer<br>planning sc<br>Acid sulfa<br>apply)<br>Note - Plann  | nt footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this heme.<br><b>Ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria</b><br>ning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid<br>s i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.  |  |
| developmer<br>planning sc<br>Acid sulfa<br>apply)<br>Note - Plan<br>sulfate soils  | heme.<br>Ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria<br>ning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid<br>s i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.   |  |
| developmer<br>planning sc<br>Acid sulfa<br>apply)<br>Note - Plann  | heme.<br>Ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria<br>ning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid   |  |
| developmer<br>planning sc<br>Acid sulfa<br>apply)<br>Note - Plan<br>sulfate soils  | heme.<br>Ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria<br>ning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid<br>is i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.<br>Development does not involve:<br>a. excavation or otherwise removing of more than 100m <sup>3</sup> of soil or sediment where below 5m  |  |
| developmer<br>planning sc<br>Acid sulfa<br>apply)<br>Note - Plan<br>sulfate soils  | <ul> <li>heme.</li> <li>ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria</li> <li>ning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid</li> <li>a. evelopment does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below 5m Australian Height Datum AHD, or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where</li> </ul>   |  |
| developmer<br>planning sc<br>Acid sulfa<br>apply)<br>Note - Plan<br>sulfate soils  | heme.<br>Ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria<br>ning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid<br>is i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.<br>Development does not involve:<br>a. excavation or otherwise removing of more than 100m <sup>3</sup> of soil or sediment where below 5m<br>Australian Height Datum AHD, or<br>b. filling of land of more than 500m <sup>3</sup> of material with an average depth of 0.5m or greater where<br>below the 5m AHD.<br>+15m AHD-   |  |
| developmer<br>planning sc<br>Acid sulfa<br>apply)<br>Note - Plan<br>sulfate soils  | heme.<br>Ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria<br>ning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid<br>is i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.<br>Development does not involve:<br>a. excavation or otherwise removing of more than 100m <sup>3</sup> of soil or sediment where below 5m<br>Australian Height Datum AHD, or<br>b. filling of land of more than 500m <sup>3</sup> of material with an average depth of 0.5m or greater where<br>below the 5m AHD.<br>Surface Elevation >5m and <20m AHD<br>+20m AHD-<br>+10m AHD-<br>+10m AHD- |  |
| developmer<br>planning sc<br>Acid sulfa<br>apply)<br>Note - Plan<br>sulfate soils  | heme.<br>Ate soils - (refer Overlay map - Acid sulfate soils to determine if the following assessment criteria<br>ning scheme policy - Acid sulfate soils provides guidance for self-assessable development that has the potential to disturb acid<br>is i.e. development involving filling or excavation works below the thresholds of 100m <sup>3</sup> and 500m <sup>3</sup> respectively.<br>Development does not involve:<br>a. excavation or otherwise removing of more than 100m <sup>3</sup> of soil or sediment where below 5m<br>Australian Height Datum AHD, or<br>b. filling of land of more than 500m <sup>3</sup> of material with an average depth of 0.5m or greater where<br>below the 5m AHD.<br>+15m AHD-   |  |

| Bushfire k  | nazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria   |  |  |
|---|---|--|--|
| apply)  | lazaru (reier Overlay map - Businne nazaru to determine ir the following assessment criteria  |  |  |
| bushfire inte   | ne purposes of section 12 of the Building Regulation 2006, land identified as very high potential bushfire intensity, high potential<br>ensity, medium potential bushfire intensity or potential impact buffer on the Bushfire hazard area overlay map is the 'designated<br>eard area'. AS 3959-2009 Construction of buildings in bushfire hazard area applies within these areas. |  |  |
| been identif  | bushfire hazard area provisions do not apply where a development envelope recognising and responding to this constraint has<br>ied and approved by Council as part of a reconfiguration of lot, development approval or approved Bush Fire Management Plan<br>previous planning schemes.  |  |  |
|   |   |  |  |
| SAO65 Building and structures have contained within the site: |   |  |  |
|   | <ul> <li>a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;</li> </ul>  |  |  |
|   | b. a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roof structure or fire fighting water supply of no more than 29, whichever is the greater;   |  |  |
|   | c. a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures;   |  |  |
|   | d. an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and   |  |  |
|   | <ul> <li>e. an access path suitable for use by a standard fire fighting appliance having a formed width of at<br/>least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%;</li> </ul>  |  |  |
|   | <ul><li>i. to, and around, each building and other roofed structures; and</li><li>ii. to each fire fighting water supply extraction point.</li></ul>  |  |  |
|   | Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS3959.  |  |  |
| •   |   |  |  |
| SAO66   | The length of driveway:   |  |  |
|   | a. to a public road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road;   |  |  |
|   | <ul> <li>b. has a maximum gradient no greater than 12.5%;</li> <li>c. have a minimum width of 3.5m;</li> </ul>  |  |  |
| ~   | <ul> <li>accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.</li> </ul>   |  |  |
| SAO67   | a. A reticulated water supply is provided by a distributer retailer for the area or, where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10,000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m o buildings and structures.   |  |  |
|   | b. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.   |  |  |
|   | c. Where a tank is the nominated on-site fire fighting water storage source, it includes:   |  |  |

Self-assessable acceptable outcomes

| Self-assessable acceptable outcomes |   |   |
|-------------------------------------|---|---|
|                                     | i.  | a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;  |
|                                     | ii.   | fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.  |
|                                     |   |   |
| SAO68                               | Developm  | nent does not involve the manufacture or storage of hazardous chemicals.  |
|                                     |   | ape character (refer Overlay map - Heritage and landscape character to determine if sment criteria apply)   |
| SAO69                               |   | nent is for the preservation, maintenance, repair and restoration of the building, item or object<br>I heritage value.  |
| SAO70                               | heritage c  | tenance, repair and restoration works are in accordance with Council approval. A cultural construction management plan for maintenance, repair and restoration is prepared in accordance ning scheme policy - Heritage and landscape character. |
| Infrastruct<br>criteria ap          |   | areas (refer Overlay map – Infrastructure buffers to determine if the following assessment  |
| SA071                               | developm  | here located on Figure 7.2.3.1 - Caboolture West structure plan or an approved Neighbourhood<br>nent plan, development does not involve the construction of any buildings or structures within<br>ltage electricity line buffer.                |
| SA072                               |   | nere located on an approved Neighbourhood development plan, development does not involve ruction of any buildings or structures within a bulk water supply infrastructure buffer.   |
| Overland f<br>apply)                | low path (I   | refer Overlay map - Overland flow path to determine if the following assessment criteria  |
| SAO73                               |   | nent for a material change of use or building work does not involve the construction of a building re in an Overland flow path area.  |
| SA074                               | Development for a material change of use or operational work does not impede the flow of flood waters through the premises or worsen flood flows to other premises. |   |
|                                     |   | port from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development<br>increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.            |
|                                     | Note - Rep<br>flow  | porting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland  |
| SA075                               |   | nent for a material change of use or building work ensures that fencing in an overland flow<br>is at least 50% permeable.   |
| SAO76                               |   | nent for a material change of use or building work that involves a hazardous chemical ensures dous chemicals is not located within an overland flow path area.  |
| SA077                               |   | nent for a material change of use or building work for a Park <sup>(57)</sup> ensures that work is provided ance with the requirements set out in Appendix B of the Planning scheme policy - Integrated   |

Part B — Criteria for assessable development - Interim uses

Where development is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part B, Table 7.2.3.6.2.

Where development is impact assessable, the assessment criteria becomes the whole of the planning scheme.

Table 7.2.3.6.2 Assessable development - Interim uses

| Perf   | formance outcomes   | Acceptable outcomes             |  |  |
|--|---|---------------------------------|--|--|
|  | General criteria  |                                 |  |  |
| Inte   | Interim uses  |                                 |  |  |
| PO1  |   | No acceptable outcome provided. |  |  |
| Inte   | rim uses:   |                                 |  |  |
| a.   | do not fragment or alienate the land or result in the loss of land for future urban purposes;   | Ġ.                              |  |  |
| b.   | do not prejudice or delay the use of the land for urban purposes.   | O Jel                           |  |  |
| PO2  |   | No acceptable outcome provided. |  |  |
| Inte   | rim uses:   |                                 |  |  |
| a.   | are adequately serviced with necessary infrastructure to meet on-site needs and requirements;   |                                 |  |  |
| b.   | are of a size and scale that maintains the low<br>density, low intensity and open area landscape<br>character anticipated in the interim; |                                 |  |  |
| C.   | are designed, located and operated in a manner<br>that avoids nuisance impacts on adjoining<br>properties;                                |                                 |  |  |
| d.   | requires minimal filling or excavation. Where this occurs, visual impacts are reduced through screening;                                  |                                 |  |  |
| e.   | are not visually dominant from the streetscape or adjoining properties;   |                                 |  |  |
| f.   | utilise materials, finishes and colours that are consistent with existing semi-rural environment.   |                                 |  |  |
| Site   | Site density  |                                 |  |  |
| PO3  |   | No acceptable outcome provided  |  |  |
| Development does not result in residential density exceeding more than one Dwelling house <sup>(22)</sup> per lot. |   |                                 |  |  |
| Buil   | ding height   |                                 |  |  |
| PO4  | L   | AO4.1                           |  |  |

| Per            | formance outcomes  | Acceptable outcomes   |
|----------------|--|---|
| The<br>a.      | e height of buildings:<br>is consistent with the existing low rise, open area<br>and low density character and amenity of the area;  | Building height for all buildings (excluding domestic outbuildings) does not exceed that on Neighbourhood development plan map - Building heights for Dwelling houses <sup>(22)</sup> .   |
| b.             | does not unduly impact on access to daylight,<br>sunlight, overshadowing or privacy experienced by<br>adjoining premises.  | AO4.2<br>The height of domestic outbuildings is a maximum of 5m.  |
| Set            | backs  |   |
| PO             | 5  | A05   |
| a.<br>b.<br>c. | n-residential uses are setback to ensures:<br>chemical spray, fumes, odour, dust are contained<br>on-site;<br>unreasonable nuisance or annoyance resulting<br>from, but not limited to; noise, storage of materials<br>and rubbish does not adversely impact upon land<br>users adjacent to, or within the general vicinity; and<br>buildings and other structures are consistent with | <ul> <li>Unless specified elsewhere in the code, the minimum setback from a boundary is as follows:</li> <li>a. Front boundary – 6m;</li> <li>b. Side boundary – 4.5m;</li> <li>c. Rear boundary – 4.5m.</li> <li>Note - This provision does not apply where a development footprint exists for a lot.</li> </ul> A06 The following uses and associated buildings are setback from all property boundaries as follows: <ul> <li>a. Animal husbandry<sup>(4)</sup> (buildings only) - 10m;</li> <li>b. Cropping<sup>(19)</sup> (buildings only) - 10m;</li> <li>c. Animal keeping<sup>(5)</sup>, excluding catteries and kennels - 20m;</li> <li>d. Cropping<sup>(19)</sup> (buildings only) - 10m;</li> </ul> |
| Dev            | the open area, low density, low built form character<br>and amenity associated with the area.  | <ul> <li>e. Intensive horticulture<sup>(40)</sup> - 10m;</li> <li>f. Rural Industry<sup>(70)</sup> - 20m;</li> <li>g. Wholesale nursery<sup>(89)</sup> - 10m;</li> <li>h. Veterinary services<sup>(87)</sup> - 10m.</li> </ul>  |
| part           | 7<br>ere a development footprint has been identified as<br>t of a development approval for reconfiguring a lot,<br>levelopment occurs within that development footprint.   | No acceptable outcome provided.   |

| Performance outcomes  | Acceptable outcomes   |  |  |
|---|---|--|--|
| Building on sloping land  |   |  |  |
| P08   | No acceptable outcome provided.   |  |  |
| Building and site design on slopes between 10% and 15% must:  |   |  |  |
| a. use split-level, multiple-slab, pier or pole construction;   |   |  |  |
| b. avoid single-plane slabs and benching; and   |   |  |  |
| c. ensure the height of any cut or fill, whether retained or not, does not exceed 900mm.  |   |  |  |
| Amenity   | 5   |  |  |
| <b>PO9</b><br>The amenity of the area and adjacent sensitive land uses<br>are protected from the impacts of dust, odour, light,<br>chemicals and other environmental nuisances.   | No acceptable outcome provided.   |  |  |
| Car parking   |   |  |  |
| <ul> <li>PO10</li> <li>Traffic generation, vehicle movement and on-site car parking associated with an activity:</li> <li>a. provides safe, convenient and accessible access for vehicles and pedestrians;</li> <li>b. provides safe and convenient on-site parking and manoeuvring to meet anticipated parking demand;</li> <li>c. is appropriate to the road classification and carrying capacity of the local network and able to meet the additional demands generated by the development; and</li> <li>d. does not result adverse impacts on the efficient and safe functioning of the road network.</li> <li>Note - Refer to Planning scheme policy - Integrated transport assessment for guidance on how to achieve compliance with this outcome.</li> </ul> | AO10<br>On-site car parking is provided in accordance with<br>Schedule 7 - Car parking. |  |  |

Note - To assist in demonstrating compliance with the following performance outcomes, a Hazard Assessment Report may be required to be prepared and submitted by a suitably qualified person in accordance with '*State Planning Policy Guideline - Guidance on development involving hazardous chemicals*'.

Terms used in this section are defined in 'State Planning Policy Guideline - Guidance on development involving hazardous chemicals'.

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| PO11   | A011.1  |
| Off sites risks from foreseeable hazard scenarios<br>involving hazardous chemicals are commensurate with<br>the sensitivity of the surrounding land use zones. | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land uses as described below:<br>Dangerous Dose |
|  | a. For any hazard scenario involving the release of gases or vapours:   |
|  | i. AEGL2 (60minutes) or if not available ERPG2;   |
|  | ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.   |
|  | b. For any hazard scenario involving fire or explosion:   |
|  | i. 7kPa overpressure;   |
|  | ii. 4.7kW/m2 heat radiation.  |
|  | If criteria AO11.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 0.5 x 10-6/year.                                   |
|  | A011.2  |
|  | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below:                   |
|  | Dangerous Dose  |
|  | a. For any hazard scenario involving the release of gases or vapours:   |
|  | i. AEGL2 (60minutes) or if not available ERPG2;   |
| Br   | ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.   |
|  | b. For any hazard scenario involving fire or explosion:   |
|  | i. 7kPa overpressure;   |
|  | ii. 4.7kW/m2 heat radiation.  |
|  | If criteria AO11.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.                                     |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | A011.3  |
|   | Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below:<br>Dangerous Dose  |
|   |   |
|   | a. For any hazard scenario involving the release of gases or vapours:   |
|   | i. AEGL2 (60minutes) or if not available ERPG2;   |
|   | ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.   |
|   | b. For any hazard scenario involving fire or explosion:   |
|   | i. 14kPa overpressure;  |
|   | ii. 12.6kW/m2 heat radiation.   |
|   |   |
|   | If criteria AO11.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.  |
|   | 5   |
| P012  | A012  |
| Buildings and package stores containing fire-risk<br>hazardous chemicals are designed to detect the early<br>stages of a fire situation and notify a designated person.   | Buildings and package stores containing fire-risk<br>hazardous chemicals are provided with 24 hour monitored<br>fire detection system for early detection of a fire event.  |
|   |   |
| P013  | A013  |
| Common storage areas containing packages of<br>flammable and toxic hazardous chemicals are designed<br>with spill containment system(s) that are adequate to<br>contain releases, including fire fighting media.  | Storage areas containing packages of flammable and<br>toxic hazardous chemicals are designed with spill<br>containment system(s) capable of containing a minimum<br>of the total aggregate capacity of all packages plus the<br>maximum operating capacity of any fire protection system<br>for the storage area(s) over a minimum of 60 minutes. |
| P014  | A014.1  |
| Storage and handling areas, including manufacturing<br>areas, containing hazardous chemicals in quantities<br>greater than 2,500L or kg within a Local Government<br>"flood hazard area" are located and designed in a manner<br>to minimise the likelihood of inundation of flood waters<br>from creeks, rivers, lakes or estuaries. | <ul> <li>The base of any tank with a WC &gt;2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively:</li> <li>a. bulk tanks are anchored so they cannot float if submerged or inundated by water; and</li> </ul>   |
|   | b. tank openings not provided with a liquid tight seal,<br>i.e. an atmospheric vent, are extended above the<br>relevant flood height level.   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | A014.2  |
|   | The lowest point of any storage area for packages >2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area.<br>Alternatively, package stores are provided with impervious bund walls or racking systems higher than the relevant flood height level.            |
| Waste Treatment   |   |
| PO15  | A015  |
| Stormwater generated on-site is treated and disposed<br>of in an acceptable manner to mitigate any impacts on<br>soil, surface water or ground water quality. Development<br>resulting in the degradation of soil, surface water or<br>ground water quality is avoided.   | All concentrated animal use areas (e.g. Sheds, pens,<br>holding yards, stables, kennels and other animal<br>enclosures) are provided with site drainage to ensure all<br>run-off is directed to suitable detention basins, filtration<br>or other treatment areas.  |
| Noise   | Q.  |
| <ul> <li>PO16</li> <li>Noise generating uses do not adversely affect existing or potential noise sensitive uses.</li> <li>Note - The use of walls, barriers or fences that are visible from or adjoin a road or public area are not appropriate noise attenuation measures unless adjoining a motorway, arterial road or rail line.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> </ul> | No acceptable outcome provided.   |
| P017  | AO17.1  |
| Sensitive land uses are provided with an appropriate acoustic environment within designated external private outdoor living spaces and internal areas while:  | Development is designed to meet the criteria outlined in the Planning Scheme Policy – Noise.  |
| <ul> <li>a. contributing to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintaining the amenity of the streetscape.</li> </ul>   | <ul> <li>AO17.2</li> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public area unless:</li> </ul>  |
| Note - A noise impact assessment may be required to demonstrate<br>compliance with this PO. Noise impact assessments are to be<br>prepared in accordance with Planning scheme policy - Noise.<br>Note - Refer to Planning Scheme Policy – Integrated design for<br>details and examples of noise attenuation structures.  | <ul> <li>adjoining a motorway or rail line; or</li> <li>adjoining part of an arterial road that does not<br/>serve an existing or future active transport<br/>purpose (e.g. pedestrian paths or cycle lanes)<br/>or where attenuation through building location<br/>and materials is not possible.</li> </ul> |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - laterated design</li> </ul> |
|  | Integrated design.<br>Note - Refer to Planning scheme policy – Integrated design for<br>details and examples of noise attenuation structures.  |
|  | Note - Refer to Overlay map – Active transport for future active transport routes.   |
| Clearing of Habitat Trees  |  |
| Note - The following development is exempt as note                             | ed in section 1.7.7 Exempt development:  |
| Where located anywhere in the Caboolture West loo                              | cal plan area:   |
| <ul> <li>Clearing of a habitat tree located within an approximately</li> </ul> | pproved development footprint;   |
|  | awfully established building reasonably necessary for emergency access or immediately  |

- Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence;
- Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- Clearing of a habitat tree in accordance with an existing bushfire management plan previously accepted by Council;
- Clearing of a habitat tree associated with maintaining existing open pastures, windbreaks, lawns or created gardens.

Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from ground level is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning Scheme Policy – Environmental Areas and Corridors. Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.

| PO1 | 8   | No acceptable outcome provided. |
|-----|---|---------------------------------|
| a.  | Development ensures that the biodiversity quality<br>and integrity of habitats is not adversely impacted<br>upon but maintained and protected.  |                                 |
| b.  | Development does not result in the net loss of fauna<br>habitat. Where development does result in the loss<br>of habitat tree, development will provide<br>replacement fauna nesting boxes at the following<br>rate of 1 nest box for every hollow removed. Where |                                 |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  |  |
| hollows have not yet formed in trees > 80cm in<br>diameter at 1.3m height, 3 nest boxes are required<br>for every habitat tree removed.  |  |
| c. Development does not result in soil erosion or land degradation or leave land exposed for an unreasonable period of time but is rehabilitated in a timely manner.   |  |
| Note - Further guidance on habitat trees is provided in Planning scheme policy - Environmental areas   |  |
| Works  | criteria   |
| Utilities  | 0  |
| PO19   | A019   |
| The development is connected to an existing reticulated<br>electricity supply system (approved by the relevant<br>energy regulating authority) and the infrastructure does<br>not negatively impact the streetscape. | The development is connected to underground electricity.   |
| PO20   | No acceptable outcome provided.  |
| The development has access to telecommunications and broadband services in accordance with current standards.  | SCI  |
| P021   | No acceptable outcome provided.  |
| Where available the development is to safely connect to reticulated gas.   |  |
| PO22   | AO22.1   |
| The development provides for the treatment and disposal<br>of sewage and other waste water in a way that will not<br>cause environmental harm or pose a risk to public health.                                       | Where in a sewered area, the development is connected to a reticulated sewerage system.  |
|  | AO22.2   |
| NBI  | Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.  |
|  | Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with The Plumbing and Drainage Act 2002.                                  |
| PO23   | AO23.1   |
| The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.  | Where in an existing connections area or a future<br>connections area as detailed in the Unitywater Water<br>Connections Policy, the development is connected to the<br>reticulated water supply system in accordance with the |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
|   | South East Queensland Water Supply and Sewerage<br>Design and Construction Code and the relevant Water<br>Service Association of Australia (WSAA) codes and<br>standards.  |
|   | A023.2   |
|   | Where not in an existing connections area or a future<br>connections area as detailed in the Unitywater<br>Connections Policy, the development is provided with an<br>adequate water supply of at least 45,000 litres by way<br>of on-site storage which provides equivalent water quality<br>and reliability to support the use requirements of the<br>development. |
| PO24  | No acceptable outcome provided.  |
| The development is provided with dedicated and constructed road access.   |  |
| Access  |  |
| PO25  | No acceptable outcome provided.  |
| Development provides functional and integrated car parking and vehicle access, that:  |  |
| <ul> <li>a. prioritises the movement and safety of pedestrians between car parking areas at the rear through to the 'main street' and the entrance to the building (e.g. Rear entry, arcade etc.);</li> <li>b. provides safety and security of people and property at all times;</li> <li>c. does not impede active transport options;</li> <li>d. does not impact on the safe and efficient movement of traffic external to the site;</li> <li>e. where possible vehicle access points are consolidated and shared with adjoining sites.</li> </ul> Note - Refer to Planning scheme policy - Centre and neighbourhood hub design for details and examples. |  |
| PO26  | No acceptable outcome provided.  |
| Where required access easements contain a driveway<br>and provision for services constructed to suit the user's<br>needs. The easement covers all works associated with<br>the access in accordance with Planning scheme policy<br>- Integrated design.   |  |
| PO27  | AO27.1   |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| Perormance outcomes The layout of the development does not compromise: a. the development of the road network in the area; b. the function or safety of the road network; c. the capacity of the road network. Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). PO28 Safe access is provided for all vehicles required to access the site. | Acceptable outcomes Direct vehicle access for residential development does not occur from arterial or sub-arterial roads or a motorway. Editor's note - Residential developments should consider amalgamation with the lot to the rear and gaining access via a laneway. Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets). AO27.2 The development provides for the extension of the road network in the area in accordance with Council's road network planning. AO27.3 The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning. AO27.4 The lot layout allows forward access to and from the site. AO28.1 Site access and driveways are designed and located in accordance with: a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval. AO28.2 Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking |
|  | Facilities – Off street car parking and the relevant<br>standards in Planning scheme policy - Integrated design.<br>Note - This includes queue lengths (refer to Schedule 8 Service<br>vehicle requirements), pavement widths and construction.   |
|  | AO28.3  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
|   | Access driveways, manoeuvring areas and loading<br>facilities provide for service vehicles listed in Schedule<br>8 Service vehicle requirements for the relevant use. The<br>on-site manoeuvring is to be in accordance with Schedule<br>8 Service vehicle requirements. |
| PO29  | AO29   |
| Upgrade works (whether trunk or non-trunk) are provided where necessary to:   | No acceptable outcome provided.  |
| <ul> <li>a. ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network;</li> <li>b. ensure the orderly and efficient continuation of the active transport network;</li> <li>c. ensure the site frontage is constructed to a suitable urban standard generally in accordance with Planning scheme policy - Integrated design.</li> </ul> | ersion -   |
| Note - An Integrated Transport Assessment (ITA) may be required<br>to demonstrate compliance with this performance outcome. An ITA<br>should be prepared in accordance with Planning scheme policy -<br>Integrated transport assessment.  | ene  |
| Note - The road hierarchy is in accordance with a Neighbourhood development plan (conceptually shown on Figure 7.2.3.2 - Movement, Major streets).  | SCI  |
| Note - To demonstrate compliance with c. of this performance<br>outcome, site frontage works where in existing road reserve<br>(non-trunk) are to be designed and constructed as follows:   |  |
| <ul> <li>Where the street is partially established to an urban standard,<br/>match the alignment of existing kerb and channel and provide<br/>carriageway widening and underground drainage where<br/>required; or</li> </ul>   |  |
| ii. Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.   |  |
| Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.  |  |
| Stormwater  |  |
| PO30  | No acceptable outcome provided.  |
| Stormwater run-off from the site is conveyed to a point<br>of lawful discharge without causing nuisance or<br>annoyance to any person, property or premises.  |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |  |

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate achievement of this performance outcome.  |                                 |
| Note - A watercourse as defined in the Water Act may be accepted<br>as a lawful point of discharge providing the drainage discharge from<br>the site does not increase the downstream flood levels during events<br>up to and including the 1% AEP storm. An afflux of +20mm may be<br>accepted on Council controlled land and road infrastructure. No<br>worsening is ensured when stormwater is discharged into a<br>catchment that includes State Transport Infrastructure. |                                 |
| PO31   | No acceptable outcome provided. |
| Stormwater generated from the development does not<br>compromise the capacity of existing stormwater<br>infrastructure downstream of the site.<br>Note - A downstream drainage discharge report in accordance with<br>Planning scheme policy - Stormwater management may be required<br>to demonstrate compliance with this performance outcome.   | e lersio                        |
| PO32   | No acceptable outcome provided. |
| Stormwater quality management systems are designed<br>and constructed to minimise the environmental impact<br>of stormwater discharge on surface and underground<br>receiving water quality and meet the design objectives<br>in Tables A and B in Appendix 3 of the SPP.<br>Note - A site-based stormwater management plan prepared by a<br>suitably qualified professional will be required in accordance with<br>Planning scheme policy - Stormwater management.            | scher                           |
| PO33   | No acceptable outcome provided. |
| <ul> <li>Easements for drainage purposes are provided over:</li> <li>a. stormwater pipes located within freehold land if the pipe diameter exceeds 300mm;</li> <li>b. overland flow paths where they cross more than one property boundary.</li> <li>Note - Refer to Planning scheme policy - Integrated design for details and examples.</li> <li>Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.</li> </ul>            |                                 |
| Site works and construction management   |                                 |
| PO34   | No acceptable outcome provided. |
| The site and any existing structures are maintained in a tidy and safe condition.  |                                 |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| PO35  | AO35.1  |
| <ul> <li>All works on-site are managed to:</li> <li>a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light;</li> <li>b. minimise as far as possible, impacts on the natural environment;</li> <li>c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises;</li> <li>d. avoid adverse impacts on street streets and their critical root zone.</li> </ul> | <ul> <li>Works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Integrated design, including but not limited to the following:</li> <li>a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions;</li> <li>b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion;</li> <li>c. stormwater discharge rates do not exceed pre-existing conditions;</li> <li>d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and</li> <li>e. the 50% AEP storm event is the minimum design storm for all silt barriers and sediment controls are constructed prior to commencement of any clearing work or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness.</li> <li>Note - The measures are adjusted on-site to maximise their effectiveness.</li> <li>AO35.3</li> <li>The completed earthworks (fill or excavation) area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property.</li> </ul> |
|   | and ensures that no permanent damage is caused to the tree.   |
| PO36  | AO36  |
| Dust suppression measures are implemented during construction works to protect nearby premises from unreasonable dust impacts.  | No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.   |
| PO37  | AO37.1  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| All works on-site and the transportation of material to and<br>from the site are managed to not negatively impact the<br>existing road network, the amenity of the surrounding<br>area or the streetscape. | Construction traffic including contractor car parking is<br>controlled in accordance with a traffic management plan<br>prepared in accordance with the Manual of Uniform<br>Traffic Control Devices (MUTCD) to ensure all traffic<br>movements to and from the site are safe.   |
| Note - Where the amount of imported material is greater than 50m <sup>3</sup> , a haulage route must be identified and approved by Council.  | A037.2  |
|  | All contractor car parking is either provided on the<br>development site, or on an alternative site in the general<br>locality which has been set aside for car parking.<br>Contractors' vehicles are generally not to be parked in<br>existing roads.<br>Note - A Traffic Management Plan may be required for the site in<br>accordance with the Manual of Uniform Traffic Control Devices<br>(MUTCD). |
|  | AO37.3<br>Any material dropped, deposited or spilled on the roads<br>as a result of construction processes associated with the<br>site are to be cleaned at all times.  |
| PO38   | AO38  |
| All disturbed areas are rehabilitated at the completion of construction.   | At completion of construction all disturbed areas of the site are to be:  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   | <ul> <li>a. topsoiled with a minimum compacted thickness or fifty (50) millimetres;</li> <li>b. grassed.</li> </ul>   |
| plan,  | Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.   |
| PO39   | AO39.1  |
| <ul><li>The clearing of vegetation on-site:</li><li>a. is limited to the area of infrastructure works, buildings areas and other necessary areas for the</li></ul>   | All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.  |
| <ul><li>works;</li><li>b. includes the removal of declared weeds and other materials which are detrimental to the intended use</li></ul>   | Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.   |
| of the land;<br>c. is disposed of in a manner which minimises<br>nuisance and annoyance to existing premises.  | AO39.2 Disposal of materials is managed in one or more of the   |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | a. all cleared vegetation, declared weeds, stumps,<br>rubbish, car bodies, scrap metal and the like are<br>removed and disposed of in a Council land fill<br>facility; or                                 |
|  | b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site.   |
|  | Note - The chipped vegetation must be stored in an approved location, preferably a park or public land.   |
| <b>PO40</b><br>Any alteration or relocation in connection with or arising<br>from the development to any service, installation, plant,<br>equipment or other item belonging to or under the control<br>of the telecommunications authority, electricity authorities,<br>the Council or other person engaged in the provision of<br>public utility services is to be carried with the development<br>and at no cost to Council. | No acceptable outcome provided.   |
| Earthworks   |   |
| PO41   | AO41.1  |
| <ul><li>On-site earthworks are designed to consider the visual and amenity impact as they relate to:</li><li>a. the natural topographical features of the site;</li><li>b. short and long-term slope stability;</li></ul>  | All cut and fill batters are provided with appropriate scour,<br>erosion protection and run-off control measures including<br>catch drains at the top of batters and lined batter drains<br>as necessary. |
| <ul> <li>c. soft or compressible foundation soils;</li> <li>d. reactive soils;</li> <li>e. low density or potentially collapsing soils;</li> <li>f. existing fills and soil contamination that may exist on-site;</li> <li>g. the stability and maintenance of steep rock slopes</li> </ul>  | AO41.2<br>Stabilisation measures are provided, as necessary, to<br>ensure long-term stability and low maintenance of steep<br>rock slopes and batters.  |
| <ul> <li>and batters;</li> <li>excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential)</li> <li>Note - Filling or excavation works are to be completed within six (6) months of the commencement date.</li> </ul>  | <b>AO41.3</b><br>All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.  |
|  | AO41.4<br>All filling or excavation is contained within the site.   |
|  | AO41.5  |
|  |   |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
|   | <ul> <li>a. limited to that required for the necessary approved use;</li> <li>b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill).</li> </ul>  |
|   | AO41.6<br>The site is prepared and the fill placed on-site in  |
|   | accordance with AS3798.<br>Note - The fill is to be inspected and tested in accordance with<br>Planning scheme policy - Operational works inspection, maintenance<br>and bonding procedures.   |
|   | AO41.7<br>Inspection and certification of steep rock slopes and<br>batters may be required by a suitably qualified and<br>experienced RPEQ.  |
| PO42  | A042   |
| Embankments are stepped, terraced and landscaped to<br>not adversely impact on the visual amenity of the<br>surrounding area.   | Any embankments more than 1.5 metres in height are stepped, terraced and landscaped.   |
|   | Figure - Embankment  |
|   | soomm<br>min<br>15m<br>15m<br>15m<br>15m<br>15m<br>max<br>15m<br>max<br>15m<br>max   |
| PO43  | AO43.1   |
| <ul><li>On-site earthworks are undertaken in a manner that:</li><li>a. does not adversely impact on a Council or public</li></ul>                                       | No earthworks are undertaken in an easement issued in favour of Council or a public sector entity.   |
| <ul><li>sector entity maintained infrastructure or any drainage feature on, or adjacent to the land;</li><li>does not preclude reasonable access to a Council</li></ul> | Note - Public sector entity as defined in the Sustainable Planning Act 2009.   |
| or public sector entity maintained infrastructure or<br>any drainage feature on, or adjacent to the land for  | AO43.2   |
| Mote - Public sector entity as defined in the <i>Sustainable Planning</i>   | Earthworks that would result in any of the following are not carried out on-site:  |
| Act 2009.   | <ul> <li>a. a reduction in cover over the Council or public sector entity maintained service to less than 600mm;</li> <li>b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity maintained infrastructure above that which existed prior to the earthworks being undertaken.</li> </ul> |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | Note - Public sector entity as defined in the <i>Sustainable Planning Act 2009</i> .   |
| PO44   | No acceptable outcome provided.  |
| Filling or excavation does not result in land instability.   |  |
| Note - A slope stability report prepared by an RPEQ may be required.   |  |
| <ul> <li>PO45</li> <li>Filling or excavation does not result in <ul> <li>a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway;</li> <li>b. increased flood inundation outside the site;</li> <li>c. any reduction in the flood storage capacity in the floodway;</li> <li>d. any clearing of native vegetation.</li> </ul> </li> <li>Note - To demonstrate compliance with this outcome, Planning scheme policy - Stormwater management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements</li> </ul> | No acceptable outcome  |
| Retaining walls and structures   |  |
| PO46<br>All earth retaining structures provide a positive interface<br>with the streetscape and minimise impacts on the amenity<br>of adjoining residents.   | <ul> <li>AO46</li> <li>Earth retaining structures:</li> <li>a. are not constructed of boulder rocks or timber;</li> <li>b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;</li> <li>Figure - Retaining on a boundary</li> </ul> |
|  | c. where height is greater than 900mm but no greater than 1.5m, are to be setback at least the equivalent  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
|  | <ul> <li>height of the retaining structure from any property boundary;</li> <li>d. where height is greater than 1.5m, are to be setback and stepped 1.5m vertical: 1.5m horizontal, terraced, landscaped and drained as shown below.</li> </ul> |
|  | Figure - Cut  |
|  | 500mm 1.5m minimum 1.5m minimum   |
|  | Catch drains<br>as required<br>Landscaping<br>Retaining<br>Note: 130<br>Retaining   |
|  | Drainage CUT 1.5m<br>maximum  |
| • C )  | Finished surface level  |
|  | Figure - Fill   |
|  | 5   |
|  | Finished surface level 1.5mmminum<br>(vpical)<br>1.5m minimum<br>(typical)<br>1.5m minimum<br>(typical)<br>1.5m minimum<br>(typical)  |
|  | Landscaping   |
|  | Drainage 1.5m maximum<br>(typical)  |
|  | Retaining Fill 900mm<br>maximum   |
|  |   |
| Fire Services  |   |
| Note - The provisions under this heading only apply if:  |   |
| a. the development is for, or incorporates:  |   |
| <ul> <li>reconfiguring a lot for a community title scheme creating</li> <li>material change of use for 2 or more sole occupancy ur</li> <li>material change of use for a Tourist park<sup>(84)</sup> with accon</li> </ul> | g 1 or more vacant lots; or<br>nits on the same lot, or within the same community titles scheme; or<br>nmodation in the form of caravans or tents; or   |

iv. material change of use for outdoor sales<sup>(54)</sup>, outdoor processing or outdoor storage where involving combustible materials.

AND

| Performance outcomes | Acceptable outcomes |
|----------------------|---------------------|

b. none of the following exceptions apply:

- i. the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
- ii. every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.

Note - The provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant system complying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent protection.

#### PO47

Development incorporates a fire fighting system that:

- a. satisfies the reasonable needs of the fire fighting entity for the area;
- b. is appropriate for the size, shape and topography of the development and its surrounds;
- c. is compatible with the operational equipment available to the fire fighting entity for the area;
- d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another;
- e. considers the fire hazard inherent in the surrounds to the development site;
- f. is maintained in effective operating order.

Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.

### AO47.1

External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of *Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations.* 

Note - For this acceptable outcome, the following are the relevant parts of AS 2419.1 (2005) that may be applicable:

- a. in regard to the form of any fire hydrant Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks<sup>(84)</sup> or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
- b. in regard to the general locational requirements for fire hydrants Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
  c. in regard to the proximity of hydrants to buildings and oth
  - in regard to the proximity of hydrants to buildings and other facilities Part 3.2.2.2 (b), (c) and (d), with the exception that:
    - for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
    - ii. for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
       iii. for outdoor sales<sup>(54)</sup>, processing or storage facilities,
    - iii. for outdoor sales<sup>(34)</sup>, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales<sup>(54)</sup>, outdoor processing and outdoor storage facilities;
- d. in regard to fire hydrant accessibility and clearance requirements Part 3.5 and, where applicable, Part 3.6.

#### AO47.2

A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:

- a. an unobstructed width of no less than 3.5m;
- b. an unobstructed height of no less than 4.8m;
- c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
- d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.

| Performance outcomes   | Acceptable outcomes  |
|--|--|
|  | AO47.3<br>On-site fire hydrant facilities are maintained in effective<br>operating order in a manner prescribed in <i>Australian</i><br><i>Standard AS1851 (2012) – Routine service of fire</i><br><i>protection systems and equipment.</i>  |
| PO48<br>On-site fire hydrants that are external to buildings, as<br>well as the available fire fighting appliance access routes<br>to those hydrants, can be readily identified at all times<br>from, or at, the vehicular entry point to the development<br>site. | <ul> <li>AO48</li> <li>For development that contains on-site fire hydrants external to buildings: <ul> <li>a. those external hydrants can be seen from the vehicular entry point to the site; or</li> <li>b. a sign identifying the following is provided at the vehicular entry point to the site: <ul> <li>i. the overall layout of the development (to scale);</li> <li>ii. internal road names (where used);</li> <li>iii. all communal facilities (where provided);</li> <li>iv. the reception area and on-site manager's office (where provided);</li> <li>v. external hydrants and hydrant booster points;</li> <li>vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrants and hydrants</li> </ul> </li> <li>Note - The sign prescribed above, and the graphics used are to be: <ul> <li>a. in a form;</li> <li>b. of a size;</li> <li>c. illuminated to a level;</li> </ul> </li> </ul></li></ul> |
| <b>PO49</b><br>Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.                               | AO49<br>For development that contains on-site fire hydrants<br>external to buildings, those hydrants are identified by<br>way of marker posts and raised reflective pavement<br>markers in the manner prescribed in the technical note<br><i>Fire hydrant indication system</i> produced by the<br>Queensland Department of Transport and Main Roads.  |

| Dee website of the Queensiand Department of Transport and Main Reads.           Use specific criteria           Animal keeping <sup>(6)</sup> for catteries and kennels           PO50         No acceptable outcome provided.           Development for a cattery and kennel ensures that:         No acceptable outcome provided.           a. it is a size, scale and design not visually dominant, overbearing or inconsistent with detached, low density, low built form rule character of the area;         No acceptable outcome provided.           b. it is sufficiently landscaped, fenced and screened to reduce the visual appearance of buildings, structures, storage and parking areas;         No acceptable outcome provided.           c.         design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties;         No acceptable outcome provided.           Dewelling house <sup>(22)</sup> - Secondary dwelling         No acceptable outcome provided.           Besondary dwellings:         No acceptable outcome provided.           a are subordinate and ancillary to the primary dwelling in size and function.         No acceptable outcome provided.           Besondary dwellings:         are not larger than 100m <sup>2</sup> GFA;         No acceptable outcome provided.           Dewelling house <sup>(22)</sup> - Domestic outbuildings         structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> on-site.         No acceptable outcome provided.  | Performance outcomes   | Acceptable outcomes             |
|--|--|---------------------------------|
| Animal keeping <sup>(5)</sup> for catteries and kennels         P050         Development for a cattery and kennel ensures that:         a. it is a size, scale and design not visually dominant, overbearing or inconsistent with detached, low density, low built form rural character of the area;         b. it is sufficiently landscaped, fenced and screened to reduce the visual appearance of buildings, structures, storage and parking areas;         c. design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties;         d. all building, including runs, are located a minimum 400m from all property boundaries;         e. fencing of sufficient height and depth, being a minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping.         Develling house <sup>(22)</sup> - Secondary dwelling         PO51         Secondary dwellings:         a. are subordinate and ancillary to the primary dwelling in size and function.         b. are not larger than 100m <sup>2</sup> GFA;         c. have the appearance, bulk and scale of a single dwelling trom the street;         d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> on-site.         Develling house <sup>(22)</sup> - Domestic outbuildings         structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> - Domestic outbuildings.  |  |                                 |
| POS0       No acceptable outcome provided.         Development for a cattery and kennel ensures that:       a. it is a size, scale and design not visually dominant, overbearing or inconsistent with detached, low density, low built form rural character of the area;       b. it is sufficiently landscaped, fenced and screened to reduce the visual appearance of buildings, structures, storage and parking areas;       c.         c.       design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties;       d.         d.       all building, including runs, are located a minimum 400m from all property boundaries;       e.         e.       fencing of sufficient height and depth, being a minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping.       No acceptable outcome provided.         Dwelling house <sup>(22)</sup> - Secondary dwelling in size and function;       No acceptable outcome provided.         genondary dwellings:       a.       are subordinate and ancillary to the primary dwelling in size and function;         b.       are not larger than 100m <sup>2</sup> GFA;       No acceptable outcome provided.         c.       have the appearance, bulk and scale of a single dwelling from the street;       Mo acceptable outcome provided.         Dwelling house <sup>(22)</sup> - Domestic outbuildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> - Domestic outbuildings       No acceptable outcome provided.  | Use speci  | fic criteria                    |
| Development for a cattery and kennel ensures that:         a. it is a size, scale and design not visually dominant, overbearing or inconsistent with detached, low density, low built form rural character of the area;         b. it is sufficiently landscaped, fenced and screened to reduce the visual appearance of buildings, structures, storage and parking areas;         c. design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties;         d. all building, including runs, are located a minimum 400m from all property boundaries;         e. fencing of sufficient height and depth, being a minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping; <b>Dwelling house<sup>(22)</sup> - Secondary dwelling</b> in size and function;         a. are subordinate and ancillary to the primary dwelling in size and function;         b. are not larger than 100m <sup>2</sup> GFA;         c. have the appearance, bulk and scale of a single dwelling from the street;         d. maintain sufficient neight of all buildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> - Domestic outbuildings <b>Dwelling house<sup>(22)</sup> - Domestic outbuildings</b> PO51         Develling house <sup>(22)</sup> - Domestic outbuildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> or-site.         Dwelling house <sup>(22)</sup> - Domestic outbuildings  | Animal keeping <sup>(5)</sup> for catteries and kennels  |                                 |
| <ul> <li>a. it is a size, scale and design not visually dominant, overbearing or inconsistent with detached, low density, low built form rural character of the area;</li> <li>b. it is sufficiently landscaped, fenced and screened to reduce the visual appearance of buildings, structures, storage and parking areas;</li> <li>c. design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties;</li> <li>d. all building, including runs, are located a minimum 400m from all property boundaries;</li> <li>e. fencing of sufficient height and depth, being a minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping.</li> <li><b>Dwelling house<sup>(22)</sup> - Secondary dwelling</b> <ul> <li>in size and function;</li> <li>are not larger than 100m<sup>2</sup> GFA;</li> <li>are not larger than 100m<sup>2</sup> GFA;</li> <li>have the appearance, bulk and scale of a single dwelling from the street;</li> <li>d. amintain sufficient area for the sting of all buildings, structures, landscaping and car parking spaces for the Dwelling house<sup>(22)</sup> - Domestic outbuildings</li> </ul> </li> <li><b>Dwelling house<sup>(22)</sup> - Domestic outbuildings</b> FO51     No acceptable outcome provided.     </li> </ul>   | PO50   | No acceptable outcome provided. |
| <ul> <li>overbearing or inconsistent with detached, low density, low built form rural character of the area;</li> <li>it is sufficiently landscaped, fenced and screened to reduce the visual appearance of buildings, structures, storage and parking areas;</li> <li>design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties;</li> <li>all building, including runs, are located a minimum 400m from all property boundaries;</li> <li>fencing of sufficient height and depth, being a minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping.</li> </ul> <b>Dwelling house<sup>(22)</sup> - Secondary dwelling</b> in size and function. b. are not larger than 100m <sup>2</sup> GFA; c. have the appearance, bulk and scale of a single dwelling from the street; d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> - Domestic outbuildings <b>Dwelling house<sup>(22)</sup> - Domestic outbuildings</b> PO51 Develling house <sup>(22)</sup> - Domestic outbuildings PO52 No acceptable outcome provided.  | Development for a cattery and kennel ensures that:   |                                 |
| <ul> <li>breduce the visual appearance of buildings, structures, storage and parking areas;</li> <li>c. design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties;</li> <li>d. all building, including runs, are located a minimum 400m from all property boundaries;</li> <li>e. fencing of sufficient height and depth, being a minimum height of 0.2m, is provided to prevent animals escaping.</li> <li>Dwelling house<sup>(22)</sup> - Secondary dwelling</li> <li>PO51</li> <li>Secondary dwellings:         <ul> <li>are subordinate and ancillary to the primary dwelling in size and function;</li> <li>b. are not larger than 100m<sup>2</sup> GFA;</li> <li>c. have the appearance, bulk and scale of a single dwelling from the street;</li> <li>d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house<sup>(22)</sup> - Domestic outbuildings</li> </ul> </li> <li>PWelling house<sup>(22)</sup> - Domestic outbuildings</li> </ul>   | overbearing or inconsistent with detached, low   | co cion                         |
| noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties;       Image: Constraint of the streat | to reduce the visual appearance of buildings,  | C Jor                           |
| 400m from all property boundaries;         e.       fencing of sufficient height and depth, being a minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping.         Dwelling house <sup>(22)</sup> - Secondary dwelling         PO51         Secondary dwellings:         a.       are subordinate and ancillary to the primary dwelling in size and function;         b.       are not larger than 100m <sup>2</sup> GFA;         c.       have the appearance, bulk and scale of a single dwelling from the street;         d.       maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> - Domestic outbuildings         PWelling house <sup>(22)</sup> - Domestic outbuildings       No acceptable outcome provided.   | noise from being clearly audible beyond the<br>development site and does not create a disturbance<br>to residents on adjoining and surrounding | ene                             |
| minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping.         Dwelling house <sup>(22)</sup> - Secondary dwelling         PO51         Secondary dwellings:         a. are subordinate and ancillary to the primary dwelling in size and function;         b. are not larger than 100m <sup>2</sup> GFA;         c. have the appearance, bulk and scale of a single dwelling from the street;         d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> on-site.         Dwelling house <sup>(22)</sup> - Domestic outbuildings         PO52   |  | CCI                             |
| PO51       No acceptable outcome provided.         Secondary dwellings:       a. are subordinate and ancillary to the primary dwelling in size and function;         b. are not larger than 100m² GFA;       b. are not larger than 100m² GFA;         c. have the appearance, bulk and scale of a single dwelling from the street;       d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> on-site.         Dwelling house <sup>(22)</sup> - Domestic outbuildings       No acceptable outcome provided.         PO52       No acceptable outcome provided.  | minimum height of 1.8m and minimum depth of  |                                 |
| Secondary dwellings:       a. are subordinate and ancillary to the primary dwelling in size and function;         b. are not larger than 100m² GFA;       b. are not larger than 100m² GFA;         c. have the appearance, bulk and scale of a single dwelling from the street;       b. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> on-site.         Dwelling house <sup>(22)</sup> - Domestic outbuildings       b. No acceptable outcome provided.   | Dwelling house <sup>(22)</sup> - Secondary dwelling  |                                 |
| <ul> <li>in size and function;</li> <li>b. are not larger than 100m<sup>2</sup> GFA;</li> <li>c. have the appearance, bulk and scale of a single dwelling from the street;</li> <li>d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house<sup>(22)</sup> on-site.</li> <li>Dwelling house<sup>(22)</sup> - Domestic outbuildings</li> <li>PO52 No acceptable outcome provided.</li> </ul>   |  | No acceptable outcome provided. |
| <ul> <li>c. have the appearance, bulk and scale of a single dwelling from the street;</li> <li>d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house<sup>(22)</sup> on-site.</li> <li>Dwelling house<sup>(22)</sup> - Domestic outbuildings</li> <li>PO52 No acceptable outcome provided.</li> </ul>  |  |                                 |
| dwelling from the street;         d. maintain sufficient area for the siting of all buildings, structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> on-site.         Dwelling house <sup>(22)</sup> - Domestic outbuildings         PO52    No acceptable outcome provided.   | b. are not larger than 100m <sup>2</sup> GFA;  |                                 |
| structures, landscaping and car parking spaces for the Dwelling house <sup>(22)</sup> on-site.         Dwelling house <sup>(22)</sup> - Domestic outbuildings         PO52       No acceptable outcome provided.   |  |                                 |
| PO52 No acceptable outcome provided.   | structures, landscaping and car parking spaces for   |                                 |
|  | Dwelling house <sup>(22)</sup> - Domestic outbuildings   | ·                               |
| Domestic outbuildings and car ports are:   | PO52   | No acceptable outcome provided. |
|  | Domestic outbuildings and car ports are:   |                                 |

| Performance outcomes |   | Acceptable outcomes   |
|----------------------|---|---|
| a.                   | of a height that does not negatively impact the visual amenity of adjoining properties;   |   |
| b.                   | located on-site to not dominate the streetscape.  |   |
| Edu                  | icational establishment <sup>(24)</sup> for agricultural educati  | on or agricultural training facilities  |
| PO                   | 53  | No acceptable outcome provided.   |
| An I                 | Educational establishment <sup>(24)</sup> :   |   |
| a.                   | is for the purpose of agricultural education or agricultural training training only;  |   |
| b.                   | is limited in size and scale and do not have adverse<br>impacts on the low-set built form, low density, open<br>area character and amenity of the area, including<br>considerations to the impact of noise, traffic, and<br>on-site waste disposal; | Clorsio   |
| C.                   | avoids locating in area of high quality cropping <sup>(19)</sup><br>land;   | e e   |
| d.                   | avoids establishing on land subject to a flooding<br>risk, or where avoidance is not possible, identify<br>measures to be taken mitigate any potential risk to<br>property and life;  | chen  |
| e.                   | ensures vehicle parking and storage areas are to<br>be screened from public view to minimise adverse<br>visual impacts on rural character;  |   |
| f.                   | does not degrade or compromise the visual, natural,<br>biological and ecological values associated with<br>vegetated areas or adversely impact upon water<br>quality;   |   |
| g.                   | does not adversely impact on the safe and efficient operation of the external road network.   |   |
| Hon                  | ne based business <sup>(35)</sup>   |   |
| PO                   | 54  | A054.1  |
|                      | Home based business(s) <sup>(35)</sup> :  | The Home based business(s) <sup>(35)</sup> , including any storage are fully enclosed within a dwelling or on-site structure.   |
| a.                   | is subordinate in size and function to the primary use on the site being a permanent residence;   | AQ54.2  |
| b.                   | are of a scale and intensity that does not result in adverse visual or nuisance impacts on the residents in adjoining or nearby dwellings;  | AO54.2<br>Up to 2 additional non-resident , either employees or<br>customers, are permitted on the site at any one time,<br>except where involving the use of heavy vehicles, where |
| C.                   | store no more heavy vehicles, trailer and motor vehicles on-site than follows:  | no employees are permitted.   |
|                      | i. 1 heavy vehicle;   | Note - This provision does not apply to Bed and Breakfast or<br>farmstay business.  |

| Per  | formance outcomes  | Acceptable outcomes   |
|--|--|---|
|  | i. 1 trailer;  | AO54.3  |
|  | ii. Up to 3 motor vehicles.  | The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:        |
| <ul> <li>d. results in a vehicular and pedestrian traffic generation consistent with that reasonably expected in the surrounding low density, low built form and open area character and amenity anticipated in the area;</li> <li>e. are suitably screened to ensure adverse visual impacts on the residents in adjoining or nearby dwellings are minimised;</li> <li>f. sufficiently separated from adjoining properties so development does not result in adverse visual, noise, or nuisance impacts on adjoining residents.</li> </ul> | <ul> <li>a. 1 heavy vehicle;</li> <li>b. 1 trailer;</li> <li>c. Up to 3 motor vehicles.</li> <li>Note - The car parking provision associated with the Dwelling house<sup>(22)</sup> is in addition to this requirement.</li> <li>Note - The number of motor vehicles stated is in addition to motor vehicles associated with a Dwelling house<sup>(22)</sup>.</li> <li>AO54.4</li> <li>Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining sites by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.</li> </ul> |   |
|  | Note - Planting for screening is to have a minimum depth of 3m.<br><b>AO54.5</b><br>Heavy vehicle storage buildings, parking areas and<br>standing areas are setback a minimum of 30m from all<br>property boundaries.   |   |
| PO   | 55   | A055  |
| The hours of operation for Home based business(s) <sup>(35)</sup> are managed so that the activity does not adversely impact on the low intensity character and amenity anticipated in the area.   | Hours of operation to be restricted to 8:00am to 6:00pm<br>Monday to Saturday, except for:<br>a. bed and breakfast or farm stay business which may<br>operate on a 24 hour basis;  |   |
|  | <ul> <li>b. office or administrative activities that do not<br/>generate non-residents visiting the site such as<br/>book keeping and computer work;</li> </ul>  |   |
|  |  | c. starting and warming up of heavy vehicles, which can commence at 7.00am.                           |
| POS  | 56   | AO56.1  |
| The  | Home based business(s) <sup>(35)</sup> does not result in:   | The use does not involve heavy vehicle servicing or major repairs, including spray painting or panel. |

| Per                     | formance outcomes   | Acceptable outcomes   |
|-------------------------|---|---|
| a.<br>b.                | an adverse visual, odour, particle drift or noise<br>nuisance impact on the residents in adjoining or<br>nearby dwellings;<br>an adverse impact upon the low intensity and open<br>area character and amenity anticipated in the<br>locality;<br>the establishment of vehicle servicing or major<br>repairs, spray painting, panel beating or any<br>environmentally relevant activity (ERA). | <ul> <li>AO56.2</li> <li>Home based business(s)<sup>(35)</sup> do not comprise an environmentally relevant activity (ERA) as defined in the Environmental Protection Regulation 2008.</li> <li>AO56.3</li> <li>Activities associated with the use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke.</li> <li>Note - Nuisance is defined in the Environmental Protection Act 1994.</li> </ul>          |
| PO                      | 57  | A057.1  |
| On-<br>acti             | site display and sales of goods is limited to the vities being undertaken from the site and does not ult in:  | Only goods grown, produced or manufactured on-site are sold from the site.  |
| a.                      | the display and sale of goods being viewed from outside of the site;  | A057.2  |
| b.                      | overall development on the site having a predominantly commercial appearance.   | Display of goods grown, produced or manufactured<br>on-site are contained within a dwelling or on-site structure<br>and the display of goods is not visible from the boundary<br>of the site.   |
| PO                      | 58  | A058  |
| Bed<br>that<br>a.<br>b. | and breakfast and farmstays are of a size and scale<br>are consistent with the low intensity, open area<br>character and amenity of the rural residential area;<br>ensures acceptable levels of privacy and amenity<br>for the residents in adjoining or nearby dwellings.  | <ul> <li>For bed and breakfast and farmstays-</li> <li>a. Short-term accommodation<sup>(77)</sup> is provided in the Dwelling house<sup>(22)</sup> of the accommodation operator;</li> <li>b. maximum 4 bedrooms are provided for a maximum of 10 guests;</li> <li>c. meals are served to paying guests only;</li> <li>d. rooms do not contain food preparation facilities.</li> </ul>  |
| Мај                     | or electricity infrastructure <sup>(43)</sup> , Substation <sup>(80)</sup> and  | Utility installation <sup>(86)</sup>  |
| PO                      | 59  | AO59.1  |
|                         | development does not have an adverse impact on<br>visual amenity of a locality and is:<br>high quality design and construction;<br>visually integrated with the surrounding area;<br>not visually dominant or intrusive;<br>located behind the main building line;<br>below the level of the predominant tree canopy or<br>the level of the surrounding buildings and<br>structures;          | <ul> <li>Development is designed to minimise surrounding land use conflicts by ensuring infrastructure, buildings, structures and other equipment:</li> <li>a. are enclosed within buildings or structures;</li> <li>b. are located behind the main building line;</li> <li>c. have a similar height, bulk and scale to the surrounding fabric;</li> <li>d. have horizontal and vertical articulation applied to all exterior walls.</li> </ul> |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| <ul> <li>f. camouflaged through the use of colours and<br/>materials which blend into the landscape;</li> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character<br/>of the zone and surrounding area.</li> </ul>  | AO59.2<br>A minimum 3m wide strip of dense planting is provided<br>around the outside of the fenced area, between the<br>development and street frontage, side and rear<br>boundaries.  |
| PO60  | AO60  |
| Infrastructure does not have an impact on pedestrian health and safety.   | <ul> <li>Access control arrangements:</li> <li>a. do not create dead-ends or dark alleyways adjacent to the infrastructure;</li> <li>b. minimise the number and width of crossovers and entry points;</li> <li>c. provide safe vehicular access to the site;</li> <li>d. do not utilise barbed wire or razor wire.</li> </ul> |
| PO61  | AO61  |
| <ul> <li>All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility:</li> <li>a. generates no audible sound at the site boundaries where in a residential setting; or</li> <li>b. meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.</li> </ul>   | All equipment which produces audible or non-audible<br>sound is housed within a fully enclosed building<br>incorporating sound control measures sufficient to ensure<br>noise emissions meet the objectives as set out in the<br>Environmental Protection (Noise) Policy 2008.  |
| Non-resident workforce accommodation <sup>(52)</sup>  | 9   |
| <ul> <li>PO62</li> <li>Development associated with Non-resident workforce accommodation<sup>(52)</sup>:</li> <li>a. provides accommodation for rural workers only and is not advertised or used for the purpose of accommodating general travellers or tourists;</li> <li>b. is not, or does not act, as a permanent place of residence for persons where a typical period of time does not exceed 3 consecutive months;</li> <li>c. is of a size, scale, intensity and design that minimises the potential for adverse noise, visual, privacy and traffic impacts on adjoining or nearby residents;</li> <li>d. is of a size, scale, intensity and design that is consistent with the low intensity, low-set built form and open area character and amenity anticipated for the area;</li> </ul> | No acceptable outcome provided.   |

| Per  | formance outcomes   | Acceptable outcomes   |
|------|---|---|
| e.   | provides suitable open space, buildings and facilities that meet the recreational, social and amenity needs of people staying on-site;  |   |
| f.   | provides landscape buffer along adjoining property boundaries to fully screen activities occurring on the site.   |   |
| Roa  | dside stall <sup>(68)</sup>   |   |
| PO   | 33  | AO63.1  |
| AR   | oadside stall <sup>(68)</sup> :   | For a Roadside stall <sup>(68)</sup> :  |
| a.   | comprises only one Roadside stall <sup>(68)</sup> per property;   | a. no more than one Roadside stall <sup>(68)</sup> per property;  |
| b.   | only offers goods grown, produced or manufactured on the site;  | b. goods offered for sale are only goods grown, produced or manufactured on the site;   |
| C.   | is of a size and in a location that will not result in<br>nuisance, or have a significant adverse impact on<br>the amenity, for residents on adjoining and<br>surrounding properties;                           | c. the maximum area associated with a Roadside stall <sup>(68)</sup> , including any larger separate items displayed for sale, does not exceed 20m <sup>2</sup> .   |
| d.   | is designed and located to ensure safe and accessible access, egress and on-site parking and not negatively impact the road network.  | AO63.2<br>Roadside stall <sup>(68)</sup> :  |
|      |   | <ul> <li>a. obtains vehicle access from a road classified as an arterial or sub-arterial;</li> <li>b. provide car parking for 2 vehicles off the road carriage and located on the property;</li> <li>c. is located no closer than 100m from an intersection.</li> </ul> |
|      |   | Note - Refer to Overlay map - Road hierarchy for road classification.   |
| Rur  | al industry <sup>(70)</sup>   |   |
| PO(  | 64<br>al industry <sup>(70)</sup> :   | No acceptable outcome provided  |
| a.   | adopt construction materials and use of colour for<br>buildings and structures are visually compatible<br>with the rural residential character and amenity;   |   |
| b.   | is of a size, scale and design that is not visually<br>dominant, overbearing and inconsistent with the<br>low intensity built form and open area character<br>and amenity of the rural residential environment. |   |
| Sale | Sales office <sup>(72)</sup>  |   |
| PO   | 55  | AO65  |
|      |   |   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Sales office <sup>(72)</sup> remain temporary in duration and retain<br>a physical connection to land or building being displayed<br>or sold.   | Development is carried out for no longer than 2 years.  |
| Telecommunications facility <sup>(81)</sup><br>Editor's note - In accordance with the Federal legislation Telecommun<br>that will not cause human exposure to electromagnetic radiation beyo<br>Radiation - Human Exposure) Standard 2003 and Radio Protection St<br>to 300Ghz.   |   |
| <b>PO66</b><br>Telecommunications facilities <sup>(81)</sup> are co-located with existing telecommunications facilities <sup>(81)</sup> , Utility installation <sup>(86)</sup> , Major electricity infrastructure <sup>(43)</sup> or Substation <sup>(80)</sup> if there is already a facility in the same coverage area. | AO66.1<br>New telecommunication facilities <sup>(81)</sup> are co-located on<br>existing towers with new equipment shelter and<br>associated structures positioned adjacent to the existing<br>shelters and structures.                                 |
|   | AO66.2<br>If not co-located with an existing facility, all co-location<br>opportunities have been investigated and fully exhausted<br>within a 2km radius of the site.  |
| <b>PO67</b><br>A new Telecommunications facility <sup>(81)</sup> is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.   | <b>AO67</b><br>A minimum of 45m <sup>2</sup> is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.   |
| PO68<br>Telecommunications facilities <sup>(81)</sup> do not conflict with lawful<br>existing land uses both on and adjoining the site.   | AO68<br>The development results in no net reduction in the<br>minimum quantity and standard of landscaping, private<br>or communal open space or car parking spaces required<br>under the planning scheme or under an existing<br>development approval. |
| PO69  | AO69.1  |
| <ul> <li>The Telecommunications facility<sup>(81)</sup> does not have an adverse impact on the visual amenity of a locality and is:</li> <li>a. high quality design and construction;</li> <li>b. visually integrated with the surrounding area;</li> </ul>   | Where in an urban area, the development does not<br>protrude more than 5m above the level of the existing<br>treeline, prominent ridgeline or building rooftops in the<br>surrounding townscape.  |
| c. not visually dominant or intrusive;  | AO69.2  |
| <ul> <li>d. located behind the main building line;</li> <li>e. below the level of the predominant tree canopy or<br/>the level of the surrounding buildings and<br/>structures;</li> </ul>  | In all other areas towers do not exceed 35m in height.  |
| <ul> <li>f. camouflaged through the use of colours and<br/>materials which blend into the landscape;</li> </ul>   | AO69.3  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| <ul> <li>g. treated to eliminate glare and reflectivity;</li> <li>h. landscaped;</li> <li>i. otherwise consistent with the amenity and character of the zone and surrounding area.</li> </ul>                                  | Acceptable outcomes         Towers, equipment shelters and associated structures are of a design, colour and material to:         a. reduce recognition in the landscape;         b. reduce glare and reflectivity.         AO69.4         All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.         Where there is no established building line the facility is located at the rear of the site.         AO69.5         The facility is enclosed by security fencing or by other means to ensure public access is prohibited.         AO69.6         A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.         Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design. |
|  | around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.<br>Note - Landscaping is provided in accordance with Planning scheme  |
|  | Note - Council may require a detailed landscaping plan, prepared<br>by a suitably qualified person, to ensure compliance with Planning<br>scheme policy - Integrated design.  |
| P070   | A070  |
| Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.   | An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.   |
| P071   | A071  |
| All activities associated with the development occur within<br>an environment incorporating sufficient controls to ensure<br>the facility generates no audible sound at the site<br>boundaries where in a residential setting. | All equipment comprising the Telecommunications facility <sup>(81)</sup> which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.  |
| Wholesale nursery <sup>(89)</sup>  |   |
| P072   | No acceptable outcome provided.   |
|  |   |

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| Buildings and activities associated with a Wholesale nursery <sup>(89)</sup> :   |                                 |
| a. ensure the propagation of plants, whether or not in the open, occur without loss of amenity to adjacent properties;   |                                 |
| <ul> <li>b. do not result in any form of environmental<br/>degradation, including, but not limited to, soil<br/>degradation, pollution of natural water courses and<br/>introduction of exotic plant species into the natural<br/>on-site or adjoining flora;</li> </ul> | 2                               |
| c. are landscaped, fenced and screened in a manner<br>to reduce the visual appear of buildings, structures,<br>storage and parking areas;  | Si sion                         |
| d. have vehicle access from a road classified as a arterial or sub-arterial.   | C Jel                           |
| Note - Refer to Overlay map - Road hierarchy for road classification.  |                                 |
| Veterinary services (87)   | 0                               |
| P073   | No acceptable outcome provided. |
| Buildings and activities associated with Veterinary services <sup>(87)</sup> :   | S                               |
| a. are for veterinary care, surgery and treatment of animals only;   |                                 |
| b. are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;  |                                 |
| c. have vehicle access from a road classified as a arterial or sub-arterial.   |                                 |
| Note - Refer to Overlay map - Road hierarchy for road classification.  |                                 |
|  |                                 |
| Winery <sup>(90)</sup>   |                                 |
| P074   | No acceptable outcome provided. |
| Buildings and activities associated with Winery <sup>(90)</sup> :  |                                 |
| a. are for a Winery <sup>(90)</sup> and ancillary activities only.<br>Uses not affiliated with Winery <sup>(90)</sup> activities, or the<br>sale of products produced or manufactured on-site,<br>are avoided;   |                                 |
|  |                                 |

| Performance outcomes  | Acceptable outcomes   |  |
|---|---|--|
| <ul> <li>b. are landscaped, fenced and screened in a manner<br/>to reduce the visual appear of buildings, structures,<br/>storage and parking areas;</li> </ul>   |   |  |
| <ul> <li>have vehicle access from a road classified as a arterial or sub-arterial.</li> </ul>   |   |  |
| Note - Refer to Overlay map - Road hierarchy for road classification.   |   |  |
| Values and cons   | straints criteria   |  |
| Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.                              |   |  |
| Acid sulfate soils - (refer Overlay map - Acid sulfate s<br>apply)<br>Note - To demonstrate achievement of the performance outcome, an A  | cid sulfate soils (ASS) investigation report and soil management plan   |  |
| is prepared by a qualified engineer. Guidance for the preparation an A<br>Planning scheme policy - Acid sulfate soils.  | ASS investigation report and soil management plan is provided in  |  |
| P075  | A075  |  |
| <ul> <li>Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development:</li> <li>a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment;</li> <li>b. protects the environmental and ecological values and health of receiving waters;</li> <li>c. protects buildings and infrastructure from the effects of acid sulfate soils.</li> </ul> | <ul> <li>Development does not involve:</li> <li>a. excavation or otherwise removing of more than 100m<sup>3</sup> of soil or sediment where below than 5m Australian Height datum AHD; or</li> <li>b. filling of land of more than 500m<sup>3</sup> of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD.</li> </ul> |  |
| Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)<br>Note - To demonstrate achievement of the performance outcomes, a bushfire management plan is prepared by a suitably qualified person. Guidance for the preparation of a bushfire management plan is provided in Planning scheme policy – Bushfire prone areas.   |   |  |
| P076  | A076  |  |
| Development:  | Buildings and structures have contained within the site   |  |
| <ul> <li>a. minimises the number of buildings and people<br/>working and living on a site exposed to bushfire<br/>risk;</li> </ul>  | a. a separation from classified vegetation of 20m or<br>the distance required to achieve a bushfire attack<br>level (BAL) at the building, roofed structure or fire<br>fighting water supply of no more than 29, whicheve   |  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| <ul> <li>c. is located and designed to increase the chance of survival of buildings and structures during a bushfire;</li> <li>d. minimises bushfire risk from build up of fuels around buildings and structures.</li> </ul>                  | <ul> <li>b. A separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater;</li> <li>c. A separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures;</li> <li>d. An area suitable for a standard fire fighting water supply extraction point; and</li> <li>e. An access path suitable for use by a standard fire fighting applicant having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%:</li> <li>i. To, and around, each building and other roofed structure; and</li> </ul> |
|   | <ul> <li>To each fire fighting water supply extraction point.</li> <li>Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attach level are as described in Australian Standard AS 3959.</li> </ul>   |
| P077  | A077  |
| Development and associated driveways and access ways:   | A length of driveway:   |
| <ul> <li>a. avoid potential for entrapment during a bushfire;</li> <li>b. ensure safe and effective access for emergency services during a bushfire;</li> <li>c. enable safe evacuation for occupants of a site during a bushfire.</li> </ul> | <ul> <li>a. to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road;</li> <li>b. has a maximum gradient no greater than 12.5%;</li> <li>c. have a minimum width of 3.5m;</li> <li>d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.</li> </ul>  |
| P078  | A078  |
| Development provides an adequate water supply for fire-fighting purposes.   | <ul> <li>a. A reticulated water supply is provided by a distributer retailer for the area or, where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10,000 litres (tanks with fire brigade tank fittings, swimming pools) is provided and located within 10m of buildings and structures.</li> <li>b. Where not connected to a reticulated water supply or a pressure and flow stated above is not available, on-site fire fighting water storage containing not</li> </ul>   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| P079<br>Development:<br>a. does not present unacceptable risk to people or<br>environment due to the impact of bushfire on<br>dangerous goods or combustible liquids;<br>b. does not present danger or difficulty to emergency<br>services for emergency response or evacuation.<br>Editor's note - Unacceptable risk is defined as a situation where<br>people or property are exposed to a predictable hazard event that<br>may result in serious injury, loss of life, failure of community<br>infrastructure, or property damage.<br>Heritage and landscape character (refer Overlay map<br>the following assessment criteria apply)<br>Note - To assist in demonstrating achievement of heritage performanc<br>suitably qualified person verifying the proposed development is in acc | e outcomes, a heritage impact assessment report prepared by a  |
| PO80   | AO80   |
| <ul> <li>Development will:</li> <li>a. not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building;</li> <li>b. protect the fabric and setting of the heritage site, object or building;</li> <li>c. be consistent with the form, scale and style of the heritage site, object or building;</li> <li>d. utilise similar materials to those existing, or where this is not reasonable or practicable, neutral</li> </ul>   | Development is for the preservation, maintenance, repair<br>and restoration of a site, object or building of cultural<br>heritage value.<br>Note - A Cultural heritage conservation management plan for the<br>preservation, maintenance, repair and restoration of a site, object<br>or building of cultural heritage value is prepared in accordance with<br>Planning scheme policy – Heritage and landscape character. The<br>plan is sent to, and approved by Council prior to the commencement<br>of any preservation, maintenance, repair and restoration works. |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| <ul> <li>e. incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building;</li> <li>f. retain public access where this is currently provided.</li> </ul>   |  |
| Infrastructure buffer areas (refer Overlay map – Infrastru<br>criteria apply)  | ucture buffers to determine if the following assessment  |
| PO81   | A081   |
| <ul> <li>Development within a High voltage electricity line buffer:</li> <li>a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields;</li> <li>b. is located and designed in a manner that maintains a high level of security of supply;</li> <li>c. is located and designed so not to impede upon the functioning and maintenance of high voltage electrical infrastructure.</li> </ul>  | Except where located on an approved Neighbourhood<br>development plan, development does not involve the<br>construction of any buildings or structures within a high<br>voltage electricity line buffer. |
| Overland flow path (refer Overlay map - Overland flow<br>apply)<br>Note - The applicable river and creek flood planning levels associated<br>obtained by requesting a flood check property report from Council.  |  |
|  |  |
| <ul> <li>PO82</li> <li>Development:</li> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure.</li> </ul>   | No acceptable outcome provided.  |
| P083   | AO83   |
| <ul> <li>Development:</li> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.</li> </ul> | No acceptable outcome provided.  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| PO84   | No acceptable outcome provided.  |
| Development does not:  |  |
| <ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or other premises, public lands, watercourses, roads or infrastructure.</li> </ul>   |  |
| Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.   |  |
| PO85   | A085   |
| Development ensures that public safety and the risk to<br>the environment are not adversely affected by a<br>detrimental impact of overland flow on a hazardous<br>chemical located or stored on the premises.   | Development ensures that a hazardous chemical is not<br>located or stored in an Overland flow path area.<br>Note - Refer to the Work Health and Safety Act 2011 and associated<br>Regulation and Guidelines, the Environmental Protection Act 1994<br>and the relevant building assessment provisions under the Building<br>Act 1975 for requirements related to the manufacture and storage<br>of hazardous substances. |
| P086   | A086   |
| Development which is not in a Rural zone ensures that<br>overland flow is not conveyed from a road or public open<br>space onto a private lot.   | Development which is not in a Rural zone that an<br>overland flow paths and drainage infrastructure is<br>provided to convey overland flow from a road or public<br>open space area away from a private lot.   |
| P087   | AO87.1   |
| Development ensures that inter-allotment drainage<br>infrastructure, overland flow paths and open drains<br>through private property cater for overland flows for a<br>fully developed upstream catchment and are able to be<br>easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.   |
| an upstream, downstream or surrounding premises.   | AO87.2   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   | Development ensures that inter-allotment drainage<br>infrastructure is designed to accommodate any event up<br>to and including the 1% AEP for the fully developed<br>upstream catchment.  |
| PO88   | No acceptable outcome provided.  |
| Development protects the conveyance of overland flow<br>such that an easement for drainage purposes is provided<br>over:   |  |

| Performance outcomes |  | Acceptable outcomes  |  |
|----------------------|--|--|--|
| a.                   | a stormwater pipe if the nominal pipe diameter exceeds 300mm;  |  |  |
| b.                   | an overland flow path where it crosses more than one premises;   |  |  |
| C.                   | inter-allotment drainage infrastructure.   |  |  |
|                      | e - Refer to Planning scheme policy - Integrated design for details examples.  |  |  |
|                      | e - Stormwater Drainage easement dimensions are provided in ordance with Section 3.8.5 of QUDM.  |  |  |
| Add                  | itional criteria for development for a Park <sup>(57)</sup>  |  |  |
| PO8                  | 9  | A089   |  |
| layo                 | elopment for a Park <sup>(57)</sup> ensures that the design and<br>ut responds to the nature of the overland flow<br>cting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated design. |  |
| a.                   | public benefit and enjoyment is maximised;   |  |  |
| b.                   | impacts on the asset life and integrity of park structures is minimised;   |  |  |
| C.                   | maintenance and replacement costs are minimised.   | 3  |  |
|                      | NBR Planning   |  |  |

### 7.2.3.7 Reconfiguring a lot code

#### 7.2.3.7.1 Application - Caboolture west local plan - Reconfiguring a lot

This code applies to assessing development in the Caboolture west local plan area, if:

- 1. self-assessable or assessable development where this code is an applicable code identified in the assessment criteria column of a table of assessment (Part 5);
- 2. impact assessable development (Part 5).

For self-assessable or assessable development for this Code:

- 1. Part A of the code applies only to self-assessable development in Urban living precinct;
- 2. Part B of the code applies only to assessable development in the Urban living precinct;
- 3. Part C of the code applies only to self-assessable development in Town centre precinct;
- 4. Part D of the code applies only to assessable development in Town centre precinct;
- 5. Part E of the code applies only to self-assessable development in the Enterprise and employment precinct;
- 6. Part F of the code applies only to assessable development in the Enterprise and employment precinct;
- 7. Part G of the code applies only to self-assessable development in the Green network precinct;
- 8. Part H of the code applies only to assessable development in the Green network precinct;
- 9. Part I of the code applies only to self-assessable development in the Rural living precinct;
- 10. Part J of the code applies only to assessable development in the Rural living precinct.

When using this code, reference should be made to Rules for determining the level of assessment and, where applicable, Rules for determining the assessment criteria located in Part 5.

#### 7.2.3.7.2 Purpose - Caboolture west local plan - Reconfiguring a lot

- 1. The purpose of the Reconfiguring a lot code is to facilitate and manage the outcomes of development for reconfiguring a lot.
- 2. The purpose of the code will be achieved through the following overall outcomes:
  - a. Reconfiguring a lot creates a diversity of lot sizes, dimensions and arrangements consistent with the intended densities, uses, configurations and character of the applicable precinct and sub-precinct while not adversely impacting on lawful uses, values or constraints present.
  - b. Reconfiguring a lot provides a variety and arrangement of lots for lawful uses consistent with the uses, precinct, zone and local plan outcomes applicable to the land and that meet the provisions of the planning scheme.
  - c. Reconfiguring a lot meets the social, cultural and recreational needs of the community by providing:
    - i. a range of affordable housing opportunities;
    - ii. accessible commercial and local employment opportunities;
    - iii. assessable Park<sup>(57)</sup> and open space areas located within walking distance to all residential lots;
    - iv. for the creation of a sense of place commensurate with the intents for the applicable precinct and sub-precinct.

- d. Reconfiguring a lot creates a lot design and orientation that enables building design appropriate for the local climate and conditions.
- e. Reconfiguring a lot identifies development footprints that are free from development constraints and natural values.
- f. Reconfiguring a lot is sensitive to, and mitigates any adverse impacts on; natural hazard, local topography and landforms, natural ecosystems including significant vegetation and local fauna habitat, cultural heritage values, existing character, outlooks and local landmarks.
- g. Reconfiguring a lot recognises and responds to the presence of major infrastructure and does not undermine the viability, integrity, operation, maintenance or safety of major infrastructure.
- h. Reconfiguring of does not result in development encroaching upon and constraining the operation of existing infrastructure, utilities, industrial uses, or major sport, recreational and entertainment facilities.
- i. Reconfiguring a lot will result in:
  - i. services being suppled to all lots in a safe, efficient, co-ordinated and sequenced manner which minimises whole of life cycle costs and is sensitive to the environment they are located in;
  - ii. stormwater infrastructure designed to protect people, property, the built environment and the natural environment in an efficient and cost effective manner;
  - iii. a street system designed to provide well-connected, safe and convenient movement and open space networks through interconnected streets and active transport linkages that provide high levels of accessibility between residences, open space areas and places of activity;
  - iv. the provision of important connections surrounding transit nodes and centres.

### 7.2.3.7.1 Urban living precinct

#### 7.2.3.7.1.1 Application - Reconfiguring a lot code - Urban living precinct

- 1. The purpose of this part of the Reconfiguring a lot code is to facilitate and manage the outcomes of development for reconfiguring a lot and its associated Operational Works in the Caboolture West local plan Urban living precinct, to achieve the Overall Outcomes.
- The purpose of this part of the code will be achieved through the overall outcomes as identified in Part 7.2.3.7
   Reconfiguring a lot code and the following additional Caboolture West local plan Urban living precinct specific overall outcomes:
  - a. Reconfiguring a lot is in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.1 Caboolture West structure plan.
  - b. Reconfiguring a lot achieves a variety of lot sizes and net residential density of between 11-30 dwellings per hectare.
  - c. Reconfiguring a lot achieves neighbourhoods that are designed to provide well-connected, safe and convenient movement and open space networks through interconnected streets and active transport linkages that provide high levels of accessibility between residences, open space areas and places of activity.
  - d. Reconfiguring a lot avoids areas subject to constraint, limitation, or environmental values. Where reconfiguring a lot cannot avoid these identified areas, it responds by:
    - i. adopting a 'least risk, least impact' approach when designing, siting and locating development to minimise the potential risk to people, property and the environment;
    - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
    - iii. maintaining environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of environmental offsets, landscaping and facilitating safe wildlife movement through the environment;
    - iv. protecting native species and protecting and enhancing native species habitat;
    - v. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
    - vi. establishing effective separation distances, buffers and mitigation measures associated with major infrastructure to minimise adverse effects on sensitive land uses from noise, dust and other nuisance generating activities;
    - vii. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of major infrastructure;
    - viii. Ensuring effective and efficient disaster management response and recovery capabilities.
    - The Reconfiguring a lot, Operational works associated with the Reconfiguring a lot, and uses expected to occur as a result of the Reconfiguring a lot:
    - i. responds to the risk presented by overland flow and minimises risk to personal safety;
    - ii. is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
    - iii. does not impact on the conveyance of overland flow up to and including the Overland Flow Defined Flood Event;
    - iv. directly, indirectly and cumulatively avoids an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
  - f. Reconfiguring a lot achieves the intent and purpose of the Urban living precinct and sub-precinct outcomes as identified in Part 7.

#### 7.2.3.7.1.2 Criteria for assessment

To determine if boundary realignment is self-assessable development, it must comply with the self-assessable acceptable outcomes set out in Part A, Table 7.2.3.7.1.1. Where development does not meet any of the relevant criteria in Part A, Table 7.2.3.7.1.1, assessment is limited to the subject matter of the SAOs that were not complied with. The following table identifies the corresponding performance outcomes where a development does not comply with a self-assessable acceptable outcome.

| Self-assessable acceptable outcomes | Corresponding performance<br>outcomes |
|-------------------------------------|---------------------------------------|
| SAO1                                | PO1, PO2, PO32, PO33                  |
| SAO2                                | PO2, PO33                             |
| SAO3                                | PO34                                  |
| SAO4                                | PO2                                   |
| SAO5                                | PO34                                  |
| SAO6                                | PO2, PO33                             |
| SAO7                                | P052                                  |

Where reconfiguring a lot is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part B, Table 7.2.3.7.1.2.

Part A - Criteria for self-assessable development - Reconfiguring a lot code - Urban living precinct

Table 7.2.3.7.1.1 Self-assessable development - Reconfiguring a lot code - Urban living precinct

| Self-assessable acceptable outcomes |   |  |  |
|-------------------------------------|---|--|--|
|                                     | General criteria  |  |  |
| Boundar                             | Boundary realignment for developable and developed lots   |  |  |
| SAO1                                | Lots created by boundary realignment:   |  |  |
|                                     | a. contain all service connections to water, sewer, electricity and other infrastructure wholly within the lot they serve;  |  |  |
|                                     | b. have constructed road access;  |  |  |
|                                     | c. do not require additional infrastructure connections or modification to existing connections.  |  |  |
|                                     | d. do not result in the creation of any additional lots;  |  |  |
| SAO2                                | Boundary realignment does not result in existing land uses on-site becoming non-complying with planning scheme criteria.  |  |  |
|                                     | Note - examples may include but are not limited to:   |  |  |
|                                     | a. minimum lot size requirements;   |  |  |
|                                     | b. minimum or maximum required setbacks   |  |  |
|                                     | c. parking and access requirements;   |  |  |
|                                     | d. servicing and Infrastructure requirements;   |  |  |
|                                     | e. dependant elements of an existing or approved land use being separately titled, including but not limited to:  |  |  |
|                                     | i. Where premises are approved as Multiple Dwelling <sup>(49)</sup> Units with a communal open space area, the communal open space cannot be separately titled as it is required by the Multiple dwelling <sup>(49)</sup> approval. |  |  |

| SAO3 | <ul> <li>Where a commercial or industrial land use contains an ancillary office<sup>(53)</sup>, the office<sup>(53)</sup> cannot be separately titled as it is considered part of the commercial or industrial use.</li> <li>Where a Dwelling house<sup>(22)</sup> includes a secondary dwelling or associated outbuildings, they cannot be separately titled as they are dependent on the Dwelling house<sup>(22)</sup> use.</li> </ul> For developed lots, resulting lots comply with the following minimum lot sizes and dimensions: |                    |                     |       |
|------|---|--------------------|---------------------|-------|
|      | Precinct  | Area               | Frontage            | Depth |
|      | Urban living precinct   |                    | 7.5m                | 25m   |
|      | Town centre precinct  | 1000m <sup>2</sup> | 40m                 | -     |
|      | Enterprise and employment precinct  | 1000m <sup>2</sup> | 40m                 | 0.    |
|      | Green network precinct  |                    |                     | - 0   |
|      | Rural living precinct   | 6000m <sup>2</sup> |                     | -     |
|      | Editor's note - Lots containing built to boundary walls should also include an appropriate easement to facilitate the maintenance of any wall within 600mm of a boundary. For boundaries with built to boundary walls on adjacent lots a 'High Density Development Easement' is recommended; or for all other built to boundary walls and 'easement for maintenance purposes' is recommended.   |                    |                     |       |
| SAO4 | For developable lots, resulting lots comply with the minimum lot size requirement of 20 hectares.   |                    | 20 hectares.        |       |
| SAO5 | For developed lots, a boundary realignment does not result in more than 4 adjoining lots of the same lot type, as defined in Table 7.2.3.7.1.3 - Lot Types.   |                    | lots of the same    |       |
| SAO6 | No new boundaries are located within 2m of High Value Areas as identified in Overlay map - Environmenta areas.  |                    | nap - Environmental |       |
| SAO7 | Boundary realignment does not result in the clearing of any Habitat trees.  |                    |                     |       |

### Part B - Criteria for assessable development - Reconfiguring a lot code - Urban living precinct

### Table 7.2.3.7.1.2 Assessable development - Reconfiguring a lot code - Urban living precinct

| Performance outcomes  | Acceptable outcomes             |
|---|---------------------------------|
| Where on a developable lot or creating developable  | ots                             |
| Lot size and design   |                                 |
| P01   | No acceptable outcome provided. |
| Reconfiguring a lot does not result in additional lots.   |                                 |
| Boundary realignment  |                                 |
| PO2   | No acceptable outcome provided. |
| Boundary realignments do not result in the:   |                                 |
| a. fragmentation or alienation of the land or result in the loss of land for future urban purposes; |                                 |
| b. delay the use of the land for urban purposes;  |                                 |

|   | ormance outcomes   | Acceptable outcomes   |
|---|--|---|
| C.  | adverse impacts on the quality and integrity of the<br>biodiversity and ecological values inherent to a High<br>Value Area identified in Overlay map -<br>Environmental areas;   |   |
| d.  | existing land uses on-site becoming non-compliant due to:  |   |
|   | i. lot size;   |   |
|   | ii. parking requirements;  |   |
|   | iii. servicing;  |   |
|   | iv. dependant elements of an existing or approved land use being separately titled.  |   |
| Note<br>Dwe<br>outt<br>on t   | e - An example may include but are not limited to where a elling house <sup>(22)</sup> includes a secondary dwelling or associated buildings, they cannot be separately titled as they are dependent he Dwelling house <sup>(22)</sup> use.  | C Jers  |
| Whe   | ere on a developed lot or creating developed lots  |   |
| 0.1   | density  |   |
| Site  |  |   |
| PO3   |  | AO3   |
| PO3<br>Recubetw<br>med  |  | A03<br>Development is in accordance with a Neighbourhood<br>development plan.   |
| PO3<br>Recubetw<br>med<br>Note<br>achi<br>loca  | onfiguring of a lot achieves a net residential density<br>yeen 11 - 30 lots per hectare to maintain a diverse<br>ium density neighbourhood character.<br>e - Future residential development on lots will be required to<br>ieve a minimum net density of 30 dwellings per hectare when   | Development is in accordance with a Neighbourhood   |
| PO3<br>Rect<br>betw<br>med<br>Note<br>achi<br>loca  | onfiguring of a lot achieves a net residential density<br>veen 11 - 30 lots per hectare to maintain a diverse<br>ium density neighbourhood character.<br>e - Future residential development on lots will be required to<br>ieve a minimum net density of 30 dwellings per hectare when<br>ited within 400m walking distance of a local centre.<br>e - Future residential development where not located within 400m<br>king distance of a local centre will be required to achieve a  | Development is in accordance with a Neighbourhood   |
| PO3<br>Rect<br>betw<br>med<br>Note<br>achi<br>loca  | <ul> <li>onfiguring of a lot achieves a net residential density veen 11 - 30 lots per hectare to maintain a diverse ium density neighbourhood character.</li> <li>e - Future residential development on lots will be required to ieve a minimum net density of 30 dwellings per hectare when ited within 400m walking distance of a local centre.</li> <li>e - Future residential development where not located within 400m king distance of a local centre will be required to achieve a imum net density of 20 dwellings per hectare.</li> </ul>   | Development is in accordance with a Neighbourhood   |
| PO3<br>Rect<br>betw<br>med<br>Note<br>achi<br>loca<br>Note<br>wall<br>mini                        | <ul> <li>onfiguring of a lot achieves a net residential density veen 11 - 30 lots per hectare to maintain a diverse ium density neighbourhood character.</li> <li>e - Future residential development on lots will be required to ieve a minimum net density of 30 dwellings per hectare when ited within 400m walking distance of a local centre.</li> <li>e - Future residential development where not located within 400m king distance of a local centre will be required to achieve a imum net density of 20 dwellings per hectare.</li> </ul>   | AO4.1<br>Lot sizes and dimensions (excluding any access handles)<br>comply with Lot Types A, B, C, D, E or F in accordance  |
| PO3<br>Rect<br>betw<br>med<br>Note<br>achi<br>loca<br>Note<br>wall<br>mini                        | onfiguring of a lot achieves a net residential density<br>veen 11 - 30 lots per hectare to maintain a diverse<br>ium density neighbourhood character.<br>e - Future residential development on lots will be required to<br>ieve a minimum net density of 30 dwellings per hectare when<br>ted within 400m walking distance of a local centre.<br>e - Future residential development where not located within 400m<br>king distance of a local centre will be required to achieve a<br>imum net density of 20 dwellings per hectare.<br>design, mix and location  | AO4.1<br>Lot sizes and dimensions (excluding any access handles)<br>comply with Lot Types A, B, C, D, E or F in accordance<br>with Table 7.2.3.7.1.3: Lot Types.  |
| PO3<br>Rect<br>betw<br>med<br>Note<br>achi<br>loca<br>Note<br>wall<br>mini<br>Lot<br>Lots<br>acco | <ul> <li>onfiguring of a lot achieves a net residential density veen 11 - 30 lots per hectare to maintain a diverse ium density neighbourhood character.</li> <li>a - Future residential development on lots will be required to ieve a minimum net density of 30 dwellings per hectare when ted within 400m walking distance of a local centre.</li> <li>a - Future residential development where not located within 400m king distance of a local centre.</li> <li>b - Future residential development where not located within 400m king distance of a local centre.</li> <li>b - Future residential development where not located within 400m king distance of a local centre will be required to achieve a imum net density of 20 dwellings per hectare.</li> <li>design, mix and location</li> <li>have a sufficient area and dimension for them to bommodate:</li> </ul> | A04.1<br>Lot sizes and dimensions (excluding any access handles)<br>comply with Lot Types A, B, C, D, E or F in accordance  |
| PO3<br>Rect<br>betw<br>med<br>Note<br>achi<br>loca<br>Note<br>wall<br>mini<br>Lots<br>acco<br>a.  | <ul> <li>onfiguring of a lot achieves a net residential density veen 11 - 30 lots per hectare to maintain a diverse ium density neighbourhood character.</li> <li>e - Future residential development on lots will be required to ieve a minimum net density of 30 dwellings per hectare when ited within 400m walking distance of a local centre.</li> <li>e - Future residential development where not located within 400m king distance of a local centre will be required to achieve a imum net density of 20 dwellings per hectare.</li> <li>design, mix and location</li> <li>have a sufficient area and dimension for them to ommodate:</li> <li>dwelling(s) including all domestic outbuildings;</li> </ul>   | AO4.1<br>Lot sizes and dimensions (excluding any access handles)<br>comply with Lot Types A, B, C, D, E or F in accordance<br>with Table 7.2.3.7.1.3: Lot Types.<br>Note - For the purpose of rear lots, frontage is the average width of |


| Performance outcomes   | Acceptable outcomes  |
|--|--|
| PO5  | AO5.1  |
| Reconfiguring a lot provides for a variety of housing<br>options, by way of a mix of lot sizes and dimensions<br>consistent with the medium density character of the<br>precinct, whilst facilitating delivery of diversity within the<br>streetscape. | <ul> <li>For reconfiguring a lot which creates in excess of 5 new lots, a mix of lot types in accordance with Table 7.2.3.7.1.3 are to be incorporated into the development as follows:</li> <li>5 - 10 lots - 2 lot types</li> </ul>  |
|  | • 11 - 20 lots - 3 lot types   |
|  | • 21 - 50 lots - 4 lot types (must include lot type A)   |
|  | <ul> <li>&gt;50 lots - 5 lot types (must include lot type A)</li> </ul>  |
|  | Editor's note - Lots containing built to boundary walls should also<br>include an appropriate easement to facilitate the maintenance of<br>any wall within 600mm of a boundary. For boundaries with built to<br>boundary walls on adjacent lots a 'High Density Development<br>Easement' is recommended; or for all other built to boundary walls<br>and 'easement for maintenance purposes' is recommended. |
|  | A05.2  |
|  | For reconfiguring a lot which creates in excess of 20 new lots, the following minimum percentages of lot types in accordance with Table 7.2.3.7.1.3 apply:   |
|  | Lot Type A - 10% of new lots and Lot Type F - 5% of new lots; or   |
|  | Lot Type A - 15% of new lots and Lot Type F - 2% of new lots; or   |
|  | <ul> <li>Lot Type A - 15% of new lots and Lot Type B - 15% of new lots.</li> </ul>   |
|  | AO5.3  |
|  | Development is in accordance with a Neighbourhood development plan.  |
| P06  | AO6.1  |
| A range of different lots are distributed throughout the development with no one lot type concentrated within a single location, to create diversity within the streetscape and minimise conflicts between vehicle access and on                       | Where not accessed via a laneway, a maximum of 4 adjoining lots of the same type in accordance with Table 7.2.3.7.1.3 are proposed where fronting the same street  |
| street parking.  | AO6.2  |
| Note - Built to boundary walls and driveway locations for lots with frontages of 12.5 metres or less are to be shown on a plan of development in accordance with the requirements of section 9.3.1 - Dwelling house code.                              | Where accessed via a laneway, a maximum of 8 adjoining lots of the same type in accordance with Table 7.2.3.7.1.3 are proposed where fronting the same street  |
|  | AO6.3  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
|   | Development is in accordance with a Neighbourhood development plan.   |
| P07   | A07   |
| POS         POS         Narrow lots do not adversely affect the character and amenity of the precinct. Residential uses establish in a manner which facilitates an integrated streetscape, maximises the efficient use of land and achieves a safe and efficient street network.         Note - Built to boundary walls and driveway locations for lots with frontages of 12.5 metres or less are to be shown on a plan of development in accordance with the requirements of section 9.3.1 | <ul> <li>a. Development is in accordance with a Neighbourhood development plan.</li> <li>OR</li> <li>b. Lots with frontages of 7.5 metres or less are located within 200 metres of: <ol> <li>a park; or</li> <li>a public transport stop or station; or</li> <li>a higher order centre, district centre, local centre or neighbourhood hub (refer Overlay map - Community activities and neighbourhood hubs).</li> </ol> </li> <li>AND <ol> <li>Lots with frontages of 32 metres or greater are predominately located on corner lots or lots with dual road frontages, and within 200 metres of: <ol> <li>a public transport stop or station; or</li> <li>a public transport stop or station; or</li> </ol> </li> <li>AND </li> </ol></li></ul> <li>AND </li> <li>C. Lots with frontages of 32 metres or greater are predominately located on corner lots or lots with dual road frontages, and within 200 metres of: <ol> <li>a park; or</li> <li>a public transport stop or station; or</li> <li>a higher order centre, district centre, local centre or neighbourhood hub (refer Overlay map - Community activities and neighbourhood hubs).</li> </ol> AO8 Development is in accordance with a Neighbourhood development plan.</li> |
| - Dwelling house code PO9   | AO9.1   |


| Performance outcomes  | Acceptable outcomes  |
|---|--|
|   |  |
| Group construction and integrated streetscape solutions<br>are encouraged through the location and grouping of lots<br>suitable for terrace and row housing.  | Any lot sharing a boundary with a Lot Type A must<br>contain a mandatory built to boundary wall on the shared<br>boundary.   |
|   | A09.2  |
|   | Driveway crossovers for lots with frontages of less than 10m are paired up to facilitate on-street parking.  |
|   | Note - Built to boundary walls for lots with frontages of 12.5 metres or less are to be shown on a plan of development in accordance with the requirements of section 9.3.1 - Dwelling house code. |
|   | A09.3  |
|   | Development is in accordance with a Neighbourhood development plan.  |
| Rear lots   |  |
| PO10  | A010   |
| Rear lots:  | Development is in accordance with a Neighbourhood  |
| a. contribute to the mix of lot sizes;  | development plan.  |
| <ul> <li>b. are limited to 1 behind any full frontage lot (i.e. a lot with a street frontage that is not an access handle);</li> </ul>  | S  |
| c. Provide sufficient area for vehicles to manoeuvre on-site allowing entry and exit to the rear lot in forward gear.   |  |
| P011  | A011   |
| Access handles for rear lots are:   | Development is in accordance with a Neighbourhood  |
| a. a minimum of 5m wide to allow for safe vehicle access and service corridors from the rear lot to the street;   | development plan.  |
| b. are located on 1 side of the full frontage lot;  |  |
| c. limited to no more than 2 directly adjoining each other.   |  |
| Street design and layout  |  |
| PO12  | A012   |
| Street layouts facilitate regular and consistent shaped<br>lots through the use of rectilinear grid patterns, or<br>modified grid patterns where constrained by topographical<br>and other physical barriers. | Development is in accordance with a Neighbourhood development plan.  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| Note - Refer to Planning scheme policy - Integrated design for guidance on how to achieve compliance with this outcome.   |  |
| PO13  | A013   |
| Street layouts are designed to connect to surrounding<br>neighbourhoods by providing an interconnected street,<br>pedestrian and cyclist networks that connects nearby<br>centres, neighbourhood hubs, community facilities, public<br>transport nodes and open space to residential areas for<br>access and emergency management purposes. The<br>layout ensures that new development is provided with<br>multiple points of access. The timing of transport works<br>ensures that multiple points of access are provided during<br>early stages of a development.<br>Note - Refer to Planning scheme policy - Neighbourhood design for<br>guidance on when alternative access points should be provided for<br>emergency management purposes.   | Development is in accordance with a Neighbourhood development plan.            |
| PO14  | A014   |
| <ul> <li>Street layouts provide an efficient and legible movement network with high levels of connectivity within and external to the to the site by:</li> <li>a. facilitating increased active transport with a focus on safety and amenity for pedestrians and cyclists;</li> <li>b. providing street blocks with a maximum walkable perimeter of 500m (refer Figure - Street block design);</li> <li>c. providing a variety of street block sizes;</li> <li>d. reducing street block sizes as they approach an activity focus;</li> <li>e. facilitating possible future connections to adjoining sites for roads, green linkages and other essential infrastructure.</li> <li>Note - Refer to Planning scheme policy - Integrated design for guidance on how to achieve compliance with this outcome.</li> </ul> | Development is in accordance with a Neighbourhood development plan.            |
| PO15<br>Street layouts create convenient and highly permeable<br>movement networks between lower and higher order<br>roads, whilst not adversely affecting the safety and<br>function of the higher order road.<br>Note - Refer to Planning scheme policy - Integrated design for<br>guidance on how to achieve compliance with this outcome.   | AO15<br>Development is in accordance with a Neighbourhood<br>development plan. |

| PO16AO16Streets are designed and constructed to cater for:Development is in a<br>development pedestrian and cycle<br>movement;b. on street parking adequate to meet the needs of<br>future residents ;C. efficient public transport routes;d. expected traffic speeds and volumes;C. efficient public transport routes; | accordance with a Neighbourhood |
|---|---------------------------------|
| <ul> <li>a. safe and convenient pedestrian and cycle movement;</li> <li>b. on street parking adequate to meet the needs of future residents;</li> <li>c. efficient public transport routes;</li> </ul>  | accordance with a Neighbourhood |
| <ul> <li>a. safe and convenient pedestrian and cycle movement;</li> <li>b. on street parking adequate to meet the needs of future residents;</li> <li>c. efficient public transport routes;</li> </ul>  | 02                              |
| <ul><li>future residents ;</li><li>c. efficient public transport routes;</li></ul>  | 0                               |
|   | $\nabla$                        |
| d. expected traffic speeds and volumes;   |                                 |
|   |                                 |
| e. utilities and stormwater drainage;   |                                 |
| f. lot access, sight lines and public safety;   | S                               |
| g. emergency access and waste collection;   | 101                             |
| h. waste service vehicles;  |                                 |
| i. required street trees, landscaping and street furniture.   | Ø                               |
| Note - Refer to Planning scheme policy - Integrated design for determining design criteria to achieve this outcome.   |                                 |
| PO17 A017   |                                 |
| Intersections are designed and constructed to provide<br>for the safe and efficient movement of pedestrians,<br>cyclists, public transport and private vehicles.  | accordance with a Neighbourhood |
| Note - Refer to Planning scheme policy - Integrated design for guidance on how to achieve compliance with this outcome.   |                                 |
| PO18 AO18   |                                 |
| Cul-de-sac or dead end streets are not proposed unless: Development is in a development plan.   | accordance with a Neighbourhood |
| a. topography or other physical barriers exist to the continuance of the street network or vehicle connection to an existing road is not permitted;   |                                 |
| b. there are no appropriate alternative solutions;  |                                 |
| c. the cul-de-sac or dead end street will facilitate future connections to adjoining land or development.   |                                 |
| Note - Refer to Planning scheme policy - Integrated design for guidance on how to achieve compliance with this outcome.   |                                 |
| PO19 AO19   |                                 |

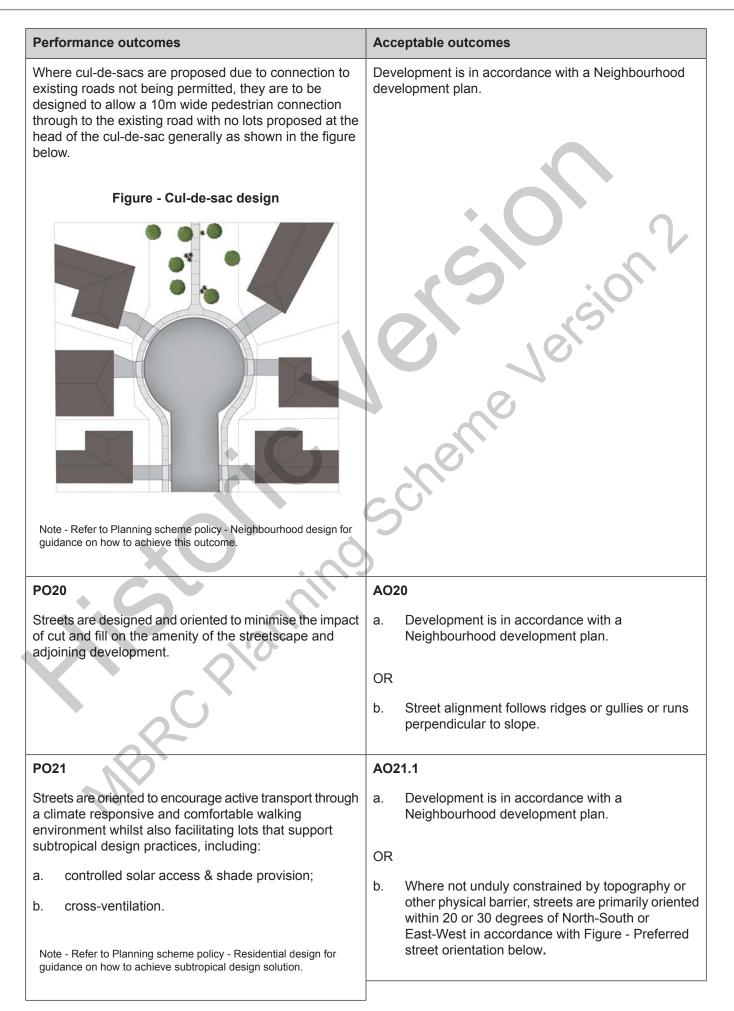

| Performance outcomes | Acceptable outcomes  |
|----------------------|--|
|                      | Figure - Preferred street orientation  |
|                      | North-South streets<br>are generally shorter<br>local level streets.<br>300<br>200<br>200<br>200<br>200<br>200<br>400<br>200<br>400<br>200<br>400<br>200<br>400<br>4                               |
|                      | A021.2   |
|                      | <ul> <li>a. Development is in accordance with a Neighbourhood development plan.</li> <li>OR</li> </ul>   |
|                      | b. The long axis of a street block is oriented east-west to facilitate a north-south orientation for a majority of lots as per Figure - Street block design below.                                 |
|                      | AO21.3   |
|                      | a. Development is in accordance with a Neighbourhood development plan.   |
|                      | OR   |
| NBR                  | b. Where lots are oriented east west, they are 14m or wider so as to allow for alternative dwelling design to achieve solar access and cross-ventilation as per Figure -Street block design below. |

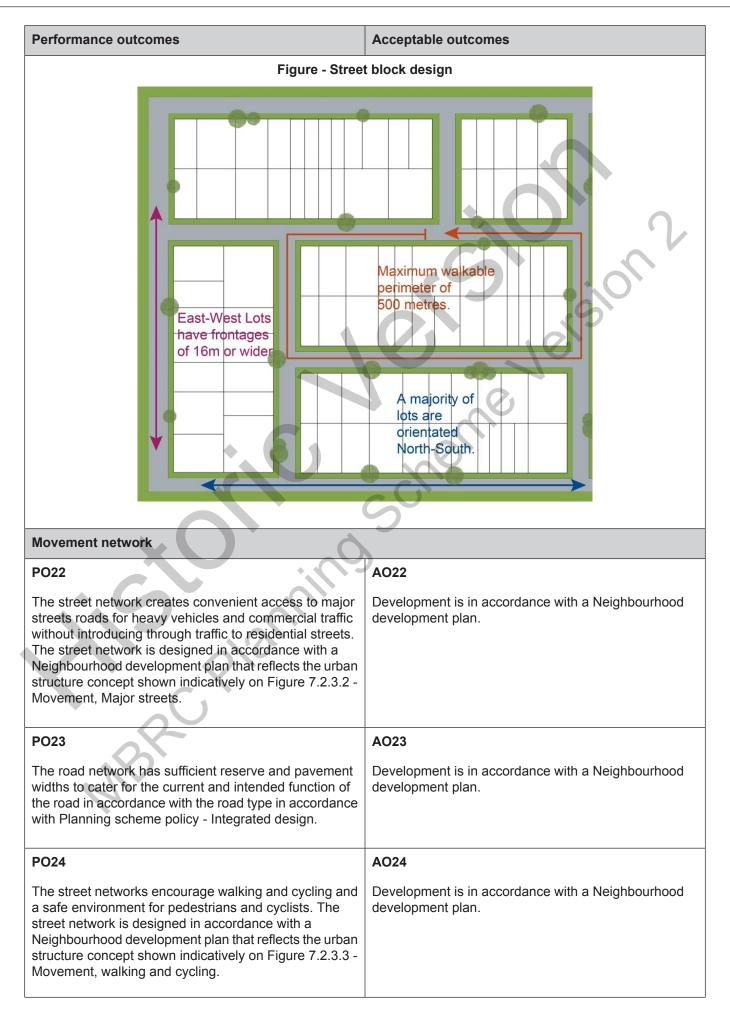

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Laneway design and location   |   |
| PO25  | AO25  |
| Laneway location contributes to a high standard of amenity for adjoining lots and the streetscape.  | a. Development is in accordance with a Neighbourhood development plan.  |
| Note - Refer to Planning scheme policy - Neighbourhood design for determining locational criteria for laneways.   | OR  |
|   | b. Laneways are primarily used where:   |
|   | <ul> <li>vehicle access is not permitted from the<br/>primary street frontage; or</li> </ul>  |
|   | ii. limiting vehicle access from the primary street<br>frontage results in a positive streetscape<br>outcome;or   |
|   | iii. where lots directly adjoin a local, district or regional Park <sup>(57)</sup> .  |
|   | S S   |
| PO26  | A026  |
| Laneways service a limited number of allotments, creating<br>a sense of place and enclosed feeling for the pedestrian<br>environment whilst contributing to the high level of<br>connectivity of the street network | <ul> <li>a. Development is in accordance with a Neighbourhood development plan.</li> <li>OR</li> </ul>  |
| Note - Refer to Planning scheme policy - Integrated design and<br>Planning scheme policy - Neighbourhood design for determining<br>design criteria for Laneways.  | <ul> <li>b. Laneways are limited to 130m in length; and</li> <li>c. Laneways are not designed as dead ends or cul-de-sacs, and are to have vehicle connections to an access street at both ends; and</li> <li>d. Where laneways exceed 100m in length, a mid lane pedestrian connection is to be provided between the adjacent access streets and the laneway.</li> </ul> |
| PO27  | A027  |
| Laneway design ensures the safety of pedestrians, cyclists and motorists by way of site lines, and sufficient road reserve for vehicle movements and the provision of street lighting.                              | a. Development is in accordance with a Neighbourhood development plan.  |
|   | OR  |
| Note - Refer to Planning scheme policy - Integrated design and<br>Planning scheme policy - Neighbourhood design for determining<br>design criteria for Laneways.  | <ul> <li>Laneways are designed with minor meanders only,<br/>and maintain direct lines of sight from one end of<br/>the laneway to the other; and</li> </ul>  |
|   | c. Laneways provide road dedication at strategic locations along the laneway to allow the construction of street lighting and any electrical pillars associated with the street lighting in accordance with current Australian Standards.   |
|   | Note - The dedication must allow for street lights to be provided on Council's standard alignment   |

| (57)  | Performance outcomes   |  |   |  |
|---|--|--|---|--|
| Park <sup>(57)</sup> and open space   |  |  |   |  |
| PO28  |  |  |   | AO28   |
| A hierarchy of Park <sup>(57)</sup> and open space is provided to meet the recreational needs of the community in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.4 - Green network and open space. |  | unity in<br>oment plan that<br>in indicatively   | Development is in accordance with a Neighbourhood development plan.   |  |
| Note - District level p<br>locations in accordar  |  |  |   |  |
| PO29  |  |  |   | A029   |
| Park <sup>(57)</sup> are provided within walking distance of all new residential lots as follows:<br>a. district parks are provided within 15 minutes walking   |  |  | Development is in accordance with a Neighbourhood development plan.   |  |
| distance time   |  |  |   |  |
| <ul> <li>b. local and neighbourhood parks are provided within 5 minutes walking distance time.</li> </ul>   |  | provided within  |   |  |
|   | PO30   |  |   |  |
| ()  | o and dosign (   | standard t   | a most the  | AO30   |
| Park <sup>(57)</sup> is of a siz<br>needs of the expe<br>per the following t<br>a. retain stands<br>environment   | ected users. P<br>able and seek<br>s of trees in Pa<br>al 'stepping sto<br>ttops, gullies, r   | Parks <sup>(57)</sup> an<br>to:<br>arks <sup>(57)</sup> – 1<br>ones' and f   | re provided as  | AO30<br>Development is in accordance with a Neighbourhood<br>development plan. |
| Park <sup>(57)</sup> is of a siz<br>needs of the expe<br>per the following t<br>a. retain stands<br>environment<br>b. locate on hill  | ected users. P<br>able and seek<br>s of trees in Pa<br>al 'stepping sto<br>ltops, gullies, r<br>bods.  | Parks <sup>(57)</sup> an<br>to:<br>arks <sup>(57)</sup> – 1<br>ones' and f   | re provided as<br>for<br>for urban relief;  | Development is in accordance with a Neighbourhood                              |
| Park <sup>(57)</sup> is of a siz<br>needs of the expe<br>per the following t<br>a. retain stands<br>environment<br>b. locate on hill<br>neighbourho   | ected users. P<br>able and seek<br>s of trees in Pa<br>al 'stepping sto<br>ltops, gullies, r<br>bods.  | Parks <sup>(57)</sup> and to:<br>arks <sup>(57)</sup> – fones' and fones' and fones' and fones' warks  | re provided as<br>for<br>for urban relief;<br>s and between   | Development is in accordance with a Neighbourhood                              |
| Park <sup>(57)</sup> is of a siz<br>needs of the expe<br>per the following t<br>a. retain stands<br>environment<br>b. locate on hill<br>neighbourho<br>Open space type  | ected users. P<br>able and seek<br>s of trees in Pa<br>al 'stepping sto<br>ltops, gullies, r<br>oods.<br>Minimum<br>area<br>0.3 ha - 0.5<br>ha                       | Parks <sup>(57)</sup> and to:<br>arks <sup>(57)</sup> – fones' and fones' and fones' and fones' walking catchment  | re provided as<br>for<br>for urban relief;<br>s and between<br>Rate<br>0.5ha/1000                           | Development is in accordance with a Neighbourhood                              |
| Park <sup>(57)</sup> is of a siz<br>needs of the expe<br>per the following t<br>a. retain stands<br>environment<br>b. locate on hill<br>neighbourho<br>Open space type<br>Small local park <sup>(57)</sup><br>recreation  | ected users. P<br>able and seek<br>s of trees in Pa<br>al 'stepping sto<br>tops, gullies, r<br>bods.<br>Minimum<br>area<br>0.3 ha - 0.5<br>ha<br>0.5 ha - 1ha        | Parks <sup>(57)</sup> and to:<br>arks <sup>(57)</sup> – fones' and fones' and fones' and fones' and fones' and fones' and fonest and | re provided as<br>for<br>for urban relief;<br>s and between<br>Rate<br>0.5ha/1000                           | Development is in accordance with a Neighbourhood                              |
| Park <sup>(57)</sup> is of a siz<br>needs of the expe<br>per the following t<br>a. retain stands<br>environment<br>b. locate on hill<br>neighbourho<br>Open space type<br>Small local park <sup>(57)</sup><br>recreation<br>Local park <sup>(57)</sup><br>recreation              | ected users. P<br>able and seek<br>s of trees in Pa<br>al 'stepping sto<br>tops, gullies, r<br>ods.<br>Minimum<br>area<br>0.3 ha - 0.5<br>ha<br>0.5 ha - 1ha<br>4 ha | Parks <sup>(57)</sup> and the second sec             | re provided as<br>for<br>for urban relief;<br>s and between<br>Rate<br>0.5ha/1000<br>persons<br>0.5 ha/1000 | Development is in accordance with a Neighbourhood                              |

| Performance outcomes  | Acceptable outcomes   |  |  |
|---|---|--|--|
| PO31  | AO31  |  |  |
| The safety and useability of parks is ensured through the careful design of the street network and lot locations which provide high levels of surveillance and access into the park <sup>(57)</sup> or open space area. The provision of parks will consider the following: | Development is in accordance with a Neighbourhood development plan.   |  |  |
| a. local and district parks are bordered by streets and not lots wherever possible;   |   |  |  |
| b. where lots do addresses local and district parks <sup>(57)</sup> , fencing is provided along the park <sup>(57)</sup> boundary at a maximum height of 1m prior to the sealing of the plan of subdivision;  | se ion't  |  |  |
| c. the design of fencing and retaining features allows<br>for safe and direct pedestrian access between the<br>park <sup>(57)</sup> and private allotment through the use of<br>private gates and limited retaining features along<br>park <sup>(57)</sup> boundaries.      | C Jersi   |  |  |
| Boundary realignment  |   |  |  |
| PO32  | No acceptable outcome provided.   |  |  |
| Boundary alignments ensure that infrastructure and services are wholly contained within the lot they serve.   | SCIE  |  |  |
| PO33<br>Boundary realignment does not result in:  | No acceptable outcome provided.   |  |  |
| <ul> <li>a. existing land uses on-site becoming non-complying with planning scheme criteria;</li> <li>b. lots being unserviced by infrastructure;</li> </ul>  |   |  |  |
| <ul><li>c. lots not providing for own private servicing</li></ul>   |   |  |  |
| d. adverse impacts on the quality and integrity of the biodiversity and ecological values inherent to a High Value Area identified in Overlay map - Environmental areas .   |   |  |  |
| PO34  | AO34  |  |  |
| Boundary realignment results in lots which have<br>appropriate size, dimensions and access to cater for uses<br>consistent with the precinct, sub-precincts and any<br>relevant other precinct.   | Lot sizes and dimensions (excluding any access handles) comply with Lot Types A, B, C, D, E or F in accordance with Table 7.2.3.7.1.3: Lot Types. |  |  |
| Reconfiguring existing development by Community Title   |   |  |  |
| PO35  | No acceptable outcome provided.   |  |  |
|   |   |  |  |

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| Reconfiguring a lot which creates or amends a community<br>title scheme as described in the <i>Body Corporate and</i><br><i>Community Management Act 1997</i> is undertaken in a<br>way that does not result in existing uses on the land<br>becoming unlawful or otherwise operating in a manner<br>that is:  |                                 |
| <ul> <li>a. inconsistent with any approvals on which those uses rely; or</li> <li>b. inconsistent with the self-assessable development requirements applying to those uses at the time that they were established.</li> </ul>  |                                 |
| <ul> <li>Note - Examples of land uses becoming unlawful include, but are not limited to the following:</li> <li>a. Land on which a Dual occupancy<sup>(21)(22)</sup> has been established is reconfigured in a way that results in both dwellings no longer being on the one lot. The reconfiguring has the effect of transforming the development from a Dual occupancy<sup>(21)</sup> to two separate Dwelling houses<sup>(22)(23)</sup>, at least one of which does not satisfy the self-assessment requirements applying to Dwelling houses<sup>(22)</sup>.</li> <li>b. Land on which a Multiple dwelling<sup>(49)</sup> has been established is reconfigured in a way that precludes lawful access to required communal facilities by either incorporating some of those facilities into private lots or otherwise obstructing the normal access routes to those facilities. Those communal facilities may have been required under self-assessment requirements for the use or conditions of development approval.</li> <li>Editor's note - To satisfy this performance outcome, the development application may need to be a combined application for reconfiguring a lot and a material change of use or otherwise be supported by details that confirm that the land use still satisfies all relevant land use requirements.</li> </ul> | scheme                          |
| Reconfiguring by Lease   |                                 |
| <ul> <li>PO36</li> <li>Reconfiguring a lot which divides land or buildings by lease in a way that allows separate occupation or use of those facilities is undertaken in a way that does not result in existing uses on the land becoming unlawful or otherwise operating in a manner that is:</li> <li>a. inconsistent with any approvals on which those</li> </ul>   | No acceptable outcome provided. |
| <ul> <li>uses rely; or</li> <li>b. inconsistent with the self-assessable development requirements applying to those uses at the time that they were established.</li> <li>Note - An example of a land use becoming unlawful is a Multiple</li> </ul>   |                                 |
| dwelling <sup>(49)</sup> over which one or more leases have been created in<br>a way that precludes lawful access to some of the required<br>communal facilities. Some of the communal car parking facilities<br>have been incorporated into lease areas while other leases are<br>located in a way that obstructs the normal access routes to other<br>communal facilities. Those communal facilities may have been   |                                 |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| required under self-assessment requirements for the use or conditions of development approval, but they are no longer freely available to all occupants of the Multiple dwelling <sup>(49)</sup> .   |   |
| Editor's note - To satisfy this performance outcome, the development application may need to be supported by details that confirm that the land use still satisfies all relevant land use requirements.  |   |
| Editor's note - Under the <i>Sustainable Planning Act</i> , the following do not constitute reconfiguring a lot and are not subject to this performance outcome:<br>a. a lease for a term, including renewal options, not exceeding  |   |
| <ul> <li>b. an agreement for the exclusive use of part of the common property for a community titles scheme under the Body Corporate and Community Management Act 1997.</li> </ul>   | ersio.  |
| Volumetric subdivision   |   |
| PO37   | No acceptable outcome provided.   |
| surface of the land ensures appropriate area, dimensions   |   |
| and access arrangements to cater for uses consistent<br>with the precinct and does not result in existing land uses<br>on-site becoming non-complying with planning scheme   | Scho  |
| and access arrangements to cater for uses consistent<br>with the precinct and does not result in existing land uses<br>on-site becoming non-complying with planning scheme<br>criteria.  | Sche  |
| <ul> <li>and access arrangements to cater for uses consistent with the precinct and does not result in existing land uses on-site becoming non-complying with planning scheme criteria.</li> <li>Note - Examples may include but are not limited to: <ul> <li>a. where a dwelling house<sup>(22)</sup> includes a secondary dwelling or associated outbuildings, they cannot be separately titled as they are dependent on the Dwelling house<sup>(22)</sup> use.</li> </ul> </li> </ul>   | Sche  |
| and access arrangements to cater for uses consistent<br>with the precinct and does not result in existing land uses<br>on-site becoming non-complying with planning scheme<br>criteria.<br>Note - Examples may include but are not limited to:<br>a. where a dwelling house <sup>(22)</sup> includes a secondary dwelling<br>or associated outbuildings, they cannot be separately titled<br>as they are dependent on the Dwelling house <sup>(22)</sup> use.<br>Reticulated supply  | A038  |
| and access arrangements to cater for uses consistent<br>with the precinct and does not result in existing land uses<br>on-site becoming non-complying with planning scheme<br>criteria.<br>Note - Examples may include but are not limited to:<br>a. where a dwelling house <sup>(22)</sup> includes a secondary dwelling<br>or associated outbuildings, they cannot be separately titled<br>as they are dependent on the Dwelling house <sup>(22)</sup> use.<br>Reticulated supply<br>PO38<br>Each lot is provided with an appropriate level of service   | AO38<br>Lots are provided with:   |
| and access arrangements to cater for uses consistent<br>with the precinct and does not result in existing land uses<br>on-site becoming non-complying with planning scheme<br>criteria.<br>Note - Examples may include but are not limited to:<br>a. where a dwelling house <sup>(22)</sup> includes a secondary dwelling<br>or associated outbuildings, they cannot be separately titled<br>as they are dependent on the Dwelling house <sup>(22)</sup> use.<br><b>Reticulated supply</b><br><b>PO38</b><br>Each lot is provided with an appropriate level of service<br>and infrastructure commensurate with the precinct. All<br>services, including water supply, stormwater<br>management, sewerage disposal, stormwater disposal,  |   |
| and access arrangements to cater for uses consistent<br>with the precinct and does not result in existing land uses<br>on-site becoming non-complying with planning scheme<br>criteria.<br>Note - Examples may include but are not limited to:<br>a. where a dwelling house <sup>(22)</sup> includes a secondary dwelling<br>or associated outbuildings, they cannot be separately titled<br>as they are dependent on the Dwelling house <sup>(22)</sup> use.<br><b>Reticulated supply</b><br><b>PO38</b><br>Each lot is provided with an appropriate level of service<br>and infrastructure commensurate with the precinct. All<br>services, including water supply, stormwater<br>management, sewerage disposal, stormwater disposal,<br>drainage, electricity, telecommunications and gas (if<br>available) are provided in a manner that:  | Lots are provided with:<br>a. a connection to the reticulated water supply  |
| <ul> <li>and access arrangements to cater for uses consistent with the precinct and does not result in existing land uses on-site becoming non-complying with planning scheme criteria.</li> <li>Note - Examples may include but are not limited to: <ul> <li>a. where a dwelling house<sup>(22)</sup> includes a secondary dwelling or associated outbuildings, they cannot be separately titled as they are dependent on the Dwelling house<sup>(22)</sup> use.</li> </ul> </li> <li>Reticulated supply</li> <li>PO38</li> <li>Each lot is provided with an appropriate level of service and infrastructure commensurate with the precinct. All services, including water supply, stormwater management, sewerage disposal, stormwater disposal, drainage, electricity, telecommunications and gas (if available) are provided in a manner that:</li> <li>a. is efficient in delivery of service;</li> </ul> | <ul> <li>Lots are provided with:</li> <li>a. a connection to the reticulated water supply infrastructure network;</li> <li>b. a connection to the sewerage infrastructure network;</li> <li>c. a connection to the reticulated electricity</li> </ul> |
| and access arrangements to cater for uses consistent<br>with the precinct and does not result in existing land uses<br>on-site becoming non-complying with planning scheme<br>criteria.<br>Note - Examples may include but are not limited to:<br>a. where a dwelling house <sup>(22)</sup> includes a secondary dwelling<br>or associated outbuildings, they cannot be separately titled<br>as they are dependent on the Dwelling house <sup>(22)</sup> use.<br><b>Reticulated supply</b><br><b>PO38</b><br>Each lot is provided with an appropriate level of service<br>and infrastructure commensurate with the precinct. All<br>services, including water supply, stormwater<br>management, sewerage disposal, stormwater disposal,<br>drainage, electricity, telecommunications and gas (if<br>available) are provided in a manner that:  | <ul> <li>Lots are provided with:</li> <li>a. a connection to the reticulated water supply infrastructure network;</li> <li>b. a connection to the sewerage infrastructure network;</li> </ul>   |

| Performance outcomes  | Acceptable outcomes             |
|---|---------------------------------|
| e. minimises risk of potential adverse impacts on the natural and built environment;  |                                 |
| <li>f. minimises risk of potential adverse impact on<br/>amenity and character values;</li>   |                                 |
| <ul> <li>g. recognises and promotes Councils Total Water<br/>Cycle Management policy and the efficient use of<br/>water resources.</li> </ul>   |                                 |
| Stormwater location and design  |                                 |
| <b>PO39</b><br>The development is planned and designed considering the land use constraints of the site and incorporates water sensitive urban design principles.   | No acceptable outcome provided. |
| PO40  | No acceptable outcome provided. |
| Stormwater drainage pipes and structures through or<br>within private land are protected by easements in favour<br>of Council with sufficient area for practical access for<br>maintenance.<br>Note - Refer to Planning scheme policy - Integrated design for<br>guidance on how to demonstrate achievement of this performance<br>outcome. | scheme                          |
| PO41  | No acceptable outcome provided. |
| Management facilities are located outside of riparian areas and prevent increased channel bed and bank erosion.   |                                 |
| PO42  | No acceptable outcome provided. |
| Natural streams and riparian vegetation are retained and enhanced through revegetation.   |                                 |
| PO43<br>Areas constructed as detention basins are adaptable for<br>passive recreation.  | No acceptable outcome provided. |
| PO44  | No acceptable outcome provided. |
| Development maintains and improves the environmental values of waterway ecosystems.   |                                 |
| PO45  | No acceptable outcome provided. |
| Constructed water bodies are not dedicated as public assets.  |                                 |
|   | 1                               |

| Performance outcomes   | Acceptable outcomes   |  |  |
|--|---|--|--|
| Stormwater management system   |   |  |  |
| PO46   | AO46  |  |  |
| The major drainage system has the capacity to safely convey stormwater flows for the defined flood event.  | The roads, drainage pathways, drainage features and<br>waterways safely convey the stormwater flows for the<br>defined flood event without allowing flows to encroach<br>upon private lots. |  |  |
| PO47   | A047  |  |  |
| Overland flow paths (for any storm event) from roads<br>and public open space areas do not pass through private<br>lots.   | Drainage pathways are provided to accommodate overland flows from roads and public open space areas.  |  |  |
| PO48<br>Development achieves the design objectives in Tables<br>A and B in Appendix 2 of the SPP.<br>Note - To demonstrate achievement of this performance outcome,<br>a stormwater quality management is prepared by a suitably qualified<br>person in accordance with Planning scheme policy - Stormwater<br>management. | No acceptable outcome provided.   |  |  |
| PO49   | No acceptable outcome provided.   |  |  |
| The stormwater management system is designed to:   | S   |  |  |
| <ul><li>a. protect the environmental values in downstream waterways;</li><li>b. maintain ground water recharge areas;</li></ul>  |   |  |  |
| c. preserve existing natural wetlands and associated vegetation buffers;   |   |  |  |
| d. avoid disturbing soils or sediments;  |   |  |  |
| e. avoid altering the natural hydrologic regime in acid sulphate soil and nutrient hazardous areas;  |   |  |  |
| f. maintain and improve receiving water quality;   |   |  |  |
| g. protect natural waterway configuration;   |   |  |  |
| h. protect downstream and adjacent properties;   |   |  |  |
| i. protect and enhance riparian areas.   |   |  |  |
| PO50   | No acceptable outcome provided.   |  |  |
| Design and construction of the stormwater management system:   |   |  |  |

| Performance outcomes |   | Acceptable outcomes   |  |  |
|----------------------|---|---|--|--|
| a.                   | utilise methods and materials to minimise the whole<br>of lifecycle costs of the stormwater management<br>system;   |   |  |  |
| b.                   | are co-ordinated with civil and other landscaping works;  |   |  |  |
| C.                   | achieves Council's Total Water Management policy and the efficient use of water resources.  |   |  |  |
| guio                 | e - Refer to Planning scheme policy - Integrated design for<br>lance on how to demonstrate achievement of this performance<br>come.   |   |  |  |
| PO5                  | 1   | No acceptable outcome provided.                                     |  |  |
| on F<br>deve         | ere associated with a minor green corridor identified<br>Figure 7.2.3.4 - Green network and open space,<br>elopment will adopt bio-retention systems for<br>mwater treatment that recognises and promotes   | V Jei   |  |  |
|                      | ncils Total Water Cycle Management policy and the<br>ient use of water resources.   |   |  |  |
|                      | e - To determine the standards for stormwater management<br>em construction refer to Planning scheme policy - Integrated<br>ign.  |   |  |  |
|                      |   | 5   |  |  |
| Clea                 | aring of native vegetation  |   |  |  |
| PO5                  | 2   | A052  |  |  |
|                      | onfiguring a lot facilitates the retention of native etation by:  | Development is in accordance with a Neighbourhood development plan. |  |  |
| a.                   | incorporating native vegetation and habitat trees<br>into the overall subdivision design, development<br>layout, on-street amenity and landscaping where<br>practicable;  |   |  |  |
| b.                   | ensuring habitat trees are located outside a<br>development footprint. Where habitat trees are to<br>be cleared, replacement fauna nesting boxes are<br>provided at the rate of 1 nest box for every hollow<br>removed. Where hollows have not yet formed in<br>trees > 80cm in diameter at 1.3m height, 3 nest<br>boxes are required for every habitat tree removed. |   |  |  |
| C.                   | providing safe, unimpeded, convenient and ongoing wildlife movement;  |   |  |  |
| d.                   | avoiding creating fragmented and isolated patches of native vegetation.   |   |  |  |
| e.                   | ensuring that biodiversity quality and integrity of<br>habitats is not adversely impacted upon but are<br>maintained and protected;   |   |  |  |

| Performance outcomes         |   | Acceptable outcomes   |  |  |
|------------------------------|---|---|--|--|
| f.<br>g.<br><b>No</b> i      | ensuring that soil erosion and land degradation<br>does not occur;<br>ensuring that quality of surface water is not<br>adversely impacted upon by providing effective<br>vegetated buffers to water bodies.   |   |  |  |
| РО                           | 53  | A053  |  |  |
| a.<br>b.<br>No<br>coi<br>pre | ese attenuation structure (e.g. walls, barriers or fences):<br>contribute to safe and usable public spaces, through<br>maintaining high levels of surveillance of parks,<br>streets and roads that serve active transport<br>purposes (e.g. existing or future pedestrian paths<br>or cycle lanes etc);<br>maintain the amenity of the streetscape.<br>ete - A noise impact assessment may be required to demonstrate<br>mpliance with this PO. Noise impact assessments are to be<br>epared in accordance with Planning scheme policy - Noise.<br>ete - Refer to Planning Scheme Policy – Integrated design for<br>tails and examples of noise attenuation structures. | <ul> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public are unless;</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serv an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and material is not possible.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> </ul> |  |  |
|                              | Values and con  | straints criteria   |  |  |
| Re<br>de                     | configuring a lot or Material change of use or Operational work, wh   | the development is consistent with a current Development permit for<br>here that approval has considered and addressed (e.g. through a<br>) or conditions of approval) the identified value or constraint under this  |  |  |
| No<br>de                     | shfire hazard (refer Overlay map - Bushfire hazard<br>oly) for developable lots only<br>ote - The preparation of a bushfire management plan in accordance<br>monstrating compliance with the following performance criteria. The<br>mpliance with the following performance criteria.   |   |  |  |
| РО                           | 54  | AO54  |  |  |
| Lot                          | s are designed to:  | Reconfiguring a lot ensures that all new lots are of an appropriate size, shape and layout to allow for the siting  |  |  |

- a. minimise the risk from bushfire hazard to each lot and provide the safest possible siting for buildings and structures;
- a. within an appropriate development footprint;

of future buildings being located:

| Performance outcomes   | Acceptable outcomes  |  |  |
|--|--|--|--|
| <ul> <li>b. limit the possible spread paths of bushfire within the reconfiguring;</li> <li>c. achieve sufficient separation distance between development and hazardous vegetation to minimise the risk to future buildings and structures during bushfire events;</li> <li>d. maintain the required level of functionality for emergency services and uses during and immediately after a natural hazard event.</li> </ul> | <ul> <li>b. within the lowest hazard locations on a lot;</li> <li>c. to achieve minimum separation from any source of bushfire hazard of 20m or the distance required to achieve a Bushfire Attack Level (BAL) of more than 29 (as identified under AS3959-2009), whichever is the greater;</li> <li>d. to achieve a minimum separation from any retained vegetation strips or small areas of vegetation of 10m or the distance required to achieve a Bushfire Attack Level (BAL) of more than 29 (as identified under AS3959-2009), whichever is the greater;</li> <li>e. away from ridgelines and hilltops;</li> <li>f. on land with a slope of less than 15%;</li> <li>g. away from north to west facing slopes.</li> </ul> |  |  |
| PO55<br>Lots provide adequate water supply and infrastructure<br>to support fire-fighting.   | AO55<br>For water supply purposes, reconfiguring a lot ensures that:<br>a. lots have access to a reticulated water supply  |  |  |
|  | <ul> <li>provided by a distributer-retailer for the area; or</li> <li>b. where no reticulated water supply is available, on-site fire fighting water storage containing not less than 10,000 litres and located within a development footprint.</li> </ul>   |  |  |
| PO56<br>Lots are designed to :   | <b>AO56</b><br>Reconfiguring a lot ensures a new lot is provided with:   |  |  |
| a. promote safe site access by avoiding potential entrapment situations;   | <ul><li>a. direct road access and egress to public roads;</li><li>b. an alternative access where the private driveway</li></ul>  |  |  |
| b. promote accessibility and manoeuvring for fire fighting during bushfire.  | is longer than 100m to reach a public road;  |  |  |
|  | c. driveway access to a public road that has a gradient no greater than 12.5%;   |  |  |
|  | d. minimum width of 3.5m.  |  |  |
| P057   | AO57   |  |  |
| Lots ensure the road layout and design supports:   | Reconfiguring a lot provides a road layout which:  |  |  |
| <ul> <li>a. safe and efficient emergency services access to sites; and manoeuvring within the subdivision;</li> <li>b. availability and maintenance of access routes for the purpose of safe evacuation.</li> </ul>  | <ul> <li>a. includes a perimeter road that separating the new lots from hazardous vegetation on adjacent lots incorporating by:</li> <li>i. a cleared width of 20m;</li> <li>ii. road gradients not exceeding 12.5%;</li> </ul>  |  |  |


| Performance outcomes  | Acceptable outcomes  |  |  |  |
|---|--|--|--|--|
|   | iii. pavement and surface treatment capable of being used by emergency vehicles;   |  |  |  |
|   | <ul> <li>Turning areas for fire fighting appliances in<br/>accordance with Qld Fire and Emergency<br/>Services' Fire Hydrant and Vehicle Access<br/>Guidelines.</li> </ul> |  |  |  |
|   | b. Or if the above is not practicable, a fire maintenance trail separates the lots from hazardous vegetation on adjacent lots incorporating:                               |  |  |  |
|   | i. a minimum cleared width of 6m and mini<br>formed width of 4m;   |  |  |  |
|   | <ul><li>ii. gradient not exceeding 12.5%;</li><li>iii. cross slope not exceeding 10%;</li></ul>  |  |  |  |
|   | <ul> <li>a formed width and erosion control devices<br/>to the standards specified in Planning scheme<br/>policy - Integrated design;</li> </ul>                           |  |  |  |
|   | v. a turning circle or turnaround area at the end<br>of the trail to allow fire fighting vehicles to<br>manoeuvre;   |  |  |  |
|   | vi. passing bays and turning/reversing bays ev 200m;   |  |  |  |
|   | vii. an access easement that is granted in favour<br>of the Council and the Queensland Fire and<br>Rescue Service or located on public land.                               |  |  |  |
| DISIU.  | c. excludes cul-de-sacs, except where a perimeter road with a cleared width of 20m isolates the lots from hazardous vegetation on adjacent lots; and                       |  |  |  |
|   | d. excludes dead-end roads.  |  |  |  |
| Heritage and landscape character (refer Overlay map<br>the following assessment criteria apply) | - Heritage and landscape character to determine if   |  |  |  |
| Note - The identification of a development footprint will assist in demo                        | instrating compliance with the following performance criteria.   |  |  |  |
| PO58  | No acceptable outcome provided.  |  |  |  |
| Lots do not:  |  |  |  |  |
| a. reduce public access to a heritage place, building, item or object;                          |  |  |  |  |


| Performance outcomes   | Acceptable outcomes                                      |  |  |
|--|--|--|--|
| b. create the potential to adversely affect views to and from the heritage place, building, item or object;  |  |  |  |
| c. obscure or destroy any pattern of historic<br>subdivision, historical context, landscape setting or<br>the scale and consistency of the urban fabric<br>relating to the local heritage place. |  |  |  |
| High voltage electricity line buffer (refer Overlay ma<br>assessment criteria apply)   | o - Infrastructure buffers to determine if the following |  |  |
| Note - The identification of a development footprint will assist in demonstrating compliance with the following performance criteria.  |  |  |  |
| PO59   | No acceptable outcome provided.                          |  |  |
| Lots provide a development footprint outside of the buffer.  | 6  |  |  |
| PO60   | AO60   |  |  |
| The creation of lots does not compromise or adversely impact upon the efficiency and integrity of supply.  | No new lots are created within the buffer area.          |  |  |
| PO61   | A061   |  |  |
| The creation of new lots does not compromise or<br>adversely impact upon access to the supply line for any<br>required maintenance or upgrading work.  | No new lots are created within the buffer area.          |  |  |
| PO62   | No acceptable outcome provided.                          |  |  |
| Boundary realignments:   |  |  |  |
| a. do not result in the creation of additional building development within the buffer;   |  |  |  |
| a. result in the reduction of building development opportunities within the buffer.  |  |  |  |
| Bulk water supply infrastructure buffer (refer Overla following assessment criteria apply)   | y map - Infrastructure buffers to determine if the       |  |  |
| Note - The identification of a development footprint will assist in demonstrating compliance with the following performance criteria.  |  |  |  |
| PO63   | No acceptable outcome provided.                          |  |  |
| Lots provide a development footprint outside of the buffer.  |  |  |  |
| PO64   | No acceptable outcome provided.                          |  |  |
| The creation of lots does not compromise or adversely impact upon the efficiency and integrity of supply.  |  |  |  |

| Performance outcomes   | Acceptable outcomes   |  |  |
|--|---|--|--|
| <b>PO65</b><br>The creation of lots does not compromise or adversely<br>impact upon access to the supply line for any required<br>maintenance or upgrading work.   | No acceptable outcome provided.   |  |  |
| PO66   | No acceptable outcome provided.   |  |  |
| <ul><li>Boundary realignments:</li><li>a. do not result in the creation of additional building development within the buffer;</li><li>b. results in the reduction of building development opportunities within the buffer.</li></ul>   | ion <sup>2</sup>  |  |  |
| Overland flow path (refer Overlay map - Overland flow<br>apply)<br>Note - The applicable river and creek flood planning levels associated<br>obtained by requesting a flood check property report from Council.  |   |  |  |
| <ul> <li>PO67</li> <li>Development:</li> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> </ul>   | No acceptable outcome provided.   |  |  |
| <ul> <li>PO68</li> <li>Development: <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;</li> <li>b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.</li> </ul> </li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow</li> </ul> | AO68<br>Development ensures that any buildings are not located<br>in an Overland flow path area.<br>Note: A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding property. |  |  |
| PO69<br>Development does not:  | No acceptable outcome provided.   |  |  |

| Performance outcomes   | Acceptable outcomes  |  |  |
|--|--|--|--|
| <ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow</li> </ul> |  |  |  |
| P070   | A070   |  |  |
| Development ensures that overland flow is not conveyed<br>from a road or public open space onto a private lot,<br>unless the development is in a Rural zone.   | Development ensures that overland flow paths and<br>drainage infrastructure is provided to convey overland<br>flow from a road or public open space area away from a<br>private lot, unless the development is in the Rural zone.  |  |  |
| PO71<br>Development ensures that Council and inter-allotment<br>drainage infrastructure, overland flow paths and open<br>drains through private property cater for overland flows<br>for a fully developed upstream catchment flows and are<br>able to be easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme<br>policy – Flood hazard, Coastal hazard and Overland flow  | <ul> <li>A071.1</li> <li>Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:</li> <li>a. Urban area – Level III;</li> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul> A071.2 Development ensures that all Council and allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment. |  |  |
| <ul> <li>PO72</li> <li>Development protects the conveyance of overland flow such that easements for drainage purposes are provided over:</li> <li>a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;</li> </ul>  | No acceptable outcome provided   |  |  |

| Performance outcomes  | Acceptable outcomes  |  |
|---|--|--|
| b. an overland flow path where it crosses more than one property; and   |  |  |
| c. inter-allotment drainage infrastructure.   |  |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |  |  |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   |  |  |
| Additional criteria for development for a Park <sup>(57)</sup>  |  |  |
| P073  | A073   |  |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated Design. |  |
| a. public benefit and enjoyment is maximised;   |  |  |
| <ul> <li>b. impacts on the asset life and integrity of park<br/>structures is minimised;</li> </ul>   |  |  |
| c. maintenance and replacement costs are minimised.   |  |  |



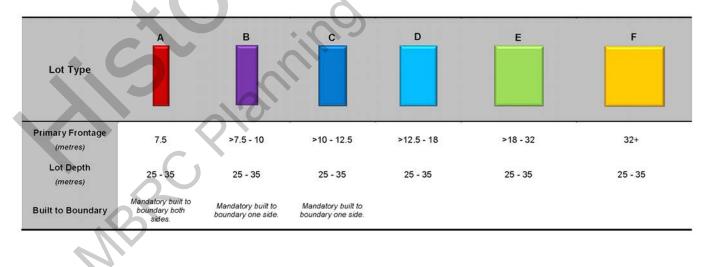

#### 7.2.3.7.2 Town centre precinct

e.

#### 7.2.3.7.2.1 Application - Reconfiguring a lot code - Town centre precinct

- 1. The purpose of this part of the Reconfiguring a lot code is to facilitate and manage the outcomes of development for reconfiguring a lot and its associated Operational Works in the Caboolture West local plan Town centre precinct, to achieve the Overall Outcomes.
- The purpose of this part of the code will be achieved through the overall outcomes as identified in Part 7.2.3.7
   Reconfiguring a lot code and the following additional Caboolture West local plan Town centre precinct specific overall outcomes:
  - a. Reconfiguring a lot is in accordance with a Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.1 Caboolture West structure plan.
  - b. Reconfiguring a lot contributes to the consolidation of the Town centre precinct through greater land use efficiency.
  - c. Reconfiguring a lot maintains lot sizes and dimensions which are able to support increased scale and intensity of mixed use development commensurate with Town centre precinct activities consistent in the applicable sub-precinct.
  - d. Reconfiguring a lot avoids areas subject to constraint, limitation, or environmental values. Where reconfiguring a lot cannot avoid these identified areas, it responds by:
    - i. adopting a 'least risk, least impact' approach when designing, siting and locating development to minimise the potential risk to people, property and the environment;
    - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
    - iii. maintaining environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of environmental offsets, landscaping and facilitating safe wildlife movement through the environment;
    - iv. protecting native species and protecting and enhancing native species habitat;
    - v. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
    - vi. establishing effective separation distances, buffers and mitigation measures associated with major infrastructure to minimise adverse effects on sensitive land uses from noise, dust and other nuisance generating activities;
    - vii. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of major infrastructure;
    - viii. Ensuring effective and efficient disaster management response and recovery capabilities.
    - The Reconfiguring a lot, Operational works associated with the Reconfiguring a lot, and uses expected to occur as a result of the Reconfiguring a lot:
      - i. responds to the risk presented by overland flow and minimises risk to personal safety;
      - ii. is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
      - iii. does not impact on the conveyance of overland flow up to and including the Overland Flow Defined Flood Event;
      - iv. directly, indirectly and cumulatively avoids an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
  - f. Reconfiguring a lot achieves the intent and purpose of the Town centre precinct outcomes as identified in Part 7.
  - g. The Town centre is configured into a block structure with a 200m grid pattern of two main streets and intersecting major streets. Blocks are to be of a length and include breaks that respond to the intended use of the precinct. (i.e. the centre core should consist of longer blocks to be more pedestrian friendly while blocks in the Urban sub-precinct should be of a finer grain (i.e. shorter with more frequent breaks) to provide better accessibility and connectivity).

#### 7.2.3.7.2.2 Criteria for assessment

To determine if boundary realignment is self-assessable development, it must comply with the self-assessable acceptable outcomes set out in Part C, Table 7.2.3.7.2.1. Where development does not meet any of the relevant criteria in Part C, Table 7.2.3.7.2.1, assessment is limited to the subject matter of the self-assessable acceptable outcomes that were not complied with. The following table identifies the corresponding performance outcomes where a development does not comply with a self-assessable acceptable outcome.

| Self-assessable acceptable outcomes | Corresponding performance<br>outcomes |  |
|-------------------------------------|---------------------------------------|--|
| SAO1                                | PO1, PO2, PO30                        |  |
| SAO2                                | PO2, PO30                             |  |
| SAO3                                | PO30                                  |  |
| SAO4                                | PO2                                   |  |
| SAO5                                | PO30                                  |  |
| SAO6                                | PO34                                  |  |

Where reconfiguring a lot is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part D, Table 7.2.3.7.2.2.

#### Part C - Criteria for self-assessable development - Reconfiguring a lot code - Town centre precinct

Table 7.2.3.7.2.1 Self-assessable development - Reconfiguring a lot code - Town centre precinct

| Self-assessable acceptable outcomes |   |  |  |  |
|-------------------------------------|---|--|--|--|
| General criteria                    |   |  |  |  |
| Boundar                             | y realignment for developable and developed lots only   |  |  |  |
| SAO1                                | Lots created by boundary realignment:   |  |  |  |
|                                     | a. contain all service connections to water, sewer, electricity and other infrastructure wholly within the lot they serve;  |  |  |  |
|                                     | b. have constructed road access;  |  |  |  |
|                                     | c. do not require additional infrastructure connections or modification to existing connections.  |  |  |  |
|                                     | d. do not result in the creation of any additional lots;  |  |  |  |
| SAO2                                | Boundary realignment does not result in existing land uses on-site becoming non-complying with planning scheme criteria.  |  |  |  |
|                                     | Note - examples may include but are not limited to:   |  |  |  |
|                                     | a. minimum lot size requirements;   |  |  |  |
|                                     | b. minimum or maximum required setbacks   |  |  |  |
|                                     | c. parking and access requirements;   |  |  |  |
|                                     | d. servicing and Infrastructure requirements;   |  |  |  |
|                                     | e. dependant elements of an existing or approved land use being separately titled, including but not limited to:  |  |  |  |
|                                     | i. Where premises are approved as Multiple dwelling <sup>(49)</sup> with a communal open space area, the communal open space cannot be separately titled as it is required by the Multiple dwelling <sup>(49)</sup> approval. |  |  |  |

| Self-assessable acceptable outcomes |  |      |          |       |  |  |  |
|-------------------------------------|--|------|----------|-------|--|--|--|
|                                     | ii. Where a commercial or industrial land use contains an ancillary office $^{(53)}$ , the office $^{(53)}$ cannot be separately titled as it is considered part of the commercial or industrial use.                |      |          |       |  |  |  |
|                                     | <ul> <li>Where a Dwelling house<sup>(22)</sup> includes a secondary dwelling or associated outbuildings, they cannot be separately titled as they are dependent on the Dwelling house<sup>(22)</sup> use.</li> </ul> |      |          |       |  |  |  |
| SAO3                                | For developed lots, resulting lots comply with the following minimum lot sizes and dimensions:   |      |          |       |  |  |  |
|                                     | Precinct   | Area | Frontage | Depth |  |  |  |
|                                     | Urban living precinct  | 7.5m | 25m      |       |  |  |  |
|                                     | Town centre precinct     1000m <sup>2</sup> 40m     -  |      |          |       |  |  |  |
|                                     | Enterprise and employment precinct 1000m <sup>2</sup> 40m -  |      |          |       |  |  |  |
|                                     | Green network precinct   | -    | 10       | -     |  |  |  |
|                                     |  |      |          |       |  |  |  |
| SAO4                                | For developable lots, resulting lots comply with the minimum lot size requirement of 20 hectares.  |      |          |       |  |  |  |
| SAO5                                | No new boundaries are located within 2m of High Value Areas as identified in Overlay map - Environmental areas.  |      |          |       |  |  |  |
| SAO6                                | Boundary realignment does not result in the clearing of any Habitat trees.   |      |          |       |  |  |  |

#### Part D - Criteria for assessable development - Reconfiguring a lot code - Town centre precinct

#### Table 7.2.3.7.2.2 Assessable development - Reconfiguring a lot code - Town centre precinct

| Performance outcomes  | Acceptable outcomes            |  |  |  |
|---|--------------------------------|--|--|--|
| Where on a developable lot or creating developable  | lots                           |  |  |  |
| Lot size and design   |                                |  |  |  |
| P01   | No acceptable outcome provided |  |  |  |
| Reconfiguring a lot does not result in additional lots.   |                                |  |  |  |
| Boundary realignment  |                                |  |  |  |
| P02   | No acceptable outcome provided |  |  |  |
| Boundary realignments do not result in the:   |                                |  |  |  |
| a. fragmentation or alienation of the land or result in the loss of land for future urban purposes; |                                |  |  |  |
| b. delay the use of the land for urban purposes;  |                                |  |  |  |
| c. existing land uses on-site becoming non-compliant due to:  |                                |  |  |  |
| i. lot size;  |                                |  |  |  |
| ii. parking requirements;   |                                |  |  |  |

| Per       | formance outcomes   | Acceptable outcomes   |
|-----------|---|---|
|           | <ul><li>iii. servicing;</li><li>iv. dependant elements of an existing or<br/>approved land use being separately titled.</li></ul>   |   |
| Whe       | ere on a developed lot or creating developed lots   |   |
| Lot       | size and design   |   |
| PO3       | 3   | A03   |
| esta      | have appropriate area and dimension for the<br>blishment of uses consistent with the applicable<br>precinct of the Town centre precinct, having regard  | Development is in accordance with a Neighbourhood development plan.   |
| a.<br>b.  | convenient and safe access;<br>on-site car parking;   | Lots comply with the following minimum sizes to facilitate appropriate uses and preferred scale and intensity of development: |
| C.        | service vehicle access and manoeuvring;   | Town centre precinct Min. lot size Min. frontage  |
| d.        | appropriately sited loading and servicing areas;  | Sub-precincts   |
| e.        | setbacks, buffers to sensitive land uses and landscaping where required;  | All sub-precincts 1000m <sup>2</sup> 40m  |
| f.        | providing for rear service lane access where possible.  | S   |
|           | e - refer to the overall outcomes for the Town centre precinct sub-precinct for consistent uses.  |   |
| PO4       |   | AO4   |
| The<br>a. | layout and frontage of lots does not result in:<br>vehicle crossing on street frontages identified with<br>a Neighbourhood development plan that reflects<br>the urban structure concept shown indicatively on<br>Figure 7.2.3.2.5 - Driveway crossover restrictions; | Development is in accordance with a Neighbourhood development plan.   |
| b.        | additional vehicle cross overs that will impede pedestrian activity on the street frontage;   |   |
| C.        | lots having a primary street frontage of less than 20m are provided with a secondary street access for vehicle movements.   |   |
| POS       | 5   | AO5   |
|           | red vehicle access arrangements are provided,<br>re possible, between adjoining centre properties.  | Development is in accordance with a Neighbourhood development plan.   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Note - an access easement may be required to be registered to ensure shared access between properties is permitted.   |   |
| PO6   | A06   |
| The creation of allotments on major streets when shown<br>on a Neighbourhood development plan (refer Figure<br>7.2.3.2 - Movement, major streets) does not adversely<br>affect the safety and efficiency of the road network. New<br>lots on higher order roads are provided with a secondary<br>street access for vehicle movements. | Development is in accordance with a Neighbourhood development plan. |
| P07   | A07   |
| Where adjacent to existing or proposed public spaces,<br>reconfiguring a lot promotes safety, amenity and activity<br>within the public space by facilitating connections to any<br>existing footpaths or roadways.   | Development is in accordance with a Neighbourhood development plan. |
| P08   | A08   |
| Reconfiguring a lot does not compromise potential future<br>connections with adjoining roadways, uses or lots by<br>way of inappropriate boundary or road reserve locations.  | Development is in accordance with a Neighbourhood development plan. |
| PO9   | A09   |
| The layout of the development results in the creation of a strong and positive identity through:  | Development is in accordance with a Neighbourhood development plan. |
| a. the provision of clearly legible movement and open space networks;   |   |
| b. an appropriate design response to site and locality characteristics.   |   |
| P010  | AO10  |
| Lots do not compromise the viability of adjoining lots<br>and provide for optimum integration with existing or<br>future development on surrounding land, having regard<br>to:<br>a. the connectivity of access and open space<br>networks;   | Development is in accordance with a Neighbourhood development plan. |
| b. the efficient provisions of infrastructure;  |   |
| c. the appropriate location of boundaries and road reserves.  |   |
| Reticulated supply  |   |
|   | A011  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| <ul> <li>Each lot is provided with an appropriate level of service and infrastructure commensurate with the Town centre precinct. All services, including water supply, stormwater management, sewage disposal, electricity, telecommunications and gas (if available) are provided in a manner that:</li> <li>a. is efficient in delivery of service;</li> <li>b. is effective in delivery of service;</li> <li>c. is conveniently accessible in the event of maintenance or repair;</li> <li>d. minimises whole of life cycle costs for that infrastructure;</li> <li>e. minimises risk of potential adverse impacts on the natural and built environment;</li> <li>f. minimises risk of potential adverse impact on amenity and character values;</li> <li>g. recognises and promotes Councils Total Water Cycle Management policy and the efficient use of water resources.</li> </ul> | <ul> <li>New lots are provided with:</li> <li>a. a connection to the reticulated water supply infrastructure network;</li> <li>b. a connection to the reticulated sewerage infrastructure network;</li> <li>c. a connection to the reticulated electricity infrastructure network;</li> <li>d. where available, access to a high speed telecommunication network.</li> </ul> |
| Street network   | CC   |
| PO12<br>The street network creates convenient access to major<br>streets for heavy vehicles and commercial traffic without<br>introducing through traffic to residential streets. The<br>street network is designed in accordance with a<br>Neighbourhood development plan that reflects the urban<br>structure concept shown indicatively on Figure 7.2.3.2<br>- Movement, major streets, Figure 7.2.3.2.2 - Indicative<br>street network and Figure 7.2.3.2.3 - Movement, key<br>streets and connections.  | AO12<br>Development is in accordance with a Neighbourhood<br>development plan.   |
| <b>PO13</b><br>The road network has sufficient reserve and pavement widths to cater for the current and intended function of the road in accordance with the road type in accordance with Planning scheme policy - Integrated design.  | AO13<br>Development is in accordance with a Neighbourhood<br>development plan.   |
| <b>PO14</b><br>Movement networks encourage walking and cycling and<br>a safe environment for pedestrians and cyclists. The<br>street network is designed in accordance with a<br>Neighbourhood development plan that reflects the urban<br>structure concept shown indicatively on Figure 7.2.3.3<br>- Movement, walking and cycling.  | AO14<br>Development is in accordance with a Neighbourhood<br>development plan.   |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| PO15   | A015  |
| Street layouts are designed to connect to surrounding neighbourhoods by providing an interconnected street, pedestrian and cyclist networks that connects nearby centres, neighbourhood hubs, community facilities, public transport nodes and open space to residential areas for access and emergency management purposes. The layout ensures that new development is provided with multiple points of access. The timing of transport works ensures that multiple points of access are provided during early stages of a development. | Development is in accordance with a Neighbourhood development plan.   |
| Stormwater location and design   | 0 10  |
| P016   | AO16  |
| Lots are of a sufficient grade to accommodate effective stormwater drainage to a lawful point of discharge.  | The surface level of a lot is at a minimum grade of 1:100<br>and slopes towards the street frontage, or other lawful<br>point of discharge. |
| P017   | No acceptable outcome provided.   |
| <ul><li>The development is planned and designed considering:</li><li>a. the land use constraints of the site;</li><li>b. water sensitive urban design principles.</li></ul>  |   |
| PO18<br>Stormwater drainage pipes and structures through or<br>within private land are protected by easements in favour<br>of Council with sufficient area for practical access for<br>maintenance.<br>Note - refer to Planning scheme policy - Integrated design for<br>guidance on how to demonstrate achievement of this performance<br>outcome.  | No acceptable outcome provided.   |
| PO19   | No acceptable outcome provided.   |
| Stormwater management facilities are located outside<br>of riparian areas and prevent increased channel bed<br>and bank erosion.   |   |
| PO20   | No acceptable outcome provided.   |
| Natural streams and riparian vegetation are retained and enhanced through revegetation.  |   |

| Performance outcomes   | Acceptable outcomes  |  |
|--|--|--|
| PO21   | No acceptable outcome provided.  |  |
| Areas constructed as detention basins are adaptable for passive recreation.  |  |  |
| PO22   | No acceptable outcome provided.  |  |
| Development maintains and improves the environmental values of waterway ecosystems.  |  |  |
| PO23   | No acceptable outcome provided.  |  |
| Constructed waterbodies proposed to be dedicated as public assets are to be avoided.   | S' silon   |  |
| Stormwater management system   |  |  |
| PO24   | A024   |  |
| The major drainage system has the capacity to safely convey stormwater flows for the defined flood event (DFE).  | The roads, drainage pathways, drainage features and waterways safely convey the stormwater flows for the defined flood event (DFE) without allowing flows to encroach upon private lots. |  |
| PO25   | AO25   |  |
| Overland flow paths (for any storm event) from roads<br>and public open space areas do not pass through private<br>lots.   | Drainage pathways are provided to accommodate overland flows from roads and public open space areas.   |  |
| PO26<br>Development achieves design objectives in Tables A<br>and B in Appendix 2 of the SPP.<br>Note - to demonstrate achievement of this performance outcome,<br>a stormwater quality management is prepared by a suitably qualified<br>person in accordance with Planning scheme policy - Stormwater<br>management. | No acceptable outcome provided.  |  |
| PO27   | No acceptable outcome provided.  |  |
| The stormwater management system is designed to:   |  |  |
| a. protect the environmental values in downstream waterways;   |  |  |
| b. maintain ground water recharge areas;   |  |  |
| c. preserve existing natural wetlands and associated buffers;  |  |  |
| d. avoid disturbing soils or sediments;  |  |  |

| No acceptable outcome provided.   |
|-----------------------------------|
| e jersi                           |
| schell                            |
| No acceptable outcome identified. |
|                                   |
|                                   |
| No acceptable outcome identified. |
|                                   |
|                                   |
|                                   |

| Per  | formance outcomes  | Acceptable outcomes             |
|--|--|---------------------------------|
| c.<br>d.<br>e.<br>f.<br><b>Rec</b><br><b>PO:</b><br><b>PO:</b><br><b>Rec</b><br>corr<br>und<br>on t<br>in a<br>a.<br>b.<br>Not<br>are<br>has<br>accoft<br>in accort<br>are | do not result in existing land uses on-site becoming<br>non-compliant with planning scheme criteria;<br>results in lots which have appropriate size,<br>dimensions and access to cater for uses consistent<br>with the precinct, sub-precinct and any relevant<br>other precinct;<br>infrastructure and services are wholly contained<br>within the lot they serve;<br>ensures the uninterrupted continuation of lots<br>providing for their own private servicing.<br><b>configuring a lot other than creating freehold lots</b><br><b>31</b><br>configuring a lot which creates or amends a<br>munity title scheme as described in the <i>Body</i><br><i>porate and Community Management Act 1997</i> is<br>ertaken in a way that does not result in existing uses<br>the land becoming unlawful or otherwise operating<br>manner that is:<br>inconsistent with any approvals on which those<br>uses rely; or<br>inconsistent with the self-assessable development<br>requirements applying to those uses at the time<br>that they were established. |                                 |
| Edi<br>dev<br>for<br>be  | e or conditions of development approval.<br>tor's note - To satisfy this performance outcome, the<br>velopment application may need to be a combined application<br>reconfiguring a lot and a material change of use or otherwise<br>supported by details that confirm that the land use still satisfies<br>relevant land use requirements.  |                                 |
| Rec  | configuring by Lease   |                                 |
| leas<br>of th<br>resu  | 32<br>configuring a lot which divides land or buildings by<br>se in a way that allows separate occupation or use<br>hose facilities is undertaken in a way that does not<br>ult in existing uses on the land becoming unlawful or<br>erwise operating in a manner that is:   | No acceptable outcome provided. |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| a. inconsistent with any approvals on which those uses rely; or  |   |
| b. inconsistent with the self-assessable developmen requirements applying to those uses at the time that they were established.  | ht  |
| Note - An example of a land use becoming unlawful is a building<br>over which one or more leases have been created in a way that<br>precludes lawful access to some of the required communal facilities.<br>Some of the communal car parking facilities have been incorporated<br>into lease areas while other leases are located in a way that<br>obstructs the normal access routes to other communal facilities.<br>Those communal facilities may have been required under<br>self-assessment requirements for the use or conditions of<br>development approval, but they are no longer freely available to all<br>occupants of the building. |   |
| Editor's note -To satisfy this performance outcome, the development<br>application may need to be supported by details that confirm that<br>the land use still satisfies all relevant land use requirements.   |   |
| Editor's note – Under the <i>Sustainable Planning Act</i> , the following do not constitute reconfiguring a lot and are not subject to this performance outcome:   |   |
| <ul> <li>a. a lease for a term, including renewal options, not exceeding 10 years; and</li> <li>b. an agreement for the exclusive use of part of the common property for a community titles scheme under the <i>Body Corporate and Community Management Act 1997</i>.</li> </ul>   | cher  |
|  | S   |
| Volumetric subdivision   |   |
| PO33   | No acceptable outcome provided.                                     |
| The reconfiguring of the space above or below the surface of the land ensures appropriate area, dimension and access arrangements to cater for uses consistent with the zone and does not result in existing land uses   |   |
| on site becoming non-compliant.  |   |
| Note - An example includes but is not limited to:  |   |
| a. Where a commercial or industrial land use contains an ancillary office, the office cannot be separately titled as it is considered part of the commercial or industrial use.  |   |
|  |   |
| Clearing of native vegetation  |   |
| PO34   | AO34  |
| Reconfiguring a lot facilitates the retention of native vegetation by:   | Development is in accordance with a Neighbourhood development plan. |
| a. incorporating native vegetation and habitat trees<br>into the overall subdivision design, development<br>layout, on-street amenity and landscaping where  |   |

practicable;

| Per  | formance outcomes  | Acceptable outcomes  |  |
|--|--|--|--|
| b.<br>c.<br>d.<br>e.<br>f.<br>g.   | ensuring habitat trees are located outside a<br>development footprint. Where habitat trees are to<br>be cleared, replacement fauna nesting boxes are<br>provided at the rate of 1 nest box for every hollow<br>removed. Where hollows have not yet formed in<br>trees > 80cm in diameter at 1.3m height, 3 nest<br>boxes are required for every habitat tree removed.<br>providing safe, unimpeded, convenient and ongoing<br>wildlife movement;<br>avoiding creating fragmented and isolated patches<br>of native vegetation.<br>ensuring that biodiversity quality and integrity of<br>habitats is not adversely impacted upon but are<br>maintained and protected;<br>ensuring that soil erosion and land degradation<br>does not occur;<br>ensuring that quality of surface water is not<br>adversely impacted upon by providing effective<br>vegetated buffers to water bodies. |  |  |
| Noi  | ise  |  |  |
| РО   | 35   | A035   |  |
| fenda.<br>a.<br>b.<br>No<br>cor<br>pre   | se attenuation structure (e.g. walls, barriers or<br>ces):<br>contribute to safe and usable public spaces,<br>through maintaining high levels of surveillance of<br>parks, streets and roads that serve active transport<br>purposes (e.g. existing or future pedestrian paths<br>or cycle lanes etc);<br>maintain the amenity of the streetscape.<br>te - A noise impact assessment may be required to demonstrate<br>mpliance with this PO. Noise impact assessments are to be<br>epared in accordance with Planning scheme policy - Noise.<br>te - Refer to Planning Scheme Policy – Integrated design for<br>tails and examples of noise attenuation structures.   | <ul> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public area unless;</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul> |  |
|  | Values and cor   | nstraints criteria   |  |
| Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme. |  |  |  |

| Performance outcomes  | Acceptable outcomes  |  |
|---|--|--|
| Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply) where on a developable lots   |  |  |
| Note - The preparation of a bushfire management plan in accordance demonstrating compliance with the following performance criteria. Th compliance with the following performance criteria.   | ce with Planning scheme policy – Bushfire prone areas can assist in 'he identification of a development footprint will assist in demonstrating   |  |
| PO36  | AO36   |  |
| <ul> <li>Lots are designed to:</li> <li>a. minimise the risk from bushfire hazard to each lot<br/>and provide the safest possible siting for buildings<br/>and structures;</li> <li>b. limit the possible spread paths of bushfire within<br/>the reconfiguring;</li> <li>c. achieve sufficient separation distance between<br/>development and hazardous vegetation to minimise<br/>the risk to future buildings and structures during<br/>bushfire events;</li> <li>d. maintain the required level of functionality for<br/>emergency services and uses during and<br/>immediately after a natural hazard event.</li> </ul> | <ul> <li>Reconfiguring a lot ensures that all new lots are of an appropriate size, shape and layout to allow for the siting of future buildings being located:</li> <li>a. within an appropriate development footprint;</li> <li>b. within the lowest hazard locations on a lot;</li> <li>c. to achieve minimum separation from any source of bushfire hazard of 20m or the distance required to achieve a Bushfire Attack Level (BAL) of more than 29 (as identified under AS3959-2009), whichever is the greater;</li> <li>d. to achieve a minimum separation from any retained vegetation strips or small areas of vegetation of 10m or the distance required to achieve a Bushfire Attack Level (BAL) of more than 29 (as identified under AS3959-2009), whichever is the greater;</li> <li>e. away from ridgelines and hilltops;</li> <li>f. on land with a slope of less than 15%;</li> <li>g. away from north to west facing slopes.</li> </ul> |  |
| PO37<br>Lots provide adequate water supply and infrastructure   | AO37<br>For water supply purposes, reconfiguring a lot ensures   |  |
| to support fire-fighting.   | <ul> <li>a. lots have access to a reticulated water supply provided by a distributer-retailer for the area; or</li> <li>b. where no reticulated water supply is available, on-site fire fighting water storage containing not less than 10,000 litres and located within a development footprint.</li> </ul>   |  |
| PO38  | AO38   |  |
| Lots are designed to :  | Reconfiguring a lot ensures a new lot is provided with:  |  |
| <ul> <li>promote safe site access by avoiding potential<br/>entrapment situations;</li> </ul>   | a. direct road access and egress to public roads;  |  |
| <ul> <li>promote accessibility and manoeuvring for fire<br/>fighting during bushfire.</li> </ul>  | <ul> <li>an alternative access where the private driveway is<br/>longer than 100m to reach a public road;</li> </ul>   |  |
|   | c. driveway access to a public road that has a gradient no greater than 12.5%;   |  |
|   | d. minimum width of 3.5m.  |  |

| Per  | formance outcomes                           | Acc  | eptable outcomes  |
|------|---|------|---|
| PO3  | 9   | AO39 |   |
| Lots | ensure the road layout and design supports: | Rec  | onfiguring a lot provides a road layout which:  |
| PO3  | 39  | AO   | 39  |
|      |   | C.   | excludes cul-de-sacs, except where a perimeter<br>road with a cleared width of 20m isolates the lots<br>from hazardous vegetation on adjacent lots; and |
|      |   | d.   | excludes dead-end roads.  |

Note - The identification of a development footprint will assist in demonstrating compliance with the following performance criteria.

assessment criteria apply)

| Performance outcomes   | Acceptable outcomes   |  |
|--|---|--|
| PO40   | No acceptable outcome provided.   |  |
| Lots provide a development footprint outside of the buffer.  |   |  |
| PO41   | A041  |  |
| The creation of lots does not compromise or adversely impact upon the efficiency and integrity of supply.  | No new lots are created within the buffer area.   |  |
| PO42   | A042  |  |
| The creation of new lots does not compromise or<br>adversely impact upon access to the supply line for any<br>required maintenance or upgrading work.  | No new lots are created within the buffer area.   |  |
| PO43   | No acceptable outcome provided.   |  |
| Boundary realignments:   |   |  |
| i. do not result in the creation of additional building development within the buffer;   |   |  |
| ii. result in the reduction of building development opportunities within the buffer.   | - cher  |  |
| Overland flow path (refer Overlay map - Overland flow<br>apply)<br>Note - The applicable river and creek flood planning levels associate<br>obtained by requesting a flood check property report from Council. | v path to determine if the following assessment criteria  |  |
| P044   | No acceptable outcome provided.   |  |
| Development:   |   |  |
| a. minimises the risk to persons from overland flow;   |   |  |
| <ul> <li>b. does not increase the potential for damage from<br/>overland flow either on the premises or on a<br/>surrounding property, public land, road or<br/>infrastructure.</li> </ul>                     |   |  |
| PO45   | AO45  |  |
| Development:   | Development ensures that any buildings are not located<br>in an Overland flow path area.  |  |
| a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;                             | Note: A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on an<br>upstream, downstream or surrounding property. |  |
| b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.   |   |  |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   |   |
| PO46   | No acceptable outcome provided.   |
| <ul><li>Development does not:</li><li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li></ul>   |   |
| <ul> <li>b. increase the potential for flood damage from<br/>overland flow either on the premises or on a<br/>surrounding property, public land, road or<br/>infrastructure.</li> </ul>  |   |
| Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.   | C lersio  |
| Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.       |   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   | cher.   |
| PO47   | A047  |
| Development ensures that overland flow is not conveyed<br>from a road or public open space onto a private lot,<br>unless the development is in a Rural zone.   | Development ensures that overland flow paths and<br>drainage infrastructure is provided to convey overland<br>flow from a road or public open space area away from a<br>private lot, unless the development is in the Rural zone.   |
| PO48   | AO48.1  |
| Development ensures that Council and inter-allotment<br>drainage infrastructure, overland flow paths and open<br>drains through private property cater for overland flows<br>for a fully developed upstream catchment flows and are<br>able to be easily maintained. | <ul> <li>Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:</li> <li>a. Urban area – Level III;</li> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> </ul> |
| Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.  | d. Commercial area – Level V.<br>AO48.2   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   | Development ensures that all Council and allotment<br>drainage infrastructure is designed to accommodate any<br>event up to and including the 1% AEP for the fully<br>developed upstream catchment.   |
| PO49   | No acceptable outcome provided  |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| Development protects the conveyance of overland flow such that easements for drainage purposes are provided over:                                       |  |
| a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;  |  |
| b. an overland flow path where it crosses more than one property; and   |  |
| c. inter-allotment drainage infrastructure.   |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |  |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   | C jers   |
| Additional criteria for development for a Park <sup>(57)</sup>  | 0  |
| PO50  | AO50   |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated Design. |
| a. public benefit and enjoyment is maximised;   | 60   |
| b. impacts on the asset life and integrity of park structures is minimised;   |  |
| c. maintenance and replacement costs are minimised.   |  |
| <ul> <li>c. maintenance and replacement costs are minimised.</li> </ul>   |  |

#### 7.2.3.7.3 Enterprise and employment precinct

#### 7.2.3.7.3.1 Application - Reconfiguring a lot code - Enterprise and employment precinct

- 1. The purpose of this part of the Reconfiguring a lot code is to facilitate and manage the outcomes of development for reconfiguring a lot and its associated Operational Works in the Caboolture West local plan Enterprise and employment precinct, to achieve the Overall Outcomes.
- The purpose of this part of the code will be achieved through the overall outcomes as identified in Part 7.2.3.7
   Reconfiguring a lot code and the following additional Caboolture West local plan Enterprise and employment precinct specific overall outcomes:
  - a. Reconfiguring a lot is in accordance with any relevant Neighbourhood development plan and conceptually with Figure 7.2.3.1 Caboolture West structure plan.
  - b. Industrial lots have access to a sufficient level of infrastructure and essential services and convenient access to major transport routes.
  - c. Reconfiguring a lot for industry purposes ensures that lot sizes and dimensions are appropriate for the scale, intensity and operation of uses consistent in the applicable sub-precinct.
  - d. Reconfiguring a lot avoids areas subject to constraint, limitation, or environmental values. Where reconfiguring a lot cannot avoid these identified areas, it responds by:
    - i. adopting a 'least risk, least impact' approach when designing, siting and locating development to minimise the potential risk to people, property and the environment;
    - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
    - iii. maintaining environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of environmental offsets, landscaping and facilitating safe wildlife movement through the environment;
    - iv. protecting native species and protecting and enhancing native species habitat;
    - v. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
    - vi. establishing effective separation distances, buffers and mitigation measures associated with major infrastructure to minimise adverse effects on sensitive land uses from noise, dust and other nuisance generating activities;
    - vii. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of major infrastructure;
    - viii. Ensuring effective and efficient disaster management response and recovery capabilities.
  - e. The Reconfiguring a lot, Operational works associated with the Reconfiguring a lot, and uses expected to occur as a result of the Reconfiguring a lot:
    - i. responds to the risk presented by overland flow and minimises risk to personal safety;
    - ii. is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
    - iii. does not impact on the conveyance of overland flow up to and including the Overland Flow Defined Flood Event;
    - iv. directly, indirectly and cumulatively avoids an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
  - f. Reconfiguring a lot achieves the intent and purpose of the Enterprise and employment precinct and relevant sub-precinct outcomes as identified in Part 7.

#### 7.2.3.7.3.2 Criteria for assessment

To determine if boundary realignment is self-assessable development, it must comply with the self-assessable acceptable outcomes set out in Part E, Table 7.2.3.7.3.1. Where development does not meet any of the relevant criteria in Part E, Table 7.2.3.7.3.1, assessment is limited to the subject matter of the self-assessable acceptable outcomes that were not complied with. The following table identifies the corresponding performance outcomes where a development does not comply with a self-assessable acceptable outcome.

| Self-assessable acceptable outcomes | Corresponding performance<br>outcomes |
|-------------------------------------|---------------------------------------|
| SAO1                                | PO1, PO2, PO30                        |
| SAO2                                | PO2, PO30                             |
| SAO3                                | PO30                                  |
| SAO4                                | PO2                                   |
| SAO5                                | PO30                                  |
| SAO6                                | PO34                                  |

# Part E - Criteria for self-assessable development - Reconfiguring a lot code - Enterprise and employment precinct

Where reconfiguring a lot is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part F, Table 7.2.3.7.3.2.

#### Table 7.2.3.7.3.1 Self-assessable development - Reconfiguring a lot code - Enterprise and employment precinct

| Self-assessable acceptable outcomes  |   |  |  |
|--|---|--|--|
|  | General criteria  |  |  |
| Boundary   | Boundary realignment for developable and developed lots   |  |  |
| SAO1   | Lots created by boundary realignment:   |  |  |
| •  | a. contain all service connections to water, sewer, electricity and other infrastructure wholly within the lot they serve;  |  |  |
| b. have constructed road access;   |   |  |  |
| c. do not require additional infrastructure connections or modification to existing connections.                                     |   |  |  |
|  | d. do not result in the creation of any additional lots;  |  |  |
| <b>SAO2</b> Boundary realignment does not result in existing land uses on-site becoming non-complying with planning scheme criteria. |   |  |  |
|  | Note - Examples may include but are not limited to:   |  |  |
|  | a. minimum lot size requirements;   |  |  |
|  | b. minimum or maximum required setbacks   |  |  |
|  | c. parking and access requirements;   |  |  |
|  | d. servicing and Infrastructure requirements;   |  |  |
|  | e. dependant elements of an existing or approved land use being separately titled, including but not limited to:  |  |  |
|  | i. Where premises are approved as Multiple dwelling <sup>(49)</sup> with a communal open space area, the communal open space cannot be separately titled as it is required by the Multiple dwelling <sup>(49)</sup> approval. |  |  |
|  |   |  |  |

| Self-assessable acceptable outcomes   |  |                    |             |            |
|---|--|--------------------|-------------|------------|
|   | <ul> <li>Where a commercial or industrial land use contains an ancillary office<sup>(53)</sup>, the office<sup>(53)</sup> cannot be separately titled as it is considered part of the commercial or industrial use.</li> <li>Where a Dwelling house<sup>(22)</sup> includes a secondary dwelling or associated outbuildings, they cannot be separately titled as they are dependent on the Dwelling house<sup>(22)</sup> use.</li> </ul> |                    |             |            |
|   |  |                    |             |            |
| SA03 For developed lots, resulting lots comply with the following minimum lot sizes and dimensions: |  |                    | mensions:   |            |
|   | Precinct   | Area               | Frontage    | Depth      |
|   | Urban living precinct  | - (                | 7.5m        | 25m        |
|   | Town centre precinct   | 1000m <sup>2</sup> | 40m         |            |
|   | Enterprise and employment precinct   | 1000m <sup>2</sup> | 40m         | <b>D</b> - |
|   | Green network precinct   | -                  | <u>\-0`</u> | -          |
|   | Rural living precinct  | 6000m <sup>2</sup> |             | -          |
|   |  |                    |             |            |
| SAO4  | <b>SA04</b> For developable lots, resulting lots comply with the minimum lot size requirement of 20 hectares.  |                    |             |            |
| SAO5  | No new boundaries are located within 2m of High Value Areas as identified in Overlay map - Environmental areas.  |                    |             |            |
| SAO6  | Boundary realignment does not result in the clearing of any Habitat trees.   |                    |             |            |

Part F - Criteria for assessable development - Reconfiguring a lot code - Enterprise and employment precinct

#### Table 7.2.3.7.3.2 Assessable development - Reconfiguring a lot code - Enterprise and employment precinct

| Performance outcomes  | Acceptable outcomes            |  |
|---|--------------------------------|--|
| Where on a developable lot or creating developable lots   |                                |  |
| Lot size and design   |                                |  |
| PO1<br>Reconfiguring a lot does not result in additional lots.  | No acceptable outcome provided |  |
| Boundary realignment  |                                |  |
| <ul> <li>PO2</li> <li>Boundary realignments do not result in the:</li> <li>a. fragmentation or alienation of the land or result in the loss of land for future urban purposes;</li> <li>b. delay the use of the land for urban purposes;</li> <li>c. existing land uses on-site becoming non-compliant due to: <ul> <li>i. lot size;</li> </ul> </li> </ul> | No acceptable outcome provided |  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| ii. parking requirements;  |  |
| iii. servicing;  |  |
| <ul> <li>iv. dependant elements of an existing or<br/>approved land use being separately titled.</li> </ul>  |  |
| Where on a developed lot or creating developed lots  |  |
| Lot size and design  |  |
| PO3  | A03  |
| Lots have appropriate area and dimension for the<br>establishment of uses consistent with the applicable<br>sub-precinct in the Enterprise and employment precinct,<br>having regard to:                             | Development is in accordance with a Neighbourhood development plan.  |
| a. convenient and safe access;   | Lots comply with the following minimum sizes to facilitate appropriate uses and preferred scale and intensity of |
| b. on-site car parking;  | development:   |
| c. service vehicle access and manoeuvring;   | Town centre precinct Min. lot size Min. frontage   |
| d. appropriately sited loading and servicing areas;  | Sub-precincts  |
| e. setbacks, buffers to sensitive land uses and landscaping where required;  | All sub-precincts 1000m <sup>2</sup> 40m   |
| <ul> <li>f. lots provide for rear service lane access where possible.</li> <li>Note - Refer to the overall outcomes for the Enterprise and employment precinct and sub-precincts for consistent uses.</li> </ul>     |  |
| P04  | A04  |
| The layout and frontage of lots does not result in:  | Development is in accordance with a Neighbourhood development plan.  |
| a. vehicle crossings on street frontages identified in<br>a Neighbourhood development plan that reflects<br>the urban structure concept shown indicatively on<br>Figure 7.2.3.2.5 - Driveway crossover restrictions; |  |
| <ul> <li>additional vehicle cross overs that will impede<br/>pedestrian activity on the street frontage;</li> </ul>  |  |
| <ul> <li>c. lots having a primary street frontage of less than<br/>20m are provided with a secondary street access<br/>for vehicle movement.</li> </ul>  |  |
| PO5  | A05  |
| Shared vehicle access arrangements are provided , where possible, between adjoining centre properties.   | Development is in accordance with a Neighbourhood development plan.  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Note - An access easement may be required to be registered to ensure shared access between properties is permitted.   |   |
| PO6   | A06   |
| The creation of allotments on major streets when shown<br>on a Neighbourhood development plan (refer Figure<br>7.2.3.2 Movement, major streets) does not adversely<br>affect the safety and efficiency of the road network. New<br>lots on higher order roads are provided with a secondary<br>street access for vehicle movements. | Development is in accordance with a Neighbourhood development plan. |
| P07   | A07   |
| Where adjacent to existing or proposed public spaces, reconfiguring a lot promotes safety, amenity and activity within the public space by facilitating connections to any existing footpaths or roadways.  | Development is in accordance with a Neighbourhood development plan. |
| PO8   | A08   |
| Reconfiguring a lot does not compromise potential future<br>connections with adjoining roadways, uses or lots by way<br>of inappropriate boundary or road reserve locations.  | Development is in accordance with a Neighbourhood development plan. |
| PO9   | A09   |
| The layout of the development results in the creation of a strong and positive identity through:  | Development is in accordance with a Neighbourhood development plan. |
| a. the provision of clearly legible movement and open space networks;   |   |
| b. an appropriate design response to site and locality characteristics.   |   |
| PO10  | AO10  |
| Lots do not compromise the viability of adjoining lots and<br>provide for optimum integration with existing or future<br>development on surrounding land, having regard to:   | Development is in accordance with a Neighbourhood development plan. |
| a. the connectivity of access and open space networks;  |   |
| b. the efficient provisions of infrastructure;  |   |
| c. the appropriate location of boundaries and road reserves.  |   |
| PO11  | A011  |
| Cul-de-sac or dead end streets are not proposed unless:   | Development is in accordance with a Neighbourhood development plan. |
|   |   |

| Performance outcomes   | Acceptable outcomes   |
|--|---|
| a. topography or other physical barriers exist to the continuance of the street network or connection to an existing road is not permitted;  |   |
| b. there are no appropriate alternative solutions;   |   |
| c. the cul-de-sac or dead end street will facilitate future connections to adjoining land or development.  |   |
| Note - Refer to Planning scheme policy - Integrated design for guidance on how to achieve compliance with this outcome.  |   |
| Reticulated supply   | .0  |
| <ul> <li>PO12</li> <li>Each lot is provided with an appropriate level of service and infrastructure commensurate with the Enterprise and employment precinct. All services, including water supply, stormwater management, sewage disposal, electricity, telecommunications and gas (if available) are provided in a manner that: <ul> <li>a. is efficient in delivery of service;</li> <li>b. is effective in delivery of service;</li> <li>c. is conveniently accessible in the event of maintenance or repair;</li> </ul> </li> <li>d. minimises whole of life cycle costs for that infrastructure;</li> <li>e. minimises risk of potential adverse impacts on the natural and built environment;</li> <li>f. minimises risk of potential adverse impact on amenity and character values;</li> <li>g. recognises and promotes Councils Total Water Cycle Management policy and the efficient use of water resources.</li> </ul> | <ul> <li>AO12</li> <li>New lots are provided with:</li> <li>a connection to the reticulated water supply infrastructure network;</li> <li>b a connection to the reticulated sewerage infrastructure network;</li> <li>c a connection to the reticulated electricity infrastructure network;</li> <li>d. where available, access to a high speed telecommunication network.</li> </ul> |
| Street network   |   |
| P013   | AO13  |
| The street network creates convenient access to major<br>streets for heavy vehicles and commercial traffic without<br>introducing through traffic to residential streets. The street<br>network is designed in accordance with a Neighbourhood<br>development plan that reflects the urban structure<br>concept shown indicatively on Figure 7.2.3.2 - Movement,<br>major streets, Figure 7.2.3.2.2 - Indicative street network,<br>Figure 7.2.3.2.3 - Movement, key streets and<br>connections.   | Development is in accordance with a Neighbourhood development plan.   |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| PO14  | A014  |
| The street network has sufficient reserve and pavement<br>widths to cater for the current and intended function of<br>the road in accordance with the road type in accordance<br>with Planning scheme policy - Integrated design.   | Development is in accordance with a Neighbourhood development plan.   |
| PO15  | A015  |
| Street layouts are designed to connect to surrounding<br>neighbourhoods by providing an interconnected street,<br>pedestrian and cyclist networks that connects nearby<br>centres, neighbourhood hubs, community facilities, public<br>transport nodes and open space to residential areas for<br>access and emergency management purposes. The<br>layout ensures that new development is provided with<br>multiple points of access. The timing of transport works<br>ensures that multiple points of access are provided during<br>early stages of a development. | Development is in accordance with a Neighbourhood development plan.   |
| Note - Refer to Planning scheme policy - Neighbourhood design for guidance on when alternative access points should be provided for emergency management purposes.  |   |
| Stormwater location and design  |   |
| PO16  | A016  |
| Lots are of a sufficient grade to accommodate effective stormwater drainage to a lawful point of discharge.   | The surface level of a lot is at a minimum grade of 1:100<br>and slopes towards the street frontage, or other lawful<br>point of discharge. |
| P017  | No acceptable outcome provided.   |
| The development is planned and designed considering:  |   |
| a. the land use constraints of the site;  |   |
| b. water sensitive urban design principles.   |   |
| PO18<br>Stormwater drainage pipes and structures through or<br>within private land are protected by easements in favour<br>of Council with sufficient area for practical access for<br>maintenance.<br>Note - Refer to Planning scheme policy - Integrated design for<br>guidance on how to demonstrate achievement of this performance<br>outcome.   | No acceptable outcome provided.   |
| PO19  | No acceptable outcome provided.   |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| Stormwater management facilities are located outside<br>of riparian areas and prevent increased channel bed and<br>bank erosion.   |  |
| PO20<br>Natural streams and riparian vegetation are retained and<br>enhanced through revegetation.   | No acceptable outcome provided.  |
| <b>PO21</b><br>Areas constructed as detention basins are adaptable for passive recreation.   | No acceptable outcome provided.  |
| PO22<br>Development maintains and improves the environmental<br>values of waterway ecosystems.   | No acceptable outcome provided.  |
| PO23<br>Constructed waterbodies proposed to be dedicated as<br>public assets are to be avoided.<br>Stormwater management system  | No acceptable outcome provided.  |
| PO24   | A024   |
| The major drainage system has the capacity to safely convey stormwater flows for the defined flood event (DFE).  | The roads, drainage pathways, drainage features and waterways safely convey the stormwater flows for the defined flood event (DFE) without allowing flows to encroach upon private lots. |
| P025   | AO25   |
| Overland flow paths (for any storm event) from roads<br>and public open space areas do not pass through private<br>lots.   | Drainage pathways are provided to accommodate overland flows from roads and public open space areas.   |
| PO26<br>Development achieves design objectives in Tables A and<br>B in Appendix 2 of the SPP.<br>Note - To demonstrate achievement of this performance outcome,<br>a stormwater quality management is prepared by a suitably qualified<br>person in accordance with Planning scheme policy - Stormwater<br>management. | No acceptable outcome provided.  |
| <b>PO27</b><br>The stormwater management system is designed to:  | No acceptable outcome provided.  |

| Performance outcomes                       |  | Acceptable outcomes             |
|--|--|---------------------------------|
| a.   | protect the environmental values in downstream waterways;  |                                 |
| b.   | maintain ground water recharge areas;  |                                 |
| C.   | preserve existing natural wetlands and associated buffers;   |                                 |
| d.   | avoid disturbing soils or sediments;   |                                 |
| e.   | avoid altering the natural hydrologic regime in acid sulphate soil and nutrient hazardous areas;   |                                 |
| f.   | maintain and improve receiving water quality;  |                                 |
| g.   | protect natural waterway configuration;  |                                 |
| h.   | protect natural wetlands and vegetation;   |                                 |
| i.   | protect downstream and adjacent properties;  |                                 |
| j.   | protect and enhance riparian areas.  | S C                             |
| a.<br>b.<br>Not<br>gui<br>out              |  | No acceptable outcome provided. |
| Figu<br>spa<br>stor<br>Cou<br>effic<br>Not | ere associated with a minor green corridor (refer<br>ure 7.2.3.4 - Green network and open<br>ce),development will adopt bio-retention systems for<br>mwater treatment that recognises and promotes<br>uncils Total Water Cycle Management policy and the<br>cient use of water resources.<br>the - To determine the standards for stormwater management<br>stem construction refer to Planning scheme policy - Integrated<br>sign. |                                 |
| Boundary realignment                       |  |                                 |
| PO   | 30   | No acceptable outcome provided. |
|  |  |                                 |

| Performance outcomes   |   | Acceptable outcomes             |
|--|---|---------------------------------|
| Boundaries realignment:-   |   |                                 |
| a.   | does not result in the creation, or in the potential creation of, additional lots;  |                                 |
| b.   | is an improvement on the existing land use situation;   |                                 |
| C.   | do not result in existing land uses on-site becoming non-compliant with planning scheme criteria;   |                                 |
| d.   | results in lots which have appropriate size,<br>dimensions and access to cater for uses consistent<br>with the precinct, sub-precinct and any other<br>relevant other precinct;   | ion'                            |
| e.   | infrastructure and services are wholly contained within the lot they serve;   | Ch alsi                         |
| f.   | ensures the uninterrupted continuation of lots providing for their own private servicing.   |                                 |
| Rec  | onfiguring a lot other than creating freehold lots  |                                 |
|  | 1<br>onfiguring a lot which creates or amends a community<br>scheme as described in the <i>Body Corporate and</i>   | No acceptable outcome provided. |
| Community Management Act 1997 is undertaken in a way that does not result in existing uses on the land becoming unlawful or otherwise operating in a manner that is: |   |                                 |
| a.<br>b.   | inconsistent with any approvals on which those<br>uses rely; or<br>inconsistent with the self-assessable development  |                                 |
|  | requirements applying to those uses at the time that they were established.   |                                 |
| are<br>esta<br>requ<br>faci<br>rout<br>requ  | e -An examples of land uses becoming unlawful includes, but<br>not limited to the following land on which a building has been<br>ablished is reconfigured in a way that precludes lawful access to<br>uired communal facilities by either incorporating some of those<br>ities into private lots or otherwise obstructing the normal access<br>es to those facilities. Those communal facilities may have been<br>uired under self-assessment requirements for the use or<br>ditions of development approval. |                                 |
| app<br>a lo  | or's note - To satisfy this performance outcome, the development<br>lication may need to be a combined application for reconfiguring<br>t and a material change of use or otherwise be supported by<br>ails that confirm that the land use still satisfies all relevant land<br>requirements.   |                                 |
|  |   |                                 |
| use  | onfiguring by Lease   |                                 |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Reconfiguring a lot which divides land or buildings by<br>lease in a way that allows separate occupation or use of<br>those facilities is undertaken in a way that does not result<br>in existing uses on the land becoming unlawful or<br>otherwise operating in a manner that is:   |   |
| <ul> <li>a. inconsistent with any approvals on which those uses rely; or</li> <li>b. inconsistent with the self-assessable development requirements applying to those uses at the time that they were established.</li> </ul>   |   |
| Note - An example of a land use becoming unlawful is a building<br>over which one or more leases have been created in a way that<br>precludes lawful access to some of the required communal facilities.<br>Some of the communal car parking facilities have been incorporated<br>into lease areas while other leases are located in a way that obstructs<br>the normal access routes to other communal facilities. Those<br>communal facilities may have been required under self-assessment<br>requirements for the use or conditions of development approval, but<br>they are no longer freely available to all occupants of the building. | C Jersion   |
| Editor's note -To satisfy this performance outcome, the development<br>application may need to be supported by details that confirm that<br>the land use still satisfies all relevant land use requirements.  | ene   |
| Editor's note – Under the <i>Sustainable Planning Act</i> , the following do not constitute reconfiguring a lot and are not subject to this performance outcome:  |   |
| <ul> <li>a. a lease for a term, including renewal options, not exceeding 10 years; and</li> <li>b. an agreement for the exclusive use of part of the common property for a community titles scheme under the <i>Body Corporate and Community Management Act 1997</i>.</li> </ul>  |   |
|   |   |
| Volumetric subdivision  |   |
| <ul> <li>PO33</li> <li>The reconfiguring of the space above or below the surface of the land ensures appropriate area, dimensions and access arrangements to cater for uses consistent with the zone and does not result in existing land uses on site becoming non-compliant.</li> <li>Note - Example include but are not limited to:</li> <li>a. Where a commercial or industrial land use contains an ancillary office, the office cannot be separately titled as it is considered part of the commercial or industrial use.</li> </ul>  | No acceptable outcome provided.                                     |
| Clearing of native vegetation   |   |
| PO34  | AO34  |
| Reconfiguring a lot facilitates the retention of native vegetation by:  | Development is in accordance with a Neighbourhood development plan. |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| <ul> <li>a. incorporating native vegetation and habitat trees into the overall subdivision design, development layout, on-street amenity and landscaping where practicable;</li> <li>b. ensuring habitat trees are located outside a development footprint. Where habitat trees are to be cleared, replacement fauna nesting boxes are provided at the rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees &gt; 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.</li> <li>c. providing safe, unimpeded, convenient and ongoing wildlife movement;</li> <li>d. avoiding creating fragmented and isolated patches of native vegetation.</li> <li>e. ensuring that biodiversity quality and integrity of habitats is not adversely impacted upon but are maintained and protected;</li> <li>f. ensuring that soil erosion and land degradation does not occur;</li> <li>g. ensuring that quality of surface water is not adversely impacted upon by providing effective vegetated buffers to water bodies.</li> </ul> |  |
| Noise  |  |
| <ul> <li>Noise attenuation structure (e.g. walls, barriers or fences):</li> <li>a. contribute to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths</li> </ul>  | <ul> <li>AO35</li> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a. are not visible from an adjoining road or public area unless;</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve</li> </ul>   |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.<br>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of points attenuation structures.   | pedestrian paths or cycle lanes) or where  |
| Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.<br>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of pairs attenuation structures.  | <ul> <li>attenuation through building location and materials is not possible.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> </ul> |

| Performance outcomes  | Acceptable outcomes  |
|---|--|
| Reconfiguring a lot or Material change of use or Operational work, w  | e the development is consistent with a current Development permit for<br>here that approval has considered and addressed (e.g. through a<br>d) or conditions of approval) the identified value or constraint under this  |
|   |  |
| compliance with the following performance criteria.   |  |
| PO36  | AO36   |
| Lots are designed to:<br>a. minimise the risk from bushfire hazard to each lot<br>and provide the safest possible siting for buildings  | Reconfiguring a lot ensures that all new lots are of an appropriate size, shape and layout to allow for the siting of future buildings being located:  |
| <ul> <li>and structures;</li> <li>b. limit the possible spread paths of bushfire within the reconfiguring;</li> <li>c. achieve sufficient separation distance between development and hazardous vegetation to minimise the risk to future buildings and structures during bushfire events;</li> </ul> | <ul> <li>a. within an appropriate development footprint;</li> <li>b. within the lowest hazard locations on a lot;</li> <li>c. to achieve minimum separation from any source of bushfire hazard of 20m or the distance required to achieve a Bushfire Attack Level (BAL) of more than 29 (as identified under AS3959-2009), whichever is the greater;</li> </ul>  |
| d. maintain the required level of functionality for<br>emergency services and uses during and<br>immediately after a natural hazard event.  | <ul> <li>d. to achieve a minimum separation from any retained vegetation strips or small areas of vegetation of 10m or the distance required to achieve a Bushfire Attack Level (BAL) of more than 29 (as identified under AS3959-2009), whichever is the greater;</li> <li>e. away from ridgelines and hilltops;</li> <li>f. on land with a slope of less than 15%;</li> <li>g. away from north to west facing slopes.</li> </ul> |
| P037  | AO37   |
| Lots provide adequate water supply and infrastructure to support fire-fighting.   | For water supply purposes, reconfiguring a lot ensures that:   |
| R C   | a. lots have access to a reticulated water supply provided by a distributer-retailer for the area; or  |
| MB  | <ul> <li>where no reticulated water supply is available,<br/>on-site fire fighting water storage containing not<br/>less than 10,000 litres and located within a<br/>development footprint.</li> </ul>   |
| PO38  | AO38   |
| Lots are designed to :  | Reconfiguring a lot ensures a new lot is provided with:  |
| <ul> <li>promote safe site access by avoiding potential<br/>entrapment situations;</li> </ul>   | a. direct road access and egress to public roads;  |
| <ul> <li>promote accessibility and manoeuvring for fire<br/>fighting during bushfire.</li> </ul>  | b. an alternative access where the private driveway is longer than 100m to reach a public road;  |

| Performance outcomes   | Acceptable outcomes   |  |
|--|---|--|
|  | c. driveway access to a public road that has a gradient no greater than 12.5%;  |  |
|  | d. minimum width of 3.5m.   |  |
| PO39   | AO39  |  |
| Lots ensure the road layout and design supports:   | Reconfiguring a lot provides a road layout which:   |  |
| Lots ensure the road layout and design supports: <ul> <li>a. safe and efficient emergency services access to sites; and manoeuvring within the subdivision;</li> <li>b. availability and maintenance of access routes for the purpose of safe evacuation.</li> </ul> | <ul> <li>Reconfiguring a lot provides a road layout which:</li> <li>a. includes a perimeter road that separating the new lots from hazardous vegetation on adjacent lots incorporating by: <ol> <li>a cleared width of 20m;</li> <li>road gradients not exceeding 12.5%;</li> <li>pavement and surface treatment capable of being used by emergency vehicles;</li> <li>Turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guidelines.</li> </ol> </li> <li>b. Or if the above is not practicable, a fire maintenance trail separates the lots from hazardous vegetation on adjacent lots incorporating: <ol> <li>a minimum cleared width of 6m and minimum formed width of 4m;</li> <li>gradient not exceeding 12.5%;</li> <li>cross slope not exceeding 10%;</li> <li>a formed width and erosion control devices to the standards specified in Planning scheme policy - Integrated design;</li> <li>a turning circle or turnaround area at the end of the trail to allow fire fighting vehicles to manoeuvre;</li> </ol> </li> </ul> |  |
|  | 200m;<br>vii. an access easement that is granted in favour  |  |
|  | of the Council and the Queensland Fire and<br>Rescue Service or located on public land.   |  |
|  | c. excludes cul-de-sacs, except where a perimeter<br>road with a cleared width of 20m isolates the lots<br>from hazardous vegetation on adjacent lots; and  |  |
|  | d. excludes dead-end roads.   |  |

| Performance outcomes   | Acceptable outcomes   |  |  |
|--|---|--|--|
| High voltage electricity line buffer (refer Overlay mag<br>assessment criteria apply)  | - Infrastructure buffers to determine if the following                                |  |  |
| Note - The identification of a development footprint will assist in demo   | onstrating compliance with the following performance criteria.                        |  |  |
| PO40   | No acceptable outcome provided.   |  |  |
| Lots provide a development footprint outside of the buffer.  |   |  |  |
| PO41   | AO41  |  |  |
| The creation of lots does not compromise or adversely impact upon the efficiency and integrity of supply.  | No new lots are created in the buffer area.   |  |  |
| PO42   | A042  |  |  |
| The creation of new lots does not compromise or adversely impact upon access to the supply line for any  | No new lots are created in the buffer area.   |  |  |
| required maintenance or upgrading work.  | e e   |  |  |
| PO43   | No acceptable outcome provided.   |  |  |
| Boundary realignments:   |   |  |  |
| i. do not result in the creation of additional building development within the buffer;   | SCI   |  |  |
| ii. result in the reduction of building development opportunities within the buffer.   |   |  |  |
|  |   |  |  |
| Overland flow path (refer Overlay map - Overland flow<br>apply)<br>Note - The applicable river and creek flood planning levels associated<br>obtained by requesting a flood check property report from Council.                              | a with defined flood event (DFE) within the inundation area can be                    |  |  |
| P044   | No acceptable outcome provided.   |  |  |
| Development:   |   |  |  |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> </ul> |   |  |  |
| PO45   | AO45  |  |  |
| Development:   | Development ensures that any buildings are not located in an Overland flow path area. |  |  |

| Performance outcomes   | Acceptable outcomes  |
|--|--|
| a. maintains the conveyance of overland flow<br>predominantly unimpeded through the premises for<br>any event up to and including the 1% AEP for the<br>fully developed upstream catchment;  | Note: A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding property.                                  |
| b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.   |  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   |  |
| PO46   | No acceptable outcome provided.  |
| <ul> <li>Development does not:</li> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> </ul>   | C Jersi  |
| Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.<br>Note - A report from a suitably qualified Registered Professional  | scher  |
| Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme  |  |
| policy – Flood hazard, Coastal hazard and Overland flow  |  |
| P047   | A047   |
| Development ensures that overland flow is not conveyed<br>from a road or public open space onto a private lot,<br>unless the development is in a Rural zone.   | Development ensures that overland flow paths and<br>drainage infrastructure is provided to convey overland<br>flow from a road or public open space area away from a<br>private lot, unless the development is in the Rural zone   |
| PO48   | AO48.1   |
| Development ensures that Council and inter-allotment<br>drainage infrastructure, overland flow paths and open<br>drains through private property cater for overland flows<br>for a fully developed upstream catchment flows and are<br>able to be easily maintained.<br>Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises. | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V;<br>d. Commercial area – Level V.<br>AO48.2 |
|  |  |

| Performance outcomes  | Acceptable outcomes   |
|---|---|
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow  | Development ensures that all Council and allotment<br>drainage infrastructure is designed to accommodate any<br>event up to and including the 1% AEP for the fully<br>developed upstream catchment. |
| PO49  | No acceptable outcome provided  |
| Development protects the conveyance of overland flow<br>such that easements for drainage purposes are provided<br>over:   |   |
| <ul> <li>a stormwater pipe if the nominal pipe diameter<br/>exceeds 300mm;</li> </ul>   |   |
| b. an overland flow path where it crosses more than one property; and   | SI  |
| c. inter-allotment drainage infrastructure.   | V Jei   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  | e e   |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   | - ner   |
| Additional criteria for development for a Park <sup>(57)</sup>  | S   |
| PO50<br>Development for a Park <sup>(57)</sup> ensures that the design and<br>layout responds to the nature of the overland flow<br>affecting the premises such that: | AO50<br>Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendi<br>B of the Planning scheme policy - Integrated Design.         |
| a. public benefit and enjoyment is maximised;   |   |
| <li>b. impacts on the asset life and integrity of park<br/>structures is minimised;</li>  |   |
| c. maintenance and replacement costs are minimised.   |   |
| NB  |   |

### 7.2.3.7.4 Green network precinct

#### 7.2.3.7.4.1 Application - Reconfiguring a lot code - Green network precinct

- 1. The purpose of this part of the Reconfiguring a lot code is to facilitate and manage the outcomes of development for reconfiguring a lot and its associated Operational Works in the Caboolture West local plan Green network precinct, to achieve the Overall Outcomes.
- The purpose of this part of the code will be achieved through the overall outcomes as identified in Part 7.2.3.7
   Reconfiguring a lot code and the following additional Caboolture West local plan Green network precinct specific overall outcomes:
  - a. Reconfiguring a lot is in accordance with any relevant Neighbourhood development plan that reflects the urban structure concept shown indicatively on Figure 7.2.3.1 Caboolture West structure plan and Figure 7.2.3.4 Green network and open space.
  - b. Reconfiguring a lot is of a size and design to achieve the intent and purpose of the Green network precinct.
  - c. Development is for the provision of infrastructure and services associated with urban development.
  - d. Reconfiguring a lot for park<sup>(57)</sup> and open space purpose is of sufficient size and dimensions to cater for the desired standard for service for park<sup>(57)</sup> and open space provision.
  - e. Reconfiguring a lot for park<sup>(57)</sup> and open space purpose is located within walking distance to residential lots, and is designed and constructed to a standard sufficient to service the social, cultural and recreational needs of the community.
  - f. Reconfiguring a lot avoids areas subject to constraint, limitation, or environmental values. Where reconfiguring a lot cannot avoid these identified areas, it responds by:
    - i. adopting a 'least risk, least impact' approach when designing, siting and locating development to minimise the potential risk to people, property and the environment;
    - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
    - iii. maintaining environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of environmental offsets, landscaping and facilitating safe wildlife movement through the environment;
    - iv. protecting native species and protecting and enhancing native species habitat;
      - protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
      - vi. establishing effective separation distances, buffers and mitigation measures associated with major infrastructure to minimise adverse effects on sensitive land uses from noise, dust and other nuisance generating activities;
      - vii. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of major infrastructure;
      - viii. Ensuring effective and efficient disaster management response and recovery capabilities.
  - g. The Reconfiguring a lot, Operational works associated with the Reconfiguring a lot, and uses expected to occur as a result of the Reconfiguring a lot:
    - i. responds to the risk presented by overland flow and minimises risk to personal safety;
    - ii. is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
    - iii. does not impact on the conveyance of overland flow up to and including the Overland Flow Defined Flood Event;
    - iv. directly, indirectly and cumulatively avoids an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.

#### 7.2.3.7.4.2 Criteria for assessment

To determine if boundary realignment is self-assessable development, it must comply with the self-assessable acceptable outcomes set out in Part G, Table 7.2.3.4.1. Where development does not meet any of the relevant criteria in Part G, Table 7.2.3.4.1 assessment is limited to the subject matter of the self-assessable acceptable outcomes that were not complied with. The following table identifies the corresponding performance outcomes where a development does not comply with a self-assessable acceptable outcome.

| Self-assessable acceptable outcomes | Corresponding performance outcomes |
|-------------------------------------|------------------------------------|
| SAO1                                | PO                                 |
| SAO2                                | PO                                 |
| SAO3                                | PO                                 |
| SAO4                                | PO                                 |
| SAO5                                | PO                                 |
| SAO6                                | PO                                 |

Where reconfiguring a lot is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part H, Table 7.2.3.4.2.

#### Part J - Criteria for self-assessable development - Reconfiguring a lot code - Green network precinct

| Self-as | sessable acceptable outcomes  |  |  |
|---------|---|--|--|
|         | General criteria  |  |  |
| Bound   | Boundary realignment for developable and developed lots   |  |  |
| SAO1    | <ul> <li>Lots created by boundary realignment:</li> <li>a. contain all service connections to water, sewer, electricity and other infrastructure wholly within the lot they serve;</li> <li>b. have constructed road access;</li> <li>c. do not require additional infrastructure connections or modification to existing connections.</li> <li>d. do not result in the creation of any additional lots;</li> </ul>   |  |  |
| SAO2    | <ul> <li>Boundary realignment does not result in existing land uses on-site becoming non-complying with planning scheme criteria.</li> <li>Note - Examples may include but are not limited to: <ul> <li>a minimum lot size requirements;</li> <li>b. minimum or maximum required setbacks</li> <li>c. parking and access requirements;</li> <li>d. servicing and infrastructure requirements;</li> <li>e. dependant elements of an existing or approved land use being separately titled, including but not limited to: <ul> <li>i. Where a Dwelling house<sup>(22)</sup> includes a secondary dwelling or associated outbuildings, they cannot be separately titled as they are dependent on the Dwelling house<sup>(22)</sup> use.</li> </ul> </li> </ul></li></ul> |  |  |

|    | Precinct   | Area                  | Frontage | Depth |
|----|--|-----------------------|----------|-------|
|    | Urban living precinct  | -                     | 7.5m     | 25m   |
|    | Town centre precinct   | 1000m <sup>2</sup>    | 40m      | -     |
|    | Enterprise and employment precinct   | 1000m <sup>2</sup>    | 40m      | -     |
|    | Green network precinct   | -                     | -        | -     |
|    | Rural living precinct  | 6000m <sup>2</sup>    | -        | -     |
|    |  |                       |          |       |
| 04 | For developable lots, resulting lots comply with the minimum lot size requirement of 20 hectares.              |                       |          |       |
| 05 | No new boundaries are located within 2m of High Value Areas as identified in Overlay map - Environmenta areas. |                       |          |       |
| 06 | Boundary realignment does not result in the cle  | earing of any Habitat | trees    | /     |

### Part H - Criteria for assessable development - Reconfiguring a lot code - Green network precinct

| Performance outcomes  | Acceptable outcomes   |  |  |
|---|---|--|--|
| Structure plan  |   |  |  |
| P01   | No acceptable outcome provided.                                     |  |  |
| <ul> <li>Development is in accordance with a relevant<br/>Neighbourhood development plan that reflects the urban<br/>structure concept shown indicatively on Figure 7.2.3.1 -<br/>Caboolture West structure plan, Figure 7.2.3.2 -<br/>Movement, major streets, and Figure 7.2.3.4 - Green<br/>network and open space with regards to:</li> <li>a. the provision of infrastructure and services<br/>associated with reconfiguring a lot and land<br/>development;</li> <li>b. utilities;</li> <li>c. parks and open space;</li> </ul> |   |  |  |
| d. environmental and recreational facilities.   |   |  |  |
| Lot size and design   |   |  |  |
| PO2   | A02   |  |  |
| Reconfiguring a lot provides a lot size and design which accounts for protecting, maintaining and enhancing the ecological, natural and biodiversity values inherent in the precinct.   | Development is in accordance with a Neighbourhood development plan. |  |  |
| PO3   | AO3   |  |  |

| PO4       Areas of recreation and open space are of a size and design standard to meet the needs of the expected users. Parks <sup>(67)</sup> are provided as follows:       Development is in accordance with a Neighbourhood development plan.         Open space type       Minimum       Waking       Rate         Small local park <sup>(67)</sup> 0.5 ha - 1 ha       400m         Desting park <sup>(67)</sup> 0.5 ha - 1 ha       150-300m       0.5 har/1000         Desting park <sup>(67)</sup> 0.5 ha - 1 ha       0.5 har/1000       persons         Desting park <sup>(67)</sup> 0.5 ha - 1 ha       0.5 har/1000       persons         Desting park <sup>(67)</sup> 0.5 ha - 1 ha       0.5 har/1000       persons         Desting park <sup>(67)</sup> 0.5 ha - 1 ha       0.5 har/1000       persons         Post       Aos       Aos       Development is in accordance with a Neighbourhood development plan.         * Regional and distict parks and meet the careful design of the street network and open space.       Aos         POS       Aos       Development plan.       Development plan.         * Regional and distict parks are bordered by streets and not lots wherever possible;       Development plan.       Development plan.         evelopment plan.       No acceptable outcome is provided       Development plan.         will consider the following:       No acceptable outcome is provided   | Areas for recreation<br>provided in location<br>to meet the recreat<br>accordance with Fin<br>space.  | ns, and of a<br>itional needs | size and de<br>of the com | esign standard<br>nmunity in   | Development is in accordance with a Neighbourhood development plan. |
|--|---|-------------------------------|---------------------------|--|---|
| Image: construction       area       catchment         Small local park <sup>(67)</sup> 0.3 ha - 0.5       150-300m       0.5ha/1000         percension       0.5 ha - 1ha       400m       persons         Detrict park <sup>(67)</sup> 0.6 ha - 1ha       400m       persons         Detrict park <sup>(67)</sup> 0.6 ha - 1ha       400m       persons         Detrict cipark <sup>(67)</sup> 4 ha       1.2km       0.5 ha/1000         persons       0.5 ma/1000       persons       0.5 ma/1000         Detrict cipark <sup>(67)</sup> 4 ha       1.2km       0.5 ha/1000         Detrict cipark <sup>(67)</sup> 4 parks add       n/a       prade-only       n/a         Detrict cipark <sup>(67)</sup> 4 parks add       n/a       parks <sup>(6)</sup> 80ha each         * Regional District       4 parks add       n/a       4 parks <sup>(6)</sup> 80ha each         * Regional and district parks have been identified on the Figure       7.2.3.4 - Green network and coen space.       Development is in accordance with a Neighbourhood development plan.         POS       Aos       Development plan.       Development plan.       Development plan.         a. local and district parks are bordered by streets and not lots wherever possible;       Development plan.       Development plan.         b. where lots do address   | Areas of recreation design standard to  | o meet the ne                 | eeds of the               |  | Development is in accordance with a Neighbourhood                   |
| recreation       ha       persons         local park <sup>(67)</sup> 0.5 ha - 1ha       400m         recreation       0.5 ha - 1ha       400m         Persons       0.5 ha' 1000       persons         District park <sup>(67)</sup> 4 ha       1.2km       0.5 ha' 1000         Persons       0.5 ha' 1000       persons       0.5 ha' 1000         District park <sup>(67)</sup> 4 ha       1.2km       0.5 ha' 1000         Post       Regional/District       4 parks add       n/a       4 parks @         sports       up to 80ha       n/a       4 parks @       80ha each         * Regional/District       4 parks add       n/a       4 parks @       Boha each         * Regional/District       4 parks add       n/a       A parks @       Development is in accordance with a Neighbourhood development plan.         POS       AO5       Development is in accordance with a Neighbourhood development plan.       development plan.         a.       local and district parks are bordered by streets and not lots wherever possible;       Development plan.       development plan.         b.       where lots do address local and district parks, fercing and retaining features allows for safe and direct pedestrian access between the park <sup>(67)</sup> boundary at a maximum height of 1m prior to the sealing of the plan each       development pla   | Open space type   |                               | 0                         | Rate   |   |
| recreation       Image: Constraint of the periods         District park <sup>(67)</sup> d ha       1.2km       0.5 ha/1000         precreation       n'a - only 1       needed in the Town centre         Regional/District       4 parks add       n'a - only 1         Regional/District       4 parks add       n'a - only 1         * Regional and district parks have been identified on the Figure 7.2.3-4 Green network and open space.       AO5         PO5       AO5         The safety and useability of areas for recreation and open space.       Development is in accordance with a Neighbourhood development plan.         evelopment is in accordance with a Neighbourhood not lots wherever possible;       Development plan.         b. where lots do address local and district parks, fencing is provided along the park <sup>(67)</sup> boundary at a maximum height of 1m prior to the sealing of the plan of subdivision;         c. the design of fencing and retaining features allows for safe and direct pedestrian access between the park <sup>(67)</sup> and private allotment through the use of private gates and limited retaining features allows for safe and direct pedestrian access between the park <sup>(67)</sup> and private allotment through the use of private gates and limited retaining features allows for safe and limited retaining features allo                               |   |                               | 150-300m                  |  |   |
| recreation       persons         District civic park <sup>(67)</sup> 3000m2       n/a       n/a - only 1         Regional/District       4 parks add       n/a       4 parks (0)         sports*       up to 80na       a       4 parks (0)         * Regional/District       4 parks add       n/a       4 parks (0)         * Regional/District       4 parks add       n/a       4 parks (0)         * Regional and district parks have been identified on the Figure       7.2.3.4 - Green network and open space.       AO5         PO5       AO5       Development is in accordance with a Neighbourhood development plan.         of the street network and lot locations which provide high levels of surveillance and access. The provision of parks will consider the following:       a.       local and district parks are bordered by streets and not lots wherever possible;       b. where lots do address local and district parks, fencing is provided along the park <sup>(57)</sup> boundary at a maximum height of 1m prior to the sealing of the plan of subdivision;       the design of fencing and retaining features alows for safe and direct pedestrian access between the park <sup>(57)</sup> and private allotment through the use of private gates and limited retaining features along park <sup>(57)</sup> and private allotment through the use of private gates and limited retaining features along park <sup>(57)</sup> and private allotment through the use of private gates and limited retaining features along park <sup>(57)</sup> and private allotment through the use of private gates and limited retaining features along park <sup>(57)</sup> boundaries. <td></td> <td>0.5 ha - 1ha</td> <td>400m</td> <td></td> <td></td> |   | 0.5 ha - 1ha                  | 400m                      |  |   |
| (Town centre only)       needed in the<br>Town centre         Regional/District<br>sports*       4 parks add<br>up to 80ha       n/a       4 parks @<br>80ha each         * Regional and district parks have been identified on the Figure<br>7.2.3.4 - Green network and open space.       AO5         PO5       AO5         The safety and useability of areas for recreation and open<br>space purposes are ensured through the careful design<br>of the street network and lot locations which provide high<br>levels of surveillance and access. The provision of parks<br>will consider the following:       Development is in accordance with a Neighbourhood<br>development plan.         a.       local and district parks are bordered by streets and<br>not lots wherever possible;       Development plan.         b.       where lots do address local and district parks,<br>fencing is provided along the park <sup>(57)</sup> boundary at<br>a maximum height of 1 m prior to the sealing of the<br>plan of subdivision;         c.       the design of fencing and retaining features allows<br>for safe and direct pdedstrian access between the<br>park <sup>(57)</sup> and private allotment through the use of<br>private gates and limited retaining features allong<br>park <sup>(57)</sup> boundaries.         Servicing   |   | 4 ha                          | 1.2km                     |  |   |
| sports*       up to 80ha       80ha each         * Regional and district parks have been identified on the Figure 7.2.3.4 - Green network and open space.       AO5         PO5       AO5         The safety and useability of areas for recreation and open space purposes are ensured through the careful design of the street network and lot locations which provide high levels of surveillance and access. The provision of parks will consider the following:       Development is in accordance with a Neighbourhood development plan.         a.       local and district parks are bordered by streets and not lots wherever possible;       Development plan.         b.       where lots do address local and district parks, fencing is provided along the park <sup>(57)</sup> boundary at a maximum height of 1m prior to the sealing of the plan of subdivision;       C.         c.       the design of fencing and retaining features allows for safe and direct pedestrian access between the park <sup>(67)</sup> and private allotment through the use of private gates and limited retaining features along park <sup>(67)</sup> boundaries.         Servicing       Evelopment  |   | 3000m2                        | n/a                       | needed in the  |   |
| 7.2.3.4 - Green network and open space.         PO5         The safety and useability of areas for recreation and open space purposes are ensured through the careful design of the street network and lot locations which provide high levels of surveillance and access. The provision of parks will consider the following:       Development is in accordance with a Neighbourhood development plan.         a.       local and district parks are bordered by streets and not lots wherever possible;       Development plan.         b.       where lots do address local and district parks, fencing is provided along the park <sup>(57)</sup> boundary at a maximum height of 1m prior to the sealing of the plan of subdivision;       c.         c.       the design of fencing and retaining features allows for safe and direct pedestrian access between the park <sup>(57)</sup> boundaries.         Servicing       servicing  | -   |                               | n/a                       |  |   |
| The safety and useability of areas for recreation and open space purposes are ensured through the careful design of the street network and lot locations which provide high levels of surveillance and access. The provision of parks will consider the following:       Development is in accordance with a Neighbourhood development plan.         a.       local and district parks are bordered by streets and not lots wherever possible;       Development is in accordance with a Neighbourhood development plan.         b.       where lots do address local and district parks, fencing is provided along the park <sup>(57)</sup> boundary at a maximum height of 1m prior to the sealing of the plan of subdivision;       the design of fencing and retaining features allows for safe and direct pedestrian access between the park <sup>(57)</sup> boundaries.         Servicing       Servicing  |   |                               |                           | on the Figure  | SCI   |
| <ul> <li>space purposes are ensured through the careful design of the street network and lot locations which provide high levels of surveillance and access. The provision of parks will consider the following:</li> <li>a. local and district parks are bordered by streets and not lots wherever possible;</li> <li>b. where lots do address local and district parks, fencing is provided along the park<sup>(57)</sup> boundary at a maximum height of 1m prior to the sealing of the plan of subdivision;</li> <li>c. the design of fencing and retaining features allows for safe and direct pedestrian access between the park<sup>(57)</sup> and private allotment through the use of private gates and limited retaining features along park<sup>(57)</sup> boundaries.</li> </ul>   | P05   |                               |                           |  | A05   |
| fencing is provided along the park <sup>(57)</sup> boundary at<br>a maximum height of 1m prior to the sealing of the<br>plan of subdivision;<br>c. the design of fencing and retaining features allows<br>for safe and direct pedestrian access between the<br>park <sup>(57)</sup> and private allotment through the use of<br>private gates and limited retaining features along<br>park <sup>(57)</sup> boundaries.   | <ul><li>space purposes are ensured through the careful design of the street network and lot locations which provide high levels of surveillance and access. The provision of parks will consider the following:</li><li>a. local and district parks are bordered by streets and</li></ul> |                               |                           | careful design<br>ch provide high<br>vision of parks<br>by streets and |   |
| for safe and direct pedestrian access between the park <sup>(57)</sup> and private allotment through the use of private gates and limited retaining features along park <sup>(57)</sup> boundaries.  Servicing   | fencing is provided along the park <sup>(57)</sup> boundary at a maximum height of 1m prior to the sealing of the   |                               |                           | <sup>7)</sup> boundary at  |   |
|  | for safe and direct pedestrian access between the park <sup>(57)</sup> and private allotment through the use of private gates and limited retaining features along  |                               |                           | s between the<br>h the use of  |   |
| PO6 No acceptable outcome is provided  | Servicing   |                               |                           |  |   |
|  | PO6   |                               |                           |  | No acceptable outcome is provided                                   |

|     |  | 1                               |
|-----|--|---------------------------------|
| and | n lot is provided with an appropriate level of service<br>infrastructure commensurate with the proposed use<br>the purpose and intent of the Green network precinct.           |                                 |
| Veg | etation clearing and environmental offsetting  |                                 |
| PO7 |  | No acceptable outcome provided. |
| Nov | regetation clearing is permitted except for:   |                                 |
| a.  | the provision of infrastructure and services associated with reconfiguring a lot and land development;   | 2                               |
| b.  | utilities;   |                                 |
| C.  | parks and open space;  |                                 |
| d.  | environmental and recreational facilities.   |                                 |
| Bou | ndary realignment  |                                 |
| PO8 |  | No acceptable outcome provided. |
|     | ndary alignments ensure that infrastructure and ices are wholly contained within the lot they serve.   | en                              |
| PO9 |  | No acceptable outcome provided. |
| Bou | ndary realignment does not result in:  | S                               |
| a.  | existing land uses on-site becoming non-complying with planning scheme criteria;   |                                 |
| b.  | lots being unserviced by infrastructure;   |                                 |
| c.  | lots not providing for own private servicing;  |                                 |
| d.  | lots of a size or dimension inconsistent with that identified for any precinct or sub-precinct;  |                                 |
| e.  | loss of habitat trees. Where habitat trees are to  |                                 |
|     | be cleared, replacement fauna nesting boxes are  |                                 |
|     | provided at the rate of 1 nest box for every hollow  |                                 |
|     | removed. Where hollows have not yet formed in  |                                 |
|     | trees > 80cm in diameter at 1.3m height, 3 nest  |                                 |
|     | boxes are required for every habitat tree removed;   |                                 |
| f.  | adverse impacts on the quality and integrity of the<br>biodiversity and ecological values inherent to a High<br>Value Area identified in Overlay map -<br>Environmental areas. |                                 |
| Rec | onfiguring a lot other than creating freehold lots   |                                 |

| <b>PO10</b><br>Reconfiguring a lot which separates existing or approved buildings whether or not including land, or separates land   | No acceptable outcome identified.  |
|--|--|
| by way of lease does not result in land uses becoming<br>non-compliant or dependant elements of a use being<br>separated by title.   |  |
| Volumetric subdivision   |  |
| PO11   | No acceptable outcome identified.  |
| The reconfiguring of the space above or below the<br>surface of the land ensures appropriate area, dimensions<br>and access arrangements to cater for uses consistent<br>with the precinct and does not result in existing land uses<br>on-site becoming non-compliant.  | Sion   |
| Reticulated supply   |  |
| <ul> <li>PO12</li> <li>Each lot is provided with an appropriate level of service and infrastructure, including water supply, stormwater management, sewerage disposal, stormwater drainage, electricity, telecommunications and gas (if available) in a manner that: <ul> <li>a. is efficient in delivery of service;</li> </ul> </li> <li>b. is effective in delivery of service;</li> <li>c. is conveniently accessible in the event of maintenance or repair;</li> <li>d. minimises whole of life cycle costs for that infrastructure;</li> <li>e. minimises risk of potential adverse impacts on the natural and built environment;</li> <li>f. minimises risk of potential adverse impact on amenity and character values;</li> <li>g. recognises and promotes Councils Total Water Cycle Management policy and the efficient use of</li> </ul> | <ul> <li>AO12</li> <li>Lots are provided with:</li> <li>a. a connection to the reticulated water supply infrastructure network;</li> <li>b. a connection to the reticulated sewerage infrastructure network;</li> <li>c. a connection to the reticulated electricity infrastructure network; and</li> <li>d. where available, access to a high speed telecommunication network.</li> </ul> |
| water resources.   |  |
| Stormwater location and design   |  |
| <b>PO13</b><br>The development is planned and designed considering<br>the land use constraints of the site and incorporates water<br>sensitive urban design principles.  | No acceptable outcome identified.  |
| PO14   | No acceptable outcome identified.  |

| Stormwater management facilities are located outside<br>of riparian areas and prevent increased channel bed and<br>bank erosion.  |   |
|---|---|
| PO15  | No acceptable outcome identified.   |
| Natural streams and riparian vegetation are retained and enhanced through revegetation.   |   |
| PO16  | No acceptable outcome identified.   |
| Development maintains and improves the environmental values of waterway ecosystems.   |   |
| Stormwater management system  |   |
| P017  | A017  |
| The major drainage system has the capacity to safely convey stormwater flows for the defined flood event.   | The roads, drainage pathways, drainage features and<br>waterways safely convey the stormwater flows for the<br>defined flood event without allowing flows to encroach<br>upon private lots. |
| PO18  | A018  |
| Overland flow paths (for any storm event) from roads<br>and public open space areas do not pass through private<br>lots.  | Drainage pathways are provided to accommodate overland flows from roads and public open space areas.  |
| P019  | No acceptable outcome identified.   |
| Development achieves the design objectives in Table A<br>and B in Appendix 2 of the SPP.<br>Note - To demonstrate achievement of this performance outcome,<br>a stormwater quality management is prepared by a suitably qualified<br>person in accordance with Planning scheme policy - Stormwater<br>management. |   |
| PO20  | No acceptable outcome identified.   |
| The stormwater management system is designed to:  |   |
| a. protect the environmental values in downstream waterways;  |   |
| b. maintain ground water recharge areas;  |   |
| c. preserve existing natural wetlands and associated buffers;   |   |
| d. avoid disturbing soils or sediments;   |   |
| e. avoid altering the natural hydrologic regime in acid sulphate soil and nutrient hazardous areas;   |   |
|   |   |

| g.   | protect natural waterway configuration;  |  |
|--|--|--|
| h.   | protect natural wetlands and vegetation;   |  |
| i.   | protect downstream and adjacent properties;  |  |
| j.   | protect and enhance riparian areas.  |  |
|  |  |  |
| PO2  | 21   | No acceptable outcome identified.  |
|  | ign and construction of the stormwater management tem:   |  |
| a.   | utilise methods and materials to minimise the whole<br>of life-cycle costs of the stormwater management<br>system; and   |  |
| b.   | are coordinated with civil and other landscaping works.  | C lets   |
| sys  | te - To determine the standards for stormwater management<br>tem construction refer to Planning scheme policy - Integrated<br>sign.  | Re   |
| PO2  | 22   |  |
| corr<br>that<br>indic<br>plar<br>deve<br>stor<br>Cou | ere connecting to or in association with a minor green<br>idor shown on a Neighbourhood development plan<br>reflects the urban structure concept shown<br>catively on Figure 7.2.3.1 - Caboolture West structure<br>and Figure 7.2.3.4 Green network and open space,<br>elopment will adopt bio-retention systems for<br>mwater treatment that recognises and promotes<br>incil's Total Water Cycle Management policy and the<br>cient use of water resources.                 | Sche   |
|  | te - To determine the standards for stormwater management<br>tem construction refer to Planning scheme policy - Integrated<br>sign   |  |
| Noi  | se   | · · · · · · · · · · · · · · · · · · ·  |
| PO2  | 23   | AO23   |
| Nois   | se attenuation structure (e.g. walls, barriers or fences):   | Noise attenuation structures (e.g. walls, barriers or  |
| con  | contribute to safe and usable public spaces, through<br>maintaining high levels of surveillance of parks,<br>streets and roads that serve active transport<br>purposes (e.g. existing or future pedestrian paths<br>or cycle lanes etc);<br>maintain the amenity of the streetscape.<br>te - A noise impact assessment may be required to demonstrate<br>npliance with this PO. Noise impact assessments are to be<br>pared in accordance with Planning scheme policy - Noise. | <ul> <li>fences):</li> <li>a. are not visible from an adjoining road or public area unless;</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> </ul> |
| pre  | pared in accordance with Planning scheme policy - Noise.   |  |

| Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.                                  | <ul> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul> |
|---|--|
| Values and con  | straints criteria  |
| Reconfiguring a lot or Material change of use or Operational work, wh   | e the development is consistent with a current Development permit for<br>here that approval has considered and addressed (e.g. through a<br>) or conditions of approval) the identified value or constraint under this   |
| High voltage electricity line buffer (refer Overlay map assessment criteria apply)  | - Infrastructure buffers to determine if the following   |
| assessment ontena appiy)  |  |
| Note - The identification of a development footprint will assist in demo  | instrating compliance with the following performance criteria.   |
| PO24  | No acceptable outcome provided.  |
| Lots provide a development footprint outside of the buffer.   | 5  |
| PO25  | AO25   |
| The creation of lots does not compromise or adversely impact upon the efficiency and integrity of supply.   | No new lots are created in the buffer area.  |
| PO26  | AO26   |
| The creation of new lots does not compromise or<br>adversely impact upon access to the supply line for any<br>required maintenance or upgrading work. | No new lots are created in the buffer area.  |
| PO27  | No acceptable outcome provided.  |
| Boundary realignments:  |  |
| <ul> <li>do not result in the creation of additional building<br/>development within the buffer;</li> </ul>   |  |
| ii. result in the reduction of building development opportunities within the buffer.  |  |
| Bulk water supply infrastructure buffer (refer Overlay following assessment criteria apply)   | r map - Infrastructure buffers to determine if the   |
| Note - The identification of a development footprint will assist in demo  | instrating compliance with the following performance criteria.   |

| PO28   | No acceptable outcome provided.   |
|--|---|
| Lots provide a development footprint outside of the buffer.  |   |
| PO29   | No acceptable outcome provided.   |
| The creation of lots does not compromise or adversely impact upon the efficiency and integrity of supply.  |   |
| PO30   | No acceptable outcome provided.   |
| The creation of lots does not compromise or adversely impact upon access to the supply line for any required maintenance or upgrading work.  |   |
| PO31   | No acceptable outcome provided.   |
| Boundary realignments:   |   |
| i. do not result in the creation of additional building development within the buffer;   |   |
| ii. results in the reduction of building development opportunities within the buffer.  |   |
|  |   |
| Overland flow path (refer Overlay map - Overland flow<br>apply)<br>Note - The applicable river and creek flood planning levels associated  | C C I   |
| apply)   | d with defined flood event (DFE) within the inundation area can be  |
| apply)<br>Note - The applicable river and creek flood planning levels associated   | C C I   |
| apply)<br>Note - The applicable river and creek flood planning levels associated<br>obtained by requesting a flood check property report from Council.   | d with defined flood event (DFE) within the inundation area can be  |
| <ul> <li>apply)</li> <li>Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council.</li> <li>PO32</li> </ul>  | d with defined flood event (DFE) within the inundation area can be  |
| <ul> <li>apply)</li> <li>Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council.</li> <li>PO32</li> <li>Development: <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or</li> </ul> </li> </ul>  | d with defined flood event (DFE) within the inundation area can be  |
| <ul> <li>apply)</li> <li>Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council.</li> <li>PO32</li> <li>Development: <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> </ul> </li> </ul>  | AO33 Development ensures that any buildings are not locate  |
| <ul> <li>apply)</li> <li>Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council.</li> <li>PO32</li> <li>Development: <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> </ul> </li> <li>PO33</li> </ul>  | A with defined flood event (DFE) within the inundation area can be No acceptable outcome provided.  No acceptable outcome provided.  AO33 Development ensures that any buildings are not locate in an Overland flow path area.  Note: A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on |
| <ul> <li>apply)</li> <li>Note - The applicable river and creek flood planning levels associated obtained by requesting a flood check property report from Council.</li> <li>PO32</li> <li>Development: <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> </ul> </li> <li>PO33 Development: <ul> <li>a. maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the</li> </ul></li></ul> | A with defined flood event (DFE) within the inundation area can be No acceptable outcome provided.  AO33 Development ensures that any buildings are not locate in an Overland flow path area. Note: A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development  |

| PO34  | No acceptable outcome provided.  |
|---|--|
| Development does not:   |  |
| <ul> <li>a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level;</li> <li>b. increase the potential for flood damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> <li>Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development</li> </ul>  |  |
| does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.<br>Note - Reporting to be prepared in accordance with Planning scheme<br>policy – Flood hazard, Coastal hazard and Overland flow   | C Jersie   |
| PO35  | AO35   |
| Development ensures that overland flow is not conveyed<br>from a road or public open space onto a private lot,<br>unless the development is in a Rural zone.  | Development ensures that overland flow paths and<br>drainage infrastructure is provided to convey overland<br>flow from a road or public open space area away from a<br>private lot, unless the development is in the Rural zone.  |
| PO36  | AO36.1   |
| <ul> <li>Development ensures that Council and inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment flows and are able to be easily maintained.</li> <li>Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.</li> <li>Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow</li> </ul> | <ul> <li>Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:</li> <li>a. Urban area – Level III;</li> <li>b. Rural area – N/A;</li> <li>c. Industrial area – Level V;</li> <li>d. Commercial area – Level V.</li> </ul> AO36.2 Development ensures that all Council and allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully |
| P037  | developed upstream catchment. No acceptable outcome provided   |
| Development protects the conveyance of overland flow such that easements for drainage purposes are provided over:   |  |
| <ul> <li>a stormwater pipe if the nominal pipe diameter<br/>exceeds 300mm;</li> </ul>   |  |

| b. an overland flow path where it crosses more than one property; and   |  |
|---|--|
| c. inter-allotment drainage infrastructure.   |  |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.  |  |
| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   |  |
| Additional criteria for development for a Park <sup>(57)</sup>  |  |
| PO38  | A038   |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated Design. |
| a. public benefit and enjoyment is maximised;   |  |
| <ul> <li>b. impacts on the asset life and integrity of park<br/>structures is minimised;</li> </ul>   |  |
| c. maintenance and replacement costs are minimised.   |  |
|   | SCI  |

### 7.2.3.7.5 Rural living precinct

#### 7.2.3.7.5.1 Application - Reconfiguring a lot code - Rural living precinct

- 1. The purpose of this part of the Reconfiguring a lot code is to facilitate and manage the outcomes of development for reconfiguring a lot and its associated Operational Works in the Caboolture West local plan Rural living precinct, to achieve the Overall Outcomes.
- The purpose of this part of the code will be achieved through the overall outcomes as identified in Part 7.2.3.7
   Reconfiguring a lot code and the following additional Caboolture West local plan Rural living precinct specific overall outcomes:
  - a. Reconfiguring a lot is undertaken for development purposes consistent with the development concept shown indicatively on Figure 7.2.3.1 Caboolture West structure plan.
  - b. Reconfiguring a lot does not result in lots smaller than 6000m<sup>2</sup>, an average lot size of 8000m<sup>2</sup>, except where subdivision of land is for the purpose of a Park<sup>(57)</sup> or Outdoor sport and recreation use<sup>(55)</sup>.
  - c. Reconfiguring a lot retains a low density and open area character expected and anticipated in a rural living environment by avoiding the provision of undersized allotments.
  - d. Reconfiguring a lot retains a clear transition between more intensively urbanised areas of Caboolture west, and it's largely undeveloped rural hinterland by avoiding the provision of undersized allotments.
  - e. Reconfiguring a lot maintains and reinforces the distinction between urban areas and rural living areas by avoiding the provision of undersized allotments.
  - f. Reconfiguring a lot avoids areas subject to constraint, limitation, or environmental values. Where reconfiguring a lot cannot avoid these identified areas, it responds by:
    - i. adopting a 'least risk, least impact' approach when designing, siting and locating development to minimise the potential risk to people, property and the environment;
    - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
    - iii. maintaining environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of environmental offsets, landscaping and facilitating safe wildlife movement through the environment;
    - iv. protecting native species and protecting and enhancing native species habitat;
      - protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
      - vi. establishing effective separation distances, buffers and mitigation measures associated with major infrastructure to minimise adverse effects on sensitive land uses from noise, dust and other nuisance generating activities;
      - vii. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of major infrastructure;
      - viii. Ensuring effective and efficient disaster management response and recovery capabilities.
  - g. The Reconfiguring a lot, Operational works associated with the Reconfiguring a lot, and uses expected to occur as a result of the Reconfiguring a lot:
    - i. responds to the risk presented by overland flow and minimises risk to personal safety;
    - ii. is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
    - iii. does not impact on the conveyance of overland flow up to and including the Overland Flow Defined Flood Event;
    - iv. directly, indirectly and cumulatively avoids an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
  - h. Reconfiguring a lot achieves the intent and purpose of the Rural living precinct outcomes as identified in section 7.2.3.5.2 above.

#### 7.2.3.7.5.2 Criteria for assessment

To determine if boundary realignment is self-assessable development, it must comply with the self-assessable acceptable outcomes set out in Part I, Table 7.2.3.5.1. Where development does not meet any of the relevant criteria in Part I, Table 7.2.3.5.1 assessment is limited to the subject matter of the self-assessable acceptable outcomes that were not complied with. The following table identifies the corresponding performance outcomes where a development does not comply with a self-assessable acceptable outcome.

| Self-assessable acceptable outcomes | Corresponding performance outcomes |
|-------------------------------------|------------------------------------|
| SAO1                                | PO11                               |
| SAO2                                | PO11                               |
| SAO3                                | PO11                               |
| SAO4                                | PO11                               |
| SOA5                                | PO11                               |

Where reconfiguring a lot is code assessable development in the Table of Assessment, the assessment criteria for that development are set out in Part H, Table 7.2.3.5.2.

#### Part I - Criteria for self-assessable development - Reconfiguring a lot code - Rural living precinct

| Table 7.2.3.7.5.1 Self-assessable development - R | Reconfiguring a lot code - Rural living precinct |
|---|--|
|   |  |

| Self-assessable acceptable outcomes |  |  |
|-------------------------------------|--|--|
| General criteria                    |  |  |
| Boundary realignment                |  |  |
| SAO1                                | Lots created by boundary realignment:  |  |
|                                     | a. contain all service connections to water, sewer, electricity and other infrastructure wholly within the lot they serve;   |  |
|                                     | b. have constructed road access;   |  |
|                                     | c. do not require additional infrastructure connections or modification to existing connections.   |  |
|                                     | d. do not result in the creation of any additional lots;   |  |
|                                     |  |  |
| SAO2                                | Boundary realignment does not result in existing land uses on-site becoming non-complying with planning scheme criteria.   |  |
|                                     |  |  |
|                                     | Note - Examples may include but are not limited to:  |  |
|                                     | a. minimum lot size requirements;  |  |
|                                     | b. minimum or maximum required setbacks  |  |
|                                     | c. parking and access requirements;  |  |
|                                     | d. servicing and infrastructure requirements;  |  |
|                                     | e. dependant elements of an existing or approved land use being separately titled, including but not limited to:   |  |
|                                     | <ul> <li>Where a Dwelling house<sup>(22)</sup> includes a secondary dwelling or associated outbuildings, they cannot be separately<br/>titled as they are dependent on the Dwelling house<sup>(22)</sup> use.</li> </ul> |  |
|                                     |  |  |

|      | Precinct  | Area               | Frontage | Depth |
|------|---|--------------------|----------|-------|
|      | Enterprise and employment precinct  | 1000m <sup>2</sup> | 40m      | -     |
|      | Green network precinct  | -                  | -        | -     |
|      | Rural living precinct   | 6000m <sup>2</sup> | -        | -     |
|      |   |                    |          |       |
| SAO4 | No new boundaries are located within 4m of High Value Areas as identified in Overlay map - Environmental areas. |                    |          |       |
| SAO5 | Boundary realignment does not result in the clearing of any Habitat trees.                                      |                    |          |       |

### Part J - Criteria for assessment development - Reconfiguring a lot code - Rural living precinct

### Table 7.2.3.7.5.2 Assessable development - Reconfiguring a lot code - Rural living precinct

| Performance outcomes   | Acceptable outcomes             |
|--|---------------------------------|
| Structure plan   |                                 |
| PO1  | No acceptable outcome provided. |
| Development is in accordance with Figure 7.2.3.1 -<br>Caboolture West structure plan with regards to:  |                                 |
| <ul> <li>the provision of infrastructure and services<br/>associated with reconfiguring a lot and land<br/>development;</li> </ul>   | SCI                             |
| b. utilities;  |                                 |
| c. parks and open space;   |                                 |
| d. the recognition and provision of minor green corridors.   |                                 |
| Lot size and design  |                                 |
| PO2  | No acceptable outcome provided. |
| Lot size and design maintains the low density, open space character associated with a rural living environment   |                                 |
| by achieving a minimum lot size of $6000m^2$ and an  |                                 |
| average lot size of 8000m <sup>2</sup> , except where subdivision of land is for the purpose of a Park <sup>(57)</sup> or Outdoor sport and recreation use <sup>(55)</sup> , Utility installation <sup>(86)</sup> or |                                 |
| recreation use <sup>(55)</sup> , Utility installation <sup>(86)</sup> or<br>Telecommunication facility <sup>(81)</sup> where no minimum lot size<br>applies.   |                                 |
| PO3  | No acceptable outcome provided. |
| Lot size and design complies with the minimum lot size<br>and dimensions specified in PO2 above and<br>accommodates the following:   |                                 |
| a. dwelling house <sup>(22)</sup> and associated structures;   |                                 |

| b. vehicle access, parking and manoeuvring;  |  |
|--|--|
| c. private open space and landscaping;   |  |
| d. any required on-site services such as on-site effluent disposal areas, stormwater retention areas; and  |  |
| e. any necessary buffering from constrained areas and essential infrastructure.  |  |
| PO4  | A04.1  |
| Lot layout and street layout minimises the impacts of<br>cutting, filling and retaining walls on the visual and<br>physical amenity of the streetscape and adjoining lots. | Development ensures that any cutting, filling, retaining<br>walls and earthworks have maximum vertical dimensions<br>of 1m either as a single element or a step in a terrace or<br>series of terraces. |
|  | Street alignment follows ridges or gullies or run perpendicular to slope.  |
| P05  | A05  |
| Lots are of a sufficient grade to accommodate effective stormwater drainage to a lawful point of discharge.  | The surface level of a lot is at a minimum grade of 1:100<br>and slopes towards the street frontage, or other lawful<br>point of discharge   |
| Street design and layout   |  |
| P06  | A06  |
| Street layouts provide an efficient and legible movement<br>network with high levels of connectivity within and<br>external to the site by:                                | Development is in accordance with Figure 7.2.3.2 -<br>Movement, major streets, Figure 7.2.3.3 - Movement,<br>walking and cycling.  |
| a. facilitating increased activity transport through a focus on safety and amenity for pedestrians and cyclist;  |  |
| <ul> <li>facilitating possible future connections to adjoining<br/>sites for roads, green linkages and other essential<br/>infrastructure.</li> </ul>                      |  |
| Note - Refer to Planning scheme policy - Integrated design for guidance on how to achieve compliance with this outcome.  |  |
| P07  | A07  |
| Streets are designed and constructed to cater for:   | Development is in accordance with Figure 7.2.3.2 -   |
| a. safe and convenient pedestrian and cycle movement;  | Movement, major streets, Figure 7.2.3.3 - Movement, walking and cycling.   |
| b. adequate on street parking;   |  |
|  |  |

| c. expected traffic speeds and volumes;  |  |
|--|--|
| d. utilities and stormwater drainage;  |  |
| e. bio-retention drainage systems in identified minor green corridors;   |  |
| f. lot access, sight lines and public safety;  |  |
| g. emergency access and waste collection;  |  |
| h. landscaping and street furniture.   |  |
| Note - Refer to Planning scheme policy - Integrated design for guidance on how to achieve compliance with this outcome.  |  |
| PO8  | A08  |
| Intersections are designed and constructed to provide<br>for the safe and efficient movement of pedestrians,<br>cyclists, public transport and private vehicles. | Development is in accordance with Figure 7.2.3.2 -<br>Movement, major streets, Figure 7.2.3.3 - Movement,<br>walking and cycling |
| PO9  | No acceptable outcome provided.  |
| Cul-de-sacs or dead end streets are not proposed unless:   |  |
| a. topography or other physical barriers exist to the continuance of street network;   |  |
| b. connection to an existing road is not permitted;  | 5  |
| c. there is no appropriate alternative solutions,  |  |
| d. the cul-des-sac or dead end street will facilitate future connections to adjoining land or development.   |  |
|  |  |
| Reticulated supply   |  |
| PO10   | AO10   |
| Each lot is provided with an appropriate level of service and infrastructure commensurate with the Rural   | New lots are provided with:  |
| residential zone. All services, including water supply,  | a. a water supply being either:  |
| stormwater management, sewage disposal, waste<br>disposal, drainage, electricity, gas and<br>telecommunications, are provided in a manner that:                  | i. connected to a reticulated water supply infrastructure network; or  |
| a. is efficient in delivery of service;  | <li>potable water from an on-site water storag<br/>supply.</li>  |
| b. is effective in delivery of service;  |  |
| <ul> <li>is conveniently accessible in the event of<br/>maintenance or repair:</li> </ul>  | b. a sewage disposal system being either:  |

maintenance or repair;

- d. minimises whole of life cycle costs for that infrastructure provided;
- e. minimises risk of potential adverse impacts on natural and physical environment;
- f. minimises risk of potential adverse impact on amenity and character values; and
- g. recognises and promotes Councils Total Water Cycle Management policy and the efficient use of water resources.

Note - Refer to Planning scheme policy - Integrated design for guidance on how to achieve compliance with this outcome.

### **Boundary realignment**

### PO11

Boundary realignment:

- a. does not result in the creation, or in the potential creation of, additional lots;
- b. does not result in lots of a size or dimension inconsistent with that identified for any precinct or sub-precinct.
- c. is an improvement on the existing land use situation;
- d. do not result in existing land uses on-site becoming non-compliant with planning scheme criteria;
- e. results in lots which have appropriate size, dimensions and access to cater for uses consistent with the precinct;
- f. infrastructure and services are wholly contained within the lot they serve;
- g. ensures the uninterrupted continuation of lots providing for their own private servicing;
- h. do not result in the loss of habitat trees. Where habitat trees are to be cleared, replacement fauna nesting boxes are provided at the rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed;
- i. do not result in adverse impacts on the quality and integrity of the biodiversity and ecological values inherent to a High Value Area identified in Overlay map - Environmental areas.

- i. connected to a reticulated sewerage infrastructure network; or
- ii. an on-site effluent treatment and disposal system.
- c. an electricity supply being either:
  - i. connected to a reticulated electricity infrastructure network; or
  - ii. separate electricity generation capacity.
- d. access to a high speed telecommunication network, where available.

No acceptable outcome identified.

Permi

| Community title and lease  | 1                                 |
|--|-----------------------------------|
| P012   | No acceptable outcome identified. |
| Reconfiguring a lot which separates existing or approved<br>buildings whether or not including land, or separates land<br>by way of lease does not result in land uses becoming<br>unlawful or dependant elements of a use being separated<br>by title.  |                                   |
| Note - Examples may include but are not limited to:  |                                   |
| <ul> <li>a. Where a commercial or industrial land use contains an ancillary office<sup>(53)</sup>, the office<sup>(53)</sup> cannot be separately titled as it is considered part of the commercial or industrial use.</li> <li>b. Where a Dwelling house<sup>(22)</sup> includes a secondary dwelling</li> </ul>  | ich in 2                          |
| or associated outbuildings, they cannot be separately titled as they are dependent on the Dwelling house <sup>(22)</sup> use.  | ersil                             |
| Volumetric subdivision   |                                   |
| P013   | No acceptable outcome identified. |
| The reconfiguring of the space above or below the surface of the land ensures appropriate area, dimensions and access arrangements to cater for uses consistent with the precinct and does not result in existing land uses on-site becoming non-complying with planning scheme criteria.<br>Note - Examples may include but are not limited to where a Dwelling house <sup>(22)</sup> includes a secondary dwelling or associated outbuildings, they cannot be separately titled as they are dependent on the Dwelling house <sup>(22)</sup> use. | schen                             |
| Dweining house.  |                                   |
| Stormwater location and design   | 1                                 |
| P014   | No acceptable outcome identified. |
| The development is planned and designed considering<br>the land use constraints of the site and incorporates water<br>sensitive urban design principles.   |                                   |
| P015   | No acceptable outcome identified. |
| Stormwater drainage pipes and structures through or<br>within private land are protected by easements in favour<br>of Council with sufficient area for practical access for<br>maintenance.  |                                   |
| Note - To determine sufficient areas for easements refer to Planning scheme policy - Integrated design.  |                                   |
|  |                                   |

| Stormwater management facilities are located outside<br>of riparian areas and prevent increased channel bed and<br>bank erosion.                   |   |
|--|---|
| P017   | No acceptable outcome identified.   |
| Natural streams and riparian vegetation are retained and enhanced through revegetation.  |   |
| PO18   | No acceptable outcome identified.   |
| Areas constructed as detention basins are adaptable for passive recreation.  |   |
| PO19   | No acceptable outcome identified.   |
| Development maintains and improves the environmental values of waterway ecosystems within the Green network and minor green corridors.             | C Jers.   |
| PO20   | No acceptable outcome identified.   |
| Constructed water bodies are not dedicated as public assets.   | en  |
| Stormwater management system   |   |
| PO21   | AO21  |
| The major drainage system has the capacity to safely convey stormwater flows for the defined flood event.  | The roads, drainage pathways, drainage features and<br>waterways safely convey the stormwater flows for the<br>defined flood event without allowing flows to encroach<br>upon private lots. |
|  |   |
| P022   | A022  |
| PO22<br>Overland flow paths (for any storm event) from newly<br>constructed roads and public open space areas do not<br>pass through private lots. | Drainage pathways are provided to accommodate   |
| Overland flow paths (for any storm event) from newly constructed roads and public open space areas do not  | Drainage pathways are provided to accommodate   |
| Overland flow paths (for any storm event) from newly constructed roads and public open space areas do not pass through private lots.               | Drainage pathways are provided to accommodate overland flows from roads and public open space areas   |

| a.  | protect the environmental values in downstream waterways;  |                                   |
|---|--|-----------------------------------|
| b.  | maintain ground water recharge areas;  |                                   |
| c.  | preserve existing natural wetlands and associated buffers;   |                                   |
| d.  | avoid disturbing soils or sediments;   |                                   |
| e.  | avoid altering the natural hydrologic regime in acid sulphate soil and nutrient hazardous areas;   |                                   |
| f.  | maintain and improve receiving water quality;  |                                   |
| g.  | protect natural waterway configuration;  |                                   |
| h.  | protect natural wetlands and vegetation;   | S                                 |
| i.  | protect downstream and adjacent properties;  |                                   |
| j.  | protect and enhance riparian areas.  |                                   |
| Note - To demonstrate achievement of this performance outcome,<br>a stormwater quality management is prepared by a suitably qualified<br>person demonstrating compliance with the Urban Stormwater<br>Planning Guideline 2010 and considering any local area stormwater<br>management planning prepared by Council. |  | heme                              |
|   |  |                                   |
| PO2   | 5  | No acceptable outcome identified. |
|   | gn and construction of the stormwater management   | No acceptable outcome identified. |
| Des   | gn and construction of the stormwater management   | No acceptable outcome identified. |
| Des<br>syst   | gn and construction of the stormwater management<br>em:<br>utilise methods and materials to minimise the whole<br>of life-cycle costs of the stormwater management   | No acceptable outcome identified. |
| Des<br>syst<br>a.   | gn and construction of the stormwater management<br>em:<br>utilise methods and materials to minimise the whole<br>of life-cycle costs of the stormwater management<br>system;<br>are coordinated with civil and other landscaping  | No acceptable outcome identified. |
| Des<br>syst<br>a.<br>b.<br>c.   | gn and construction of the stormwater management<br>em:<br>utilise methods and materials to minimise the whole<br>of life-cycle costs of the stormwater management<br>system;<br>are coordinated with civil and other landscaping<br>works;<br>achieves Councils Total Water Cycle Management<br>policy and the efficient use of water resources.  | No acceptable outcome identified. |
| Des<br>syst<br>a.<br>b.<br>c.   | gn and construction of the stormwater management<br>em:<br>utilise methods and materials to minimise the whole<br>of life-cycle costs of the stormwater management<br>system;<br>are coordinated with civil and other landscaping<br>works;<br>achieves Councils Total Water Cycle Management<br>policy and the efficient use of water resources.<br>e - To determine the standards for stormwater management<br>em construction refer to Planning scheme policy - Integrated<br>gn. | No acceptable outcome identified. |

| Note - To determine the standards for stormwater management<br>system construction refer to Planning scheme policy - Integrated<br>design.   |   |
|--|---|
| Park and open space  |   |
| PO27   | A027  |
| Areas for recreation and open space purposes are<br>provided in locations, and of a size and design standard<br>to meet the recreational needs of the community in<br>accordance with Figure 7.2.3.4 - Green network and open<br>space.  | Development is in accordance with a Neighbourhood development plan. |
| PO28   | AO28  |
| The safety and useability of parks <sup>(57)</sup> is ensured through<br>the careful design of the street network and lot locations<br>which provide high levels of surveillance and access into<br>the park <sup>(57)</sup> or open space area. The provision of parks<br>will consider the following:  | Development is in accordance with a Neighbourhood development plan. |
| <ul> <li>a. local and district parks<sup>(57)</sup> are bordered by streets<br/>and not lots wherever possible;</li> </ul>   |   |
| b. where lots do addresses local and district parks <sup>(57)</sup> , fencing is provided along the park <sup>(57)</sup> boundary at a maximum height of 1m prior to the sealing of the plan of subdivision;   | cchei   |
| c. the design of fencing and retaining features allows<br>for safe and direct pedestrian access between the<br>park <sup>(57)</sup> and private allotment through the use of<br>private gates and limited retaining features along<br>park <sup>(57)</sup> boundaries.   |   |
| Clearing of native vegetation  |   |
| PO29   | No acceptable outcome provided.                                     |
| Reconfiguring a lot facilitates the retention of native vegetation by:   |   |
| <ul> <li>a. incorporating native vegetation and habitat trees<br/>into the overall subdivision design, development<br/>layout, on-street amenity and landscaping where<br/>practicable;</li> </ul>   |   |
| <ul> <li>ensuring habitat trees are located outside a<br/>development footprint. Where habitat trees are to<br/>be cleared, replacement fauna nesting boxes are<br/>provided at the rate of 1 nest box for every hollow<br/>removed. Where hollows have not yet formed in<br/>trees &gt; 80cm in diameter at 1.3m height, 3 nest<br/>boxes are required for every habitat tree removed.</li> </ul> |   |
| c. providing safe, unimpeded, convenient and ongoing wildlife movement;  |   |
| d. avoiding creating fragmented and isolated patches<br>of native vegetation.  |   |

| <ul> <li>e. ensuring that biodiversity quality and integrity of habitats is not adversely impacted upon but are maintained and protected;</li> <li>e. ensuring that soll erosion and land degradation does not occur;</li> <li>e. ensuring that quality of surface water is not adversely impacted upon by providing effective vegetated buffers to water bodies.</li> <li>PO30</li> <li>No acceptable outcome provided.</li> <li>Compensatory planting is located in the Caboolture West local plan - Green network precinct.</li> <li>Noise</li> <li>PO31</li> <li>Noise attenuation structure (e.g. walls, barriers or fences):         <ul> <li>a. contribute to safe and usable public spaces, througn maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>maintainthe amenity of the streetscape.</li> </ul> </li> <li>Note - Rofer to Planning scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Abte - Refer to Planning scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> </ul> |  |  |  |
|---|--|--|--|
| <ul> <li>PO31</li> <li>Noise attenuation structure (e.g. walls, barriers or fences):</li> <li>a. contribute to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintain the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>AO31</li> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a are not visible from an adjoining road or public area unless;</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map - Active transport for future active transport routes.</li> </ul>   | <ul> <li>habitats is not adversely impacted upon but maintained and protected;</li> <li>f. ensuring that soil erosion and land degradatid does not occur;</li> <li>g. ensuring that quality of surface water is not adversely impacted upon by providing effectivegetated buffers to water bodies.</li> <li>PO30</li> <li>Compensatory planting is located in the Caboolture</li> </ul>  | are ion ive No acceptable outcome provided.  |  |
| <ul> <li>PO31</li> <li>Noise attenuation structure (e.g. walls, barriers or fences):</li> <li>a. contribute to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintain the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>AO31</li> <li>Noise attenuation structures (e.g. walls, barriers or fences):</li> <li>a are not visible from an adjoining road or public area unless;</li> <li>i. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map - Active transport for future active transport routes.</li> </ul>   | Noiso  |  |  |
| <ul> <li>Noise attenuation structure (e.g. walls, barriers or fences):</li> <li>a. contribute to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc.);</li> <li>b. maintain the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy - Integrated design for details and examples of noise attenuation structures.</li> </ul>   | 10136  |  |  |
| <ul> <li>a. contribute to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);</li> <li>b. maintain the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active transport routes.</li> </ul>   | PO31   | AO31   |  |
| Values and constraints criteria   | <ul> <li>a. contribute to safe and usable public spaces, th maintaining high levels of surveillance of par streets and roads that serve active transport purposes (e.g. existing or future pedestrian por cycle lanes etc);</li> <li>b. maintain the amenity of the streetscape.</li> <li>Note - A noise impact assessment may be required to demon compliance with this PO. Noise impact assessments are to b prepared in accordance with Planning scheme policy - Noise</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for the street of the street of the scheme policy - Noise</li> </ul> | <ul> <li>fences):</li> <li>a. are not visible from an adjoining road or public area unless;</li> <li>a. adjoining a motorway or rail line; or</li> <li>ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.</li> <li>b. do not remove existing or prevent future active transport routes or connections to the street network;</li> <li>c. are located, constructed and landscaped in accordance with Planning scheme policy - Integrated design.</li> <li>Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.</li> <li>Note - Refer to Overlay map – Active transport for future active</li> </ul> |  |
|   | Values and constraints criteria  |  |  |

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

# Bushfire hazard (refer Overlay map - Bushfire hazard to determine if the following assessment criteria apply)

Note - The preparation of a bushfire management plan in accordance with Planning scheme policy – Bushfire prone areas can assist in demonstrating compliance with the following performance criteria. The identification of a development footprint will assist in demonstrating compliance with the following performance criteria.

| PO32  | AO32   |
|---|--|
| <ul> <li>Lots are designed to:</li> <li>a. minimise the risk from bushfire hazard to each lot<br/>and provide the safest possible siting for buildings<br/>and structures;</li> <li>b. limit the possible spread paths of bushfire within<br/>the reconfiguring;</li> <li>c. achieve sufficient separation distance between<br/>development and hazardous vegetation to minimise<br/>the risk to future buildings and structures during<br/>bushfire events;</li> <li>d. maintain the required level of functionality for<br/>emergency services and uses during and<br/>immediately after a natural hazard event.</li> </ul> | <ul> <li>Reconfiguring a lot ensures that all new lots are of an appropriate size, shape and layout to allow for the siting of future buildings being located:</li> <li>a. within an appropriate development footprint;</li> <li>b. within the lowest hazard locations on a lot;</li> <li>c. to achieve minimum separation from any source of bushfire hazard of 20m or the distance required to achieve a Bushfire Attack Level (BAL) of more than 29 (as identified under AS3959-2009), whichever is the greater;</li> <li>d. to achieve a minimum separation from any retained vegetation strips or small areas of vegetation of 10m or the distance required to achieve a Bushfire Attack Level (BAL) of more than 29 (as identified under AS3959-2009), whichever is the greater;</li> <li>e. away from ridgelines and hilltops;</li> <li>f. on land with a slope of less than 15%;</li> <li>g. away from north to west facing slopes.</li> </ul> |
| PO33<br>Lots provide adequate water supply and infrastructure<br>to support fire-fighting.  | <ul> <li>AO33</li> <li>For water supply purposes, reconfiguring a lot ensures that:</li> <li>a. lots have access to a reticulated water supply provided by a distributer-retailer for the area; or</li> <li>b. where no reticulated water supply is available, on-site fire fighting water storage containing not less than 10,000 litres and located within a development footprint.</li> </ul>   |
| P034  | AO34   |
| Lots are designed to :  | Reconfiguring a lot ensures a new lot is provided with:  |
| a. promote safe site access by avoiding potential entrapment situations;  | a. direct road access and egress to public roads;  |
| <ul> <li>promote accessibility and manoeuvring for fire fighting during bushfire.</li> </ul>  | <ul><li>b. an alternative access where the private driveway is longer than 100m to reach a public road;</li><li>c. driveway access to a public road that has a gradient</li></ul>  |
|   | no greater than 12.5%;   |
| Mr.   | d. minimum width of 3.5m.  |
| PO35  | AO35   |
| Lots ensure the road layout and design supports:  | Reconfiguring a lot provides a road layout which:  |
| <ul> <li>a. safe and efficient emergency services access to sites; and manoeuvring within the subdivision;</li> <li>b. availability and maintenance of access routes for</li> </ul>   | a. includes a perimeter road that separating the new lots from hazardous vegetation on adjacent lots incorporating by:   |
| <ul> <li>availability and maintenance of access routes for<br/>the purpose of safe evacuation.</li> </ul>   | i. a cleared width of 20m;   |

|        | ii. road gradients not exceeding 12.5%;   |
|--------|---|
|        | <li>iii. pavement and surface treatment capable of<br/>being used by emergency vehicles;</li>   |
|        | <ul> <li>Turning areas for fire fighting appliances in<br/>accordance with Qld Fire and Emergency<br/>Services' Fire Hydrant and Vehicle Access<br/>Guidelines.</li> </ul>    |
|        | b. Or if the above is not practicable, a fire maintenance trail separates the lots from hazardous vegetation on adjacent lots incorporating:                                  |
|        | i. a minimum cleared width of 6m and minimum formed width of 4m;  |
|        | ii. gradient not exceeding 12.5%;   |
|        | iii. cross slope not exceeding 10%;   |
|        | <ul> <li>a formed width and erosion control devices<br/>to the standards specified in Planning scheme<br/>policy - Integrated design;</li> </ul>                              |
|        | v. a turning circle or turnaround area at the end<br>of the trail to allow fire fighting vehicles to<br>manoeuvre;  |
|        | vi. passing bays and turning/reversing bays every 200m;   |
|        | vii. an access easement that is granted in favour<br>of the Council and the Queensland Fire and<br>Rescue Service or located on public land.                                  |
| 013101 | <ul> <li>excludes cul-de-sacs, except where a perimeter<br/>road with a cleared width of 20m isolates the lots<br/>from hazardous vegetation on adjacent lots; and</li> </ul> |
|        | d. excludes dead-end roads.   |

High voltage electricity line buffer (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

Note - The identification of a development footprint will assist in demonstrating compliance with the following performance criteria.

| *   |   |
|---|---|
| PO36  | No acceptable outcome provided.             |
| Lots provide a development footprint outside of the buffer.   |   |
| PO37  | AO37  |
| The creation of lots does not compromise or adversely impact upon the efficiency and integrity of supply. | No new lots are created in the buffer area. |

|  | 1   |  |
|--|---|--|
| PO38   | AO38  |  |
| The creation of new lots does not compromise or<br>adversely impact upon access to the supply line for any<br>required maintenance or upgrading work.  | No new lots are created in the buffer area.   |  |
| PO39   | No acceptable outcome provided.   |  |
| Boundary realignments:   |   |  |
| i. do not result in the creation of additional building development within the buffer;   |   |  |
| ii. result in the reduction of building development opportunities within the buffer.   |   |  |
| Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply) Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council. |   |  |
| PO40   | No acceptable outcome provided.   |  |
| Development:   | C   |  |
| <ul> <li>a. minimises the risk to persons from overland flow;</li> <li>b. does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.</li> </ul>   | SCI   |  |
| PO41   | AO41  |  |
| Development:   | Development ensures that any buildings are not located  |  |
| a. maintains the conveyance of overland flow   | in an Overland flow path area.  |  |
| predominantly unimpeded through the premises for<br>any event up to and including the 1% AEP for the<br>fully developed upstream catchment;  | Note: A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding property. |  |
| b. does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.   |   |  |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   |   |  |
| PO42   | No acceptable outcome provided.   |  |
| Development does not:  |   |  |
| a. directly, indirectly or cumulatively cause any  |   |  |
| <ul><li>increase in overland flow velocity or level;</li><li>b. increase the potential for flood damage from overland flow either on the premises or on a</li></ul>  |   |  |

| surrounding property, public land, road or infrastructure.   |   |
|--|---|
| Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.   |   |
| Note - A report from a suitably qualified Registered Professional<br>Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.       |   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   |   |
| PO43   | A043  |
| Development ensures that overland flow is not conveyed<br>from a road or public open space onto a private lot,<br>unless the development is in a Rural zone.   | Development ensures that overland flow paths and<br>drainage infrastructure is provided to convey overland<br>flow from a road or public open space area away from a<br>private lot, unless the development is in the Rural zone.                   |
| PO44   | A044.1  |
| Development ensures that Council and inter-allotment<br>drainage infrastructure, overland flow paths and open<br>drains through private property cater for overland flows<br>for a fully developed upstream catchment flows and are<br>able to be easily maintained. | Development ensures that roof and allotment drainage<br>infrastructure is provided in accordance with the following<br>relevant level as identified in QUDM:<br>a. Urban area – Level III;<br>b. Rural area – N/A;<br>c. Industrial area – Level V; |
| Engineer Queensland is required certifying that the development<br>does not increase the potential for significant adverse impacts on<br>an upstream, downstream or surrounding premises.  | d. Commercial area – Level V.<br>AO44.2   |
| Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow   | Development ensures that all Council and allotment<br>drainage infrastructure is designed to accommodate any<br>event up to and including the 1% AEP for the fully<br>developed upstream catchment.   |
| PO45   | No acceptable outcome provided  |
| Development protects the conveyance of overland flow such that easements for drainage purposes are provided over:  |   |
| a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;   |   |
| b. an overland flow path where it crosses more than one property; and  |   |
| c. inter-allotment drainage infrastructure.  |   |
| Note - Refer to Planning scheme policy - Integrated design for details and examples.   |   |

| Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.   |  |
|---|--|
|   |  |
| Additional criteria for development for a Park <sup>(57)</sup>  |  |
| PO46  | AO46   |
| Development for a Park <sup>(57)</sup> ensures that the design and layout responds to the nature of the overland flow affecting the premises such that: | Development for a Park <sup>(57)</sup> ensures works are provided<br>in accordance with the requirements set out in Appendix<br>B of the Planning scheme policy - Integrated Design. |
| a. public benefit and enjoyment is maximised;   |  |
| <li>b. impacts on the asset life and integrity of park<br/>structures is minimised;</li>  |  |
| c. maintenance and replacement costs are minimised.   | 6  |
|   | scheme   |