6.2.11 Rural residential zone code

6.2.11.1 Application - Rural residential zone

This code applies to assessing development in the Rural residential zone, if:

- 1. the development has been categorised as either accepted development subject to requirements or assessable development code assessment, and this code is identified as applicable to that development in the assessment benchmarks for assessable development and requirements for accepted development column of a table of assessment (Part 5);
- 2. the development has been categorised as assessable development impact assessment (Part 5).

When using this code, reference should be made to section 5.3.2 Determining the category of development and category of assessment and, where applicable, section 5.3.3 Determining and applying the requirements for accepted development and the assessment benchmarks for assessable development located in Part 5.

For accepted development subject to requirements or assessable development under this Code :

- 1. Part A of the code applies to accepted development subject to requirements
- 2. Part B of the code applies to assessable development.

A dwelling house⁽²²⁾ in this zone is not subject to Schedule 6, Part 2, Item 2. Development associated with a dwelling house⁽²²⁾ is subject to the relevant provisions in this code and not the dwelling house code.

6.2.11.2 Purpose - Rural residential zone

- 1. The purpose of the Rural residential zone is to provide for residential development on large lots where infrastructure and services may not be provided and where the intensity of residential development is generally dispersed. The zone is generally located at the urban-rural fringe, having a semi-rural or bushland amenity and character with a strong dominance of open area and scope for planting. Development is characteristically low density (large lots), low intensity of built form and catering for a range of lifestyle choices. The opportunity and ability for rural uses to occur is retained. Limited provision for other low intensity non-residential uses is also provided where it is demonstrated they have minimal adverse impacts on the amenity and character of the zone.
- 2. The Rural residential zone seeks to implement the policy direction set in Part 3, Strategic Framework.
- 3. The purpose of the Rural residential zone will be achieved through the following overall outcomes:
 - a. A range of larger lots used primarily for residential (lifestyle) activities with limited provision of infrastructure. Residential uses are limited to a single dwelling house⁽²²⁾ per allotment. A secondary dwelling is permitted provided it functions and appears subordinate to the principal dwelling house⁽²²⁾.
 - b. The ongoing operation of existing rural uses and primary production activities is retained. Rural uses and primary production activities establish where they do not adversely impact on the use, character and amenity values of adjoining properties.
 - c. Development maintains a distinct and recognisable transition between more intensively urbanised areas of the region, and the region's largely undeveloped rural hinterland.
 - d. Development does not detrimentally impact upon the low density, low intensity and open area character and amenity associated with the Rural residential zone.
 - e. Development does not fragment, pre-empt or compromise the potential for development in areas identified as potential future growth fronts for urban purposes beyond the life of the planning scheme.

Note - The potential future growth areas are shown on Overlay map - Rural residential lot sizes as having no further subdivision.

- f. Development does not adversely affect the operation of aviation facilities at Mt Glorious (See Overlay map Infrastructure buffers). This aviation facility comprise a VHF beacon.
- g. Home based business⁽³⁵⁾ establish where the scale and intensity of the activity does not detrimentally impact upon the low density, low intensity and open area character and amenity associated with the Rural residential zone.
- Retail and commercial activity group uses establish within existing Neighbourhood Hubs (see Overlay map
 - Community activities and neighbourhood hubs). Redevelopment or development within existing
 Neighbourhood Hubs occurs where:
 - i. development does not result in nuisance or amenity impacts on adjoining residents or the wider streetscape;
 - ii. development is small scale, low intensity and consistent with the rural residential character and amenity associated with the particular Neighbourhood hub; and
 - iii. development associated with retail and commercial activity group activities does not involve the expansion of existing Neighbourhood hubs onto adjoining lots.
- i. Community activity group uses establish within existing Community Activities locations (see Overlay map Community activities and neighbourhood hubs). Community activity group activities may only establish on lots that immediately adjoin existing Community activities and neigbourhood hubs only. Redevelopment or development within existing Community Activities locations, or on lots immediately adjoining Community activities and neighbourhood hubs occurs where:
 - i. development does not result in nuisance or amenity impacts on adjoining residents or the wider streetscape; and
 - ii. development is small scale, low intensity and consistent with the rural residential character and amenity associated with the particular Community Activities location.
- j. Development generating high volumes of traffic or involving heavy vehicle traffic movements are located on roads of a standard and capacity to accommodate traffic demand.
- k. Development does not result in the establishment of industrial activities.
- I. General works associated with the development achieves the following:
 - i. a high standard of electricity, telecommunications, roads, sewerage, water supply and street lighting services is provided to new developments to meet the current and future needs of users of the site;
 - ii. the development manages stormwater to:
 - A. ensure the discharge of stormwater does not adversely affect the quality, environmental values or ecosystem functions of downstream receiving waters;
 - B. prevent stormwater contamination and the release of pollutants;
 - C. maintain or improve the structure and condition of drainage lines and riparian areas;
 - D. avoid off-site adverse impacts from stormwater.
 - iii. the development does not result in unacceptable impacts on the capacity on the capacity and safety of the external road network;
 - iv. the development ensures the safety, efficiency and useability of access ways and parking areas;
 - v. site works including earthworks are managed to be safe and have minimal impacts on adjoining or adjacent premises, the streetscape or the environment.
- m. Activities associated with a use do not cause a nuisance by way of aerosols, fumes, light, noise, odour, particles or smoke;
- n. Noise generating uses are designed, sited and constructed to minimise the transmission of noise to appropriate levels and do not cause environmental harm or nuisance.

- o. Noise sensitive uses are designed, sited and constructed so as not to be subject to unacceptable levels of noise.
- p. Development in a Water supply buffer is undertaken in a manner which contributes to the maintenance and enhancement where possible of water quality to protect the drinking water and aquatic ecosystem environmental values in those catchments.
- q. Development avoids areas subject to constraint, limitation, or environmental value. Where development cannot avoid these identified areas, it responds by:
 - i. adopting a 'least risk, least impact' approach when designing, siting and locating development in any area subject to a constraint, limitation or environmental value to minimise the potential risk to people, property and the environment;
 - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
 - iii. when located within a Water buffer area, complying with the Water Quality Vision and Objectives contained in the Seqwater Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.
 - iv. maintaining, restoring and rehabilitating environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of planting and landscaping, and facilitating safe wildlife movement and connectivity through:
 - A. the provision of replacement, restoration, rehabilitation planting and landscaping;
 - B. the location, design and management of development to avoid or minimise adverse impacts on ecological systems and processes;
 - C. the requiring of environmental offsets in accordance with the Environmental Offsets Act 2014.
 - v. protecting native species and protecting and enhancing species habitat;
 - vi. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
 - vii. establishing effective separation distances, buffers and mitigation measures associated with identified infrastructure to minimise adverse effects on sensitive land uses from odour, noise, dust and other nuisance generating activities;
 - viii. establishing, maintaining and protecting appropriate buffers to waterways, wetlands, native vegetation and significant fauna habitat;
 - ix. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of identified infrastructure;
 - x. ensuring effective and efficient disaster management response and recovery capabilities;
 - xi. where located in an overland flow path:
 - A. development siting, built form, layout and access responds to the risk presented by the overland flow and minimises risk to personal safety;
 - B. development is resilient to the impacts of overland flow by ensuring the siting and design accounts for the potential risks to property associated with the overland flow;
 - C. development does not impact on the conveyance of the overland flow for any event up to and including the 1% AEP for the fully developed upstream catchment;
 - D. development directly, indirectly and cumulatively avoid an increase in the severity of overland flow and potential for damage on the premises or other premises, public lands, watercourses, roads or infrastructure.
- r. Development in the Rural residential zone includes one or more of the following:

Animal husbandry ⁽⁴⁾	•	Dwelling house ⁽²²⁾	•	Permanent plantation ⁽⁵⁹⁾
 Animal keeping⁽⁵⁾ - excluding catteries and kennels 	•	Emergency services ⁽²⁵⁾ Environment facility ⁽²⁶⁾	•	Retail and Commercial Activity Group - where in a Neighbourhood Hub

•	Aquaculture ⁽⁶⁾ - if water area	•	Home based business ⁽³⁵⁾	•	Roadside stall ⁽⁶⁸⁾
	associated with ponds and dams are less than 200m ² or housed tanks are less than 50m ²	•	Intensive horticulture ⁽⁴⁰⁾ - where on lots 1 ha or more	•	Rural Industry ⁽⁷⁰⁾ - where on lots 1 ha or more and GFA no more than 150m ²
•	Community Activity Group- where in or adjoining a Community Activity location	•	Non resident workforce accommodation ⁽⁵²⁾ - where on lots 2 ha or more	•	Rural workers' accommodation ⁽⁷¹⁾ - where on lots 2 ha or more
•	Community residence ⁽¹⁶⁾	•	Outdoor sports and recreation ⁽⁵⁵⁾ - if located on Council owned or controlled	•	Sales office ⁽⁷²⁾
•	Cropping ⁽¹⁹⁾ , where not forestry for wood production		land and in accordance with a Council approved Master Plan	•	Telecommunication facility Veterinary services ⁽⁸⁷⁾ - where on lots 1 ha or more
		•	Park	•	Wholesale nursery ⁽⁸⁹⁾ - where on lots 1 ha or more
				•	Winery ⁽⁹⁰⁾

Note - Community Activity Group = Child care centre⁽¹³⁾, Community care centre⁽¹⁵⁾, Community use⁽¹⁷⁾, Health care services⁽³³⁾, Place of worship⁽⁶⁰⁾.

Note - Retail and Commercial Activity Group = Food and drink outlet⁽²⁸⁾, Office⁽⁵³⁾, Service industry⁽⁷³⁾, Shop⁽⁷⁵⁾.

s. Development in the Rural residential zone does not include one or more of the following:

•	Adult store ⁽¹⁾	•	High Impact industry ⁽³⁴⁾	•	Relocatable home park ⁽⁶²⁾
•	Agricultural supplies store ⁽²⁾	•	Hospital ⁽³⁶⁾	•	Renewable energy facility ⁽⁶³⁾
•	Air services ⁽³⁾	•	Hotel ⁽³⁷⁾	•	Research and technology industry ⁽⁶⁴⁾
•	Bar ⁽⁷⁾	•	Intensive animal industry ⁽³⁹⁾		
•	Brothel ⁽⁸⁾	•	Landing ⁽⁴¹⁾	•	Residential care facility ⁽⁶⁵⁾
•	Bulk landscape supplies ⁽⁹⁾	•	Low impact industry ⁽⁴²⁾	•	Resort complex ⁽⁶⁶⁾
•	Car wash ⁽¹¹⁾	•	Major sport, recreation and entertainment facility ⁽⁴⁴⁾	•	Retail and Commercial Activity Group - where not in a Neighbourhood Hub
•	Caretaker's accommodation ⁽¹⁰⁾	•	Marine industry ⁽⁴⁵⁾	•	Retirement facility ⁽⁶⁷⁾
•	Cemetery ⁽¹²⁾	•	Medium impact industry ⁽⁴⁷⁾	•	Rooming Accommodation ⁽⁶⁹⁾
•	Community Activity Group	•	Motor sport facility ⁽⁴⁸⁾	•	Service station ⁽⁷⁴⁾
	-where not in or adjoining a Community Activity location	•	Multiple dwelling ⁽⁴⁹⁾	•	Shopping centre ⁽⁷⁶⁾
•	Crematorium ⁽¹⁸⁾	•	Nature-based tourism ⁽⁵⁰⁾	•	Short-term accommodation ⁽⁷⁷⁾
•	Cropping ⁽¹⁹⁾ - where forestry for wood production	•	Nightclub entertainment facility ⁽⁵¹⁾	•	Showroom ⁽⁷⁸⁾
•	Detention facility ⁽²⁰⁾	•	Outdoor sales ⁽⁵⁴⁾	•	Special industry ⁽⁷⁹⁾

 Dual occupancy⁽²¹⁾ Dwelling unit⁽²³⁾ Extractive industry⁽²⁷⁾ Funeral parlour⁽³⁰⁾ Function facility⁽²⁹⁾ Hardware and trade supplies⁽³²⁾ 	 Outdoor sport and recreation⁽⁵⁵⁾ - where not located on Council owned or controlled land Parking station⁽⁵⁸⁾ Port services⁽⁶¹⁾ 	 Theatre⁽⁸²⁾ Tourist attraction⁽⁸³⁾ Tourist park⁽⁸⁴⁾ Transport depot⁽⁸⁵⁾ Warehouse⁽⁸⁸⁾
---	---	--

Note - Community Activity Group = Child care centre⁽¹³⁾, Community care centre⁽¹⁵⁾, Community use⁽¹⁷⁾, Health care services⁽³³⁾, Place of worship⁽⁶⁰⁾.

Note - Retail and Commercial Activity Group = Food and drink outlet⁽²⁸⁾, Office⁽⁵³⁾, Service industry⁽⁷³⁾, Shop⁽⁷⁵⁾.

t. Development not included in the tables above may be considered on its merits and where it reflects and supports the outcomes of the zone.

6.2.11.4 Accepted development subject to requirements

If development is to be categorised as accepted development subject to requirements it must comply with the requirements for accepted development set out in Part A, Table 6.2.11.1. Where the development does not meet a requirement for accepted development (RAD) within Part A, Table 6.2.11.1, the category of development changes to assessable development under the rules outlined in section 5.3.3. (1), and assessment is against the corresponding performance outcome (PO) identified in the table below. This only occurs whenever a RAD is not met, and is therefore limited to the subject matter of the RADs that are not complied with. To remove any doubt, for those RADs that are complied with, there is no need for assessment against the corresponding PO.

Requirements for accepted development (RAD)	Corresponding performance outcomes (PO)
RAD1	PO2
RAD2	PO3
RAD3	PO4
RAD4	PO5
RAD5	PO7
RAD6	PO8
RAD7	PO9
RAD8	PO10
RAD9	PO11
RAD10	PO15-PO18
RAD11	PO15-PO18
RAD12	PO19
RAD13	PO20-PO25
RAD14	PO23

Requirements for accepted development (RAD)	Corresponding performance outcomes (PO)
RAD15	PO24
RAD16	PO28
RAD17	PO28
RAD18	PO30-PO32
RAD19	PO33
RAD20	PO34
RAD21	PO36
RAD22	PO38
RAD23	PO39
RAD24	PO36
RAD25	PO40, PO43-PO44
RAD26	PO42
RAD27	PO46
RAD28	PO46
RAD29	PO46
RAD30	PO47
RAD31	PO48
RAD32	PO50
RAD33	PO50
RAD34	PO50
RAD35	PO50
RAD36	PO51
RAD37	PO52
RAD38	PO53
RAD39	PO54
RAD40	P055
RAD41	PO56
RAD42	PO56
RAD43	PO57
RAD44	PO57
RAD45	P057
RAD46	PO58
RAD47	PO58
RAD48	PO58

Requirements for accepted development (RAD)	Corresponding performance outcomes (PO)
RAD49	PO58
RAD50	PO58
RAD51	PO59
RAD52	PO60
RAD53	PO60
RAD54	PO60
RAD55	PO60
RAD56	PO61
RAD57	PO61
RAD58	PO62
RAD59	PO66-PO67
RAD60	PO66-PO67
RAD61	PO66-PO67
RAD62	PO66-PO67
RAD63	PO68
RAD64	PO68
RAD65	PO69
RAD66	P070
RAD67	P070
RAD68	P071
RAD69	P072
RAD70	P073
RAD71	P073
RAD72	P073
RAD73	P074
RAD74	P074
RAD75	P076
RAD76	P076
RAD77	P076
RAD78	P076
RAD79	P076
RAD80	P076
RAD81	P077
RAD82	P079

Requirements for accepted development (RAD)	Corresponding performance outcomes (PO)
RAD83	PO80
RAD84	P078, P081
RAD85	PO81
RAD86	PO81
RAD87	PO81
RAD88	P083
RAD89	P087
RAD90	P088
RAD91	PO88
RAD92	PO89
RAD93	PO90
RAD94	PO91
RAD95	PO92-PO103
RAD96	PO92-PO103
RAD97	PO104
RAD98	PO105
RAD99	PO106
RAD100	PO107
RAD101	PO108
RAD102	PO109
RAD103	PO109
RAD104	PO110-PO111
RAD105	PO110-PO111
RAD106	PO113
RAD107	PO113
RAD108	PO113
RAD109	PO114
RAD110	PO115
RAD111	PO116
RAD112	PO117
RAD113	PO118
RAD114	PO118
RAD115	PO121
RAD116	PO119

Requirements for accepted development (RAD)	Corresponding performance outcomes (PO)
RAD117	PO119
RAD118	PO119
RAD119	PO119
RAD120	PO120
RAD121	PO120
RAD122	PO122
RAD123	PO123-PO124
RAD124	PO125
RAD125	P0127-P0129, P0131-P0133
RAD126	P0127-P0129, P0131-P0133
RAD127	P0127-P0129, P0131-P0133
RAD128	PO130
RAD129	PO134
RAD130	PO135
RAD131	PO136
RAD132	PO137
RAD133	PO138
RAD134	PO138

Part A — Requirements for accepted development - Rural residential zone

Table 6.2.11.1 Requirements for accepted development - Rural residential zone

Requirer	Requirements for accepted development				
	General requirements				
Develop	nent footprint				
RAD1	Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within the development footprint.				
Building	height				
RAD2	Unless otherwise specified in this code, the building height of all buildings and structures does not exceed 5m.				
Building	on sloping land between 10% and 15%				
RAD3	Building and site design on slopes between 10% and 15%:				
	a. use split-level, multiple-slab, pier or pole construction;				
	b. avoid single-plane slabs and benching; and				
	c. ensure the height of any cut or fill, whether retained or not, does not exceed 900mm.				

	Note - This provision does not apply to outbuildings or where a development footprint exists for a lot
Setback	
RAD4	 Unless otherwise specified in this code, the minimum setbacks from a property boundary are as follows: a. road boundary – 6m b. side boundary – 4.5m c. rear boundary – 4.5m. Note - This provision does not apply where a development footprint exists for a lot. Note - Where located in a bushfire hazard area (see Overlay map - Bushfire hazard) a greater setback may be required. See values and constraints requirements Bushfire hazard.
Lighting	
RAD5	Artificial lighting on-site is directed and shielded in such a manner as not to exceed the recommended maximum values of light technical parameters for the control of obtrusive light given in Table 2.1 of Australian Standard AS 4282 (1997) Control of Obtrusive Effects of Outdoor Lighting. Note - "Curfewed hours" are taken to be those hours between 10pm and 7am on the following day
Waste tre	eatment
RAD6	All concentrated animal use areas (eg sheds, pens, holding yards, stables, kennels) are provided with site drainage to ensure all stormwater run-off is directed to suitable detention basins, filtration or other treatment areas.
Site cove	er in the second se
RAD7	 Site cover of all buildings and roofed structures does not exceed: a. On lots equal to or less than 1 ha, 15% of the site or 750m², whichever is the lesser. b. On lots greater than 1 ha, 7.5% of the site or 1500m², whichever is the lesser. Note - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.2, A3. Non-compliance with this provision for a Dwelling house requires a concurrence agency response from Council.
Rural use	es setbacks
RAD8	 The following uses and associated buildings and structures are setback from all property boundaries as follows: a. Animal husbandry⁽⁴⁾ (buildings only) - 10m b. Animal keeping⁽⁵⁾, excluding catteries and kennels - 20m c. Aquaculture⁽⁶⁾ involving ponds or water behind dams - 100m d. Aquaculture⁽⁶⁾ involving the housing of tanks - 20m

	e. Cropping ⁽¹⁹⁾ (buildings only) - 10m
	f. Intensive horticulture ⁽⁴⁰⁾ - 10m
	g. Permanent plantations ⁽⁵⁹⁾ - 25m
	h. Rural Industry ⁽⁷⁰⁾ - 20m
	i. Wholesale nursery ⁽⁸⁹⁾ - 10m
	j. Veterinary services ⁽⁸⁷⁾ - 10m.
Car parki	ing (for other than Non-resident workforce accommodation and Rural workers' accommodation)
RAD9	On-site car parking is provided in accordance with Schedule 7 - Car parking.
Hazardou	us Chemicals
RAD10	All development that involves the storage or handling of hazardous chemicals listed in Schedule 9, Development involving hazardous chemicals, Table 9.0.1 Quantity thresholds for hazardous chemicals stored as accepted development subject to requirements complies with Table 9.0.3 Hazardous chemicals.
RAD11	Development does not involve the storage or handling of hazardous chemicals listed in Schedule 9, Development involving hazardous chemicals, Table 9.0.2 Hazardous chemicals assessable thresholds.
Clearing	of habitat trees where not located in the Environmental areas overlay map
RAD12	Development does not result in the damaging, destroyed or clearing of a habitat tree. This does not apply to:
	a. Clearing of a habitat tree located within an approved development footprint;
	b. Clearing of a habitat tree within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
	c. Clearing of a habitat tree reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
	d. Clearing of a habitat tree reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
	e. Clearing of a habitat tree reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
	f. Clearing of a habitat tree in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
	g. Clearing of a habitat tree associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
	h. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.
	Editor's note - A native tree measuring greater than 80cm in diameter when measured at 1.3m from the ground is recognised as a 'habitat tree'. For further information on habitat trees, refer to Planning scheme policy – Environmental areas and corridors. Information detailing how this measurement is undertaken is provided in Australian Standard AS 4970 2009 Protection of Trees on Development Sites - Appendix A.

	Works requirements
Utilities	
RAD13	Where available, the development is connected to:
	 a. an existing reticulated electricity supply; b. telecommunications and broadband; c. reticulated sewerage; d. reticulated water; e. sealed and dedicated road.
RAD14	Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.
	Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater Code.
RAD15	Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development.
Access	
RAD16	Any new or changes to existing site access and driveways are designed and located in accordance with:
	 a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.
RAD17	Any new or changes to existing internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
Stormwa	ter
RAD18	Any new or changes to existing stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises in accordance with Planning scheme policy – Integrated design.
	Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.
Site work	s and construction management
RAD19	The site and any existing structures are to be maintained in a tidy and safe condition.
RAD20	Site construction works incorporate temporary stormwater run-off, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design.
RAD21	Construction traffic including contractor car parking is controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe.

RAD22	All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.
	Note - No parking of vehicles or storage of machinery or goods is to occur in these areas during development works.
RAD23	Any damage to Council land or infrastructure is repaired or replaced with the same materials, prior to plan sealing, or final building classification.
RAD24	Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times.
Earthwor	ks
RAD25	The site is prepared and the fill placed on-site in accordance with Australian Standard AS3798.
	Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures
RAD26	Filling or excavation does not result in:
	 a. a reduction in cover over any Council or public sector entity infrastructure to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the filling or excavation works being undertaken.
	Note - Public sector entity is defined in Schedule 2 of the Act.
Fire serv	ices
Note - The	provisions under this heading only apply if:
a. the	development is for, or incorporates:
i. ii. iii. iv.	reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park ⁽⁸⁴⁾ with accommodation in the form of caravans or tents; or material change of use for outdoor sales ⁽⁵⁴⁾ , outdoor processing or outdoor storage where involving combustible materials.
AND	
b. non	e of the following exceptions apply:
i.	the distributor-retailer for the area has indicated, in its netserv plan, that the premises will not be served by that entity's reticulated water supply; or
ii.	every part of the development site is within 60m walking distance of an existing fire hydrant on the distributor-retailer's reticulated water supply network, measured around all obstructions, either on or adjacent to the site.
	provisions under this heading do not apply to buildings that are required by the Building Code of Australia to have a fire hydrant nplying with Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations or other fire fighting facilities which provide equivalent
RAD27	External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of <i>Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations</i> .
	Note - For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005):

	 a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks⁽⁸⁴⁾ or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative;
	b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005);
	c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that:
	i for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings;
	ii for caravans and tents, hydrant coverage need only extend to the roof of those tents and caravans;
	iii for outdoor sales ⁽⁵⁴⁾ , processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales ⁽⁵⁴⁾ , outdoor processing and outdoor storage facilities; and
	d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and where applicable, Part 3.6.
RAD28	A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land:
	a. an unobstructed width of no less than 3.5m;
	b. an unobstructed height of no less than 4.8m;
	c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance;
	d. an area for a fire brigade pumping appliance to stand within 20m of each fire hydrant and 8m of each hydrant booster point.
RAD29	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>
RAD30	For development that contains on-site fire hydrants external to buildings:
	a. those external hydrants can be seen from the vehicular entry point to the site; orb. a sign identifying the following is provided at the vehicular entry point to the site:
	i. the overall layout of the development (to scale);
	ii. internal road names (where used);iii. all communal facilities (where provided);
	iv. the reception area and on-site manager's office (where provided);
	 v. external hydrants and hydrant booster points; vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
	Note - The sign prescribed above, and the graphics used are to be:
	Note - The sign prescribed above, and the graphics used are to be: a. in a form;
	a. in a form;

RAD31	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavements markers in the manner prescribed in the technical note <i>Fire hydrant indication system</i> produced by the Queensland Department of Transport and Main Roads.
	Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.
	Use specific requirements
Commur	nity activities group adjoining Community activities and neighbourhood hubs
RAD32	Development provides car parking spaces in accordance with Schedule 7 - car parking; or retains the number of car parking spaces currently provided on the site (except where reduction is required for the provision of cycle parking), whichever is the greater.
RAD33	Car parking spaces (other than existing spaces) are not located in front of the main building line.
RAD34	Development does not result in a reduction in bin storage areas.
	Note - Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.
RAD35	Development does not result in a reduction in the area (m ²) or standard of established landscaping on-site.
Dwelling	house ⁽²²⁾
RAD36	Residential density does not exceed one dwelling house ⁽²²⁾ per lot.
RAD37	Building height for a dwelling house ⁽²²⁾ does not exceed:
	a. that on Overlay map - Building heights for a dwelling house ⁽²²⁾ ; or
	 b. for domestic outbuildings and free standing carports and garages, building height does not exceed 4m.
RAD38	Setbacks are as follows:
	a. Where a dwelling house ⁽²²⁾ or outbuilding has a building height of 3m or less:
	i. road boundary - 6m
	ii. side boundary - 1.5m
	iii. rear boundary - 1.5m.
	 Where a dwelling house⁽²²⁾ or outbuilding has a building height greater than 3m and less than 8.5m:
	i. road boundary - 6m
	ii. side boundary - 4.5m
	iii. rear boundary - 4.5m.

	1
	Note - Where located in a bushfire hazard area (see Overlay map - Bushfire hazard) a greater setback may be required. See values and constraints requirements Bushfire hazard.
	Note - Note - This is a quantifiable standard that is an alternative provision to the QDC, part MP1.2, A1 (a), (b) and (c), A2 (a), (b) and (d). Non-compliance with this provision for a Dwelling house requires a concurrence agency response from Council.
	Note - This provision does not apply where a development footprint exists for a lot.
RAD39	Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within the development footprint.
RAD40	Building and site design on slope between 10% and 15% must:
	a. use split-level, multiple-slab, pier or pole construction;
	b. avoid single-plane, and benching;
	c. ensure the height of any cut or fill, whether retained or not, does not exceed 900mm.
	Note - This provision does not apply to outbuildings or any building work.
	Note - This provision does not apply where a development footprint exists for a lot.
RAD41	For Lake Samsonvale or Lake Kurwongbah, a setback of no less than 400m is maintained between the following nominated full supply levels to those lakes and any dwelling house ⁽²²⁾ or outbuilding on the land:-
	a. RL 39.63m AHD being the full supply level of Lake Samsonvale; and
	b. RL 21m AHD being the full supply level of Lake Kurwongbah.
	OR
	No part of any dwelling house ⁽²²⁾ or outbuilding on Lot 5 RP111651 or Lot RP111653 is any closer than 80m to the full supply level of RL 21m AHD to Lake Kurwongbah.
	Editor's Note - The 400m buffer around Lake Samsonvale and Lake Kurwongbah is shown on Overlay map - Infrastructure buffers.
RAD42	Waste/effluent disposal systems are localed at least:-
	a. 80m from the full supply level of RL 21m AHD to Lake Kurwongbah on Lot 5 RP111651 or Lot 10 RP111653; and
	b. 400m from RL 39.63m AHD being the full supply level of Lake Samsonvale and RL 21m AHD being the full supply level to Lake Kurwongbah.
	Editor's Note - The 400m buffer around Lake Samsonvale and Lake Kurwongbah is shown on Overlay map - Infrastructure buffers.
Dwelling	house ⁽²²⁾ where including a secondary dwelling
RAD43	The maximum GFA for a secondary dwelling is 100m ² .
	1


RAD44	The secondary dwelling obtains access from the existing driveway giving access to the dwelling house ⁽²²⁾							
RAD45	The secondary dwelling is located within 50m of the dwelling house ⁽²²⁾ .							
Home ba	sed business ⁽³⁵⁾							
RAD46	The home based business(s) ⁽³⁵⁾ , including any storage, are fully contained within a dwelling or on-site structure.							
RAD47	Up to 2 additional non-resident, either employees or customers, are permitted on the site at any one time, except where involving the use of heavy vehicles, where no employees are permitted. Note - This provision does not apply to Bed and Breakfast or farmstay business.							
RAD48	The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows:							
	a. 1 heavy vehicle;							
	b. 1 trailer;							
	c. Up to 3 motor vehicles.							
	Note - The car parking provision associated with the dwelling house ⁽²²⁾ is in addition to this requirement.							
RAD49	Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining lots by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas.							
RAD50	Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.							
RAD51	Hours of operation to be restricted to 8.00am to 6.00pm Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday and Anzac Day, except for:							
	a. bed and breakfast or farm stay business which may operate on a 24 hour basis,							
	b. office or administrative activities that do not generate non-residents visiting the site such as book keeping and computer work,							
	c. starting and warming up of heavy vehicles, which can commence at 7.00am.							
RAD52	The home based business(s) ⁽³⁵⁾ do not generate noise that is audible from the boundary of the site.							
	Note - Guidance as acceptable noise is provided in the standards listed in the Environmental Protection (Noise) Policy 2008.							
	Note - This provision does not apply to the use of heavy vehicles or motor vehicles.							
RAD53	Activities associated with a use do not cause a nuisance by way of aerosols, fumes, light, noise, odour particles or smoke.							
	Note - Nuisance is defined in the Environmental Protection Act 1994.							
RAD54	The home based business ⁽³⁵⁾ does not involve vehicle servicing or major repairs, including spray painting or panel beating.							

	Note - Vehicle servicing excludes general maintenance of a vehicle such as, but not limited to, changing of tyres, engine fluids, filters, and parts such as batteries and plugs.								
RAD55	The home based business ⁽³⁵⁾ does not involve an environmentally relevant activity (ERA) as defined in the Environmental Protection Regulations 2008.								
RAD56	Only goods grown, produced or manufactured on-site are sold from the site.								
RAD57	Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from the boundary of the site.								
RAD58	For bed and breakfast and farmstays:								
	a. overnight accommodation is provided in the dwelling house ⁽²²⁾ of the accommodation operator;								
	b. maximum 4 bedroom are provided for a maximum of 10 guests;								
	c. meals are served to paying guests only;								
	d. rooms do not contain food preparation facilities.								
Non-resi	dent workforce accommodation ⁽⁵²⁾								
RAD59	No more than 1 Non-resident workforce accommodation ⁽⁵²⁾ use per site.								
RAD60	Non-resident workforce accommodation ⁽⁵²⁾ is contained within 1 structure.								
RAD61	Non-resident workforce accommodation ⁽⁵²⁾ obtains access from the existing driveway giving access to the Dwelling house ⁽²²⁾ .								
RAD62	Non-resident workforce accommodation ⁽⁵²⁾ is located within 20m of the Dwelling house ⁽²²⁾ .								
RAD63	For Lake Samsonvale or Lake Kurwongbah, a setback of no less than 400m is maintained between the following nominated full supply levels to those lakes and any Non-resident workforce accommodation ⁽⁵²⁾ on the land:-								
	a. RL 39.63m AHD being the full supply level to Lake Samsonvale; and								
	b. RL 21m AHD being the full supply level to Lake Kurwongbah.								
	OR								
	No part of any Non-resident workforce accommodation ⁽⁵²⁾ on Lot 5 RP111651 or Lot 10 RP111653 is any closer than 80m to the full supply level of RL 21m AHD to Lake Kurwongbah.								
	Editor's note - The 400m buffer around Lake Samsonvale and Lake Kurwongbah is shown on Overlay map - Infrastructure buffers								
RAD64	Waste/effluent disposal systems are located at least:-								
	a. 80m from the full supply level of RL 21m AHD to Lake Kurwongbah on Lot 5 RP111651 or Lot 10 RP111653; and								
	b. 400m from RL 39.63m AHD being the full supply level to Lake Samsonvale and RL 21m AHD being								

	Editor's note - The 400m buffer around Lake Samsonvale and Lake Kurwongbah is shown on Overlay map - Infrastructure buffers						
Permane	nt plantation ⁽⁵⁹⁾						
RAD65	Planting only comprises native species naturally occurring in the area.						
Retail and	d commercial activities and Community activities groups						
RAD66	Development provides car parking spaces in accordance with Schedule 7 - Car parking; or retains the number of car parking spaces currently provided on the site (except where reduction is required for the provision of cycle parking), whichever is the greater.						
RAD67	Car parking spaces (other than existing spaces) are not located in front of the main building line.						
RAD68	Development does not result in a reduction in bin storage areas.						
	Note - Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy – Waste.						
RAD69	Development does not result in a reduction in the area (m ²) or standard of established landscaping on-site.						
Roadside	se provisions do not apply to a home based business ⁽³⁵⁾ .						
RAD70	No more than one roadside stall ⁽⁶⁸⁾ per property.						
RAD71	Goods offered for sale are only goods grown, produced or manufactured on the site						
RAD72	The maximum area associated with a roadside stall ⁽⁶⁸⁾ , including any larger separate items displayed for sale, does not exceed 20m ² .						
RAD73	Car parking for 2 vehicles is provided off the road carriage way and on the property.						
RAD74	The roadside stall ⁽⁶⁸⁾ is located no closer than 100m from an intersection.						
Rural wo	rkers' accommodation ⁽⁷¹⁾						
RAD75	No more than 1 Rural workers' accommodation ⁽⁷¹⁾ per site.						
RAD76	Rural workers' accommodation ⁽⁷¹⁾ is contained within 1 structure.						
RAD77	Rural workers' accommodation obtains access from the existing driveway giving access to the dwelling house ⁽²²⁾ .						
RAD78	Rural workers' accommodation ⁽⁷¹⁾ are located within 20m of the dwelling house ⁽²²⁾ .						
RAD79	For Lake Samsonvale or Lake Kurwongbah, a setback of no less than 400m is maintained between the following nominated full supply levels to those lakes and Rural workers' accommodation on the land:-						
	a. RL 39.63m AHD being the full supply level to Lake Samsonvale; and						
	b. RL 21m AHD being the full supply level to Lake Kurwongbah.						
	OR						

	No part of any Rural workers' accommodation ⁽⁷¹⁾ on Lot 5 RP111651 or Lot 10 RP111653 is any closer than 80m to the full supply level of RL 21m AHD to Lake Kurwongbah.
	Editor's note - The 400m buffer around Lake Samsonvale and Lake Kurwongbah is shown on Overlay map - Infrastructure buffers
RAD80	Waste/effluent disposal systems are located at least:-
	a. 80m from the full supply level of RL 21m AHD to Lake Kurwongbah on Lot 5 RP111651 or Lot 10 RP111653; and
	b. 400m from RL 39.63m AHD being the full supply level to Lake Samsonvale and RL 21m AHD being the full supply level to Lake Kurwongbah.
	Editor's note - The 400m buffer around Lake Samsonvale and Lake Kurwongbah is shown on Overlay map - Infrastructure buffers
Sales off	ice ⁽⁷²⁾
RAD81	A sales office ⁽⁷²⁾ is located on the site for no longer than 2 years.
Editor's no that will no Radiation	munications facility ⁽⁸¹⁾ te - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner t cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
Editor's no that will no Radiation to 300Ghz	te - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner to cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz
Editor's no that will no Radiation to 300Ghz	A minimum of 45m ² is available at ground level to allow for additional equipment shelters and associated
Editor's no that will no Radiation to 300Ghz RAD82 RAD83	 A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under
Editor's no that will no Radiation to 300Ghz RAD82 RAD83	 A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval. Equipment shelters and associated structures are located: a. directly beside the existing equipment shelter and associated structures;
Editor's no that will no Radiation to 300Ghz RAD82 RAD83	 A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval. Equipment shelters and associated structures are located:
Editor's no that will no Radiation to 300Ghz RAD82 RAD83 RAD84	 te - In accordance with the Federal legislation Telecommunications facilities⁽⁸¹⁾ must be constructed and operated in a manner to cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval. Equipment shelters and associated structures are located: a. directly beside the existing equipment shelter and associated structures; b. behind the main building line; c. further away from the frontage than the existing equipment shelter and associated structures; d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive
Editor's no that will no Radiation to 300Ghz RAD82 RAD83 RAD84 RAD84	 te - In accordance with the Federal legislation Telecommunications facilities⁽⁸¹⁾ must be constructed and operated in a manner to cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval. Equipment shelters and associated structures are located: a. directly beside the existing equipment shelter and associated structures; b. behind the main building line; c. further away from the frontage than the existing equipment shelter and associated structures; d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.
Editor's no that will no Radiation	 te - In accordance with the Federal legislation Telecommunications facilities⁽⁸¹⁾ must be constructed and operated in a manner to cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval. Equipment shelters and associated structures are located: a. directly beside the existing equipment shelter and associated structures; b. behind the main building line; c. further away from the frontage than the existing equipment shelter and associated structures; d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m. Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.
Editor's no Radiation to 300Ghz RAD82 RAD83 RAD84 RAD85 RAD85	 te - In accordance with the Federal legislation Telecommunications facilities⁽⁸¹⁾ must be constructed and operated in a manner it cause human exposure to electromagnetic radiation beyond the limits outlined in the Radiocommunications (Electromagnetic - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz A minimum of 45m² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility. The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval. Equipment shelters and associated structures are located: a. directly beside the existing equipment shelter and associated structures; b. behind the main building line; c. further away from the frontage than the existing equipment shelter and associated structures; d. a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m. Equipment shelters and other associated structures are either the same type of colour or material to match the surrounding locality.

RAD88	All equipment comprising the telecommunications facility ⁽⁸¹⁾ which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.								
for Reconf	guring ent foo	a lot or Material chang print plan (or similar in	ts requiremer e of use or O	nts do not ap operational v	oply wher work, whe	ere that appr	oment is co oval has co	onsidered and add	rent Development permit lressed (e.g. through a e or constraint under this
Note - Plar	nning s	oils - (refer Overla cheme policy - Acid su te soils i.e. developmer	lfate soils pro	vides guida	ince for r	equirements	for accepte	ed development th	-
RAD89	Dev	elopment does no	t involve:						
	a.	excavation or oth Height Datum Al		oving of n	nore tha	an 100m³ c	of soil or s	ediment where	e below 5m Australian
	b.	filling of land of m the 5m AHD.	ore than 5	00m³ of m	naterial	with an av	verage de	pth of 0.5m or	greater where below
		+20m AHD		e Elevation ≤5m A	AHD	Surfa	ce Elevation >5m	n and <20m AHD	Surface Elevation ≥20m AHD
		+15m AHD +10m AHD							Excavation area Assessable development Self assessable development
		+5m AHD							
		Om AHD (mean sealevel)	>500m ³	2]>0.5m <100m ³	≥100m ³	≥100m ³	<100m ³		
		-5m AHD	- 🗸	×	~	~	×	×	×
Bushfire	haza	rd (refer Overlay	map - Bus	shfire haz	zard to	determin	e if the f	ollowing requ	irements apply)
bushfire int	ensity		fire intensity of	or potential i	mpact bu	Iffer on the B	ushfire haza	ard overlay map is	e intensity, high potential the 'designated bushfire
RAD90	a.	Building and stru i. not located							
					-		% (see C	overlay map –	Landslide hazard)
	b.	Dwellings are loc	ated on ea	ast to sou	th facir	g slopes.			

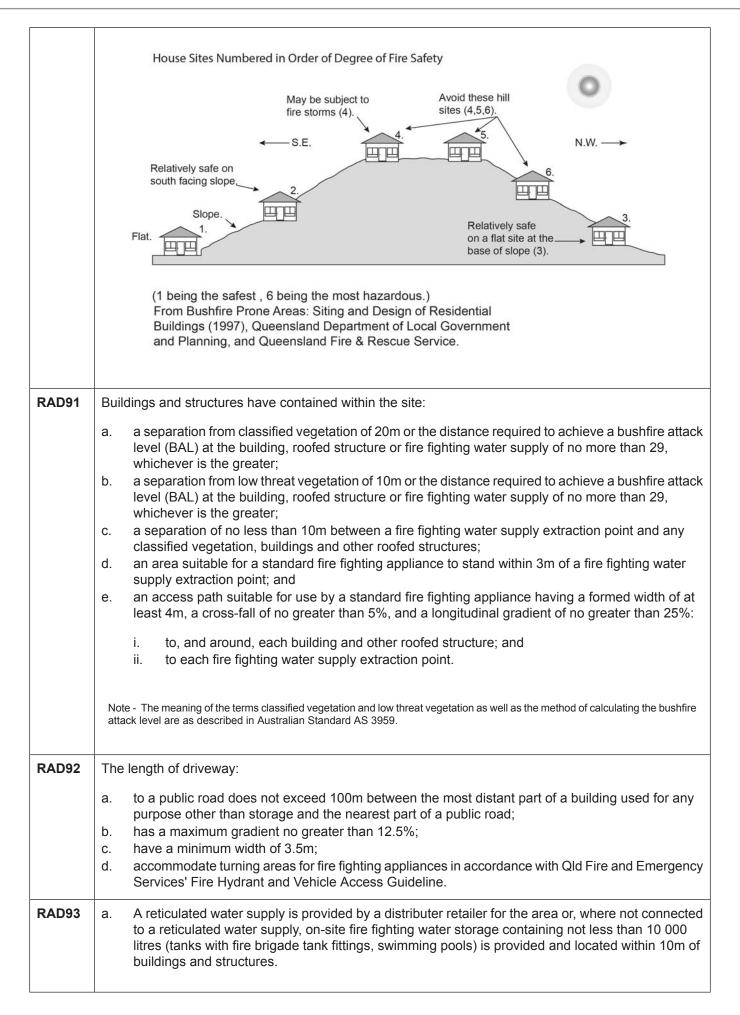

		b.	Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access to within 3m of that water storage source is provided.
		C.	Where a tank is the nominated on-site fire fighting water storage source, it includes:
			i. a hardstand area allowing medium rigid vehicle (15 tonne fire appliance) access within 6m of the tank;
			ii. fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 20mm (minimum) to accommodate suction lines.
RAD9	4	Deve	elopment does not involve the manufacture or storage of hazardous chemicals.
Enviro apply)		ental	areas (refer Overlay map - Environmental areas to determine if the following requirements
Note -	The f	ollowi	ng are excluded from the native clearing provisions of this planning scheme:
a.	Clear	ring of	native vegetation located within an approved development footprint;
			native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately response to an accident or emergency;
		ring of rastruc	native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage cture;
	eithe	r side	native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other ing is not to exceed 2m in width either side of the fence;
			native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public re or drainage purposes;
			native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to ed by Council;
			native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping reaks, lawns or created gardens;
h.	Grazi	ing of	native pasture by stock;
i.	Nativ	e fore	st practice where accepted development under Part 1, 1.7.7 Accepted development.
Note -	Defin	ition fo	or native vegetation is located in Schedule 1 Definitions.
of state defined	e envi d in S	ironme chedu	etation subject to this requirement primarily comprises of matters of national environmental significance (MNES), matters ental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is le 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix scheme policy - Environmental areas.
			e accuracy of overlay mapping can be challenged through the development application process (code assessable by way of a planning scheme amendment. See Council's website for details.
Editors	s' Note	e - Wh	en clearing native vegetation within a MSES area, you may still require approval from the State government.
RAD9		Area	The no suitable land cleared of native vegetation exists, clearing of native vegetation in High Value or Value Offset Area is for the purpose of a new dwelling house ⁽²²⁾ and all associated facilities* or xtension to an existing dwelling house ⁽²²⁾ only, and comprises an area no greater than 1500m ² .

	I
	Note - *All associated facilities includes: on-site wastewater treatment, all areas of disturbance, on-site parking, access and manoeuvring areas.
	Editor's note - See in heading above for other uses excluded from native vegetation clearing requirements.
	Editor's note - Where vegetation clearance is accepted development subject to requirements, care should be undertaken to avoid adverse impacts on koalas, koala habitat values and habitat connectivity and to encourage existing koala usage of the site. Measures to minimise impacts include:
	 i. co-locating all associated activities, infrastructure and access strips; ii. be the least valued area of koala habitat on the site; iii. minimise the footprint of the development envelope area;
	 iv. minimise edge effects to areas external to the development envelope; v. location and design consideration to ensure koala safety and movement in accordance with the Koala-sensitive Design Guideline and Planning scheme policy – Environmental areas; vi. sufficient area between the development and koala habitat trees to achieve their long-term viability.
	Editor's note - Where vegetation clearing is accepted development subject to requirements, consideration should be given to avoid clearing habitat trees. Habitat trees may contain structural hollows where animals live, breed and shelter. The provision of nest boxes or salvaging of hollows will provide compensatory roosting and nesting opportunities for local wildlife including sugar gliders, possums and owls. For further information see Planning scheme policy – Environmental areas.
RAD96	No clearing of native vegetation is to occur within the Value Offset Area MLES - Waterway buffer or Value Offset Area MLES - Wetland buffer.
	This does not apply to the following:
	 a. Clearing of native vegetation located within an approved development footprint; b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency; c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
	 d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental management and conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
	 e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes; f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably
	 qualified person, submitted to and accepted by Council; g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens; h. Grazing of native pasture by stock;
	i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development.
	e resources separation area (refer Overlay map - Extractive resources (separation area) to determine owing requirements apply)
RAD97	Development does not result in more than one dwelling house ⁽²²⁾ per lot within separation areas.
RAD98	Development within the separation area does not include the following uses:
	a. caretaker's accommodation ⁽¹⁰⁾ ;
	b. community residence ⁽¹⁶⁾ ;
	c. dual occupancy ⁽²¹⁾ ;
	d. dwelling unit ⁽²³⁾ ; e. hospital ⁽³⁶⁾ ;
	e. hospital ⁽³⁰⁾ ; f. rooming accommodation ⁽⁶⁹⁾ ;

RAD99	 g. multiple dwelling⁽⁴⁹⁾; h. non-resident workforce accommodation⁽⁵²⁾; i. relocatable home park⁽⁶²⁾; j. residential care facility⁽⁶⁵⁾; k. resort complex⁽⁶⁶⁾; l. retirement facility⁽⁶⁷⁾; m. rural workers' accommodation⁽⁷¹⁾; n. short-term accommodation⁽⁷⁷⁾; o. tourist park⁽⁸⁴⁾. All habitable rooms within the separation area are: a. acoustically insulated to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008; 		
	b. provided with mechanical ventilation.		
RAD100	Private open space areas are separated from the resource processing area by buildings or a 1.8m high solid structure.		
	e resources transport routes (refer Overlay map - Extractive resources (transport route and buffer) ine if the following requirements apply)		
RAD101	The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation ⁽¹⁰⁾ , except where located in the Extractive industry zone; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house; ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; n. Rural workers' accommodation ⁽⁷¹⁾ ; o. Short-term accommodation ⁽⁷⁷⁾ ; p. Tourist park ⁽⁶⁴⁾ .		
RAD102	Except for an existing vacant lot, development does not create a new vehicle access point onto an Extractive Industry Zone transportation route.		
RAD103	A vehicle access point is located, designed and constructed in accordance with the Planning scheme policy - Integrated design.		
the follow Note - Plac landscape heritage sig scheme po	and landscape character (refer Overlay map - Heritage and landscape character to determine if <i>ving requirements apply</i>) es, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural gnificance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning licy - Heritage and landscape character.		
RAD104	Development is for the preservation, maintenance, repair and restoration of the site, object or building.		

	This does not apply to Listed item 99, in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.			
	Note - Preservation, maintenance, repair and restoration are defined in Schedule 1 - Definitions			
RAD105	A cultural heritage conservation management plan is prepared in accordance with Planning scheme policy – Heritage and landscape character and submitted to Council prior to the commencement of any preservation, maintenance, repair and restoration works. Any preservation, maintenance, repair and restoration works are in accordance with the Council approved cultural heritage conservation management plan.			
	This does not apply to Listed item 99 in Schedule 1 - List of sites, objects and buildings of significant historical and cultural value of Planning scheme policy - Heritage and landscape character.			
RAD106	Development does not result in the removal of or damage to any significant tree identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character.			
RAD107	The following development does not occur within 20m of the base of any significant tree, identified on Overlay map – Heritage and landscape character and listed in Appendix 2 of Planning scheme policy – Heritage and landscape character:			
	 a. construction of any building; b. laying of overhead or underground services; c. any sealing, paving, soil compaction; d. any alteration of more than 75mm to the ground level prior to work commencing. 			
RAD108	 B Pruning of a significant tree occurs in accordance with Australian Standard AS 4373-2007 - Pruning of Amenity Trees. 			
Landslide	hazard (refer Overlay map - Landslide hazard to determine if the following requirements apply)			
RAD109	Development does not:			
	 a. involve earthworks exceeding 50m³; b. involve cut and fill having a height greater than 600mm; c. involve any retaining wall having a height greater than 600mm; d. redirect or alter the existing flow of surface or groundwater. 			
RAD110	Buildings, excluding domestic outbuildings:			
	a. are split-level, multiple-slab, pier or pole construction;b. are not single plane slab on ground.			
RAD111	Development does not involve the manufacture, handling or storage of hazardous chemicals.			
Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following requirements apply)				
RAD112	Development does not include the following uses within a Wastewater treatment site buffer:			
	 a. Caretaker's accommodation⁽¹⁰⁾; b. Community residence⁽¹⁶⁾; 			
	 c. Dual occupancy⁽²¹⁾; d. Dwelling house;⁽²²⁾ e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; 			

	 h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; n. Rural workers' accommodation⁽⁷¹⁾; 			
	 o. Short-term accommodation⁽⁷⁷⁾; p. Tourist park⁽⁸⁴⁾. 			
RAD113	Development within a Water supply buffer does not include the incineration or burial of waste and all other waste is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.			
RAD114	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.			
RAD115	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):			
	a. buildings or structures;			
	b. gates and fences;			
	c. storage of equipment or materials;			
	d. landscaping or earthworks or stormwater or other infrastructure.			
RAD116	On-site sewerage facilities in a Water supply buffer produce a minimum secondary treated effluent (90th percentile) and effluent application to ensure water quality is maintained and protected.			
RAD117	On-site sewerage facilities in a Water supply buffer for a dwelling house ⁽²²⁾ include:			
	 a. emergency storage capacity of 1,000 litres and adequate buffering for shock loading/down time; b. a reserve land application area of 100% of the effluent irrigation design area; c. land application areas that are vegetated; 			
	 the base of the land application field is at least 2 metres above the seasonal high water table/bedrock (whichever is the closest to the base of the application area); 			
	 e. wastewater collection and storage systems must have capacity to accommodate full load at peak times. 			
RAD118	On-site sewerage facilities in a Water supply buffer for development other than a dwelling house include emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies/overload with provision for de-sludging.			
RAD119	Development involving Permanent plantation ⁽⁵⁹⁾ within a Water supply buffer maintains a minimum of 30% ground cover at all times.			
RAD120	Development does not involve the construction of any buildings or structures within a Bulk water supplinfrastructure buffer.			
RAD121	Development involving a major hazard facility or an Environmentally Relevant Activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.			
RAD122	Development does not include the following uses located within a landfill site buffer:			
	 a. caretaker's accommodation⁽¹⁰⁾; b. community residence⁽¹⁶⁾; c. dual occupancy⁽²¹⁾; 			

	 d. dwelling house;⁽²²⁾ e. dwelling unit⁽²³⁾; f. hospital⁽³⁶⁾; 			
	e. dwelling unit ⁽²³⁾ ;			
	f. hospital ⁽³⁶⁾ ;			
	g. rooming accommodation ⁽⁶⁹⁾ ;			
	h. multiple dwelling ⁽⁴⁹⁾ ;			
	i. non-resident workforce accommodation ⁽⁵²⁾ ;			
	j. relocatable home park ⁽⁶²⁾ ;			
	k. residential care facility ⁽⁶⁵⁾ ;			
	I. resort complex ⁽⁶⁶⁾ .			
	m. retirement facility ⁽⁶⁷⁾ ;			
	n. rural workers' accommodation ⁽⁷¹⁾ ;			
	o. short term accommodation ⁽⁷⁷⁾ ;			
	p. tourist park ⁽⁸⁴⁾ .			
RAD123	All habitable rooms located within an Electricity supply substation buffer are:			
	a leasted a minimum of 10m from an electricity output substation (80), and			
	 a. located a minimum of 10m from an electricity supply substation⁽⁸⁰⁾; and b. acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, 			
	 acoustically insulated to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008. 			
RAD124	Development does not involve the construction of any buildings or structures containing habitable rooms			
	or sensitive land uses within a High voltage electricity line buffer.			
• • • •				
Overland	flow path (refer Overlay map - Overland flow path to determine if the following requirements apply)			
RAD125	Development for a material change of use or building work does not involve the construction of a building			
	or structure in an Overland flow path area.			
RAD126	Development for a material change of use or operational work does not impede the flow of flood waters			
	through the premises or worsen flood flows to other premises.			
	Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development			
	does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.			
	Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow			
RAD127	Development for a material change of use or building work ensures that fencing in an overland flow nath			
RAD 121	Development for a material change of use or building work ensures that fencing in an overland flow path area is at least 50% permeable.			
RAD128	Development for a material change of use or building work that involves a hazardous chemical ensures			
	the hazardous chemicals is not located within an overland flow path area.			
RAD129	Development for a material change of use or building work for a Park ⁽⁵⁷⁾ ensures that work is provided			
	in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated			
	design.			
Riparian	and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the			
-	requirements apply)			
	W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps - Riparian and			
wetland se	and setbacks.			
RAD130	No development is to occur within:			
170 130				
	a. 50m from top of bank for W1 waterway and drainage line			
	b. 30m from top of bank for W2 waterway and drainage line			

	c. 20m from top of bank for W3 waterway and drainage line
	d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.
	Note - W1, W2 and W3 waterways and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.
	Note - In some cases, the top of bank may not be easily defined, as such a hydraulic measurement may be applied instead. Moreton Bay Regional Council will provide further direction on how to determine and locate the setback boundary in these locations.
	Note - The minimum setback distance applies to the each side of waterway.
	nenity - Regionally significant (Hills) and Locally important (Coast) - (refer Overlay map - Scenic o determine if the following requirements apply)
RAD131	Where located in the Regionally significant (Hills) scenic amenity overlay, buildings and structures are not:
	a. located on a hill top or ridge line; and
	b. all parts of the building and structure are located below the hill top or ridge line.
	Existing bushland retained. House is below the hill top / ridge line. Pole house on slope. Existing vegetation retained.
	House is above the hill top / ridge line. Slab on ground with retaining walls. Existing vegetation removed
RAD132	Where located in the Regionally significant (Hills) scenic amenity overlay, driveways and accessways:
	a. go across land contours and do not cut straight up slopes;b. follow natural contours, not resulting in batters or retaining walls being greater than 1m in height.

RAD133	Where located in the Regionally significant (Hills) scenic amenity overlay, roofs and wall surfaces of buildings and structures adopt the following colours:				
		Colours from Australian Standard AS2700s – 1996			
	G12 – Holly	G53 – Banksia	N44 – Bridge Grey		
	G13 – Emerald	G54 – Mist Green	N45 – Koala Grey		
	G14 – Moss Green	G55 – Lichen	N52 – Mid Grey		
	G15 – Rainforest Green	G56 – Sage Green	N54 – Basalt		
	G16 – Traffic Green	G62 – Rivergum	N55 – Lead Grey		
	G17 – Mint Green	G64 – Slate	X54 – Brown		
	G21 – Jade	G65 – Ti Tree	X61 – Wombat		
	G22 – Serpentine	N25 – Birch Grey	X62 – Dark Earth		
	G23 – Shamrock	N32 – Green Grey	X63 – Iron Bark		
	G24 – Fern Green	N33 – Lightbox Grey	Y51 – Bronze Olive		
	G25 – Olive	N35 – Light Grey	Y61 – Black Olive		
	G34 – Avocado	N41 – Oyster	Y63 – Khaki		
	G52 – Eucalyptus	N42 – Storm Grey	Y66 – Mudstone		
		N43 – Pipeline Grey			
	Note - In the Rural residential zone, netting, shade cloth and similar coverings associated with agricultural operations are exempt.				
RAD134		Regionally significant (Hills) scenic amenity ov es are painted or finished such that reflectivity			

Transport noise corridors (refer Overlay map - Transport noise corridors)

Note - This is for information purposes only. No requirements for accepted development or criteria for assessable development apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code.

Part B — Criteria for assessable development - Rural residential zone

Where development is categorised as assessable development - code assessment in the Table of Assessment, and located in a precinct, the assessment benchmarks are the criteria set out in Part B, Table 6.2.11.2 as well as the purpose statement and overall outcomes of this code.

Where development is categorised as assessable development - impact assessment, the assessment benchmarks become the whole of the planning scheme.

Table 6.2.11.2 Assessable development - Rural residential zone

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
Gen	eral	
PO1	l	No example provided.
Dev	elopment:	
a.	is limited in size, scale and intensity to be compatible with the low density, low rise built form and open area character and amenity anticipated in the Rural residential zone;	
b.	is designed, located and operated in a manner to avoid detrimental impacts on the low density, low rise built form and open area character and amenity anticipated in the Rural residential zone;	
C.	is designed, located and operated in a manner that avoids nuisance impacts on adjoining properties;	
d.	is adequately serviced with necessary infrastructure to meet on-site needs and requirements;	
e.	ensures adequate on-site stormwater and waste disposal is provided to avoid adverse impacts on water quality;	
f.	requires minimal cutting, filling or excavating. Where this occurs, visual impacts are reduced through screening;	
g.	avoids being obtrusive or visually dominant through on-site location, colours and materials of buildings and structures, except where materials such as netting, shade cloth and similar coverings are necessary for agricultural operations; and	
h.	does not result in any instability, erosion or degradation of land, water, soil resource or loss of natural, ecological or biological values.	

Performance Outcomes		Examples that achieve aspects of the Performance Outcomes		
Dev	Development footprint			
PO2	2	E2		
All buildings, structures, associated facilities and infrastructure are contained within an approved development footprint. Development outside of an approved development footprint must:		Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within the development footprint.		
a.	not be subject to a development constraint such as, but not limited to, flood, steep slope, waterway setbacks and significant vegetation;			
b.	development does not result in any instability, erosion or degradation of land, water, soil resource or loss of natural, ecological or biological values.			
Bui	lding height			
PO	3	E3		
Buil	ding and structure height:	Unless otherwise specified in this code, the building height		
a.	is consistent with the low rise built form and open area character and amenity values anticipated in the Rural residential zone;	of all buildings and structures does not exceed 5m.		
b.	does not unduly impact on access to sunlight, overshadowing or privacy experienced by adjoining properties;			
C.	is not visually dominant or overbearing;			
d.	does not adversely affect the operation of aviation facilities at Mt Glorious (See Overlay map - Major infrastructure) by adopting design or on-site management measures that:			
	 ensures a physical line-of-sight between transmitting or receiving devices. 			
	ensure electromagnetic fields do not interfere with the functioning of the aviation facility.			
Bui	Iding on sloping land			
PO ₄		E4		
	slopes between 10% and 15%, building and site	Building and site design on slopes between 10% and 15%:		
	ign must achieve the following:	a. use split-level, multiple-slab, pier or pole construction;		
a.	use split-level, multiple-slab, pier or pole construction;	and		

Performance Outcomes		Examples that achieve aspects of the Performance Outcomes	
b.	avoid single-plane slabs and benching;	b.	avoid single-plane slabs and benching;
C.	ensure the height of any cut or fill, whether retained or not, does not exceed 900mm;	C.	ensure the height of any cut or fill, whether retained or not, does not exceed 900mm.
d.	minimising any visual impact on the Rural residential landscape character; and		
e.	protecting the amenity of adjoining properties.		
Set	backs	<u> </u>	
PO	5	E5	
	packs:	The follo	minimum setbacks from a property boundary are as ws:
a.	are sufficient to minimise overlooking and maintain privacy of adjoining properties;	a.	road boundary - 6m
b.	create sufficient separation to ensure buildings	b.	site boundary - 4.5m
	are not visually dominant or overbearing on adjoining properties with respect to the low density character and amenity anticipated in the Rural residential zone.	C.	rear boundary - 4.5m.
POe	3	E6	
	those properties within the catchments of Lake	Was	ste/effluent disposal systems are located at least:-
Samsonvale or Lake Kurwongbah, development having a waste/effluent disposal system are positioned in a manner which avoids adverse impacts on the water quality of those lakes.		a.	80m from the full supply level of RL 21m AHD to Lake Kurwongbah on Lot 5 RP111651 or Lot 10 RP111653; and
		b.	400m from RL 39.63m AHD being the full supply level of Lake Samsonvale and RL 21m AHD being the full supply level to Lake Kurwongbah.
		-	tor's Note - The 400m buffer around Lake Samsonvale and Lake wongbah is shown on Overlay map - Infrastructure buffers.
Am	enity	<u> </u>	
P07		No example provided.	
use: nois	amenity of the area and adjacent sensitive land s are protected from the impacts of dust, odour, se, light, chemicals and other environmental sances.		
Was	ste treatment		
PO	3	E8	

Performance Outcomes		Examples that achieve aspects of the Performance Outcomes	
Stormwater generated on-site is treated and disposed of in an acceptable manner to mitigate any detrimental effects on soil, surface water or ground water quality. Development resulting in the degradation of soil, surface water or ground water quality is avoided.		All concentrated animal use area (eg sheds, pens, holding yards, stables, kennels and other animal enclosures) are provided with site drainage to ensure all run-off is directed to suitable detention basins, filtration or other treatment areas.	
Site	cover		
POS)	E9	
Buil a. b. c.	ding and roofed structures on a site: reflects the detached, low density, low rise built form and open area environment anticipated in the Rural residential zone; does not appear dominant or overbearing; provides generous open areas around buildings for useable private open space, and protects existing vegetation.	 Site cover of all buildings and roofed structures does not exceed: a. on lots equal to or less than 1 ha, 15% of the site or 750m², whichever is the lesser. b. on lots greater than 1 ha, 7.5% of the site or 1500m², whichever is the lesser. 	
Rur	al uses setbacks		
PO1	10	E10	
Dev a. b.	elopment ensures that: chemical spray, fumes, odour, dust does not drift beyond the property boundary but is contained on-site; unreasonable nuisance or annoyance resulting from - but not limited to - noise, storage of materials and rubbish does not adversely impact upon land users adjacent to, or within the general vicinity; buildings and other structures are consistent with the low density, low rise built form and open area environment anticipated in the Rural residential zone.	 The following uses and associated buildings are setback from property boundaries as follows: a. Animal husbandry⁽⁴⁾ (buildings only) - 10m b. Animal keeping⁽⁵⁾, excluding catteries and kennels - 20m c. Aquaculture⁽⁶⁾ involving ponds or water behind dams - 100m d. Aquaculture⁽⁶⁾ involving the housing of tanks - 20m e. Community residence⁽¹⁶⁾ - 20m f. Cropping⁽¹⁹⁾ (buildings only) - 10m g. Intensive horticulture⁽⁴⁰⁾ - 10m h. Permanent plantations⁽⁵⁹⁾ - 25m i. Rural Industry⁽⁷⁰⁾ - 20m j. Wholesale nursery⁽⁸⁹⁾ - 10m k. Veterinary services⁽⁸⁷⁾ - 10m. 	
Car	parking		
PO11		E11	

at achieve aspects of the Performance
arking is provided at a rate identified in Car parking.
provided.
is designed to meet the criteria outlined in Scheme Policy – Noise. tion structures (e.g. walls, barriers or fences): visible from an adjoining road or public area joining a motorway or rail line; or joining part of an arterial road that does not rve an existing or future active transport rpose (e.g. pedestrian paths or cycle lanes) where attenuation through building location d materials is not possible. emove existing or prevent future active t routes or connections to the street network; ted, constructed and landscaped in nce with Planning scheme policy - Integrated Planning scheme policy – Integrated design for details of noise attenuation structures.
teo nc Pla

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes		
Sensitive land use separation			
PO14 Vulnerable land uses within 1500m of any existing Tier	No example provided.		
1, 2 or 3 MHF is compatible with MHF risks. Note - To demonstrate compliance with this performance outcome a impact assessment report may be required.			
be prepared and submitted by a suitably qualified person in accord involving hazardous chemicals'.	formance outcomes, a Hazard Assessment Report may be required to ance with ' <i>State Planning Policy Guideline - Guidance on development</i> by Guideline - Guidance on development involving hazardous chemicals'.		
PO15	E15.1		
Off sites risks from foreseeable hazard scenarios involving hazardous chemicals are commensurate with the sensitivity of the surrounding land use zones.	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of land zoned for vulnerable or sensitive land uses as described below:		
	Dangerous Dose		
	a. For any hazard scenario involving the release of gases or vapours:		
	i. AEGL2 (60minutes) or if not available ERPG2;		
	ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.		
	b. For any hazard scenario involving fire or explosion:		
	i. 7kPa overpressure;		
	ii. 4.7kW/m2 heat radiation.		
	If criteria E14.1 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 0.5 x 10-6/year.		
	E15.2		
	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of a commercial or community activity land use zone as described below:		
	Dangerous Dose		

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	a. For any hazard scenario involving the release of gases or vapours:
	i. AEGL2 (60minutes) or if not available ERPG2;
	ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	b. For any hazard scenario involving fire or explosion:
	i. 7kPa overpressure;
	ii. 4.7kW/m2 heat radiation.
	If criteria E14.2 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 5 x 10-6/year.
	E15.3
	Off site impacts or risks from any foreseeable hazard scenario does not exceed the dangerous dose at the boundary of an industrial land use zone as described below:
	Dangerous Dose
	a. For any hazard scenario involving the release of gases or vapours:
	i. AEGL2 (60minutes) or if not available ERPG2;
	ii. An oxygen content in air <19.5% or >23.5% at normal atmospheric pressure.
	b. For any hazard scenario involving fire or explosion:
	i. 14kPa overpressure;
	ii. 12.6kW/m2 heat radiation.
	If criteria E14.3 (a) or (b) cannot be achieved, then the risk of any foreseeable hazard scenario shall not exceed an individual fatality risk level of 50 x 10-6/year.
PO16	E16
Buildings and package stores containing fire-risk hazardous chemicals are designed to detect the early stages of a fire situation and notify a designated person.	Buildings and package stores containing fire-risk hazardous chemicals are provided with 24 hour monitored fire detection system for early detection of a fire event.
P017	E17

	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
flam with	nmon storage areas containing packages of mable and toxic hazardous chemicals are designed spill containment system(s) that are adequate to tain releases, including fire fighting media.	Storage areas containing packages of flammable and toxic hazardous chemicals are designed with spill containment system(s) capable of containing a minimum of the total aggregate capacity of all packages plus the maximum operating capacity of any fire protection system for the storage area(s) over a minimum of 60 minutes.
PO1	18	E18.1
area grea "floc mar	rage and handling areas, including manufacturing as, containing hazardous chemicals in quantities ater than 2,500L or kg within a Local Government od hazard area" are located and designed in a oner to minimise the likelihood of inundation of flood ers from creeks, rivers, lakes or estuaries.	 The base of any tank with a WC >2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively: a. bulk tanks are anchored so they cannot float if submerged or inundated by water; and b. tank openings not provided with a liquid tight seal, i.e. an atmospheric vent, are extended above the relevant flood height level.
		E18.2
		The lowest point of any storage area for packages
		>2,500L or kg is higher than any relevant flood height level identified in an area's flood hazard area. Alternatively, package stores are provided with impervious bund walls or racking systems higher than the relevant flood height level.
Clea	aring of habitat trees where not located within th	ne Environmental areas overlay map
DO:		
PO1	19	No example provided.
PO1 a.	19 Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.	No example provided.
	Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted	No example provided.
a.	Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected. Development does not result in the net loss of fauna habitat. Where development does result in the loss of a habitat tree, development will provide replacement fauna nesting boxes at the following rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest	No example provided.

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
Work	s criteria
Utilities	
PO20	E20
The development is connected to an existing reticulated electricity supply system approved by the relevant energy regulating authority.	Development is connected to underground electricity.
PO21	No example provided.
The development has access to telecommunications and broadband services in accordance with current standards.	
PO22	No example provided.
Where available the development is to safely connect to reticulated gas.	
PO23	E23.1
The development provides for the treatment and disposal of sewage and other waste water in a way that will not cause environmental harm or pose a risk to	Where in a sewered area, the development is connected to a reticulated sewerage network.
public health.	E23.2
	Where not in a sewered area, the development is serviced by an appropriate on-site sewerage facility.
	Note - A site and soil evaluation report is generally required to demonstrate compliance with this outcome. Reports are to be prepared in accordance with AS1547 On-site domestic wastewater management and the Queensland Plumbing and Wastewater Code.
	E23.3
	Trade waste is pre-treated on-site prior to discharging into the sewerage network.
PO24	E24.1
The development is provided with an adequate and sustainable supply of potable (drinking and general use e.g. gardening, washing, fire fighting) water.	Where in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is connected to the reticulated water supply system in accordance with the South East Queensland Water Supply and Sewerage Design and Construction Code and the relevant Water Service Association of Australia (WSAA) codes and standards.
	E24.2

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	Where not in an existing connections area or a future connections area as detailed in the Unitywater Connections Policy, the development is provided with an adequate water supply of 45,000 litres by way of on-site storage which provides equivalent water quality and reliability to support the use requirements of the development.
PO25	No example provided.
The development is provided with constructed and dedicated road access.	
Access	
PO26	No example provided.
Where required, access easements contain a driveway and provision for services appropriate to the use. The easement covers all works associated with the access in accordance with Planning scheme policy - Integrated design.	
PO27	E27.1
The layout of the development does not compromise:a. the development of the road network in the area;b. the function or safety of the road network;	The development provides for the extension of the road network in the area in accordance with Council's road network planning.
c. the capacity of the road network.	E27.2
Note - The road hierarchy is mapped on Overlay map - Road hierarchy.	The development does not compromise future road widening of frontage roads in accordance with the relevant standard and Council's road planning.
	E27.3
	The lot layout allows forward access to and from the site.
PO28	E28.1
Safe access is provided for all vehicles required to access the site.	Site access and driveways are designed and located in accordance with:
	 a. Where for a Council-controlled road, AS/NZS2890.1 section 3; or b. Where for a State-Controlled road, the Safe Intersection Sight Distance requirements in AustRoads and the appropriate IPWEAQ standard drawings, or a copy of a Transport Infrastructure Act 1994, section 62 approval.

Perf	ormance Outcomes	Examples that achieve aspects of the Performance Outcomes
		Internal driveways and access ways are designed and constructed in accordance with AS/NZS2890.1 Parking Facilities – Off street car parking and the relevant standards in Planning scheme policy - Integrated design.
		Note - This includes queue lengths (refer to Schedule 8 Service vehicle requirements), pavement widths and construction.
		E28.3
		Access driveways, manoeuvring areas and loading facilities provide for service vehicles listed in Schedule 8 Service vehicle requirements for the relevant use. The on-site manoeuvring is to be in accordance with Schedule 8 Service vehicle requirements.
PO2	9	No example provided.
	rade works (whether trunk or non-trunk) are ided where necessary to:	
a. b. c.	ensure the type or volume of traffic generated by the development does not have a negative impact on the external road network; ensure the orderly and efficient continuation of the active transport network; ensure the site frontage is constructed to a	
0.	suitable urban standard generally in accordance with Planning scheme policy - Integrated design.	
to de to P guid in ac	e - An Integrated Transport Assessment (ITA) may be required emonstrate compliance with this performance outcome refer lanning scheme policy - Integrated transport assessment for lance on when an ITA is required. An ITA should be prepared ccordance with Planning scheme policy - Integrated transport essment.	
	e - The road network is mapped on Overlay map - Road archy.	
	e - The primary and secondary active transport network is oped on Overlay map - Active transport.	
outo	e - To demonstrate compliance with c. of this performance come, site frontage works where in existing road reserve n-trunk) are to be designed and constructed as follows:	
i.	Where the street is partially established to an urban standard, match the alignment of existing kerb and channel and provide carriageway widening and underground drainage where required; or	
ii.	Where the street is not established to an urban standard, prepare a design that demonstrates how the relevant features of the particular road as shown in the Planning scheme policy - Integrated Design can be achieved in the existing reserve.	

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
Note - Refer to Planning scheme policy - Integrated design for road network and active transport network design standards.	
Stormwater	
PO30	No example provided.
Stormwater run-off from the site is conveyed to a point of lawful discharge without causing nuisance or annoyance to any person, property or premises.	
Note - Refer to Planning scheme policy - Integrated design for details.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
Note - A watercourse as defined in the Water Act may be accepted as a lawful point of discharge providing the drainage discharge from the site does not increase the downstream flood levels during events up to and including the 1% AEP storm. An afflux of +20mm may be accepted on Council controlled land and road infrastructure. No worsening is ensured when stormwater is discharged into a catchment that includes State Transport Infrastructure.	
PO31	No example provided.
Stormwater generated from the development does not compromise the capacity of existing stormwater infrastructure downstream of the site.	
Note - A downstream drainage discharge report in accordance with Planning scheme policy - Stormwater management may be required to demonstrate achievement of this performance outcome.	
PO32	No example provided.
Stormwater quality management systems are designed and constructed to minimise the environmental impact of stormwater discharge on surface and underground receiving water quality and meet the design objectives in Tables A and B in Appendix 2 of the SPP.	
Note - A stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management.	
Site works and construction managment	
PO33	No example provided.
The site and any existing structures are maintained in a tidy and safe condition.	


PO34	E34.1
 All works on-site are managed to: a. minimise as far as practicable, impacts on adjoining or adjacent premises and the streetscape in regard to erosion and sedimentation, dust, noise, safety and light; b. minimise as far as possible, impacts on the natural environment; c. ensure stormwater discharge is managed in a manner that does not cause nuisance or annoyance to any person or premises; d. avoid adverse impacts on street trees and their critical root zone. 	 Works incorporate temporary stormwater runoff, erosion and sediment controls and trash traps designed in accordance with the Urban Stormwater Quality Planning Guidelines, Planning scheme policy - Stormwater management and Planning scheme policy - Integrated design, including but not limited to the following: a. stormwater is not discharged to adjacent properties in a manner that differs significantly from pre-existing conditions; b. stormwater discharged to adjoining and downstream properties does not cause scour and erosion; c. stormwater discharge rates do not exceed pre-existing conditions; d. the 10% AEP storm event is the minimum design storm for all temporary diversion drains; and e. the 50% AEP storm event is the minimum design storm for all silt barriers and sediment controls are constructed prior to commencement of any clearing or earthworks and are maintained and adjusted as necessary at all times to ensure their ongoing effectiveness. E34.3 The completed earthworks area is stabilised using turf, established grass seeding, mulch or sprayed stabilisation techniques to control erosion and sediment and dust from leaving the property. E34.4 Where works are proposed in proximity to an existing street tree, an inspection and a root management plan is undertaken by a qualified arborist which demonstrates and ensures that no permanent damage is caused to the tree.
PO35	E35
Dust suppression measures are implemented during soil disturbances and construction works to protect nearby premises from unreasonable dust impacts.	No dust emissions extend beyond the boundaries of the site during soil disturbances and construction works.
PO36	E36.1


All works on-site and the transportation of material to and from the site are managed to not negatively imper set in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe. Note - Where the amount of imported or exported material is greater than 50m, a haulage route must be identified and approved by Counal. E36.2 All contractor car parking is either provided on the general in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements to and from the site are safe. E36.2 All contractor car parking is either provided on the general in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to be parked in accordance with the general in Construction traffic including contractor car parking. P037 E36.3 All disturbed areas are rehabilitated at the completion of construction all disturbed areas of the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD). Note - Refer to Planning scheme policy - Integrated design for details. E37 All disturbed areas are rehabilitated at the completion of construction all disturbed areas of the site are to be cleaned at all times. P038 E37 The clearing of vegetation on-site: a. is limited to the area of infrastructure works, building areas and other necessary areas for the maximise grass coverage from grass seeding of these areas. P038 E38.1 The clearing of vegetation on-site: E38.1 <	Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
greater than 50m ² , a haulage route must be identified and approved by Council. E36.2 All contractor car parking is either provided on the development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in existing roads. Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD). F037 All disturbed areas are rehabilitated at the completion of construction processes associated with the site are to be cleaned at all times. P037 All disturbed areas are rehabilitated at the completion of construction all disturbed areas of the site are to be cleaned at all times. P037 Note - Refer to Planning scheme policy - Integrated design for details. Note - Refer to Planning scheme policy - Integrated design for details. P038 The clearing of vegetation on-site: a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and D. includes the removal of declared weeds and other materials which are detrimental to the interned curve due sed of the land; c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. Disposal of materials is managed in one or more of the following ways:	and from the site are managed to not negatively impact the existing road network, the amenity of the surrounding area or the streetscape.	controlled in accordance with a traffic management plan, prepared in accordance with the Manual of Uniform Traffic Control Devices (MUTCD) to ensure all traffic movements
development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parking in existing roads. Note - A Traffic Management Plan may be required for the site in accordance with the Manual of Uniform Traffic Control Devices (MUTCD). F037 E36.3 All disturbed areas are rehabilitated at the completion of construction processes associated with the site are to be cleaned at all times. P037 E37 All disturbed areas are rehabilitated at the completion of construction. At completion of construction all disturbed areas of the site are to be: a. topsolied with a minimum compacted thickness of details. a. topsolied with a minimum compacted thickness of fifty (50) millimetres; b. grassed. Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas. P038 E38.1 All native vegetation to be retained on-site is temporarily for cord or protected prior to and during development works; and other mecessary areas for the intendor use of the land; b. includes the removal of declared weeds and other meterials which are detrimental to the intended use of the land; c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.	greater than 50m ³ , a haulage route must be identified and	E36.2
accordance with the Manual of Uniform Traffic Control Devices (MUTCD). E36.3 Any material dropped, deposited or spilled on the road(s) as a result of construction processes associated with the site are to be cleaned at all times. P037 E37 All disturbed areas are rehabilitated at the completion of construction. At completion of construction all disturbed areas of the site are to be: Note - Refer to Planning scheme policy - Integrated design for details. At completion of construction and during any maintenance period to maximise grass coverage from grass seeding of these areas. P038 E38.1 The clearing of vegetation on-site: All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; E38.2 c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. Disposal of materials is managed in one or more of the following ways:		development site, or on an alternative site in the general locality which has been set aside for car parking. Contractors vehicles are generally not to be parked in
PO37E37All disturbed areas are rehabilitated at the completion of construction.At completion of construction all disturbed areas of the site are to be:Note - Refer to Planning scheme policy - Integrated design for details.E37PO38a. topsoiled with a minimum compacted thickness of fifty (50) millimetres; b. grassed.PO38E38.1The clearing of vegetation on-site: a. is limited to the area of infrastructure works; building areas and other necessary areas for the works; andE38.1All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;E38.2C. is disposed of in a manner which minimises nuisance and annoyance to existing premises.Disposal of materials is managed in one or more of the following ways:		accordance with the Manual of Uniform Traffic Control Devices
as a result of construction processes associated with the site are to be cleaned at all times.PO37E37All disturbed areas are rehabilitated at the completion of construction.At completion of construction all disturbed areas of the site are to be:Note - Refer to Planning scheme policy - Integrated design for details.At completion of construction all disturbed areas of the site are to be:Note - Refer to Planning scheme policy - Integrated design for details.a. topsoiled with a minimum compacted thickness of fifty (50) millimetres;b. grassed.Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.PO38E38.1The clearing of vegetation on-site:All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works.b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;Sale 2c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.Disposal of materials is managed in one or more of the following ways:		E36.3
All disturbed areas are rehabilitated at the completion of construction. At completion of construction all disturbed areas of the site are to be: Note - Refer to Planning scheme policy - Integrated design for details. a. topsoiled with a minimum compacted thickness of fifty (50) millimetres; b. grassed. Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas. PO38 E38.1 The clearing of vegetation on-site: All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. building areas and other necessary areas for the works; and b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; Note - No parking of venetices of storage of machinery or goods is to occur in these areas during development works. c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. Disposal of materials is managed in one or more of the following ways:		as a result of construction processes associated with the
of construction.are to be:Note - Refer to Planning scheme policy - Integrated design for details.a. topsoiled with a minimum compacted thickness of fifty (50) millimetres; b. grassed.PO38Note - These areas are to be maintained during any maintenance period to maximise grass coverage from grass seeding of these areas.PO38E38.1The clearing of vegetation on-site: a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; andAll native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land;All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works.c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.E38.2Disposal of materials is managed in one or more of the following ways:	PO37	E37
PO38 E38.1 PO38 All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; Note - No parking of velopment works. c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. Disposal of materials is managed in one or more of the following ways:		-
PO38 E38.1 The clearing of vegetation on-site: All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. building areas and other necessary areas for the works; and b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; c. is disposed of in a manner which minimises nuisance and annoyance to existing premises.		fifty (50) millimetres;
 The clearing of vegetation on-site: a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. All native vegetation to be retained on-site is temporarily fenced or protected prior to and during development works. Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works. E38.2 Disposal of materials is managed in one or more of the following ways: 		
 a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. fenced or protected prior to and during development works. Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works. E38.2 Disposal of materials is managed in one or more of the following ways: 	PO38	E38.1
 a. is limited to the area of infrastructure works, building areas and other necessary areas for the works; and b. includes the removal of declared weeds and other materials which are detrimental to the intended use of the land; c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. Note - No parking of vehicles of storage of machinery or goods is to occur in these areas during development works. E38.2 Disposal of materials is managed in one or more of the following ways: 	The clearing of vegetation on-site:	
 materials which are detrimental to the intended use of the land; is disposed of in a manner which minimises nuisance and annoyance to existing premises. Disposal of materials is managed in one or more of the following ways: 	building areas and other necessary areas for the works; and	Note - No parking of vehicles of storage of machinery or goods is to
c. is disposed of in a manner which minimises nuisance and annoyance to existing premises. Disposal of materials is managed in one or more of the following ways:	materials which are detrimental to the intended	
Note - No burning of cleared vegetation is permitted.	c. is disposed of in a manner which minimises	Disposal of materials is managed in one or more of the
	Note - No burning of cleared vegetation is permitted.	

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
PO39 Any alteration or relocation in connection with or arising from the development to any service, installation, plant, equipment or other item belonging to or under the control of the telecommunications authority, electricity authorities, the Council or other person engaged in the provision of public utility services is to be carried with the development and at no cost to Council.	 a. all cleared vegetation, declared weeds, stumps, rubbish, car bodies, scrap metal and the like are removed and disposed of in a Council land fill facility; or b. all native vegetation with a diameter below 400mm is to be chipped and stored on-site. Note - The chipped vegetation must be stored in an approved location, preferably a park or public land. No example provided.
Earthworks	
PO40	E40.1
 On-site earthworks are designed to consider the visual and amenity impact as they relate to: a. the natural topographical features of the site; b. short and long-term slope stability; c. soft or compressible foundation soils; d. reactive soils; e. low density or potentially collapsing soils; f. existing fill and soil contamination that may exist on-site; g. the stability and maintenance of steep rock slopes and batters; h. excavation (cut) and fill and impacts on the amenity of adjoining lots (e.g. residential). Note - Filling or excavation works are to be completed within six months of the commencement date.	All cut and fill batters are provided with appropriate scour, erosion protection and run-off control measures including catch drains at the top of batters and lined batter drains as necessary. E40.2 Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance of steep
	rock slopes and batters.
	E40.3 Inspection and certification of steep rock slopes and batters is required by a suitably qualified and experienced RPEQ. E40.4
	All fill batters steeper than 1 (V) in 6 (H) on residential lots are fully turfed to prevent scour and erosion.
	E40.5 All filling or excavation is contained on-site.
	E40.6

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
P041	 All fill placed on-site is: a. limited to that required for the necessary approved use; b. clean and uncontaminated (i.e. no building waste, concrete, green waste or contaminated material etc. is used as fill). E40.7 The site is prepared and the fill placed on-site in accordance with AS3798. Note - The fill is to be inspected and tested in accordance with Planning scheme policy - Operational works inspection, maintenance and bonding procedures. E41
Embankments are stepped, terraced and landscaped to not adversely impact on the visual amenity of the surrounding area.	Any embankments more than 1.5 metres in height are stepped, terraced and landscaped. Figure - Embankment
 PO42 Filling or excavation is undertaken in a manner that: a. does not adversely impact on a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land; b. does not preclude reasonable access to a Council or public sector entity maintained infrastructure or any drainage feature on, or adjacent to the land for monitoring, maintenance or replacement purposes. Note - Public sector entity as defined in the Sustainable Planning Act 2009. 	 E42.1 No filling or excavation is undertaken in an easement issued in favour of Council or a public sector entity. Note - Public sector entity as defined in the Sustainable Planning Act 2009. E42.2 Filling or excavation that would result in any of the following is not carried out on-site: a. a reduction in cover over any Council or public sector entity infrastructure service to less than 600mm; b. an increase in finished surface grade over, or within 1.5m on each side of, the Council or public sector entity infrastructure above that which existed prior to the earthworks being undertaken. Note - Public sector entity as defined in the Sustainable Planning Act 2009.

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
PO43	No example provided.
Filling or excavation does not result in land instability.	
Note - Steep rock slopes and batters are inspected and certified for long-term stability by a suitably qualified and experienced geotechnical engineer with RPEQ qualifications. Stabilisation measures are provided, as necessary, to ensure long-term stability and low maintenance.	
PO44	No example provided.
Development does not result in	
 a. adverse impacts on the hydrological and hydraulic capacity of the waterway or floodway; b. increased flood inundation outside the site; c. any reduction in the flood storage capacity in the floodway; d. and any clearing of native vegetation. Note - To demonstrate compliance with this outcome, Planning Scheme Policy - Stormwater Management provides guidance on the preparation of a site based stormwater management plan by a suitably qualified professional. Refer to Planning scheme policy - Integrated design for guidance on infrastructure design and modelling requirements.	
Retaining walls and structures	
PO45	E45
All earth retaining structures provide a positive interface with the streetscape and minimise impacts on the amenity of adjoining residents.	 Earth retaining structures: a. are not constructed of boulder rocks or timber; b. where height is no greater than 900mm, are provided in accordance with Figure - Retaining on a boundary;
	Figure - Retaining on boundary



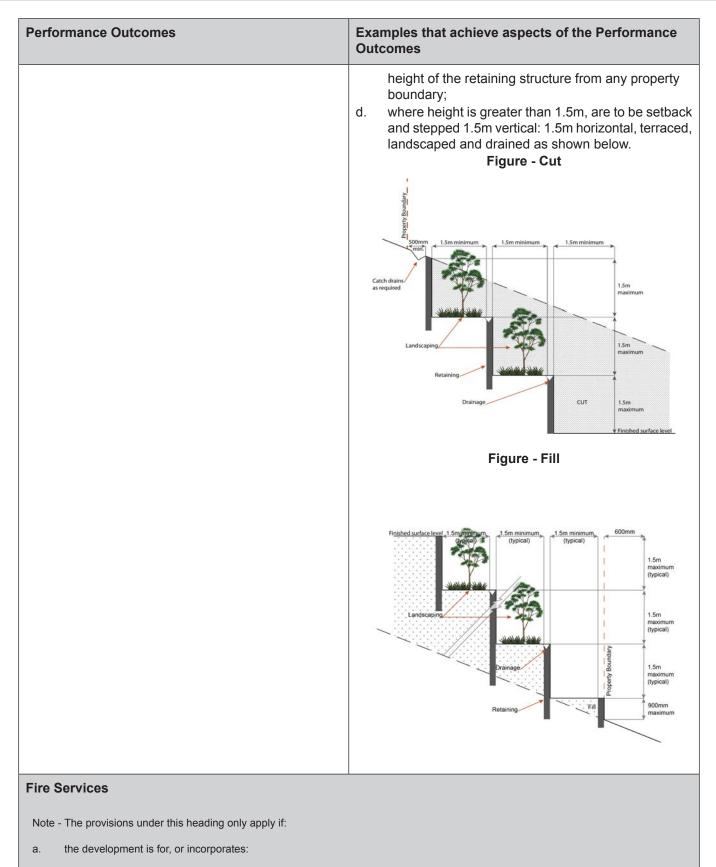

- reconfiguring a lot for a community title scheme creating 1 or more vacant lots; or i.
- material change of use for 2 or more sole occupancy units on the same lot, or within the same community titles scheme; or material change of use for a Tourist park⁽⁸⁴⁾ with accommodation in the form of caravans or tents; or material change of use for outdoor sales⁽⁵⁴⁾, outdoor processing or outdoor storage where involving combustible materials. ii.
- iii.
- iv.

AND

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
water supply; or ii. every part of the development site is within 60m walking water supply network, measured around all obstruction Note - The provisions under this heading do not apply to buildings to system complying with Australian Standard AS 2419.1 (2005) – Fire H protection. PO46	hat are required by the Building Code of Australia to have a fire hydrant hydrant Installations or other fire fighting facilities which provide equivalent E46.1
 Development incorporates a fire fighting system that: a. satisfies the reasonable needs of the fire fighting entity for the area; b. is appropriate for the size, shape and topography of the development and its surrounds; c. is compatible with the operational equipment available to the fire fighting entity for the area; d. considers the fire hazard inherent in the materials comprising the development and their proximity to one another; e. considers the fire hazard inherent in the surrounds to the development site; f. is maintained in effective operating order. Note - The Queensland Fire and Emergency Services is the entity currently providing the fire fighting function for the urban areas of the Moreton Bay Region.	 External fire hydrant facilities are provided on site to the standard prescribed under the relevant parts of Australian Standard AS 2419.1 (2005) – Fire Hydrant Installations. Note - For this requirement for accepted development, the following are the relevant parts of AS 2419.1 (2005) that may be applicable: a. in regard to the form of any fire hydrant - Part 8.5 and Part 3.2.2.1, with the exception that for Tourist parks⁽⁸⁴⁾ or development comprised solely of dwellings and their associated outbuildings, single outlet above-ground hydrants or suitably signposted in-ground hydrants would be an acceptable alternative; b. in regard to the general locational requirements for fire hydrants - Part 3.2.2.2 (a), (e), (f), (g) and (h) as well as Appendix B of AS 2419.1 (2005); c. in regard to the proximity of hydrants to buildings and other facilities - Part 3.2.2.2 (b), (c) and (d), with the exception that: i. for dwellings and their associated outbuildings, hydrant coverage need only extend to the roof and external walls of those buildings; ii. for outdoor sales⁽⁵⁴⁾, processing or storage facilities, hydrant coverage is required across the entire area of the outdoor sales⁽⁵⁴⁾, outdoor processing and outdoor storage facilities; d. in regard to fire hydrant accessibility and clearance requirements - Part 3.5 and, where applicable, Part 3.6. E46.2 A continuous path of travel having the following characteristics is provided between the vehicle access point to the site and each external fire hydrant and hydrant booster point on the land: a. an unobstructed width of no less than 3.5m; b. an unobstructed height of no less than 4.8m; c. constructed to be readily traversed by a 17 tonne HRV fire brigade pumping appliance; d. an area for a fire brigade pumping appliance;

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	E46.3
	On-site fire hydrant facilities are maintained in effective operating order in a manner prescribed in <i>Australian Standard AS1851 (2012) – Routine service of fire protection systems and equipment.</i>
PO47	E47
On-site fire hydrants that are external to buildings, as vell as the available fire fighting appliance access outes to those hydrants, can be readily identified at all	For development that contains on-site fire hydrants external to buildings:
times from, or at, the vehicular entry point to the development site.	a. those external hydrants can be seen from the vehicular entry point to the site; or
	b. a sign identifying the following is provided at the vehicular entry point to the site:
	i. the overall layout of the development (to scale);
	ii. internal road names (where used);
	iii. all communal facilities (where provided);
	iv. the reception area and on-site manager's office (where provided);
	v. external hydrants and hydrant booster points;
	vi. physical constraints within the internal roadway system which would restrict access by fire fighting appliances to external hydrants and hydrant booster points.
	Note - The sign prescribed above, and the graphics used are to be:
	a. in a form;
	b. of a size;
	c. illuminated to a level;
	which allows the information on the sign to be readily understood, at all times, by a person in a fire fighting appliance up to 4.5m from the sign.
PO48	E48
Each on-site fire hydrant that is external to a building is signposted in a way that enables it to be readily identified at all times by the occupants of any firefighting appliance traversing the development site.	For development that contains on-site fire hydrants external to buildings, those hydrants are identified by way of marker posts and raised reflective pavement markers in the manner prescribed in the technical note <i>Fire hydrant</i> <i>indication system</i> produced by the Queensland Department of Transport and Main Roads.

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
		Note - Technical note Fire hydrant indication system is available on the website of the Queensland Department of Transport and Main Roads.
	Use sp	ecific criteria
Ani	imal keeping ⁽⁵⁾ for catteries and kennels	
PO4	49	No example provided.
Dev	velopment for a cattery and kennel ensures that:	
a.	it is a size, scale and design not visually dominant, overbearing or inconsistent with the low density, low rise built form character anticipated in the Rural residential zone;	
b.	it is sufficiently landscaped, fenced and screened in a manner to reduce the visual appearance of buildings, structures, storage and parking areas;	
C.	design, siting and construction prevents animal noise from being clearly audible beyond the development site and does not create a disturbance to residents on adjoining and surrounding properties; and	
d.	fencing of sufficient height and depth, being a minimum height of 1.8m and minimum depth of 0.2m, is provided to prevent animals escaping.	
Con	mmunity activities group adjoining Community	activities and neighbourhood hubs
PO	50	No example provided.
	<i>w</i> Community activities group uses may establish ere they:	
a.	immediately adjoin Community activities and neighbourhood hubs;	
b.	are located on allotments that have appropriate area and dimensions for the sitting of:	
	i. buildings and structures;	
	ii. vehicle servicing, deliveries, parking, manoeuvring and circulation;	
	iii. landscaping and open space including	

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
c. d.	of a small scale and low built form, having regard to the surrounding character; do not result in nuisance impacts upon adjoining residents or the streetscape.	
Dwe	elling house ⁽²²⁾	
PO	51	E51
Dev exce	elopment does not result in residential density eeding more than one dwelling house ⁽²²⁾ per lot.	Residential density does not exceed one dwelling house ⁽²²⁾ per lot.
PO	52	E52
Buil	ding and roofed structure height:	Building height for a dwelling house ⁽²²⁾ does not exceed:
a. b. c. d.	 is consistent with the low rise built form and open area character and amenity values anticipated in the Rural residential zone; does not unduly impact on access to sunlight, overshadowing or privacy experienced by adjoining properties; is not visually dominant or overbearing; does not adversely affect the operation of aviation facilities at Mt Glorious (See Overlay map - Infrastructure buffers) by adopting design or on-site management measures that: i. ensures a physical line-of-sight between transmitting or receiving devices. ii. ensure electromagnetic fields do not interfere with the functioning of the aviation facility. 	 a. that on Overlay map - Building heights for dwelling houses⁽²²⁾; or b. for domestic outbuildings and free standing carports and garages, building height does not exceed 4m.
PO	53	E53
Set	backs:	Setbacks are as follows:
a. b.	are sufficient to minimise overlooking and maintain privacy of adjoining properties; create sufficient separation to ensure buildings are not visually dominant or overbearing with respect to the low density character and amenity anticipated in the Rural residential zone.	 Where a dwelling house⁽²²⁾ or outbuilding has a building height of 3m or less: a. road boundary - 6m b. side boundary - 1.5m c. rear boundary - 1.5m. Where a dwelling house⁽²²⁾ or outbuilding has a building height greater than 3m and less than 8.5m:

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	 a. road boundary - 6m b. side boundary - 4.5m c. rear boundary - 4.5m.
 PO54 All buildings, structures, associated facilities and infrastructure are contained within an approved development footprint. Development outside of an approved development footprint must: a. not be subject to a development constraint such as, but not limited to, bushfire, flood, steep slope, 	E54 Where a development footprint has been identified as part of a development approval for reconfiguring a lot, all development occurs within a development footprint.
 b. development does not result in any instability, erosion or degradation of land, water, soil resource or loss of natural, ecological or biological values. 	
PO55	E55
Development is designed to respond to sloping topography in the siting, design and form of buildings and structures by:	Building and site design on slope between 10% and 15% must:
 a. minimising cut and fill to create single flat pads and benching; 	a. use split-level, multiple-slab, pier or pole construction;b. avoid single-plane, and benching;
b. avoiding expanses of retaining walls, loss of trees and vegetation and interference with natural drainage systems; and	c. ensure the height of any cut or fill, whether retained or not, does not exceed 900mm.
c. minimising any impact on the landscape character of the Rural residential zone;	
d. protecting the amenity of adjoining properties.	
PO56	E56.1
For those properties within the catchments of Lake Samsonvale or Lake Kurwongbah, dwelling houses ⁽²²⁾ , outbuildings and their associated waste/effluent disposal areas are positioned in a manner which avoids adverse impacts on the water quality of those lakes.	For Lake Samsonvale or Lake Kurwongbah, a setback of no less than 400m is maintained between the following nominated full supply levels to those lakes and any Dwelling house or outbuilding on the land:-
	a. RL 39.63m AHD being the full supply level of Lake Samsonvale; and
	 RL 21m AHD being the full supply level of Lake Kurwongbah.
	OR

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	No part of any Dwelling house ⁽²²⁾ or outbuilding on Lot 5 RP111651 or Lot RP111653 is any closer than 80m to the full supply level of RL 21m AHD to Lake Kurwongbah. Editor's Note - The 400m buffer around Lake Samsonvale and Lake Kurwongbah is shown on Overlay map - Infrastructure buffers.
	E56.2
	Waste/effluent disposal systems are localed at least:-
	a. 80m from the full supply level of RL 21m AHD to Lake Kurwongbah on Lot 5 RP111651 or Lot 10 RP111653; and
	 b. 400m from RL 39.63m AHD being the full supply level of Lake Samsonvale and RL 21m AHD being the full supply level to Lake Kurwongbah.
	Editor's Note - The 400m buffer around Lake Samsonvale and Lake Kurwongbah is shown on Overlay map - Infrastructure buffers.

Dwelling house ⁽²²⁾ where including a secondary dwelling		
P057	E57	
 Dwelling house⁽²²⁾ where including a secondary dwelling: a. remains subordinate to the principal dwelling; b. has a maximum GFA of 100m². c. retains its connection with the principal dwelling by: i. avoiding the establishment of a separate access; and ii. being located within 50m of the principal dwelling house⁽²²⁾; d. a size, scale and design that is not visually dominant, overbearing and inconsistent with the low density, low rise built form and open area character anticipated in a Rural residential area. 	 Dwelling house⁽²²⁾ where including a secondary dwelling: a. has a maximum GFA of 100m². b. obtains access from the existing driveway giving access to the dwelling house⁽²²⁾. c. is located within 50m from the principal dwelling house⁽²²⁾. 	
Home based business ⁽³⁵⁾		
PO58	E58.1	
Home based business(s) ⁽³⁵⁾ :	The home based business(s) ⁽³⁵⁾ , including any storage, are fully enclosed within a dwelling or on-site structure.	

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
a. b. c. d. f.	 is subordinate in size and function to the primary use on the site being a permanent residence; are of a scale and intensity that does not result in adverse visual or nuisance impacts on the residents in adjoining or nearby dwellings; store no more heavy vehicles, trailer and motor vehicle on-site, as follows: 1 heavy vehicle; 1 trailer; Up to 3 motor vehicles. results in a vehicular and pedestrian traffic generation consistent with that reasonably expected in the surrounding low density, low built form and open area character and amenity anticipated in the Rural residential zone; are suitably screened to ensure adverse visual impacts on the residents in adjoining or nearby dwellings are minimised; sufficiently separated from adjoining properties so development does not result in adverse visual, noise, or nuisance impacts on adjoining residents. 	 E58.2 Up to 2 additional non-resident, either employees or customers, are permitted on the site at any one time, except where involving the use of heavy vehicles, where no employees are permitted. E58.3 The maximum number of heavy vehicles, trailer and motor vehicles stored on-site is as follows: 1 heavy vehicle; 1 trailer; Up to 3 motor vehicles. E58.4 Vehicle parking areas, vehicle standing areas and outdoor storage areas of plant and equipment are screened from adjoining lots by either planting, wall(s), fence(s) or a combination at least 1.8m in height along the length of those areas. E58.5 Heavy vehicle storage buildings, parking areas and standing areas are setback a minimum of 30m from all property boundaries.
PO59 The hours of operation for home based business(s) ⁽³⁵⁾ are managed so that the activity does not adversely impact on the low intensity character and amenity anticipated in the Rural residential zone.		 E59 Hours of operation to be restricted to 8.00am to 6.00pm Monday to Saturday and are not open to the public on Sunday's, Christmas Day, Good Friday and Anzac Day, except for: a. bed and breakfast or farm stay business which may operate on a 24 hour basis, b. office or administrative activities that do not generate non-residents visiting the site such as book keeping and computer work, and c. starting and warming up of heavy vehicles, which can commence at 7.00am.
PO6 Hon	6 0 ne based business ⁽³⁵⁾ does not result in:	E60.1 The use does not involve heavy vehicle servicing or major repairs, including spray painting or panel.

Performance Outcomes		Examples that achieve aspects of the Performance Outcomes	
activ	an adverse visual, odour, particle drift or noise nuisance impact on the residents in adjoining or nearby dwellings; an adverse impact upon the low intensity and open area character and amenity anticipated in the locality; The establishment of vehicle servicing or major repairs, spray painting, panel beating or any environmentally relevant activity (ERA). 61 site display and sales of goods is limited to the vities being undertaken from the site and does not ult in:	 E60.2 Home based business(s)⁽³⁵⁾ do not comprise an environmentally relevant activity (ERA) as defined in the <i>Environmental Protection Regulation 2008</i>. E60.3 Home based business(s)⁽³⁵⁾ do not generate noise that is audible from the boundary of the site. E61.1 Only goods grown, produced or manufactured on-site are sold from the site. 	
a. b.	the display and sale of goods being viewed from outside of the site; overall development on the site having a predominantly commercial appearance.	E61.2 Display of goods grown, produced or manufactured on-site are contained within a dwelling or on-site structure and the display of goods is not visible from the boundary of the site.	
	62 If and breakfast and farmstays are of a size and le that: are consistent with the low intensity, open area character and amenity of the rural residential area; ensures acceptable levels of privacy and amenity for the residents in adjoining or nearby dwellings.	 E62 For bed and breakfast and farmstays- a. short-term accommodation⁽⁷⁷⁾ is provided in the dwelling house⁽²²⁾ of the accommodation operator. b. maximum 4 bedrooms are provided for a maximum of 10 guests. c. meals are served to paying guests only d. rooms do not contain food preparation facilities. 	
Мај	or electricity infrastructure ⁽⁴³⁾ , Substation ⁽⁸⁰⁾ an	d Utility installation ⁽⁸⁶⁾	
PO	63	E63.1	

The development does not have an adverse impact on the visual amenity of a locality and is:		use	elopment is designed to minimise surrounding land conflicts by ensuring infrastructure, buildings, ctures and other equipment:	
	a.	high quality design and construction;		
	b.	visually integrated with the surrounding area;	a.	are enclosed within buildings or structures;
	C.	not visually dominant or intrusive;	b.	are located behind the main building line;
	d.	located behind the main building line;	C.	have a similar height, bulk and scale to the
	e.	below the level of the predominant tree canopy		surrounding fabric;
		or the level of the surrounding buildings and structures;	d.	have horizontal and vertical articulation applied to all exterior walls.
	f.	camouflaged through the use of colours and		
		materials which blend into the landscape;	E63	.2
	g.	treated to eliminate glare and reflectivity;		

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
h. i.	landscaped; otherwise consistent with the amenity and character of the zone and surrounding area.	A minimum 3m wide strip of dense planting is provided around the outside of the fenced area, between the development and street frontage, side and rear boundaries.
PO	64	E64
	astructure does not have an impact on pedestrian Ith and safety.	 Access control arrangements: a. do not create dead-ends or dark alleyways adjacent to the infrastructure; b. minimise the number and width of crossovers and entry points; c. provide safe vehicular access to the site; d. do not utilise barbed wire or razor wire.
PO	65	E65
with	activities associated with the development occur in an environment incorporating sufficient controls nsure the facility: generates no audible sound at the site boundaries where in a residential setting; or meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.	All equipment which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure noise emissions meet the objectives as set out in the Environmental Protection (Noise) Policy 2008.
Nor	n-resident workforce accommodation ⁽⁵²⁾	
PO66		No example provided.
Dev acco	relopment associated with non-resident workforce ommodation ⁽⁵²⁾ :	
а.	provides accommodation for rural workers only and is not advertised or used for the purpose of accommodating general travellers or tourists; and	
b.	is not, or does not act, as a permanent place of residence for persons where a typical period of time does not exceed 3 consecutive months.	
PO	67	
Dev acco	relopment associated with non-resident workforce ommodation ⁽⁵²⁾ :	
a.	is of a size, scale, intensity and design that minimises the potential for adverse noise, visual, privacy and traffic impacts on adjoining or nearby residents;	
b.	is of a size, scale, intensity and design that is consistent with the low intensity, low-set built form and open area character and amenity anticipated for the Rural residential zone; and	

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
C.	provides suitable open space, buildings and facilities that meet the recreational, social and amenity needs of people staying on-site;	
d.	provides landscape buffer along adjoining property boundaries to fully screen activities occurring on the site.	
PO	68	
San wor disp	ere located within the buffer around Lake nsonvale or Lake Kurwongbah, non-resident kforce buildings and their associated waste/effluent bosal areas are positioned in a manner which avoids erse impacts on the water quality of those lakes.	
	tor's note - The 400m buffer around Lake Samsonvale and the Kurwongbah is shown on Overlay map - Infrastructure buffers	
Per	manent plantation ⁽⁵⁹⁾	
PO	69	E69
Plar a.	nting for permanent plantation ⁽⁵⁹⁾ purposes: only comprises native species naturally occurring	Planting only comprises native species naturally occurring in the area.
	in the area;	
b.	is sufficiently set back from property boundaries to avoid adverse impacts on adjoining properties such as shading, fire risk, health and safety.	
Ret	ail and commercial activities and Community ac	tivities groups
PO	70	E70.1
The	number of car parking spaces is managed to:	Car parking is provided in accordance with Schedule 7 - Car parking.
a.	avoid significant impacts on the safety and efficiency of the road network;	Note - The above rates exclude car parking spaces for people with a disability required by Disability Discrimination Act 1992 or the relevant
b.	avoid an oversupply of car parking spaces;	disability discrimination legislation and standards.
C.	avoid the visual impacts of large areas of open car parking from road frontages and public areas;	E70.2
d. e.	promote active and public transport options; promote innovative solutions, including on-street parking and shared parking areas.	All car parking areas are designed and constructed in accordance with Australian Standard AS2890.1 and Planning scheme policy - Integrated design.
PO	71	No example provided.

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
Bins and bin storage areas are provided, designed and managed in accordance with Planning scheme policy - Waste.		
PO7	72	No example provided.
On-	site landscaping is provided that:	
a.	is incorporated into the design of the development;	
b.	reduces the dominance of car parking and servicing areas from the street frontage;	
C.	retains mature trees wherever possible;	
d.	does not create safety or security issues by creating potential concealment areas or interfering with sightlines;	
e.	maintains the achievement of active frontages and sightlines for casual surveillance.	
	e - All landscaping is to accord with Planning scheme policy tegrated design.	

Roadside stall (68)

P073		E73	
A roadside stall ⁽⁶⁸⁾ :		For	a roadside stall ⁽⁶⁸⁾ :
a.	comprises only one roadside stall ⁽⁶⁸⁾ per property;	a.	no more than one roadside stall ⁽⁶⁸⁾ per property;
b.	only offers goods grown, produced or manufactured on the site;	b.	goods offered for sale are only goods grown, produced or manufactured on the site;
C.	is of a size and in a location that will not result in nuisance, or have a significant adverse impact on the amenity, for residents on adjoining and surrounding properties.	C.	the maximum area associated with a roadside stall ⁽⁶⁸⁾ , including any larger separate items displayed for sale, does not exceed 20m ² .
POT	P074		
A ro	adside stall ⁽⁶⁸⁾ is designed and located to:	Roa	dside stall ⁽⁶⁸⁾ :
a.	ensure safe and accessible access, egress and on-site parking;	a.	provide car parking for 2 vehicles off the road carriage and located on the property;
b.	ensure safe and efficient functioning of roads.	b.	is located no closer than 100m from an intersection.
Rur	Rural industry ⁽⁷⁰⁾		
PO7	75	No e	example provided.

ŀd.		
ied out for no longer than 2 years.		
Telecommunications facility ⁽⁸¹⁾ Editor's note - In accordance with the Federal legislation Telecommunications facilities ⁽⁸¹⁾ must be constructed and operated in a manner		

to 300Ghz.

Radiation - Human Exposure) Standard 2003 and Radio Protection Standard for Maximum Exposure Levels to Radiofrequency Fields - 3Khz

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
P078	E78.1
Telecommunications facilities ⁽⁸¹⁾ are co-located with existing telecommunications facilities ⁽⁸¹⁾ , Utility installation ⁽⁸⁶⁾ , Major electricity infrastructure ⁽⁴³⁾ or Substation ⁽⁸⁰⁾ if there is already a facility in the same coverage area.	New telecommunication facilities ⁽⁸¹⁾ are co-located on existing towers with new equipment shelter and associated structures positioned adjacent to the existing shelters and structures.
	E78.2
	If not co-located with an existing facility, all co-location opportunities have been investigated and fully exhausted within a 2km radius of the site.
P079	E79
A new Telecommunications facility ⁽⁸¹⁾ is designed and constructed to ensure co-masting or co-siting with other carriers both on the tower or pole and at ground level is possible in the future.	A minimum of 45m ² is available at ground level to allow for additional equipment shelters and associated structures for the purpose of co-locating on the proposed facility.
PO80	E80
Telecommunications facilities ⁽⁸¹⁾ do not conflict with lawful existing land uses both on and adjoining the site.	The development results in no net reduction in the minimum quantity and standard of landscaping, private or communal open space or car parking spaces required under the planning scheme or under an existing development approval.
PO81	E81.1
The Telecommunications facility ⁽⁸¹⁾ does not have an adverse impact on the visual amenity of a locality and is: a. high quality design and construction;	Where in an urban area, the development does not protrude more than 5m above the level of the existing treeline, prominent ridgeline or building rooftops in the surrounding townscape.
b. visually integrated with the surrounding area;c. not visually dominant or intrusive;	E81.2
 c. not visually dominant or intrusive; d. located behind the main building line; e. below the level of the predominant tree canopy or the level of the surrounding buildings and 	In all other areas towers do not exceed 35m in height.
structures;	E81.3
f. camouflaged through the use of colours and materials which blend into the landscape;g. treated to eliminate glare and reflectivity;	Towers, equipment shelters and associated structures are of a design, colour and material to:
 h. landscaped; i. otherwise consistent with the amenity and character of the zone and surrounding area. 	a. reduce recognition in the landscape;b. reduce glare and reflectivity.
	E81.4
	All structures and buildings are setback behind the main building line and a minimum of 10m from side and rear boundaries, except where in the Industry and Extractive industry zones, the minimum side and rear setback is 3m.

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	Where there is no established building line the facility is located at the rear of the site.
	E81.5
	The facility is enclosed by security fencing or by other means to ensure public access is prohibited.
	E81.6
	A minimum 3m wide strip of dense planting is provided around the perimeter of the fenced area, between the facility and street frontage and adjoining uses.
	Note - Landscaping is provided in accordance with Planning scheme policy - Integrated design.
	Note - Council may require a detailed landscaping plan, prepared by a suitably qualified person, to ensure compliance with Planning scheme policy - Integrated design.
PO82	E82
Lawful access is maintained to the site at all times that does not alter the amenity of the landscape or surrounding uses.	An Access and Landscape Plan demonstrates how 24 hour vehicular access will be obtained and maintained to the facility in a manner that is appropriate to the site's context.
PO83	E83
All activities associated with the development occur within an environment incorporating sufficient controls to ensure the facility generates no audible sound at the site boundaries where in a residential setting.	All equipment comprising the Telecommunications facility ⁽⁸¹⁾ which produces audible or non-audible sound is housed within a fully enclosed building incorporating sound control measures sufficient to ensure no noise from this equipment can be heard, or felt at the site boundary.
Wholesale nursery ⁽⁸⁹⁾	
PO84	No example provided.
Buildings and activities associated with a wholesale nursery ⁽⁸⁹⁾ :	
a. ensures the propagation of plants, whether or not in the open, occur without loss of amenity to adjacent properties;	
 b. do not result in any form of environmental degradation, including, but not limited to, soil degradation, pollution of natural water courses and introduction of exotic plant species into the natural on-site or adjoining flora; 	

apply)

Performance Outcomes		Examples that achieve aspects of the Performance Outcomes
C.	are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;	
d.	have vehicle access from a road classified as a State Arterial, Arterial or Sub-Arterial (refer Overlay map - Road hierarchy).	
Vete	erinary services ⁽⁸⁷⁾	
PO	35	No example provided.
Buil serv	dings and activities associated with veterinary <i>v</i> ices ⁽⁸⁷⁾ :	
a.	are for veterinary care, surgery and treatment of animals only; and	
b.	are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;	
C.	have vehicle access from a road classified as a State Arterial, Arterial or Sub-Arterial (refer Overlay map - Road hierarchy).	
Win	iery ⁽⁹⁰⁾	
PO	36	No example provided.
Buil	dings and activities associated with winery ⁽⁹⁰⁾ :	
a.	are for a winery ⁽⁹⁰⁾ and ancillary activities only. Uses not affiliated with winery ⁽⁹⁰⁾ activities, or the sale of products produced or manufactured on-site, are avoided;	
b.	are landscaped, fenced and screened in a manner to reduce the visual appear of buildings, structures, storage and parking areas;	
C.	have vehicle access from a road classified as a State Arterial, Arterial or Sub-Arterial (Overlay map - Road hierarchy).	
	Values and co	onstraints criteria
Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.		

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes		
Note - To demonstrate achievement of the performance outcome, an Acid sulfate soils (ASS) investigation report and soil management plan is prepared by a qualified engineer. Guidance for the preparation an ASS investigation report and soil management plan is provided in Planning scheme policy - Acid sulfate soils.			
 PO87 Development avoids disturbing acid sulfate soils. Where development disturbs acid sulfate soils, development: a. is managed to avoid or minimise the release of surface or groundwater flows containing acid and metal contaminants into the environment; b. protects the environmental and ecological values and health of receiving waters; c. protects buildings and infrastructure from the effects of acid sulfate soils. Bushfire hazard (refer Overlay map - Bushfire haza apply) 	 E87 Development does not involve: a. excavation or otherwise removing of more than 100m³ of soil or sediment where below than 5m Australian Height datum AHD; or b. filling of land of more than 500m³ of material with an average depth of 0.5m or greater where below the 5m Australian Height datum AHD. rd to determine if the following assessment criteria 		
Note - To demonstrate achievement of the performance outcomes, a bushfire management plan is prepared by a suitably qualified person Guidance for the preparation of a bushfire management plan is provided in Planning scheme policy – Bushfire prone areas. Note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage.			
PO88	E88.1		
Development:	Buildings and structures are:		
 a. minimises the number of buildings and people working and living on a site exposed to bushfire risk; b. ensures the protection of life during the passage of a fire front; 	 a. not located on a ridgeline; b. not located on land with a slope greater than 15% (see Overlay map - Landslide hazard); c. dwellings are located on east to south facing slopes. 		
c. is located and designed to increase the chance	E88.2		
of survival of buildings and structures during a bushfire;	Buildings and structures have contained within the site:		
 d. minimises bushfire risk from build up of fuels around buildings and structures; e. ensure safe and effective access for emergency services during a bushfire. 	 a. a separation from classified vegetation of 20m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater; b. a separation from low threat vegetation of 10m or the distance required to achieve a bushfire attack level (BAL) at the building, roofed structure or fire fighting water supply of no more than 29, whichever is the greater; c. a separation of no less than 10m between a fire fighting water supply extraction point and any classified vegetation, buildings and other roofed structures; 		

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	 d. an area suitable for a standard fire fighting appliance to stand within 3m of a fire fighting water supply extraction point; and e. an access path suitable for use by a standard fire fighting appliance having a formed width of at least 4m, a cross-fall of no greater than 5%, and a longitudinal gradient of no greater than 25%: i. to, and around, each building and other roofed structure; and ii. to each fire fighting water supply extraction point. Note - The meaning of the terms classified vegetation and low threat vegetation as well as the method of calculating the bushfire attack level are as described in Australian Standard AS 3959
PO89	E89
 Development and associated driveways and access ways: a. avoid potential for entrapment during a bushfire; b. ensure safe and effective access for emergency services during a bushfire; c. enable safe evacuation for occupants of a site during a bushfire. 	 A length of driveway: a. to a road does not exceed 100m between the most distant part of a building used for any purpose other than storage and the nearest part of a public road; b. has a maximum gradient no greater than 12.5%; c. have a minimum width of 3.5m; d. accommodate turning areas for fire fighting appliances in accordance with Qld Fire and Emergency Services' Fire Hydrant and Vehicle Access Guideline.
PO90	E90
Development provides an adequate water supply for fire-fighting purposes.	 a. a reticulated water supply is provided by a distributer retailer for the area or; b. where not connected to a reticulated water supply, on-site fire fighting water storage containing not less than 10 000 litres (tanks with fire brigade tank fittings, swimming pools) is located within 10m of buildings and structures. c. Where a swimming pool is the nominated on-site fire fighting water storage source, vehicle access is provided to within 3m of that water storage source. d. Where a tank is the nominated on-site fire fighting water storage source, it includes: a hardstand area allowing medium rigid vehicles (15 tonne fire appliance) access within 6m of the tank; fire brigade tank fittings, comprising 50mm ball valve and male camlock coupling and, if underground, an access hole of 200mm (minimum) to accommodate suction lines.

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
PO91	E91
 Development: a. does not present unacceptable risk to people or environment due to the impact of bushfire on dangerous goods or combustible liquids; b. does not present danger or difficulty to emergency services for emergency response or evacuation. Editor's note - Unacceptable risk is defined as a situation where people or property are exposed to a predictable hazard event that may result in serious injury, loss of life, failure of community infrastructure, or property damage. 	Development does not involve the manufacture or storage of hazardous chemicals.

Environmental areas (refer Overlay map - Environmental areas to determine if the following assessment criteria apply)

Note - The following are excluded from the native vegetation clearing provisions of this planning scheme:

- a. Clearing of native vegetation located within an approved development footprint;
- b. Clearing of native vegetation within 10m from a lawfully established building reasonably necessary for emergency access or immediately required in response to an accident or emergency;
- c. Clearing of native vegetation reasonably necessary to remove or reduce the risk vegetation poses to serious personal injury or damage to infrastructure;
- d. Clearing of native vegetation reasonably necessary to construct and maintain a property boundary fence and not exceed 4m in width either side of the fence where in the Rural, Rural residential and Environmental Management and Conservation zones. In any other zone, clearing is not to exceed 2m in width either side of the fence;
- e. Clearing of native vegetation reasonably necessary for the purpose of maintenance or works within a registered easement for public infrastructure or drainage purposes;
- f. Clearing of native vegetation in accordance with a bushfire management plan prepared by a suitably qualified person, submitted to and accepted by Council;
- g. Clearing of native vegetation associated with removal of recognised weed species, maintaining existing open pastures and cropping land, windbreaks, lawns or created gardens;
- h. Grazing of native pasture by stock;
- i. Native forest practice where accepted development under Part 1, 1.7.7 Accepted development

Note - Definition for native vegetation is located in Schedule 1 Definitions.

Note - Native vegetation subject to this criteria primarily comprises of matters of national environmental significance (MNES), matters of state environmental significance (MSES). They also comprise some matters of local environmental significance (MLES). A MLES is defined in Schedule 1.2, Administrative definitions. A list of the elements that apply to the mapped MSES and MLES is provided in Appendix 1 of the Planning scheme policy - Environmental areas.

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

Note - To demonstrate achievement of the performance outcome, an ecological assessment, vegetation management plan and fauna management plan, as required, are prepared by a suitably qualified person. Guidance for the preparation of above mentioned reports is provided in Planning scheme policy - Environmental areas.

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes	
Vegetation clearing, ecological value and connectivity		
PO92	No example provided.	
Development avoids locating in a High Value Area or a Value Offset Area. Where it is not practicable or reasonable for development to avoid establishing in these areas, development must ensure that:		
 a. the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area is maintained and not lost or degraded; b. on-site mitigation measures, mechanisms or processes are in place demonstrating the quality and integrity of the biodiversity and ecological values inherent to a High Value Area and a Value Offset Area are maintained. For example, this can be achieved through replacement, restoration or rehabilitation planting as part of any proposed covenant, the development of a Vegetation Management Plan, a Fauna Management Plan, and any other on-site mitigation options identified in the Planning scheme policy - Environmental areas*. * Editor's note - This is not a requirement for an environmental offset under the Environmental Offsets Act 2014. 		
 PO93 Development provides for safe, unimpeded, convenient and ongoing wildlife movement and establishes and maintains habitat connectivity by: a. retaining habitat trees; b. providing contiguous patches of habitat; c. provide replacement and rehabilitation planting to improve connectivity; d. avoiding the creation of fragmented and isolated patches of habitat; e. providing wildlife movement infrastructure. Editor's note - Wildlife movement infrastructure may include refuge poles, tree boulevarding, 'stepping stone' vegetation plantings, tunnels, appropriate wildlife fencing; culverts with ledges, underpasses, overpasses, land bridges and rope bridges. Further information is provided in Planning scheme policy – Environmental areas. 	No example provided.	
Vegetation clearing and habitat protection		
PO94	No example provided.	

Perf	ormance Outcomes	Examples that achieve aspects of the Performance Outcomes
Development ensures that the biodiversity quality and integrity of habitats is not adversely impacted upon but maintained and protected.		
PO9	5	No example provided.
Development does not result in the net loss or degradation of habitat value in a High Value Area or a Value Offset Area. Where development does result in the loss or degradation of habitat value, development will:		
а. b. c.	rehabilitate, revegetate, restore and enhance an area to ensure it continues to function as a viable and healthy habitat area; provide replacement fauna nesting boxes in the event of habitat tree loss in accordance with Planning scheme policy - Environmental areas; undertake rehabilitation, revegetation and restoration in accordance with the South East Queensland Ecological Restoration Framework.	
PO9	6	No example provided.
	elopment ensures safe, unimpeded, convenient ongoing wildlife movement and habitat connectivity	
a. b. c. d.	providing contiguous patches of habitat; avoiding the creation of fragmented and isolated patches of habitat; providing wildlife movement infrastructure; providing replacement and rehabilitation planting to improve connectivity.	
Vegetation clearing and soil resource stability		
PO9	7	No example provided.
Dev	elopment does not:	
a. b.	result in soil erosion or land degradation; leave cleared land exposed for an unreasonable period of time but is rehabilitated in a timely manner.	
Vegetation clearing and water quality		
PO9	8	No example provided.
Development maintains or improves the quality of groundwater and surface water within, and downstream, of a site by:		
a.	ensuring an effective vegetated buffers and setbacks from waterbodies is retained to achieve natural filtration and reduce sediment loads;	

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
 b. avoiding or minimising changes to landforms to maintain hydrological water flows; c. adopting suitable measures to exclude livestock from entering a waterbody where a site is being used for animal husbandry⁽⁴⁾ and animal keeping⁽⁵⁾ activities. 	
PO99	No example provided.
Development minimises adverse impacts of stormwater run-off on water quality by:	
 a. minimising flow velocity to reduce erosion; b. minimising hard surface areas; c. maximising the use of permeable surfaces; d. incorporating sediment retention devices; e. minimising channelled flow. 	
Vegetation clearing and access, edge effects and u	rban heat island effects
PO100	No example provided.
Development retains safe and convenient public access in a manner that does not result in the adverse edge effects or the loss or degradation of biodiversity values within the environment.	
PO101	No example provided.
Development minimises potential adverse 'edge effects' on ecological values by:	
 providing dense planting buffers of native vegetation between a development and environmental areas; 	
 retaining patches of native vegetation of greatest possible size where located between a development and environmental areas ; 	
c. restoring, rehabilitating and increasing the size of existing patches of native vegetation;	
 ensuring that buildings and access (public and vehicle) are setback as far as possible from environmental areas and corridors; 	
e. landscaping with native plants of local origin.	
Editor's note - Edge effects are factors of development that go to detrimentally affecting the composition and density of natural populations at the fringe of natural areas. Factors include weed invasion, pets, public and vehicle access, nutrient loads, noise and light pollution, increased fire frequency and changes in the groundwater and surface water flow.	

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes	
Development avoids adverse microclimate change and does not result in increased urban heat island effects. Adverse urban heat island effects are minimised by:		
a. pervious surfaces;b. providing deeply planted vegetation buffers and green linkage opportunities;		
c. landscaping with local native plant species to achieve well-shaded urban places;d. increasing the service extent of the urban forest canopy.		
Vegetation clearing and Matters of Local Environme	ental Significance (MLES) environmental offsets	
PO103	No example provided.	
Where development results in the unavoidable loss of native vegetation within a Value Offset Area MLES waterway buffer or a Value Offset Area MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas.		
Editor's note - For MSES Koala Offsets, the environmental offset provisions in schedule 11 of the Regulation, in combination with the requirements of the Environmental Offset Act 2014, apply.		
Extractive resources separation area (refer Overlay map - Extractive resources (separation area) to determine if the following assessment criteria apply)		
Note - To demonstrate achievement of the performance outcomes, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing noise impact assessment report is provided in Planning scheme policy – Noise.		
PO104	E104	
Development does not increase the number of people	Development does not result in more than one dwelling	

living in the Extractive Resources separation area.	house ⁽²²⁾ per lot within separation areas.
PO105	E105
 Development: a. does not introduce or increase uses that are sensitive to the impacts of an Extractive industry⁽²⁷⁾; b. is compatible with the operation of an Extractive industry⁽²⁷⁾; c. does not comprise or undermine the function and integrity of the separation area in providing a buffer between key extractive and processing activities and sensitive, incompatible uses outside the separation area. 	Development within the separation area does not include the following uses: a. caretaker's accommodation ⁽¹⁰⁾ ; b. community residence ⁽¹⁶⁾ ; c. dual occupancy ⁽²¹⁾ ; d. dwelling unit ⁽²³⁾ ; e. hospital ⁽³⁶⁾ ; f. rooming accommodation ⁽⁶⁹⁾ ; g. multiple dwelling ⁽⁴⁹⁾ ; h. non-resident workforce accommodation ⁽⁵²⁾ ; i. relocatable home park ⁽⁶²⁾ ; j. residential care facility ⁽⁶⁵⁾ ;

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	 k. resort complex⁽⁶⁶⁾; l. retirement facility⁽⁶⁷⁾; m. rural workers' accommodation⁽⁷¹⁾; n. short-term accommodation⁽⁷⁷⁾; o. tourist park⁽⁸⁴⁾.
PO106 Habitable rooms achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment.	 E106 All habitable rooms within the separation area are: a. acoustically insulated to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008; b. provided with mechanical ventilation.
PO107 Development provides open space areas for passive recreation in a manner where impacts from key extractive/processing activities, particularly noise, is minimised.	E107 Private open space areas are separated from the resource processing area by buildings or a 1.8m high solid structure.
Extractive resources transport route (refer Overlay is to determine if the following assessment criteria ap PO108	map - Extractive resources (transport route and buffer) ply) E108
 Development: a. does not increase in the number of people living in close proximity to a transport route and being subject to the adverse effects from the transportation route; b. does not result in the establishment of uses that are incompatible with the operation of Extractive resources transport routes; c. adopts design and location measures to satisfactorily mitigate the potential adverse impacts associated with transportation routes on sensitive land uses. Such measures include, but are not limited to: locating the furthest distance possible from the transportation route; habitable rooms being located the furthest from the transportation route; 	 The following uses are not located within the 100m wide transport route buffer: a. Caretaker's accommodation⁽¹⁰⁾, except where located in the Extractive industry zone; b. Community residence⁽¹⁶⁾; c. Dual occupancy⁽²¹⁾; d. Dwelling house⁽²²⁾; e. Dwelling unit⁽²³⁾; f. Hospital⁽³⁶⁾; g. Rooming accommodation⁽⁶⁹⁾; h. Multiple dwelling⁽⁴⁹⁾; i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; n. Rural workers' accommodation⁽⁷¹⁾; o. Short-term accommodation⁽⁷⁷⁾; p. Tourist park⁽⁸⁴⁾.
PO109	E109.1

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
a. b. c.	does not adversely impact upon the efficient and effective transportation of extractive material along a transportation route; ensures vehicle access and egress along transportation routes are designed and located to achieve a high degree of safety, having good visibility; utilises existing vehicle access points and where existing vehicle access points are sub-standard or poorly formed, they are upgraded to an appropriate standard.	E109.2 A vehicle access point is located, designed and constructed in accordance with Planning scheme policy - Integrated design.

Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - To assist in demonstrating achievement of heritage performance outcomes, a Cultural heritage impact assessment report is prepared by a suitably qualified person verifying the proposed development is in accordance with The Australia ICOMOS Burra Charter.

Note - To assist in demonstrating achievement of this performance outcome, a Tree assessment report is prepared by a qualified arborist in accordance with Planning scheme policy – Heritage and landscape character. The Tree assessment report will also detail the measures adopted in accordance with AS 4970-2009 Protection of trees on development sites.

Note - Places, including sites, objects and buildings having local cultural heritage significance, are identified on Overlay map - Heritage and landscape character and listed in Schedule 1 of Planning scheme policy - Heritage and landscape character. Places also having cultural heritage significance at a State level and being entered in the Queensland Heritage Register, are also identified in Schedule 1 of Planning scheme policy - Heritage and landscape character.

PO1	10	E110
Dev a. b. c. d. e. f.	elopment will: not diminish or cause irreversible damage to the cultural heritage values present on the site, and associated with a heritage site, object or building; protect the fabric and setting of the heritage site, object or building; be consistent with the form, scale and style of the heritage site, object or building; utilise similar materials to those existing, or where this is not reasonable or practicable, neutral materials and finishes; incorporate complementary elements, detailing and ornamentation to those present on the heritage site, object or building; retain public access where this is currently provided.	Development is for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value. Note - A cultural heritage conservation management plan for the preservation, maintenance, repair and restoration of a site, object or building of cultural heritage value is prepared in accordance with Planning scheme policy - Heritage and landscape character. The plan is sent to, and approved by Council prior to the commencement of any preservation, maintenance, repair and restoration works.
PO1	11	No example provided.
Den	nolition and removal is only considered where:	
a.	a report prepared by a suitably qualified conservation architect or conservation engineer demonstrates that the building is structurally unsound and is not reasonably capable of economic repair; or	

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
 b. demolition is confined to the removal of outbuildings, extensions and alterations that are not part of the original structure; or c. limited demolition is performed in the course of repairs, maintenance or restoration; or d. demolition is performed following a catastrophic event which substantially destroys the building or object. 	
PO112	No example provided.
Where development is occurring on land adjoining a site of cultural heritage value, the development is to be sympathetic to and consistent with the cultural heritage values present on the site and not result in their values being eroded, degraded or unreasonably obscured from public view.	
PO113	E113
Development does not adversely impact upon the health and vitality of significant trees. Where development occurs in proximity to a significant tree, construction measures and techniques as detailed in AS 4970-2009 Protection of trees on development sites are adopted to ensure a significant tree's health, wellbeing and vitality.	 Development does: a. not result in the removal of a significant tree; b. not occur within 20m of a protected tree; c. involve pruning of a tree in accordance with Australian Standard AS 4373-2007 – Pruning of Amenity Trees.
Significant trees are only removed where they are in a poor state of health or where they pose a health and safety risk to persons or property. A Tree Assessment report prepared by a suitably qualified arborist confirming a tree's state of health is required to demonstrate achievement of this performance outcome.	
Landslide hazard (refer Overlay map - Landslide ha apply)	zard to determine if the following assessment criteria

Note - To demonstrate achievement of the performance outcomes, a site-specific geotechnical assessment report is prepared by a qualified engineer. Guidance for the preparation of a geotechnical assessment report is provided in Planning scheme policy – Landslide hazard.

P0114	E114
Development:	Development does not:
 a. maintains the safety of people and property on a site and neighbouring sites from landslides; b. ensures the long-term stability of the site considering the full nature and end use of the development; c. ensures site stability during all phases of construction and development; d. minimises disturbance of natural drainage patterns of the site and does not result in the 	 a. involve earthworks exceeding 50m³; b. involve cut and fill having a height greater than 600mm; c. involve any retaining wall having a height greater than 600mm; d. redirect or alter the existing flow of surface or groundwater.

Per	formance Outcomes	Examples that achieve aspects of the Performance Outcomes
e.	redirection or alteration of the existing flow if surface or groundwater minimises adverse visual impacts on the amenity of adjoining residents and provides a positive interface with the streetscape.	
PO1	15	E115
topc	dings are designed to respond to sloping ography in the siting, design and form of buildings structures by: minimising overuse of cut and fill to create single flat pads and benching; avoiding expanses of retaining walls, loss of trees and vegetation and interference with natural drainage systems; minimising any adverse visual impact on the landscape character ; Protect the amenity of adjoining properties.	 Buildings, excluding domestic outbuildings: a. are split-level, multiple-slab, pier or pole construction; b. are not single plane slab on ground.
and haza	elopment protects the safety of people, property the environment from the impacts of landslide on ardous chemicals manufactured, handled or stored neorporating design measures to ensure: the long-term stability of the development site considering the full nature and end use of the development; site stability during all phases of construction and development; the development is not adversely affected by landslide activity originating on sloping land above the site; emergency access and access from the site for the public and emergency vehicles is available and is not at risk from landslide.	E116 Development does not involve the manufacture, handling or storage of hazardous chemicals.
	astructure buffers (refer Overlay map - Infrastru eria apply)	cture buffers to determine if the following assessment
PO1	17	E117
Was affe	our sensitive development is separated from stewater treatment plants so they are not adversely cted by odour emission or other air pollutant acts.	The following uses are not located within a wastewater treatment site buffer: a. Caretaker's accommodation ⁽¹⁰⁾ ; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house ⁽²²⁾ e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ;

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	 i. Non-resident workforce accommodation⁽⁵²⁾; j. Relocatable home park⁽⁶²⁾; k. Residential care facility⁽⁶⁵⁾; l. Resort complex⁽⁶⁶⁾; m. Retirement facility⁽⁶⁷⁾; n. Rural workers' accommodation⁽⁷¹⁾; o. Short-term accommodation⁽⁷⁷⁾; p. Tourist park⁽⁸⁴⁾.
PO118	E118.1
Development within a Water supply buffer captures solid or liquid waste from all land use, development and activities is designed, constructed and managed to prevent the release of contaminants to surface water or groundwater bodies.	Run-off and sediment from roadways and impervious surfaces within a Water supply buffer are intercepted and treated on-site to remove oil, grease, chemicals, silt, trace metals and nutrients such as nitrogen and phosphorous.
	E118.2
	Incineration or burial of waste within a Water supply buffer is not undertaken onsite.
	E118.3
	Solid waste within a Water supply buffer is collected and stored in weather proof, sealed waste receptacles, located in roofed and bunded areas, for disposal by a licenced contractor.
	E118.4
	Holding tanks within a Water supply buffer are used for all liquid waste and provide for the separation of oils/solvents and solids prior to pump-out and collection by a licenced contractor.
	E118.5
	Management, handling and storage of hazardous chemicals (including fuelling of vehicles) within a Water supply buffer, is undertaken in secured, climate controlled, weather proof, level and bunded enclosures.
PO119	E119
On-site sewerage systems within a Water supply buffer are designed and operated to ensure there is no worsening or adverse impacts to health risks, environmental risks and water quality. Editor's Note - For guidance refer to the Seq water Development Guidelines: Development Guidelines for Water Quality Management in Drinking Water Catchments 2012.	 Secondary treated wastewater treatment systems within a Water supply buffer include: a. emergency storage capable of holding 3-6 hours peak flow of treated effluent in the event of emergencies or overload with provision for de-sludging; b. back up pump installation and backup power;

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	 MEDLI modelling to determine irrigation rates and sizing of irrigation areas;
	d. vegetated land application areas are not located in overland flow paths or on areas that perform groundwater recharge or discharge functions; and
	e. wastewater collection and storage systems have a capacity to accommodate full load at peak times and includes temporary facilities.
PO120	E120
Development within a Bulk water supply infrastructure buffer is located, designed and constructed to:	Development:
 a. protect the integrity of the water supply pipeline; b. maintain adequate access for any required maintenance or upgrading work to the water supply pipeline; 	 a. does not involve the construction of any buildings or structures within a Bulk water supply infrastructure buffer; b. involving a major hazard facility or environmentally relevant activity (ERA) is setback 30m from a Bulk water supply infrastructure buffer.
PO121	E121
Development is located and designed to maintain required access to Bulk water supply infrastructure.	Development does not restrict access to Bulk water supply infrastructure of any type or size, having regard to (among other things):
	 a. buildings or structures; b. gates and fences; c. storage of equipment or materials; d. landscaping or earthworks or stormwater or other infrastructure.
PO122	E122
Odour sensitive development is separated from landfill sites so they are not adversely affected by odour emission or other air pollutant impacts.	The following uses are not located within a Landfill buffer: a. Caretaker's accommodation ⁽¹⁰⁾ ; b. Community residence ⁽¹⁶⁾ ; c. Dual occupancy ⁽²¹⁾ ; d. Dwelling house ⁽²²⁾ ; e. Dwelling unit ⁽²³⁾ ; f. Hospital ⁽³⁶⁾ ; g. Rooming accommodation ⁽⁶⁹⁾ ; h. Multiple dwelling ⁽⁴⁹⁾ ; i. Non-resident workforce accommodation ⁽⁵²⁾ ; j. Relocatable home park ⁽⁶²⁾ ; k. Residential care facility ⁽⁶⁵⁾ ; l. Resort complex ⁽⁶⁶⁾ ; m. Retirement facility ⁽⁶⁷⁾ ; n. Rural workers' accommodation ⁽⁷¹⁾ ; o. Short-term accommodation ⁽⁷⁷⁾ ; p. Tourist park ⁽⁸⁴⁾ .

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
PO123	E123
Habitable rooms within an Electricity supply substation buffer are located a sufficient distance from substations ⁽⁸⁰⁾ to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields. Note - Habitable room is defined in the Building Code of Australia (Volume 1)	 Habitable rooms: a. are not located within an Electricity supply substation buffer; and b. proposed on a site subject to an Electricity supply supply substation⁽⁸⁰⁾ are acoustically insulted to achieve the noise levels listed in Schedule 1, Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008. Note - Habitable room is defined in the Building Code of Australia (Volume 1)
PO124 Habitable rooms within an Electricity supply substation buffer are acoustically insulated from the noise of a substation ⁽⁸⁰⁾ to achieve the noise levels listed in Schedule 1 Acoustic Quality Objectives, Environmental Protection (Noise) Policy 2008 and provides a safe, healthy and disturbance free living environment. Note - To demonstrate achievement of the performance outcome, a noise impact assessment report is prepared by a suitably qualified person. Guidance to preparing an noise impact assessment report is provided in Planning scheme policy – Noise. Note - Habitable room is defined in the Building Code of Australia (Volume 1)	No example provided.
 PO125 Development within a High voltage electricity line buffer provides adequate buffers to high voltage electricity lines to protect amenity and health by ensuring development: a. is located and designed to avoid any potential adverse impacts on personal health and wellbeing from electromagnetic fields in accordance with the principle of prudent avoidance; b. is located and designed in a manner that maintains a high level of security of supply; c. is located and design so not to impede upon the functioning and maintenance of high voltage electrical infrastructure. 	E125 Development does not involve the construction of any buildings or structures within a High voltage electricity line buffer.
PO126	E126
Development within a Pumping station buffer is located, designed and constructed to:	Development does not involve the construction of any buildings or structures within a Pumping station buffer.

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
a. ensure that odour or other air pollutant impac on the amenity of the development met the a quality of objectives in the Environmental Protection (Air) Policy 2008;	
b. ensure that noise impacts on the amenity of development met the indoor noise objectives out in the Environmental Protection (Noise) Po 2008.	set
Overland flow path (refer Overlay map - Overlan apply)	d flow path to determine if the following assessment criteria
Note - The applicable river and creek flood planning levels as obtained by requesting a flood check property report from Co	sociated with defined flood event (DFE) within the inundation area can be uncil.
PO127	No example provided.
Development:	
 a. minimises the risk to persons from overland f b. does not increase the potential for damage f overland flow either on the premises or other premises, public land, watercourses, roads or infrastructure. 	om
PO128	No example provided.
Development:	
 a. maintains the conveyance of overland flow predominantly unimpeded through the premi for any event up to and including the 1% AEF the fully developed upstream catchment; b. does not concentrate, intensify or divert overl flow onto an upstream, downstream or surrounding property. 	? for
Note - A report from a suitably qualified Registered Professio Engineer Queensland is required certifying that the developm does not increase the potential for significant adverse impacts an upstream, downstream or surrounding premises.	ent
Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland fl	DW.
PO129	No example provided.
Development does not:	
 a. directly, indirectly or cumulatively cause any increase in overland flow velocity or level; b. increase the potential for flood damage from overland flow either on the premises or other 	

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
premises, public lands, watercourses, roads or infrastructure. Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.	
PO130	E130
Development ensures that public safety and the risk to the environment are not adversely affected by a detrimental impact of overland flow on a hazardous chemical located or stored on the premises.	Development ensures that a hazardous chemical is not located or stored in an Overland flow path area. Note - Refer to the Work Health and Safety Act 2011 and associated Regulation and Guidelines, the Environmental Protection Act 1994 and the relevant building assessment provisions under the Building Act 1975 for requirements related to the manufacture and storage of hazardous substances.
PO131	E131
Development which is not in a Rural zone ensures that overland flow is not conveyed from a road or public open space onto a private lot.	Development which is not in a Rural zone that an overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot.
PO132	E132.1
Development ensures that inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment and are able to be easily maintained. Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on	 Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM: a. Urban area – Level III; b. Rural area – N/A; c. Industrial area – Level V; d. Commercial area – Level V.
an upstream, downstream or surrounding premises.	E132.2
Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow	Development ensures that inter-allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.
PO133	No example provided.
Development protects the conveyance of overland flow such that an easement for drainage purposes is provided over:	
 a stormwater pipe if the nominal pipe diameter exceeds 300mm; 	

Performance Outcomes		Examples that achieve aspects of the Performance Outcomes		
b.	an overland flow path where it crosses more than one premises;			
C.	inter-allotment drainage infrastructure.			
Note - Refer to Planning scheme policy - Integrated design for details and examples.				
Note - Stormwater Drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.				
Additional criteria for development for a Park ⁽⁵⁷⁾				
PO1	34	E134		
Development for a Park ⁽⁵⁷⁾ ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:		Development for a Park ⁽⁵⁷⁾ ensures works are provided in accordance with the requirements set out in Appendix B of the Planning scheme policy - Integrated design.		
a.	public benefit and enjoyment is maximised;			
b.	impacts on the asset life and integrity of park structures is minimised;			
C.	maintenance and replacement costs are minimised.			
Riparian and wetland setbacks				
PO135		E135		
Development provides and maintains a suitable setback		Development does not occur within:		
env	from waterways and wetlands that protects natural and environmental values. This is achieved by recognising and responding to the following matters:	a. 50m from top of bank for W1 waterway and drainage line		
a.	impact on fauna habitats;	b. 30m from top of bank for W2 waterway and drainage line		
b.	impact on wildlife corridors and connectivity;			
C.	impact on stream integrity;	c. 20m from top of bank for W3 waterway and drainag line		
d.	impact of opportunities for revegetation and rehabilitation planting;	d. 100m from the edge of a Ramsar wetland, 50m from all other wetlands.		
e.	edge effects.	Note - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.		
	nic amenity - Regionally significant (Hills) and L enity to determine if the following assessment c	ocally important (Coast) (refer Overlay map - Scenic riteria apply)		

Note - In the Rural Residential Zone, netting, shade cloth and similar coverings associated with agricultural operations are exempt.

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
PO136	E136
 Development: a. avoids being viewed as a visually conspicuous built form on a hill top or ridgeline; b. retain the natural character or bushland settings as the dominant landscape characteristic; c. is viewed as being visually consistent with the natural landscape setting and does not diminish the scenic and visual qualities present in the environment. 	 Where located in the Regionally significant (Hills) scenic amenity overlay, buildings and structures are not: a. located on a hill top or ridge line; b. all parts of the building and structure are located below the hill top or ridge line.
PO137	E137
 Development: a. does not adversely detract or degrade the quality of views, vista or key landmarks; b. retains the natural character or bushland settings as the dominant landscape characteristic. 	 Where located in the Regionally significant (Hills) scenic amenity overlay, driveways and accessways: a. go across land contours, and do not cut straight up slopes; b. follow natural contours, not resulting in batters or retaining walls being greater than 900mm in height.
PO138	E138.1
 Buildings and structures incorporate colours and finishes that: a. are consistent with a natural, open space character and bushland environment; 	Where located in the Regionally significant (hills) scenic amenity overlay, roofs and wall surfaces of buildings and structures adopt the following colours:
b. do not produce glare or appear visual	Colours from Australian Standard AS2700s – 1996
incompatible with the surrounding natural character and bushland environment;	G12 – Holly G54 – Mist Green N 44 – Bridge Grey
c. are not visually dominant or detract from the	G13 – Emerald G55 – Lichen N45 – Koala Grey
natural qualities of the landscape.	G14 – Moss Green G56 – Sage Green N52 – Mid Grey
	G15 – Rainforest G62 – Rivergum N54 – Basalt Green
	G16 – Traffic Green G64 – Slate N55 – Lead Grey
	G17 – Mint Green G65 – Ti Tree X54 – Brown
	G21 – Jade N25 – Birch Grey X61 – Wombat
	G22 – Serpentine N32 – Green Grey X62 – Dark Earth
	G23 – Shamrock N33 – Lightbox Grey X63 – Iron Bark
	G24 – Fern Green N35 – Light Grey Y51 – Bronze Olive
	G25 – Olive N41 – Oyster Y61 – Black Olive
	G34 – Avocado N42 – Storm Grey Y63 – Khaki
	G52 – Eucalyptus N43 – Pipeline Grey Y66 – Mudstone
	G53 – Banksia
	E138.2

Performance Outcomes	Examples that achieve aspects of the Performance Outcomes
	Where located in the Regionally significant (hills) scenic amenity overlay, roofs and wall surfaces of buildings and structures are painted or finished such that reflectivity is less than 35%.

Transport noise corridors (refer Overlay map - Transport noise corridors to determine if the following assessment criteria apply)

This is for information purposes only. No requirements for accepted development or criteria for assessable development apply. Development located within a Transport Noise Corridor must satisfy the requirements of the Queensland Development Code