


ELEVATION

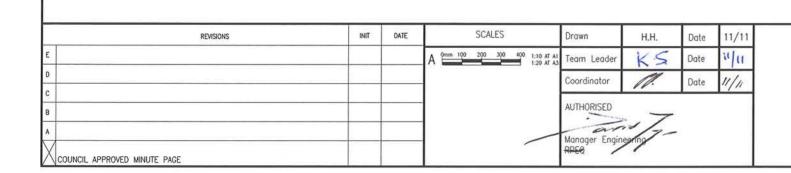

PLAN PLAN ELEVATION HURDLE SUPPORT DETAIL

NOTES

- 1. All pipe bends to bend around a 50 dia. pin.
- All welds to frame to be 3mm CWT and effected with E48xx OR W50x electrodes but not less than required by A.S. 4100.
- Drill 10mm bleed holes in the underside of all sealed frame sections and remove all burrs and sharp edges prior to galvanizing.
- All components are to be hot dipped galvanized to AS 1650 after fabrication and then coated with an approved thermoplastic coating to manufactures spec — brunswick green.
- 5. Ensure all equipment is installed vertical/plumb.
- 6. Refer to project drawings for set out of Dog Agility Equipment.
- 7. ALL DIMENSIONS IN MILLIMETRES.

DOG AGILITY EQUIPMENT HURDLES



DRW No.

MBRC - 5004

ORIGINAL SIZE

REVISION

C-5004 dwg Date: Nov 11, 20