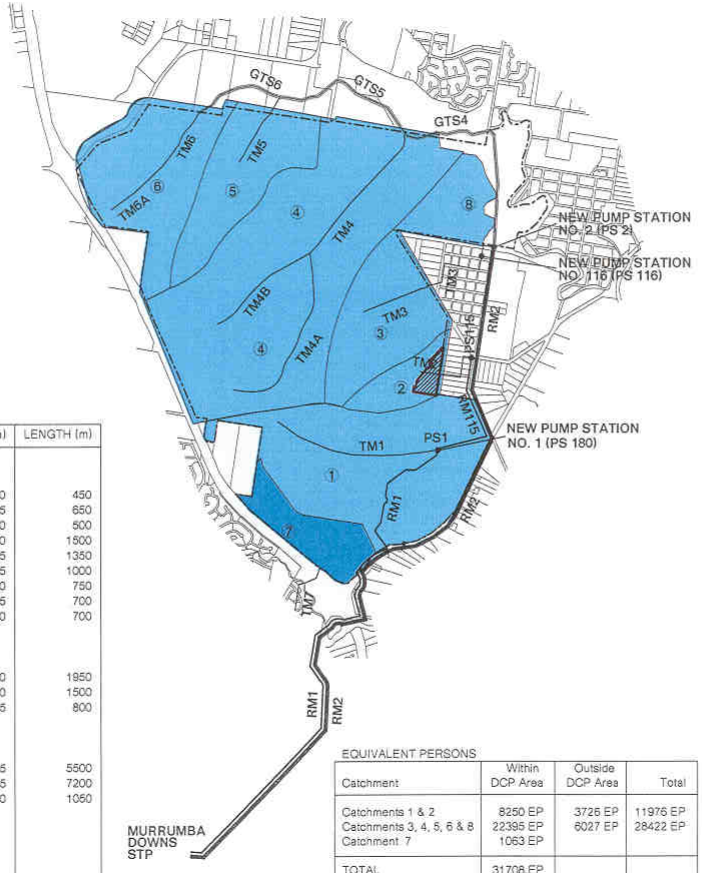

NORTH LAKES

Legend

- PS1 Pump Station
- TM Trunk Gravity Main
- RM Rising Main
- ③ Catchment Number
- Freshwater Creek Catchment (Part)
- Saltwater Creek Catchment (Part)
- Catchment Boundary
- DCP Area Boundary
- Generalised Sector Area

PRINCIPAL DEVELOPER WORKS

WORKS	DIAMETER (mm)	LENGTH (m)
TRUNK MAINS		
TM1	450	450
	375	650
	300	500
TM4	450	1500
TM4A	375	1350
TM4B	375	1000
TM5	300	750
TM6	375	700
TM6A	300	700
GRAVITY TRUNK SEWER		
GTS4	600	1950
GTS5	450	1500
GTS6	375	800
RISING MAINS		
RM1	375	5500
RM2	525	7200
RM115	150	1050
PUMP STATIONS		
PS1		
PS2		

EQUIVALENT PERSONS

Catchment	Within DCP Area	Outside DCP Area	Total
Catchments 1 & 2	8250 EP	3726 EP	11976 EP
Catchments 3, 4, 5, 6 & 8	22395 EP	6027 EP	28422 EP
Catchment 7	1063 EP		
TOTAL	31708 EP		

PINE RIVERS

EAST RIDGE RESIDENTIAL PRECINCT
RESIDENTIAL SECTOR FOURTEEN

SEWERAGE HEADWORKS

0 500 1000 1500m
Scale 1:30 000 AT A3

File No. F 2.5.23
Dgn No. ER-RS14-F10
JANUARY 2002

FIGURE 10